


Product data sheet

Characteristics

8502SEO2V02SX11

NEMA Contactor, Type S, nonreversing, Size 3, 90A, 50 HP at 575 VAC, 3 phase, up to 100 kA, 3 pole, 120 VAC coil, open

Product availability : Non-Stock - Not normally stocked in distribution facility

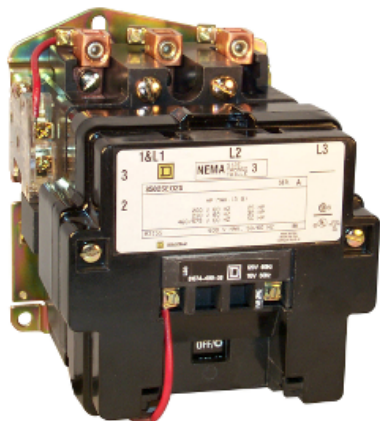

Main

Product Type	Contactors
Type	8502S
Control Circuit Type	Separate control circuit
Control Circuit Voltage	120 V AC 60 Hz 110 V AC 50 Hz
Contactors Type	Non-reversing
Current Rating	90 A
Number of Poles	3P
Phase	3 phase
Horsepower Rating	25 HP 200 V AC 30 HP 230 V AC 50 HP 460 V AC 50 HP 575 V AC
Maximum Voltage Rating	600 V AC
SCCR	Circuit-breaker 150 A maximum, SCCR: 100 kA at 480 V AC Fuse J 200 A maximum, SCCR: 100 kA at 600 V AC Fuse T 200 A maximum, SCCR: 100 kA at 600 V AC Fuse RK1 200 A maximum, SCCR: 100 kA at 600 V AC Fuse RK5 200 A maximum, SCCR: 100 kA at 600 V AC
Control Units	No control units
Pilot Light	No indicator
Auxiliary Contacts	1 NO + 1 NC
Control Circuit Fusing	Fuse not supplied
Electrical Connection	Screw clamp terminals
Enclosure Type	Not rated (open device)
Certifications	UL listed file E78351 CCN NLDX CSA

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.

NEMA Size	3
Height	7.09 in (180.09 mm)
Depth	6.50 in (165.10 mm)
Width	5.98 in (151.94 mm)

Ordering and shipping details

Category	21193 - 8502,36 SE,SF(NOT S*R,T,W)
Discount Schedule	CP1
Nbr. of units in pkg.	1
Package weight(Lbs)	14 lb(US) (6.35 kg)
Returnability	No
Country of origin	MX

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
RECh Regulation	RECh Declaration
EU RoHS Directive	Not compliant
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months
----------	-----------