
CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	LENGTH "M"	LENGTH "B"	APPROXIMATE BREAK STRENGTH* (LBS/N)	UL LISTED	CSA APPROVED
36690	1300941044	.18-.25 / 4.6-6.4	1.70±0.50 / 43.2±12.7	9.00±1.00 / 228.6±25.4	300 / 1334	NO	YES
36691	1300940536	.23-.32 / 5.8-8.1	2.50±0.50 / 63.5±12.7	9.00±1.00 / 228.6±25.4	300 / 1334		
36692	1300940537	.30-.39 / 7.6-9.9	2.50±0.50 / 63.5±12.7	9.00±1.00 / 228.6±25.4	300 / 1334		
36693	1300940538	.37-.48 / 9.4-12.2	4.00±0.50 / 101.6±12.7	10.00±1.00 / 254.0±25.4	300 / 1334		
36694	1300940539	.46-.58 / 11.7-14.7	4.00±0.50 / 101.6±12.7	10.00±1.00 / 254.0±25.4	400 / 1779		
36695	1300940540	.56-.71 / 14.2-18.0	5.50±0.50 / 139.7±12.7	10.00±1.00 / 254.0±25.4	600 / 2669		
36696	----------	.69-.88 /17.5-22.4	6.00±0.50 / 152.4±12.7	10.00±1.00 / 254.0±25.4	800 / 3559		

* TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 10.

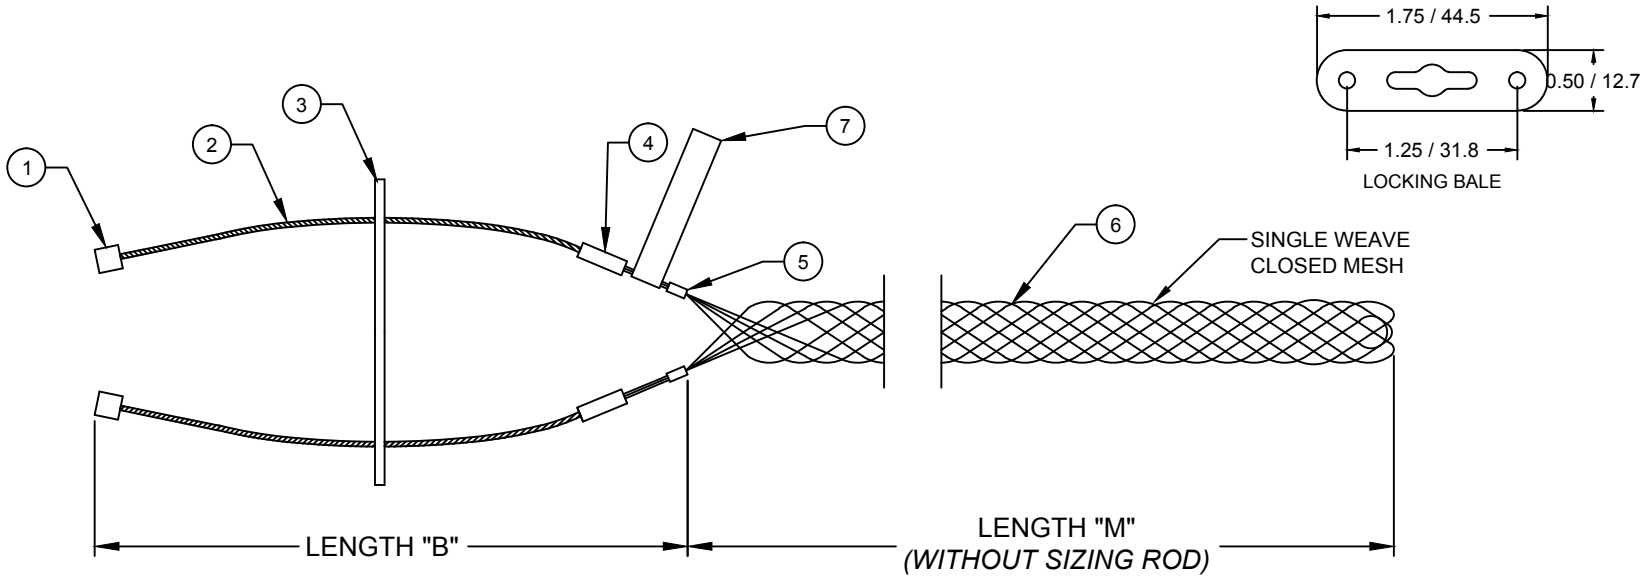

ITEM	DESCRIPTION	MATERIAL
1	BUTTON STOP	STAINLESS STEEL
2	BALE WIRE	TINNED BRONZE
3	LOCKING BALE	STAINLESS STEEL
4	FERRULE	STAINLESS STEEL
5	CRIMP CONNECTOR	STAINLESS STEEL
6	WIRE MESH	TINNED BRONZE
7	LABEL	MYLAR

RELEASE SALES DWG
EC NO: IPG2015-1537 2015/03/04
DRWN: HRUIZ01 2015/03/04
CHKD: HKNEELAN 2015/03/04
APPR: JFMURPHY 2015/06/12
DESCRIPTION
A
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: INCH/MM
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: HRUIZ01 DATE: 2015/03/04
CHECKED BY: HKNEELAN DATE: 2015/03/04
APPROVED BY: JFMURPHY DATE: 2015/06/12

TITLE
SUPPORT GRIPS
FIBER OPTIC
LOCKING BALE CLOSED MESH

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-130094-034
SHEET NO.: 1 OF 1
SIZE: A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION