

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0192520131](#)  
**Status:** **Active**  
**Overview:** [wire management products](#)  
**Description:** 101.60mm (4.000") UV Black Cable Tie, 18 Pound Tensile Strength, 100/Bag

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Accessories
Series	<a href="#">19252</a>
Application Tooling Part Link	192940002
Comments	Engineering Number N-04-18-0-C-LC
Component Type	Cable Tie
Overview	<a href="#">wire management products</a>
Product Name	N/A

**Physical**


Circuits (Loaded)	N/A
Lock to Mating Part	None
Packaging Type	Bag
Temperature Range - Operating	105°C

**Material Info**

Old Part Number	N-04-18-0-C-LC
-----------------	----------------

**Reference - Drawing Numbers**

Sales Drawing	SD-19252-001
---------------	--------------

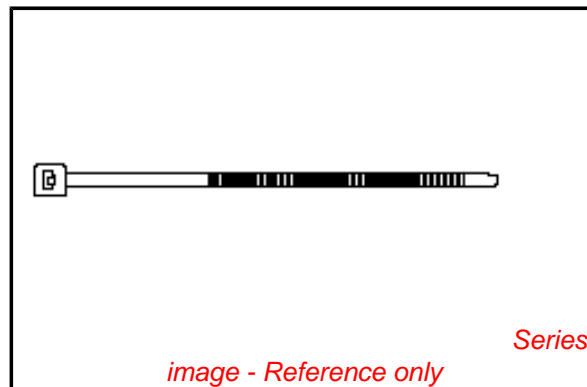

**EU RoHS**

**ELV and RoHS  
Compliant**  
**REACH SVHC**  
 Not Reviewed  
**Halogen-Free  
Status**

**China RoHS**



**Not Reviewed**

**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**


[19252Series](#)

**Application Tooling | [FAQ](#)**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
ServiceGrade™ Economy Cable Tie Tool	<a href="#">0192940002</a>



N-07-50-MH-9-C-XX

ⓓ

N = CABLE TIES

CABLE TIE LENGTH  
INCHES  
(ROUNDED)

TENSILE STRENGTH  
18 = 18 LBS  
40 = 40 LBS  
50 = 50 LBS  
120 = 120 LBS

TIE TYPE  
(BLANK) = STANDARD TIE  
ID = IDENTIFICATION  
MH = MOUNTING HOLE

INTERNAL DESIGNATOR

AMOUNT PER PACKAGE  
C = 100  
D = 500  
M = 1000

COLORS  
0 = UV BLACK  
9 = NATURAL  
30 = HEAT STABILIZED

SALES DRAWING

REMOVE BASE INFO EC NO: ETC2007-0295 DRWN: TBOANN02007/02/13 CHKD: JMACNEIL 2007/02/13 APPR: JMACNEIL 2007/02/14	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	DESCRIPTION	mm	INCH	DIMENSION STYLE IN/MM		TITLE	
	▽ = 0	4 PLACES ± ---	± ---	DRAWN BY B.ENDERL	DATE 04/05/11	19252 SERIES ENGINEERING NUMBERS CABLE TIES	
	∇ = 0	3 PLACES ± ---	± ---	CHECKED BY H.BEITZL	DATE 04/05/11	MOLEX INCORPORATED	
REV		2 PLACES ± ---	± ---	APPROVED BY R.DEROSS	DATE 04/05/11	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-19252-001
		1 PLACE ± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SHEET NO. 1 OF 1	
		ANGULAR ± ---°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			