

# Coaxial Frequency Mixer

## ZX05-1HW+

Level 17 (LO Power +17 dBm) 5 to 750 MHz



### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

### Coaxial Connections

LO	1
RF	2
IF	3

### Features

- rugged construction
- small size
- low conversion loss
- high L-R isolation
- protected by US Patents 6,133,525 & 6,790,049

### Applications

- cellular
- PCS
- instrumentation
- satellite communication


CASE STYLE: FL905

Connectors	Model
SMA	ZX05-1HW-S+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Outline Drawing

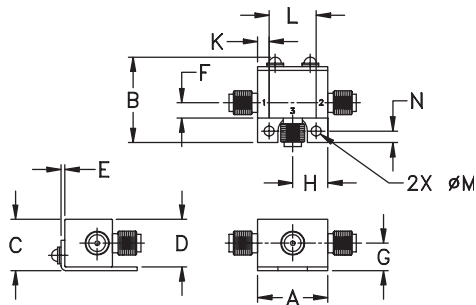

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
.74	.90	.54	.50	.04	.16	.29	
18.80	22.86	13.72	12.70	1.02	4.06	7.37	
H	J	K	L	M	N	wt	
.37	--	.122	.496	.106	.122	grams	
9.40	--	3.10	12.60	2.69	3.10	20.0	

### Electrical Specifications (T<sub>AMB</sub>=25°C)

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)						
		L	M	U	L	M	U							
5-750	DC-750	64	45	48	35	42	28	50	35	40	30	30	20	26


1 dB COMP.: +14 dBm typ.  
Positive phase detection  
Conversion loss specification at 30 MHz IF

L = low range [f<sub>l</sub> to 10 f<sub>l</sub>]  
M = mid range [10 f<sub>l</sub> to f<sub>u</sub>/2]  
U = upper range [f<sub>u</sub>/2 to f<sub>u</sub>]

### Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
5.10	35.10	6.74	94.96	63.87	1.31	1.53
35.10	65.10	6.40	67.86	54.58	1.12	1.48
75.10	45.10	6.40	60.85	49.58	1.11	1.61
120.10	90.10	6.33	56.83	47.30	1.07	1.61
139.72	109.72	6.17	55.81	45.58	1.04	1.61
159.33	129.33	6.13	54.98	44.04	1.03	1.61
198.56	168.56	6.06	52.51	43.49	1.03	1.58
237.79	207.79	6.05	52.13	42.27	1.04	1.56
277.02	247.02	6.06	49.94	42.33	1.05	1.56
316.25	286.25	6.15	48.93	42.92	1.07	1.54
355.49	325.49	6.22	49.43	41.63	1.08	1.60
400.10	370.10	6.28	49.34	39.26	1.10	1.63
443.85	413.85	6.33	47.39	37.31	1.11	1.68
487.60	457.60	6.45	43.70	35.86	1.13	1.74
531.35	479.48	6.56	42.87	33.92	1.14	1.79
575.10	545.10	6.62	42.60	31.89	1.15	1.82
618.85	588.85	6.73	42.18	30.57	1.16	1.85
662.60	632.60	6.75	42.16	29.55	1.19	1.91
706.35	676.35	6.99	40.42	29.93	1.24	2.03
750.10	720.10	7.38	40.62	29.75	1.36	2.11








### Electrical Schematic

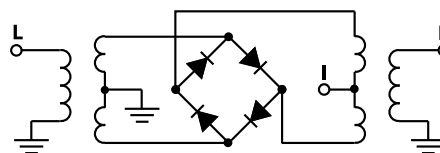

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



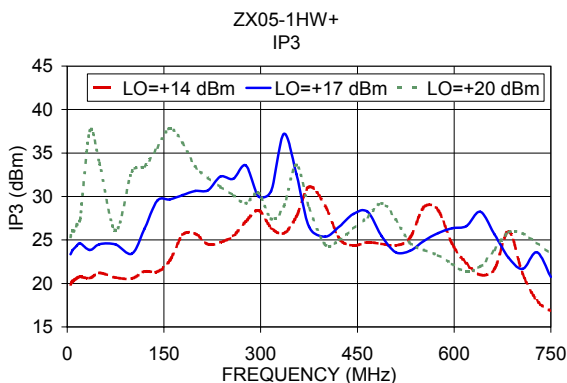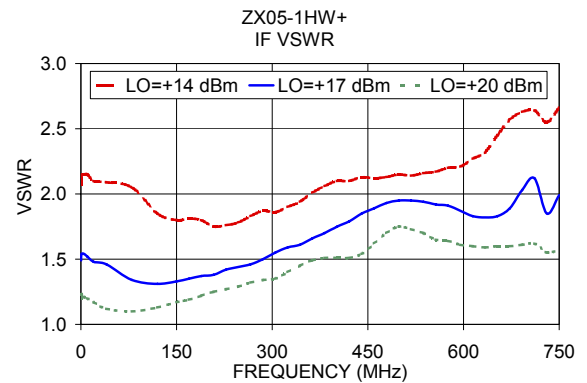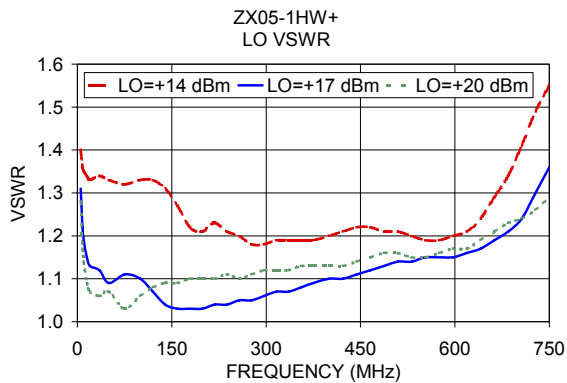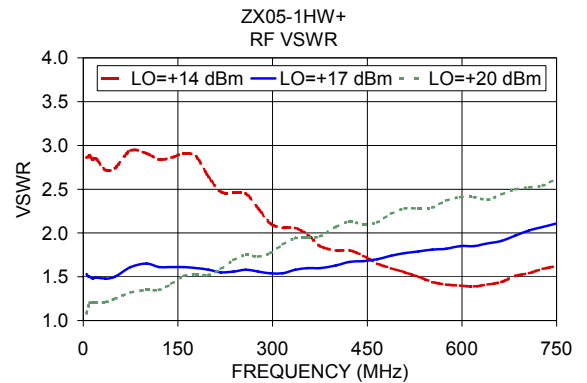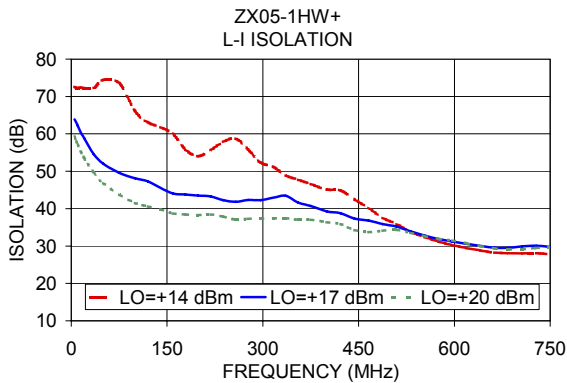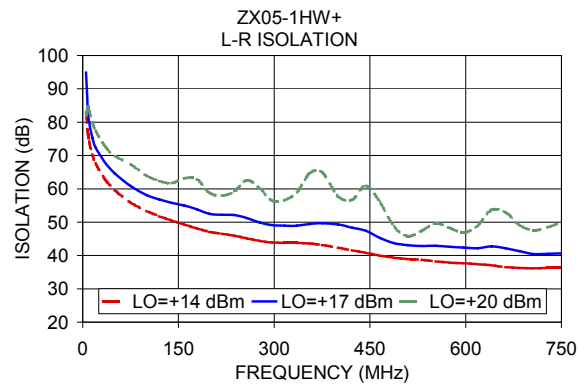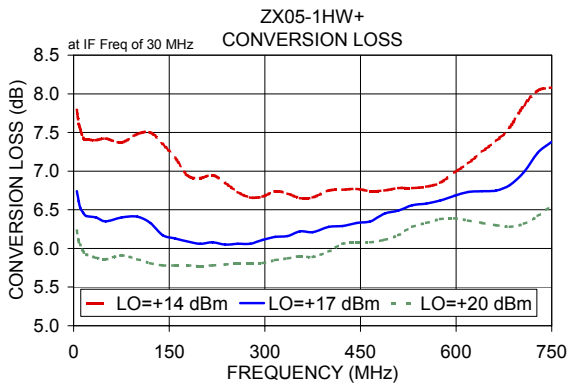

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

