

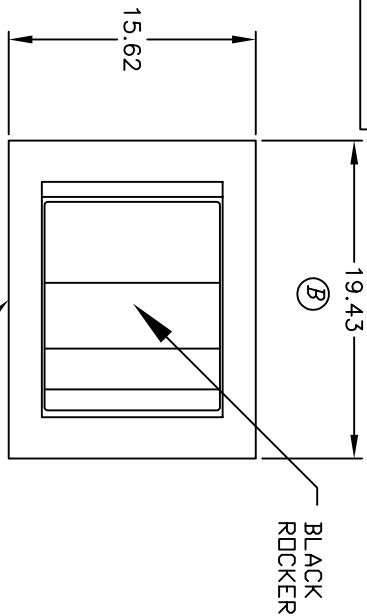
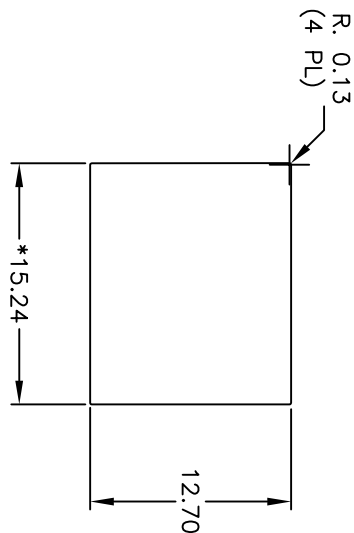


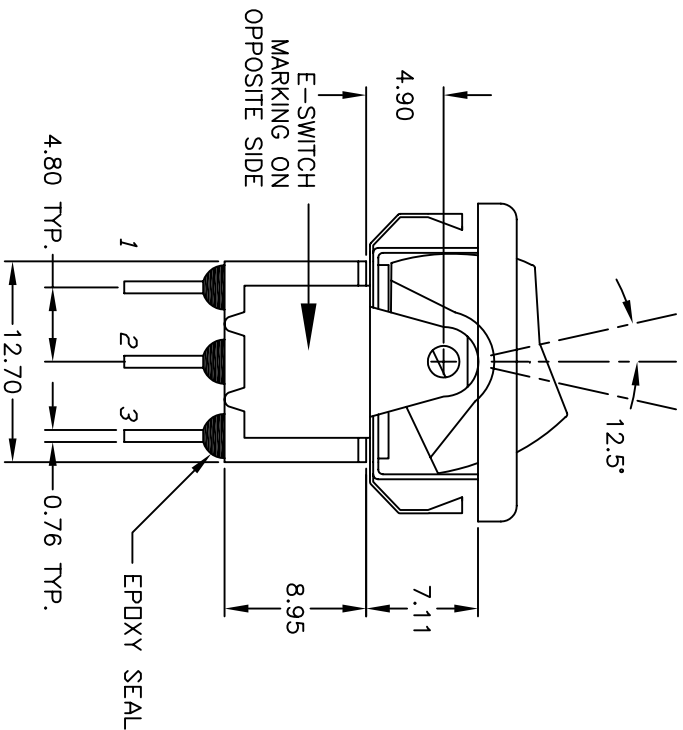

RECOMMENDED PANEL MOUNTING


SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
DN	OFF	DN	
2-3,5-6	OPEN	2-1,5-4	

PANEL THICKNESS
* DIMENSION IS 15.75/15.88
FDR PANEL THICKNESS BETWEEN
1.52mm TO 3.18mm

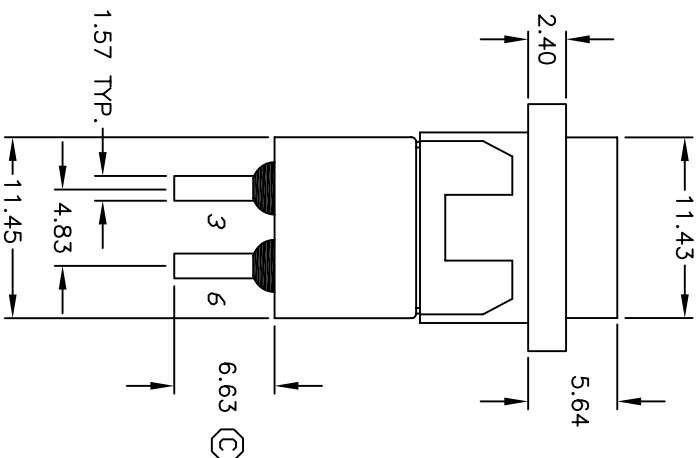

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100ma for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. 2002/95/EC (ROHS) COMPLIANT



E-SWITCH®

				TITLE 300DP3R6BLKM3QEBLK				
C	17567	CHANGED DIM. 6.35 TO 6.63	8/16/07	BF				
REV.	ECN No.	DESCRIPTION	DATE	CHKD				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED								
					SCALE 2:1			
					DATE 8/16/07		DR BF	
					DWG T3223003		REV C	