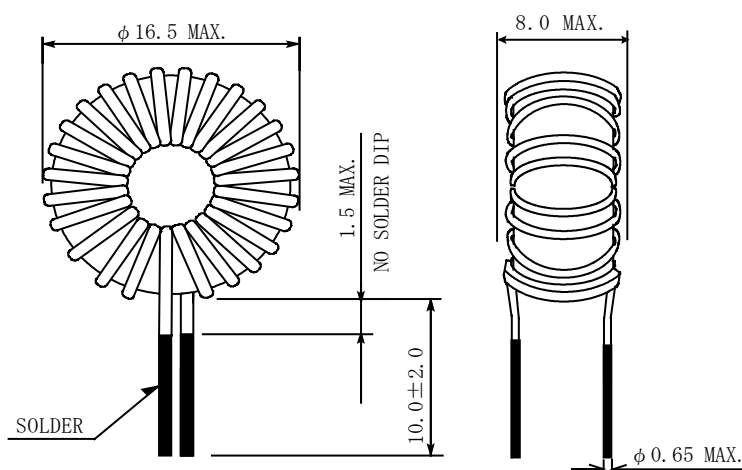


Type: PFN0716
◆ Product Description

- $\phi 16.5\text{mm} \times 8.0\text{mm}$. Max
- In addition to the typical versions of parameters shown here, custom parameters are available to meet your exact requirements.


◆ Feature

- Iron dust core is used to realize better DC Saturation characteristics and higher noise absorption effect.
- Less leakage magnetic flux.
- Ideally used as normal mode chokes EMI suppression in power supplies or signal lines.
- Elimination for impulse noise.
- RoHS Compliance

◆ Dimensions (mm)

◆ Specification

Part Name.	Inductance (μH) [MIN.] At 1kHz	D.C.R.(m Ω) [MAX.] (at 20°C)	Impedance [MIN.]			Rated Current (A)※1
			①	②	③	
PFN0716NP-NM29A	21	43	544 Ω a t 5MHz	1180 Ω a t 10MHz	1245 Ω a t 20MHz	5.4
PFN0716NP-NM39A	37	58	1245 Ω a t 5MHz	2070 Ω a t 7MHz	950 Ω a t 15MHz	2.9

※1. Rated current: The DC current at which the temperature rise is $\Delta t = 40^\circ\text{C}$. ($T_a = 20^\circ\text{C}$).