
SD

M55339/22-00636

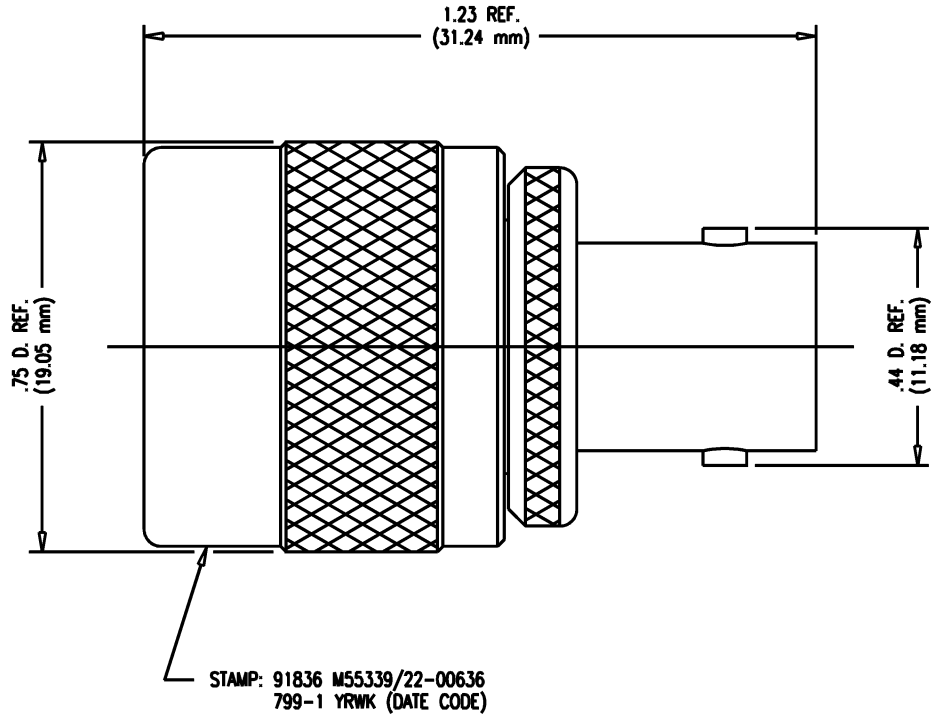

NOTES:

1. BNC INTERFACE PER MIL-STD-348, FIG. 301-2.
2. C INTERFACE PER MIL-STD-348, FIG. 302-1.
3. MATERIALS:
   - INSULATORS- TEFLON, ASTM-D-4894
   - GASKET- SILICONE RUBBER, ZZ-R-765
   - CENTER CONTACT, OUTER CONTACT, SPRING WASHER } BER. COP., ASTM-B-196
   - C RING- HARD DRAWN COPPER WIRE PER QQ-W-336
   - ALL OTHER PARTS-BRASS, ASTM-B16
4. FINISHES:
   - CENTER CONTACT & C RING- GOLD PLATE PER MIL-G-45204
   - OUTER CONTACT & SPRING WASHER-SILVER PLATE PER QQ-S-365
   - ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
5. ELECTRIAL CHARACTERISTICS:
   - NOMINAL IMPEDANCE-50 OHMS
   - WORKING VOLTAGE-500 VRMS
   - FREQUENCY RANGE-DC TO 4 GHZ

REVISIONS

ISSUE	CHANGES
1	RESTRICTED USAGE JHP 09/08/76
2	RESTRICTION REMOVED ER 16292 MJB 05/24/77
3	CN 23170 E MA 03/19/82
4	CN 35618 D ME 01/09/95
5	CN 37594 C REDRAWN TML 02/16/00

799-1S

SCALE 4:1

APPROX SURFACE AREA

799-1

USED ON

REF:

ADAPTER C(M)-BNC(F)

DRAWN	JHP	DATE	09/08/76
DESIGN		DATE	
APPR.	JM	DATE	09/25/76

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M55339/22-00636

SD