Filter Inductors
High Current



ELECTRICAL SPECIFICATIONS

Inductance: Measured at 1.0 V with no DC current

Incremental Current: The typical current at which the inductance will be decreased by 5 % from its initial zero DC value

Dielectric Rating: 2500 VRMS between winding and outer circumference to within 0.250" [6.35 mm] of the insulating sleeve edge

Operating Temperature: - 55 °C to + 125 °C (no load)
- 55 °C to + 85 °C (at full rated current)

Current Rating: Maximum continuous Operating current (DC or RMS) based on a 40 °C temperature rise

FEATURES

- Printed circuit mounting (axial leads)
- Protected by polyolefin tubing
- High saturation bobbin used allowing high inductance with low DC resistance
- Pre-tinned leads
- High resistivity core offers very high parallel resistance, resulting in maximum coil performance
- 20 sleeveless models available at reduced cost

Pb-free
RoHS COMPLIANT

MECHANICAL SPECIFICATIONS


Wire: Solid soft copper

Terminals: 20 AWG tinned copper leads

Coating: Polyolefin tubing - flame retardant UL type VW-1 per MIL-I-23053/5, Class 3 requirements

Core Material: Ferrite

DIMENSIONS in inches [millimeters]

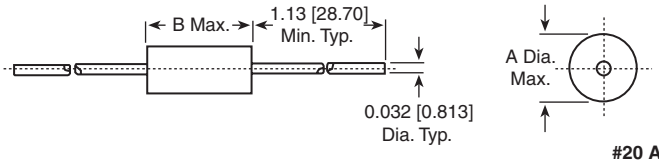

MODEL	A (Max.)	B (Max.)
IHD-1	0.270 [6.85]	0.700 [17.78]
IHD-3	0.460 [11.68]	0.900 [22.86]

STANDARD ELECTRICAL SPECIFICATIONS

IND. at 1 kHz (µH)	TOL.	DCR MAX. (Ohms)	RATED CURRENT (Max. Amps)	INCREMENTAL CURRENT (Amps Approx.)	IND. at 1 kHz (µH)	TOL.	DCR MAX. (Ohms)	RATED CURRENT (Max. Amps)	INCREMENTAL CURRENT (Amps Approx.)
MODEL IHD-1									
1.0	± 15 %	0.009	5.3	7.00	56.0	± 15 %	0.130	1.4	0.97
1.2	± 15 %	0.010	5.0	6.40	68.0	± 15 %	0.145	1.3	0.88
1.5	± 15 %	0.011	4.8	5.70	82.0	± 15 %	0.152	1.3	0.80
1.8	± 15 %	0.012	4.6	5.20	100.0	± 15 %	0.208	1.1	0.73
2.2	± 15 %	0.013	4.4	4.70	120.0	± 15 %	0.283	0.94	0.66
2.7	± 15 %	0.014	4.2	4.30	150.0	± 15 %	0.330	0.87	0.60
3.3	± 15 %	0.016	4.0	3.90	180.0	± 15 %	0.362	0.83	0.54
3.9	± 15 %	0.017	3.8	3.60	220.0	± 15 %	0.505	0.70	0.49
4.7	± 15 %	0.022	3.4	3.30	270.0	± 15 %	0.557	0.67	0.45
5.6	± 15 %	0.024	3.2	3.00	330.0	± 15 %	0.650	0.62	0.40
6.8	± 15 %	0.026	3.1	2.70	390.0	± 15 %	0.770	0.57	0.37
8.2	± 15 %	0.028	3.0	2.50	470.0	± 15 %	1.030	0.49	0.34
10.0	± 15 %	0.033	2.8	2.30	560.0	± 15 %	1.140	0.47	0.31
12.0	± 15 %	0.037	2.6	2.10	680.0	± 15 %	1.500	0.41	0.28
15.0	± 15 %	0.040	2.5	1.90	820.0	± 15 %	1.980	0.36	0.26
18.0	± 15 %	0.044	2.4	1.70	1000.0	± 15 %	2.300	0.33	0.23
22.0	± 15 %	0.050	2.2	1.50	1200.0	± 15 %	2.550	0.31	0.21
27.0	± 15 %	0.070	1.9	1.40	1500.0	± 15 %	3.000	0.29	0.19
33.0	± 15 %	0.075	1.8	1.30	1800.0	± 15 %	4.000	0.25	0.18
39.0	± 15 %	0.084	1.7	1.20	2200.0	± 15 %	4.400	0.24	0.16
47.0	± 15 %	0.104	1.6	1.10	2700.0	± 15 %	5.800	0.21	0.14

STANDARD ELECTRICAL SPECIFICATIONS

IND. at 1 kHz (µH)	TOL.	DCR MAX. (Ohms)	RATED CURRENT (Max. Amps)	INCREMENTAL CURRENT (Amps Approx.)	IND. at 1 kHz (µH)	TOL.	DCR MAX. (Ohms)	RATED CURRENT (Max. Amps)	INCREMENTAL CURRENT (Amps Approx.)
MODEL IHD-1									
3300.0	± 15 %	6.560	0.20	0.13	8200.0	± 15 %	20.800	0.11	0.08
3900.0	± 15 %	8.630	0.17	0.12	10000.0	± 15 %	23.400	0.10	0.08
4700.0	± 15 %	10.100	0.16	0.11	12000.0	± 15 %	26.000	0.10	0.07
5600.0	± 15 %	11.200	0.15	0.10	15000.0	± 15 %	36.000	0.08	0.06
6800.0	± 15 %	15.000	0.13	0.09	18000.0	v	40.000	0.08	0.06
MODEL IHD-3									
3.9	± 15 %	0.007	4.0	8.20	680.0	± 15 %	0.570	1.0	0.67
4.7	± 15 %	0.008	4.0	7.50	820.0	± 15 %	0.643	0.8	0.61
5.6	± 15 %	0.011	4.0	6.90	1000.0	± 15 %	0.844	0.8	0.56
6.8	± 15 %	0.011	4.0	6.30	1200.0	± 15 %	0.977	0.6	0.51
8.2	± 15 %	0.013	4.0	5.70	1500.0	± 15 %	1.180	0.6	0.46
10.0	± 15 %	0.016	4.0	5.20	1800.0	± 15 %	1.500	0.6	0.42
12.0	± 15 %	0.018	4.0	4.70	2200.0	± 15 %	1.760	0.5	0.38
15.0	± 15 %	0.020	4.0	4.30	2700.0	± 15 %	2.130	0.4	0.34
18.0	± 15 %	0.022	4.0	3.90	3300.0	± 15 %	2.530	0.4	0.31
22.0	± 15 %	0.024	4.0	3.50	3900.0	± 15 %	2.840	0.4	0.29
27.0	± 15 %	0.025	4.0	3.20	4700.0	± 15 %	3.790	0.4	0.26
33.0	± 15 %	0.028	4.0	2.90	5600.0	± 15 %	4.240	0.32	0.24
39.0	± 15 %	0.031	4.0	2.70	6800.0	± 15 %	5.750	0.25	0.22
47.0	± 15 %	0.034	4.0	2.50	8200.0	± 15 %	6.440	0.25	0.20
56.0	± 15 %	0.043	3.2	2.30	10000.0	± 15 %	7.300	0.25	0.18
68.0	± 15 %	0.059	2.5	2.10	12000.0	± 15 %	9.340	0.20	0.17
82.0	± 15 %	0.066	2.0	1.90	15000.0	± 15 %	10.700	0.20	0.15
100.0	± 15 %	0.084	1.6	1.70	18000.0	± 15 %	14.800	0.16	0.14
120.0	± 15 %	0.113	1.6	1.60	22000.0	± 15 %	18.000	0.13	0.12
150.0	± 15 %	0.129	1.6	1.40	27000.0	± 15 %	22.700	0.13	0.11
180.0	± 15 %	0.150	1.6	1.30	33000.0	± 15 %	25.700	0.13	0.10
220.0	± 15 %	0.162	1.6	1.20	39000.0	± 15 %	29.700	0.10	0.09
270.0	± 15 %	0.226	1.6	1.10	47000.0	± 15 %	33.700	0.10	0.09
330.0	± 15 %	0.257	1.6	0.95	56000.0	± 15 %	38.000	0.10	0.08
390.0	± 15 %	0.288	1.6	0.88	68000.0	± 15 %	52.800	0.08	0.07
470.0	± 15 %	0.393	1.2	0.80	82000.0	± 15 %	67.300	0.07	0.07
560.0	± 15 %	0.504	1.0	0.74	100000.0	± 15 %	76.000	0.07	0.06

MARKING

- Vishay Dale
- Model
- Value
- Date code

ORDERING INFORMATION

IHD-1	3.9 µH	± 15 %	ER	e2
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER INFORMATION

I	H	D	1	E	R	3	R	9	L
MODEL				PACKING CODE		INDUCTANCE VALUE			TOL.

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.