

Surface Mount Frequency Mixer

LRMS-1LH+

Level 10 (LO Power +10dBm) 2 to 500 MHz



CASE STYLE: QQQ130

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6

Outline Drawing

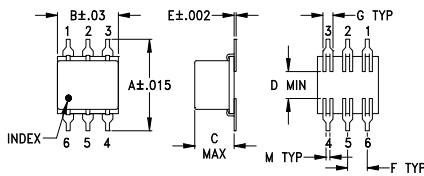


PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
.400	.31	.200	.10	.010	.100	.050	
10.16	7.87	5.08	2.54	0.25	2.54	1.27	
H	J	K	L	M			wt
.420	.120	.060	.100	.020			grams
10.67	3.05	1.52	2.54	0.51			0.55

Demo Board MCL P/N: TB-44+ Suggested PCB Layout (PL-083)

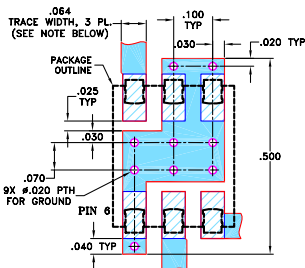

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
□ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 5.36 dB typ.
- excellent L-R isolation, 44 dB typ.

Applications

- HF/VHF/UHF
- instrumentation
- cellular

Electrical Specifications


FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)										
		L	M	U	L	M	U											
2-500	DC-500	5.80	.08	7.0	8.0	58	45	44	25	30	20	55	40	40	25	28	17	18







1 dB COMP.: +5 dBm typ. L = low range [f_1 to $10 f_1$] M = mid range [$10 f_1$ to $f_1/2$] U = upper range [$f_1/2$ to f_1]
 \bar{X} = Mid-Band Max. Total Range Max. m = mid band [$2f_1$ to $f_1/2$]

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)		VSWR RF Port (:1)	Frequency (MHz)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO Port (:1)
	RF	LO					
2.10	32.10	6.37	1.49	10.50	70.41	69.11	2.35
4.10	34.10	6.02	1.27	14.50	68.58	66.80	2.36
6.10	36.10	5.89	1.19	20.50	66.18	64.14	2.33
10.10	40.10	5.86	1.12	24.50	65.07	62.56	2.34
14.10	44.10	5.80	1.10	30.50	63.23	60.51	2.34
18.10	48.10	5.80	1.09	35.00	62.19	59.35	2.34
20.10	50.10	5.83	1.08	40.10	60.93	58.03	2.34
25.10	55.10	5.81	1.08	50.10	59.14	56.14	2.35
50.10	80.10	5.88	1.08	80.10	54.86	51.36	2.34
100.10	130.10	5.86	1.09	105.10	52.51	49.23	2.32
125.10	155.10	5.87	1.10	155.10	49.42	47.19	2.35
150.10	180.10	5.89	1.10	205.10	47.19	45.64	2.34
175.10	205.10	5.92	1.11	255.10	45.16	43.93	2.40
200.10	230.10	5.97	1.12	305.10	44.26	42.34	2.44
250.10	280.10	6.03	1.13	330.10	43.91	41.23	2.48
300.10	330.10	6.05	1.15	355.10	42.98	40.21	2.46
350.10	380.10	6.14	1.16	405.10	41.12	37.43	2.51
400.10	430.10	6.15	1.19	430.10	40.51	36.00	2.52
425.10	455.10	6.14	1.20	455.10	39.78	34.95	2.53
500.00	470.00	6.26	1.21	470.00	39.26	34.54	2.57

Electrical Schematic

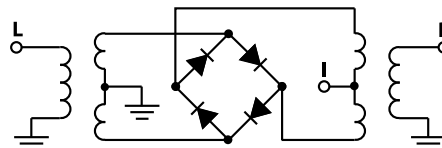

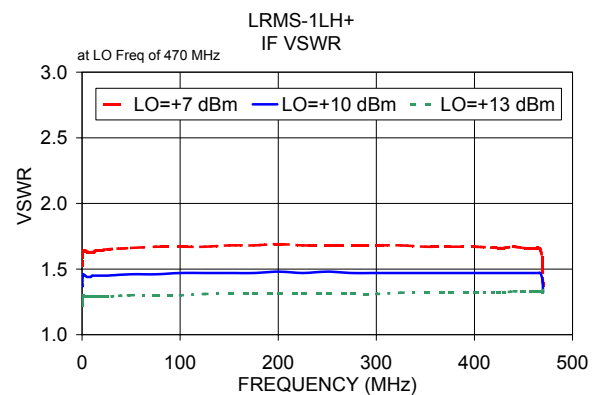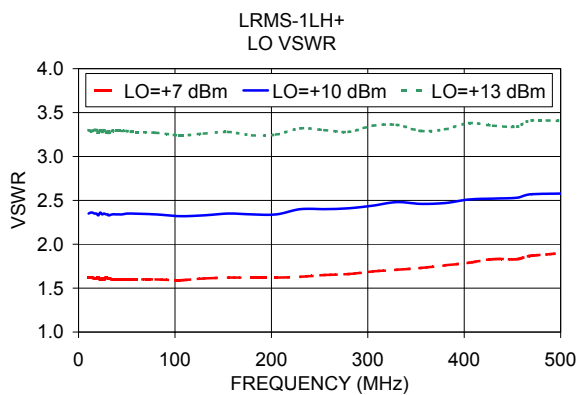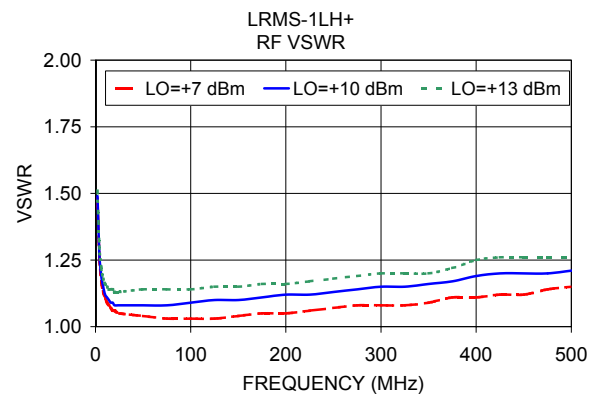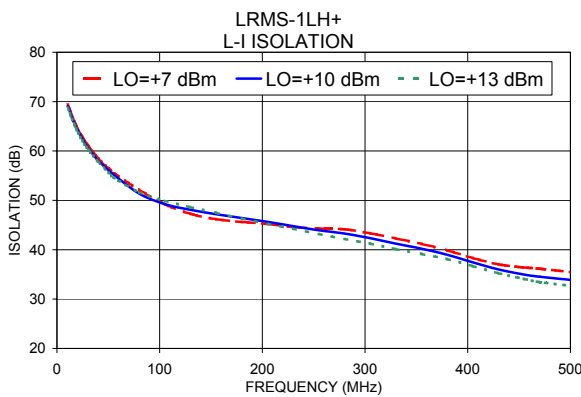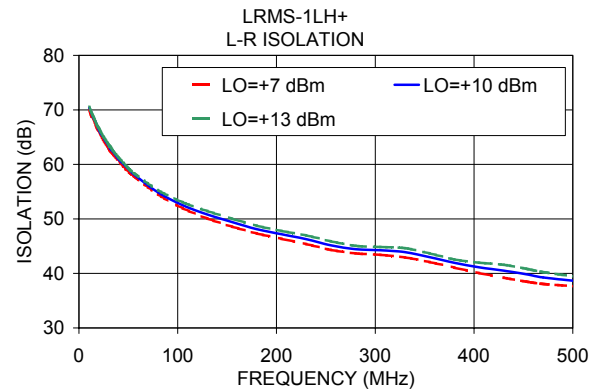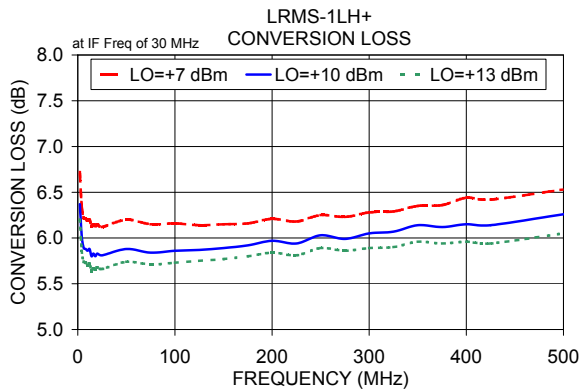

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

