crydom™

POWER COMPONENTS



CHTA30/CHTB35


High Temperature 150°C Series

400/600/800V - TRIAC


Applications

- Heat Regulation
  - Ovens
  - Coffee Makers
  - Cookers
- Light Dimming
- Control of Inductive Loads
  - Motors
  - Transformers


- > Superior Commutating Performance at High Temperature (di/dt)c = 25A/ms @ (dv/dt)c = 50V/µs
- > Ideal for Most Demanding Applications
- > Alternistor/No Snubber Type
- > IGT 50 mA
- > VDRM/VRMM 400, 600, 800V



TO-220AB Isolated (CHTA30)



TO-220AB Non-Isolated (CHTB35)



ISO9001 Certified

Absolute Maximum Ratings

		CONDITIONS	SYMBOL	RATING
RMS On-State Current (full sine wave)	Tc = 120°C Tc = 95°C	TO-220AB TO-220AB Iso	$I_{T(RMS)}$	35A (CHTB) 30A (CHTA)
Non Repetitive Surge Peak On-State Current (Full Cycle, Tj Initial = 25°C)		F =50 Hz F =60 Hz	I_{TSM}	380A 400A
I^2t Value for fusing		tp = 10 ms	I^2t	660A²s
Critical rate of rise of on-state current I_G=2 x I_{GT}, tr<100 ns, Tj = 150°C			di/dt	100A/µsec
Peak Gate Current @ Tj = 150°C		tp = 20 µs	I_{GM}	4A
Average Gate Power Dissipation @ Tj = 150°C			PG(AV)	1W
Storage Temperature Range			T_{stg}	-40 to +150°C
Operating Junction Temperature Range			T_j	-40 to +150°C
Isolation Voltage (CHTA Series only)			V_{ISO}	2500 V_{RMS}

Electrical Characteristics

I_{GT} MAX @ V_D =12 V, R_L = 30Ω NOTE 1		QI-II-III	50mA
V_{GT} MAX @ V_D =12 V, R_L = 30Ω		QI-II-III	1.3V
V_{GD} MIN @ V_D =V_{DRM}, R_L = 3.3kΩ	Tj = 150°C	QI-II-III	0.15V
I_H MAX @ I_T = 500 mA NOTE 2			75mA
I_L MAX @ I_G = 1.2 I_{GT}		QI-III	75mA
I_L MAX @ I_G = 1.2 I_{GT}		Q-II	100mA
dv/dt MIN @ V_D = 67%V_{DRM} (gate open) NOTE 2	Tj = 150°C		500V/µsec
(di/dt)c MIN without snubber NOTES 2 & 4	Tj = 150°C		25A/msec

Static Characteristics

V_T MAX @ I_{TM} =48 A, tp = 380µs NOTE 2	Tj = 25°C	1.5V
V_{to} MAX @ Threshold Voltage NOTE 2	Tj = 150°C	0.8V
R_d MAX @ Dynamic Resistance NOTE 2	Tj = 150°C	19m Ω
I_{DRM} MAX @ V_{DRM} = V_{RRM}	Tj = 25°C	5µA
I_{RRM} MAX @ V_{DRM} = V_{RRM}	Tj = 150°C	8.5mA

GENERAL NOTES

1. Minimum IGT is guaranted at 5% of IGT max.
2. For both polarities of A2 referenced to A1
3. All parameters at 25 degrees C unless otherwise specified.
4. Commutating dv/dt = 50V/µs, (exponential to 200Vpk)

CHTA30/CHTB35

High Temperature 150°C Series

400/600/800V - TRIAC

Thermal Resistances


		SYMBOL	RATING
Junction to Case (AC)	TO-220AB	Rth(j-c)	0.8 ° C/W
Junction to Case (AC)	TO-220AB Isolated	Rth(j-c)	1.7 ° C/W
Junction to Ambient	TO-220AB	Rth(j-a)	60 ° C/W
Junction to Ambient	TO-220AB Isolated	Rth(j-a)	60 ° C/W

Part Number Selection

Part Number	Voltage [Vpk]	IGT[mA]	Type	Package
CHTA30-xxxB	400, 600, 800	50mA	Standard	TO-220AB
CHTB35-xxxB	400, 600, 800	50mA	Standard	TO-220AB

Part Number Designation

SERIES **CHT** **B** (Isolation Type **A:** Isolated **B:** Non-Isolated) **35** (Rated Current **30:** 30 Amp (CHTA) **35:** 35 Amp (CHTB)) - **800** (Maximum Blocking Voltage **400:** 400Vpk **600:** 600Vpk **800:** 800Vpk) **PT** (Packaging **Blank:** Bulk **PT:** Plastic Tube)

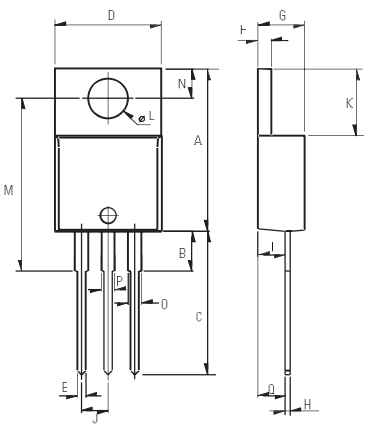

Weight: 2.3g (0.08 oz)

Dimensions

REF.	Millimeters Min.	Typ.	Max.	Inches Min.	Typ.	Max.
A	15.24		15.75	0.6		0.62
B		3.23			0.127	
C	12.78		13.79	0.503		0.543
D	9.96		10.36	0.392		0.408
E	0.69		0.94	0.027		0.037
F	1.22		1.32	0.048		0.052
G	4.62		4.83	0.182		0.19
H	0.46		0.61	0.018		0.024
I	2.49		2.84	0.098		0.112
J	2.39		2.69	0.094		0.106
K	6.48		6.88	0.255		0.271
L	3.78		3.89	0.149		0.153
M	15.49	16	16.51	0.61	0.63	0.65
N	2.59		2.9	0.102		0.114
O	0.99		1.55	0.039		0.061
P	0.99		1.55	0.039		0.061
Q		2.67			0.105	

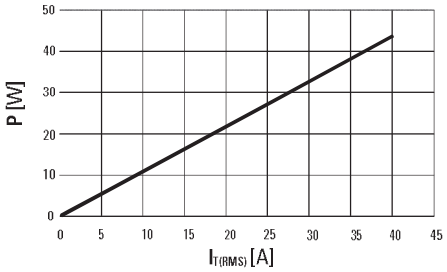


Fig. 1: Power dissipation versus RMS on-state current (full cycle).

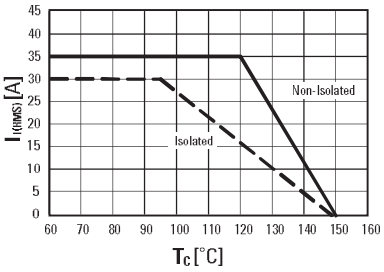


Fig. 2: RMS on-state current versus case temperature (full cycle)

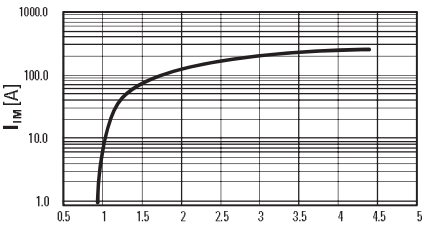


Fig. 3: On-state current versus on-state voltage (instantaneous values)

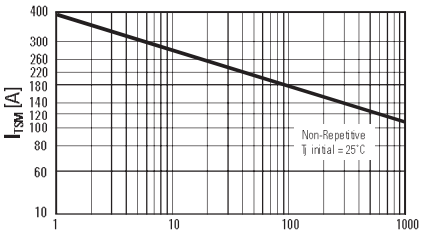


Fig. 4: Non-repetitive surge peak on-state current versus number of cycles.

ISO9001 Certified

Approvals

UL Recognized Component - E72445 (Pending for CHTA30)

USA
Sales Support (877) 502-5500
Tech Support (877) 702-7700
Fax (619) 710-8540
Email: sales@crydom.com
Crydom Corp
2320 Paseo de las Americas, Suite 201
San Diego, CA 92154

EUROPE - UK
Telephone +44 (0) 1202 365070
Fax +44 (0) 1202 365090
Email: intsales@crydom.com
Crydom International Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE

Germany
Telephone +49 (0) 180 3000 506

ASIA - Thailand
Telephone +66 (0)2 665 2517
Fax +66 (0)2 665 2588
Crydom Asia
18/8 Fico Place 12th Floor
Soi Sukhumvit 21 (Asoke)
Klongtoey Nua, Wattana
Bangkok, Thailand 10110

© 2004 Crydom Corp, All Rights Reserved. Specifications are subject to change without prior notice. Crydom and the Crydom logo are trademarks of Crydom Corp. CrydomCHT30/35_L0205.pdf