
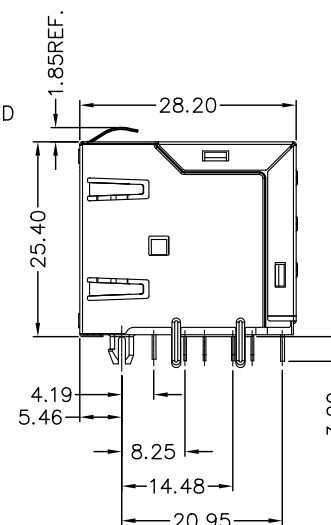


REV.	ECN. NO.	NAME	DATE

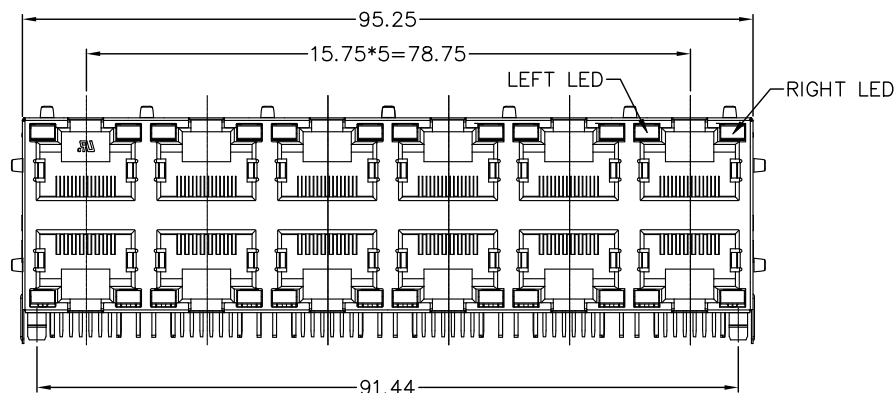

NOTES:

1.MATERIAL:

HOUSING: PA46,UL94V-0,BLACK

INSERT: PBT,UL94V-0,BLACK

CONTACT:PHOSPHOR BORNZE,T=0.35

SHELL: COPPER ALLOY

2.FINISH:



CONTACT:GOLD 3u" ON CONTACT AREA

MATTE TIN PLATING ON SOLDER TAIL



SHELL: NICKEL PLATING OVERALL

3.OPERATING TEMPERATURE: -40°C~+85°C.

4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

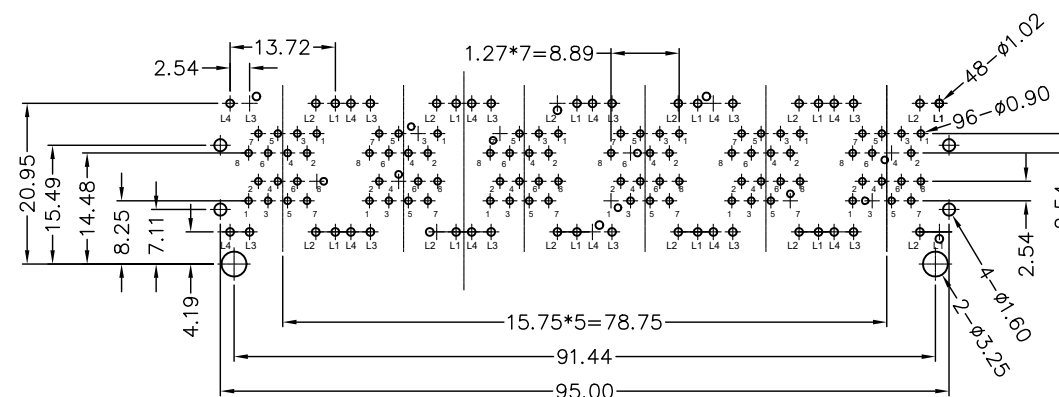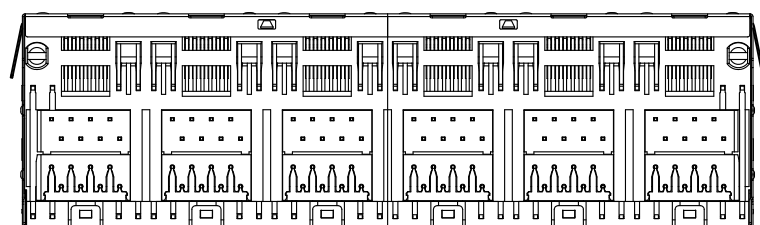

RECOMMENED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ±0.05



RoHS Compliant

TOLERANCE UNSPECIFIED . .0 ± 0.38 .00 ± 0.25 .000 ± 0.10 ANGLE ± 3.00° MANUFACTURING COPY		VITALCONN a vital connector company		FOR YOUR VITAL CONNECTION	
		TITLE: RJ45 8P8C 2X6 WITH LED			
DRAWN BY:	BECKER	PART NO:	JS2621G2D401		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT:mm	SHEET:10F1	FCN: B2
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	