

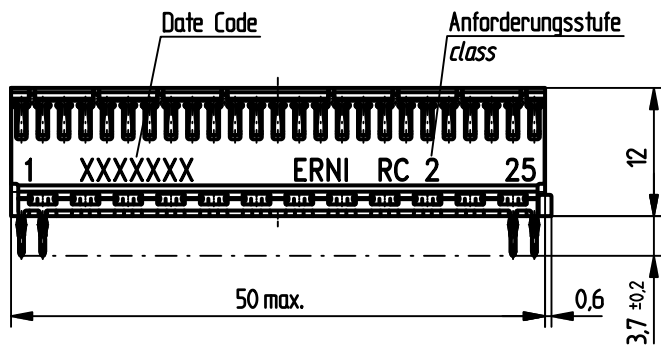



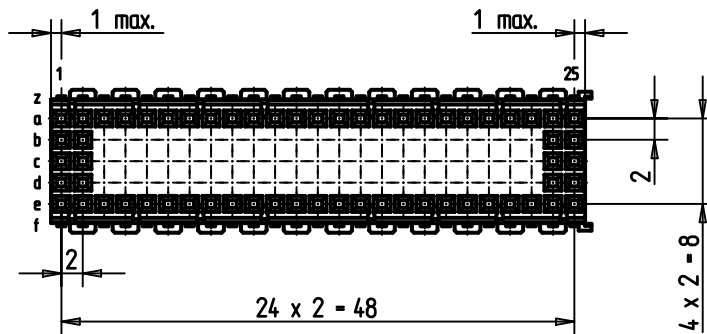


Bestückungsplan - contact layout

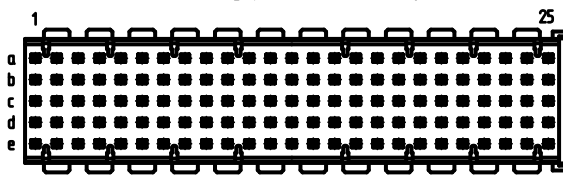

■ - bestückt - assemble

Lochbild für Leiterplatte
(Bestückungsseite)

Board hole pattern
(Component mounting side)

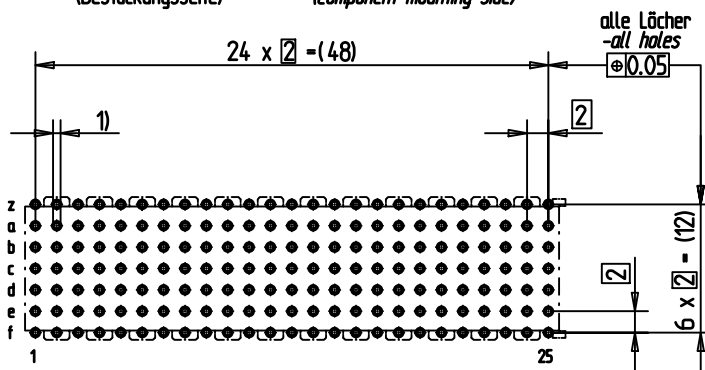

- 1) $\varnothing 0,6 \pm 0,05$ Durchmesser des metallisierten Loches
 $\varnothing 0,6 \pm 0,05$ Diameter of finished plated-through hole
 $\varnothing 0,7 \pm 0,02$ Bohrungsdurchmesser des Loches
 $\varnothing 0,7 \pm 0,02$ Diameter of drilled hole

Schichtaufbau im metallisierten Loch
 siehe Zeichnung 114406

Metal plating of plated-through hole
 see drawing 114406

Fehlende Masse und Angaben nach IEC 61076-4-101
 Missing information and dimensions per IEC 61076-4-101

Bedruckung siehe Zeichnung 284811
 Marking see drawing 284811

Au - Plating !

Consider protection memo from DIN 34

Information: Abschirmleiste Reihe z+f montiert shieldings row z+f mounted Anforderungsstufe 207 / class 207				Tolerances		 All Dimensions in mm		Scale		2:1	
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation			
								ERmet-FS Federleiste B <i>ERmet-Female Straight Type B</i>			
				ERNI		www.ERNI.com		223998			
Index				Date		H:00066973.SZA		ERMB			