


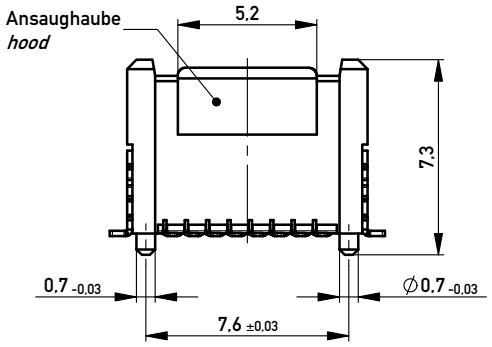





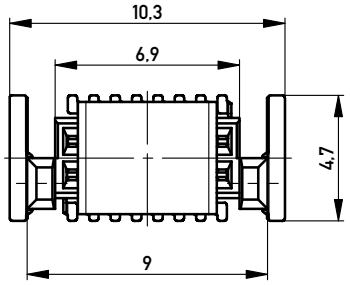


ohne Ansaughaube - *without hood*

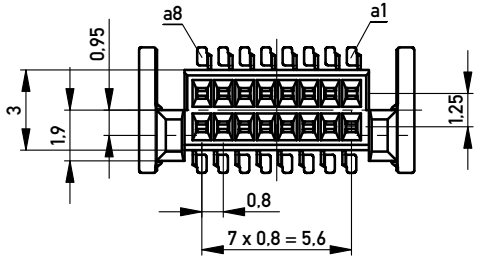

ohne Ansaughaube - *without hood*



Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

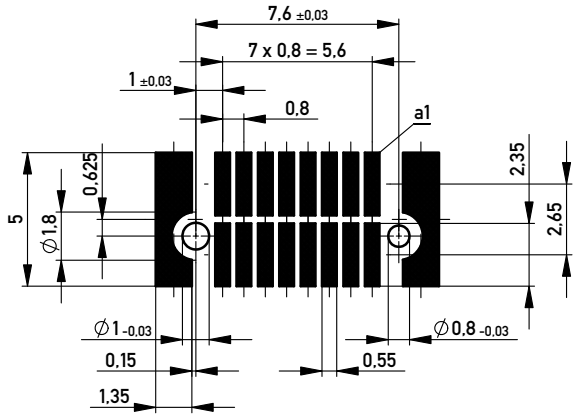


Anforderungsstufe 2
Performance Level 2

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt in Gurtverpackung - *Tape on Reel Packaging*
Verpackungseinheit: 670 Stück - *Packaging unit: 670 pcs*

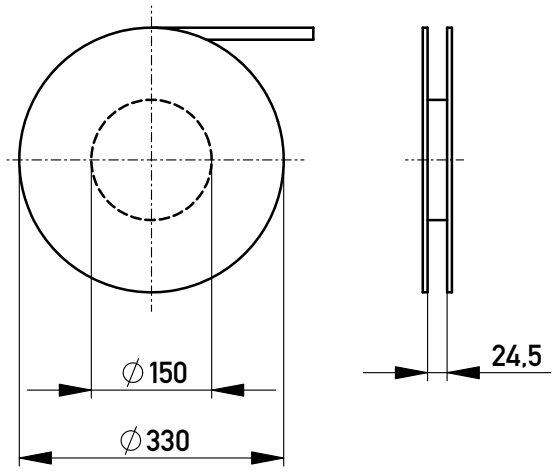

Abspulrichtung - *Reel off Direction*

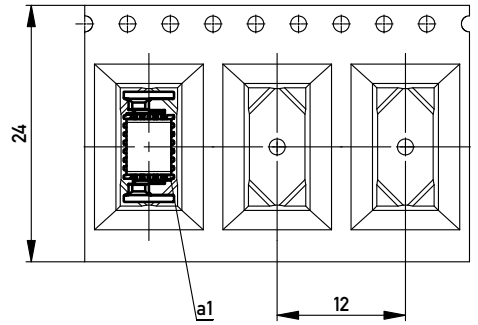

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:	Tolerances: All Dimensions in mm	Scale 5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation: 0,8 DRC-B, F 6mm, 16 polig / *0,8 DRC-B, F 6mm, 16 pin*	
c / Index	21.09.2012 / Date	ERNI www.ERNI.com	454925 / I / A3
			Class: DRCB