




**Fig. 1**

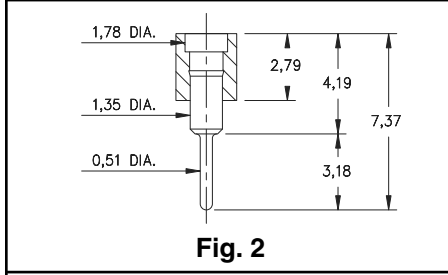


**Fig. 2**

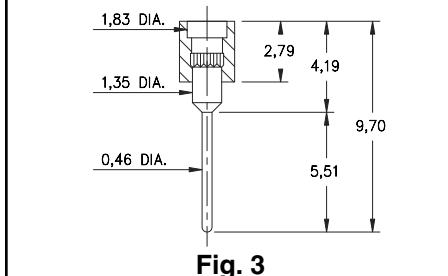


**Fig. 3**

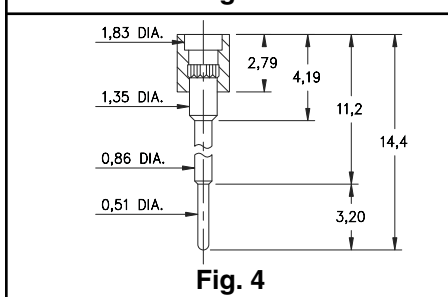

**Fig. 4**

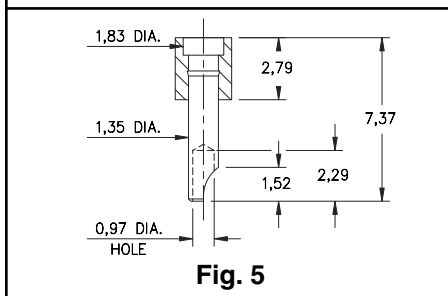


**Fig. 5**

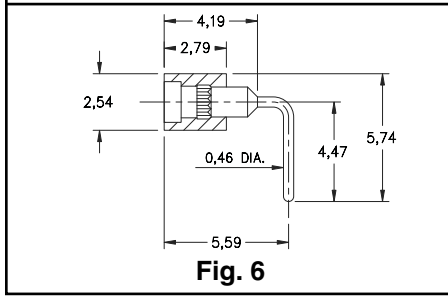

**Fig. 6**

- Series 319, 330 and 399 single row strips may be cut to any length.
- Spring Target connectors present a large flat surface for making tangent connections to our standard 1,07 dia spring pin plungers. The target connectors provide an excellent gold plated conductive path back to the board mounted spring pin connector.
- Target connectors use MM #1938, #1940, #1941, #1942 and #3024 pins. See page 185 for details.
- Insulators are high temp. thermoplastic.

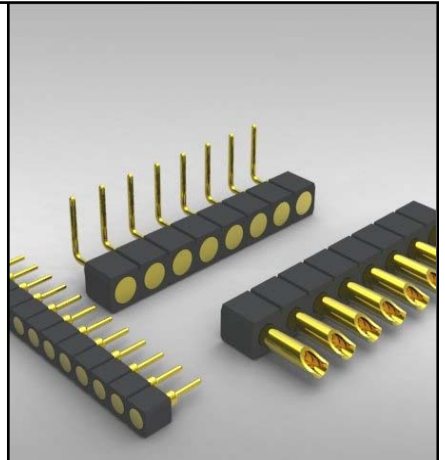

### Ordering Information

<b>Fig. 1</b>	<b>Series 319...041</b> <b>SMT w/ Alignment Pins</b>
	319-10-1__-30-041000 Specify # of pins      ↳      01-64
<b>Fig. 2</b>	<b>Series 319...001</b> <b>Standard Solder Tails</b>
	319-10-1__-00-001000 Specify # of pins      ↳      01-64
<b>Fig. 3</b>	<b>Series 319...002</b> <b>Long Solder Tails</b>
	319-10-1__-00-002000 Specify # of pins      ↳      01-64
<b>Fig. 4</b>	<b>Series 319...005</b> <b>Elevated Solder Tails</b>
	319-10-1__-00-005000 Specify # of pins      ↳      01-64
<b>Fig. 5</b>	<b>Series 330...240</b> <b>Solder Cups</b>
	330-10-1__-00-240000 Specify # of pins      ↳      01-64
<b>Fig. 6</b>	<b>Series 399...008</b> <b>Right Angle Solder Tails</b>
	399-10-1__-10-008000 Specify # of pins      ↳      01-64

*For Electrical,  
Mechanical & Environmental  
Data, See pg. 4*



PLATING CODE =	<b>10</b>		
Pin Plating		0,25µm Au	