


ENERGIZER 10 size - **Mercury Free**



(top view) (bottom view)

**Industry Standard Dimensions**

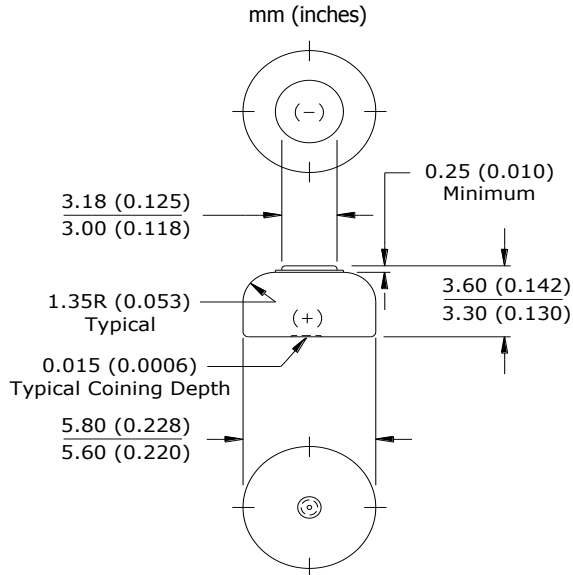


**Specifications**

<b>Chemical System:</b>	Zinc Air (Zn/O <sub>2</sub> )
<b>Tab Color:</b>	Yellow
<b>Designation:</b>	ANSI-7005ZD, IEC-PR70
<b>Nominal Voltage:</b>	1.4 Volts
<b>Typical Capacity:</b>	91 mAh (to 0.9 volts) (Rated at 3k ohms at 21°C/50% RH)
<b>Typical Weight:</b>	0.32 grams (0.01 oz.)
<b>Typical Volume:</b>	0.08 cubic centimeters (0.005 cubic inch)


**Typical Discharge Characteristics**

IEC Industry Standards / Standard Test Protocol  
(3/.7 mA .1S/1H59M 59.9S 12H at 21C)

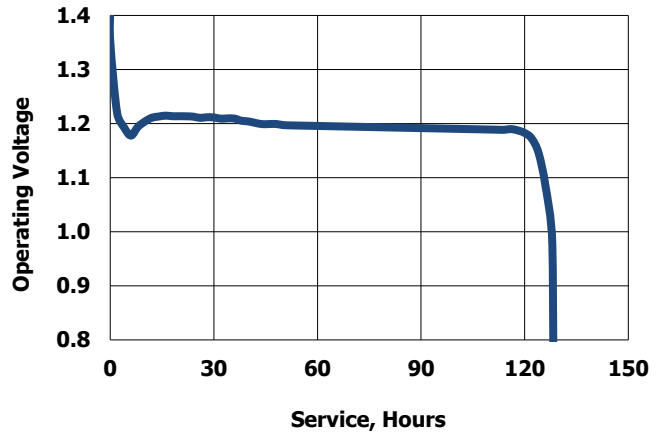


**Typical Discharge Characteristics**

ANSI/IEC Industry Standards / Intermittent Test Protocol  
(3K ohm 12 hours per day at 21C)

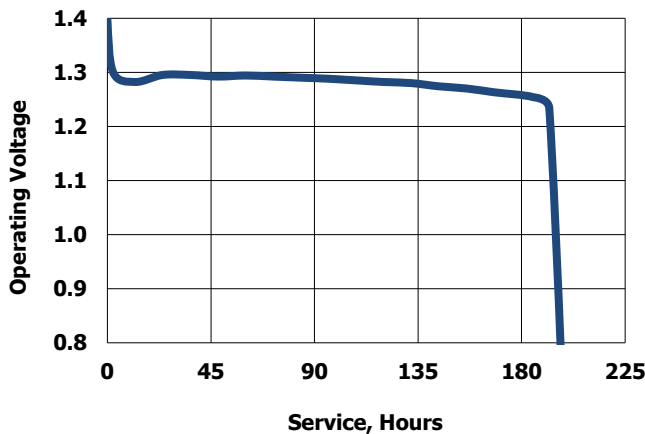

**Typical Discharge Characteristics**

IEC Industry Standards / High Drain Test Protocol  
(5/1 mA .1S/1H59M 59.9S 12H at 21C)

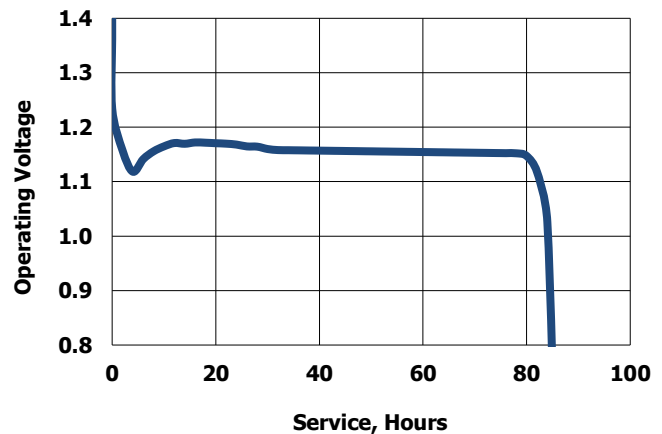

**Important Notice**

This data sheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.