

SHEET 1 OF 1

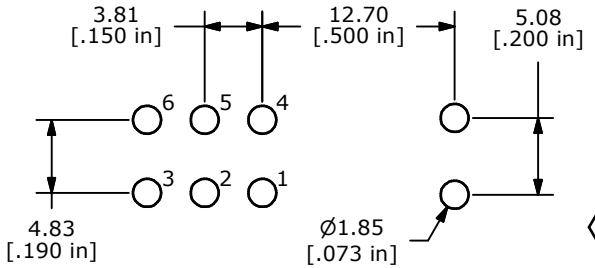


P.C. MOUNTING

▲ SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
C 1-3, 4-6	1-2, 4-5


(ON)=MOMENTARY





CIRCUIT DIAGRAM

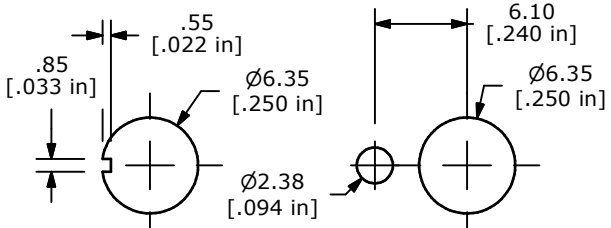


PANEL MOUNTING

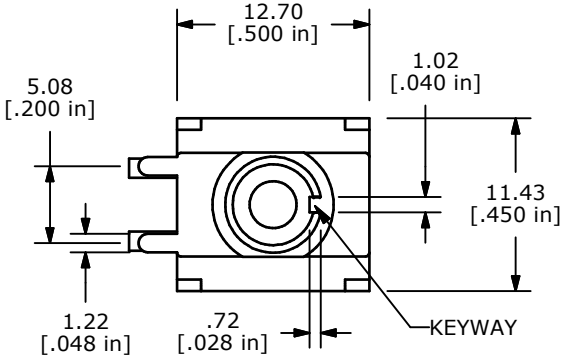

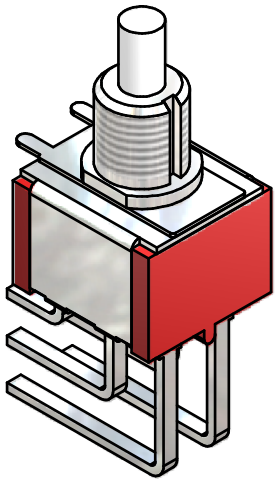

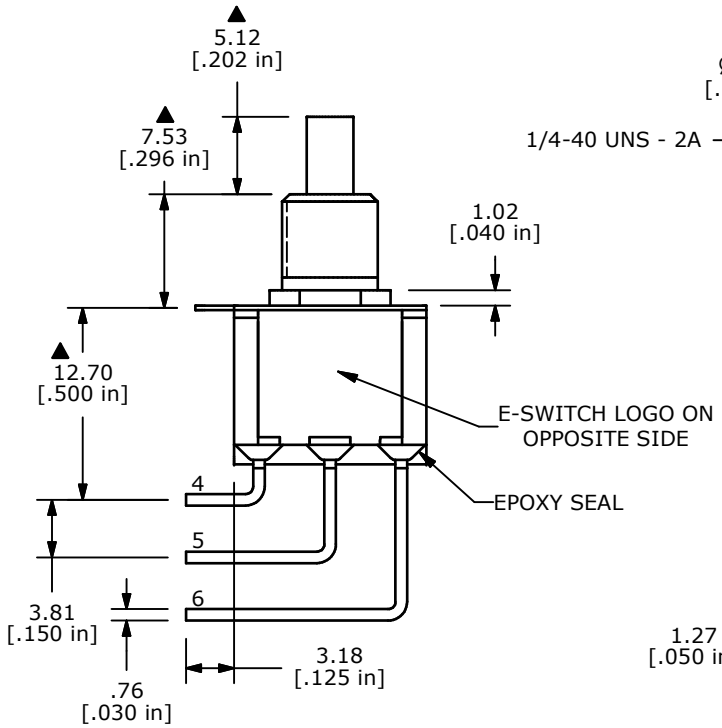

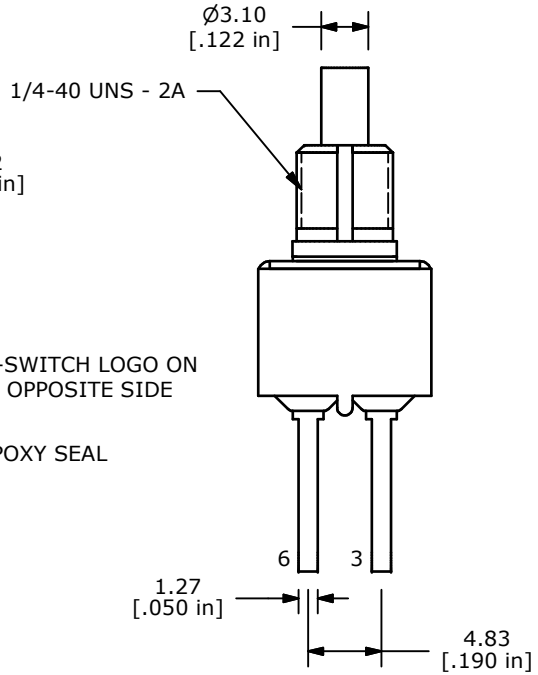

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: GOLD
5. RATING: 0.4VA MAX. @20V MAX. AC OR DC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. ACUATION FORCE: 300 ± 100gf
▲9. TRAVEL: 1.0 ± 0.2mm
10. CONTACT RESISTANCE: 20 mOHM MAX. TYPICAL @ 2-4 VDC
11. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL.
12. OPERATING TEMP.: -30°C to 85°C
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2011/65/EU (ROHS) COMPLIANT.
15. HARDWARE TO BE SHIPPED BULK
    T100000 - HEXNUT - QTY 2
    T100011 - LOCKWASHER - QTY 1
    T100015 - LOCKRING - QTY 1

REV	PCR NO	DESCRIPTION	DATE	BY
A	20832	RELEASED FOR PRODUCTION	10/19/12	EBP

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE 700DP7B10M7REH

SCALE	DATE	DR	DWG	REV
	10/19/2012	EBP	ST711070	A