
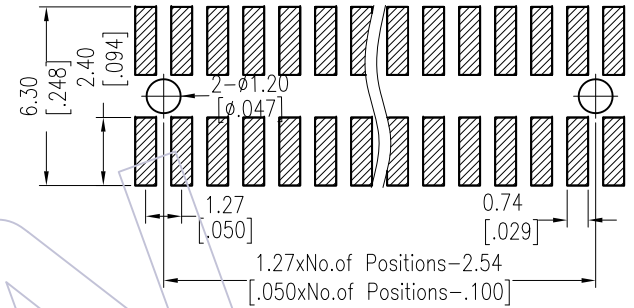


HSF

NOTES:
 Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:LCP+30%G.F UL94V-0



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

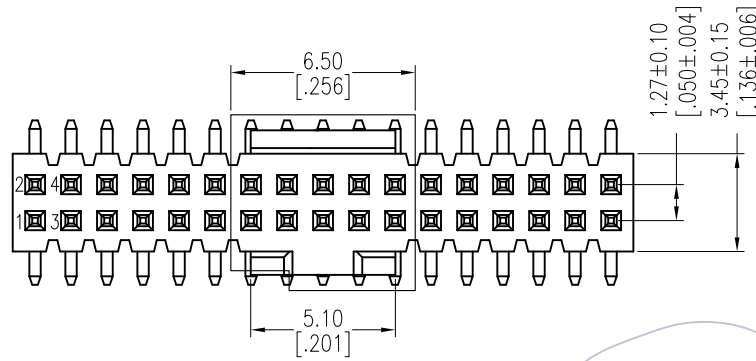


Ordering Information

3132-XX M XX B K00 X X

No.of Pins	Contact Plating	Color Insulator	Packing	Series No.
10 34	G0=Gold Flash	B=Black	T=Tube	1=Type 1
14 40	G3=10u"Gold	W=White	P=Tube+CAP	2=Type 2
16 44	G4=15u"Gold		R=Tape&Reel+CAP	
20 50	G5=30u"Gold			
24 60	S0=Gold Flash/Tin			
26 64	S3=10u"Gold/Tin			
30 80	S4=15u"Gold/Tin			
32 100	S5=30u"Gold/Tin			
	SN=Tin			

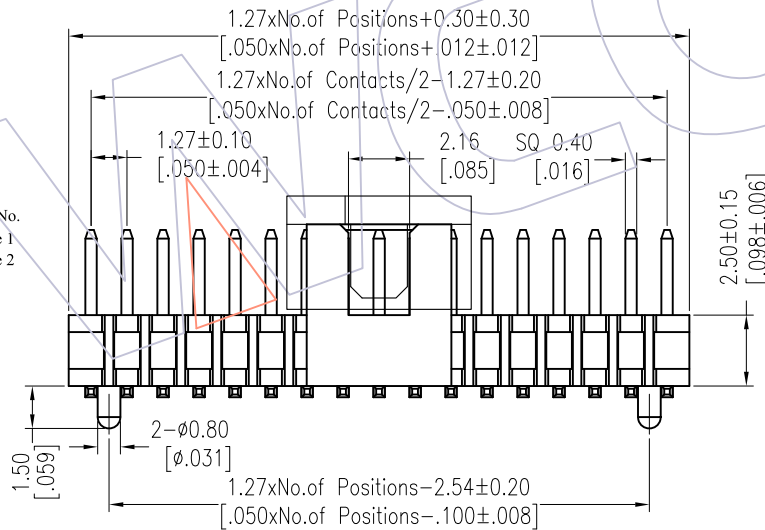

Type 1: W/O Post

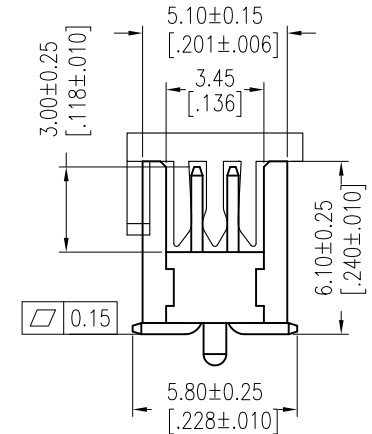

Type 2: With Post

Item	Pitch	Mating
Standard	1.27	5232
Alternate		

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
x.x ±0.40	JYHuang	2012/09/15	UNIT mm		3132-XXMXXBK00XX
x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE:
x.xxx ±0.15	APPROVE	DATE	SHEET 1/1		1.27mm BOX SMT "S" TYPE H=6.10
Angle ± 3'			PROJ.		Customer NO.
DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2012/09/18	NEW	-----