

Phase leg MOSFET Power Module

V_{DSS} = 200V
R_{DSon} = 8mΩ max @ Tj = 25°C
I_D = 208A @ Tc = 25°C

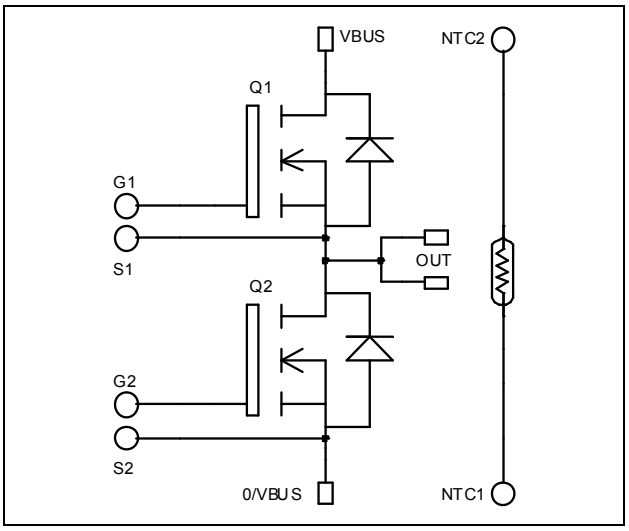

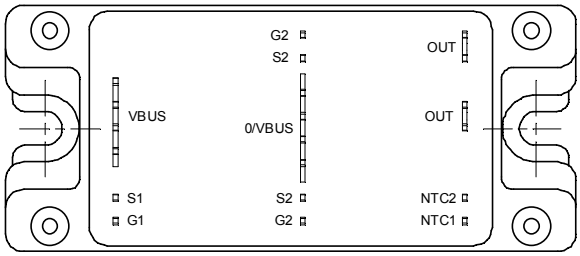

Application

- Welding converters
- Switched Mode Power Supplies
- Uninterruptible Power Supplies

Features

- Power MOS 7® FREDFETs
  - Low R_{DSon}
  - Low input and Miller capacitance
  - Low gate charge
  - Fast intrinsic reverse diode
  - Avalanche energy rated
  - Very rugged
- Kelvin source for easy drive
- Very low stray inductance
  - Symmetrical design
  - Lead frames for power connections
- Internal thermistor for temperature monitoring
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile

Absolute maximum ratings

Symbol	*Parameter*		*Max ratings*	*Unit*
V_{DSS}	Drain - Source Breakdown Voltage		200	V
I_D	Continuous Drain Current	T_c = 25°C	208	A
		T_c = 80°C	155	
I_{DM}	Pulsed Drain current		832	
V_{GS}	Gate - Source Voltage		±30	V
R_{DSon}	Drain - Source ON Resistance		8	mΩ
P_D	Maximum Power Dissipation	T_c = 25°C	781	W
I_{AR}	Avalanche current (repetitive and non repetitive)		100	A
E_{AR}	Repetitive Avalanche Energy		50	mJ
E_{AS}	Single Pulse Avalanche Energy		3000	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handing Procedures Should Be Followed.

All ratings @ T_j = 25°C unless otherwise specified

Electrical Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
BV_{DSS}	Drain - Source Breakdown Voltage	V_{GS} = 0V, I_D = 375µA		200			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{GS} = 0V,V_{DS} = 200V	T_j = 25°C			375	µA
		V_{GS} = 0V,V_{DS} = 160V	T_j = 125°C			1500	
$R_{DS(on)}$	Drain – Source on Resistance	V_{GS} = 10V, I_D = 104A				8	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS} = V_{DS}, I_D = 5mA		3		5	V
I_{GSS}	Gate – Source Leakage Current	V_{GS} = ±30 V, V_{DS} = 0V				±150	nA

Dynamic Characteristics

Symbol	*Characteristic*	*Test Conditions*	*Min*	*Typ*	*Max*	*Unit*
C_{iss}	Input Capacitance	V_{GS} = 0V V_{DS} = 25V f = 1MHz		14.4		nF
C_{oss}	Output Capacitance			4.66		
C_{rss}	Reverse Transfer Capacitance			0.29		
Q_g	Total gate Charge	V_{GS} = 10V V_{Bus} = 100V I_D = 208A		280		nC
Q_{gs}	Gate – Source Charge			106		
Q_{gd}	Gate – Drain Charge			134		
$T_{d(on)}$	Turn-on Delay Time	**Inductive switching @ 125°C** V_{GS} = 15V V_{Bus} = 133V I_D = 208A R_G = 2.5Ω		32		ns
T_r	Rise Time			64		
$T_{d(off)}$	Turn-off Delay Time			88		
T_f	Fall Time			116		
E_{on}	Turn-on Switching Energy ❶	**Inductive switching @ 25°C** V_{GS} = 15V, V_{Bus} = 133V I_D = 208A, R_G = 2.5Ω		1698		µJ
E_{off}	Turn-off Switching Energy ❷			1858		
E_{on}	Turn-on Switching Energy ❶	**Inductive switching @ 125°C** V_{GS} = 15V, V_{Bus} = 133V I_D = 208A, R_G = 2.5Ω		1872		µJ
E_{off}	Turn-off Switching Energy ❷			1972		

Source - Drain diode ratings and characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
I_S	Continuous Source current (Body diode)		Tc = 25°C			208	A
			Tc = 80°C			155	
V_{SD}	Diode Forward Voltage	V_{GS} = 0V, I_S = - 208A				1.3	V
dv/dt	Peak Diode Recovery ❸					5	V/ns
t_{rr}	Reverse Recovery Time	I_S = - 208A V_R = 133V di_S/dt = 200A/µs	T_j = 25°C			230	ns
			T_j = 125°C			450	
Q_{rr}	Reverse Recovery Charge	I_S = - 208A V_R = 133V di_S/dt = 200A/µs	T_j = 25°C		1.8		µC
			T_j = 125°C		6.8		

❶ E_{on} includes diode reverse recovery.
❷ In accordance with JEDEC standard JESD24-1.
❸ dv/dt numbers reflect the limitations of the circuit rather than the device itself.
$I_S \le$ - 208A di/dt ≤ 700A/µs $V_R \le V_{DSS}$ $T_j \le$ 150°C

Thermal and package characteristics

Symbol	Characteristic			Min	Typ	Max	Unit
R_{thJC}	Junction to Case					0.16	°C/W
V_{ISOL}	RMS Isolation Voltage, any terminal to case t =1 min, I isol<1mA, 50/60Hz			2500			V
T_J	Operating junction temperature range			-40		150	°C
T_{STG}	Storage Temperature Range			-40		125	
T_C	Operating Case Temperature			-40		100	
Torque	Mounting torque	To Heatsink	M5			4.7	N.m
Wt	Package Weight					160	g


Temperature sensor NTC

Symbol	Characteristic	Min	Typ	Max	Unit
R_{25}	Resistance @ 25°C		68		kΩ
$B_{25/85}$	T_{25} = 298.16 K		4080		K


$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$


T: Thermistor temperature
R_T: Thermistor value at T


Package outline

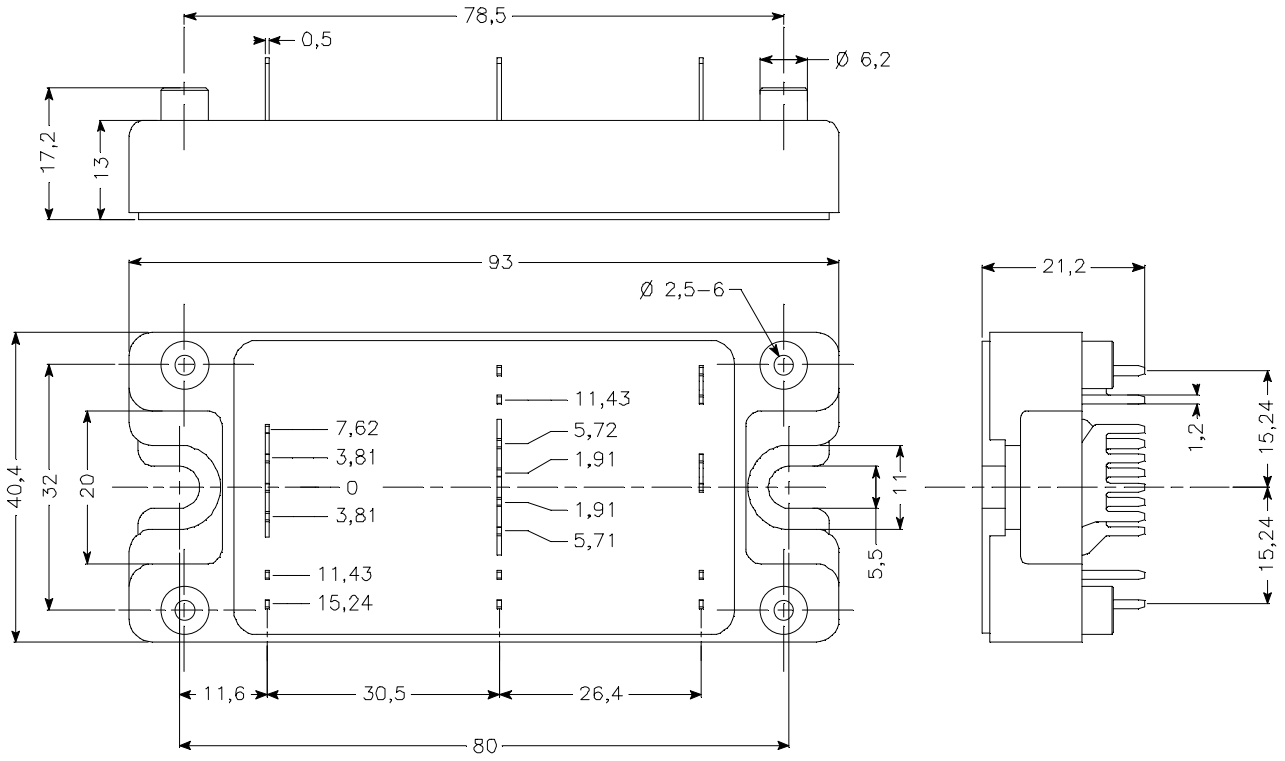



Typical Performance Curve

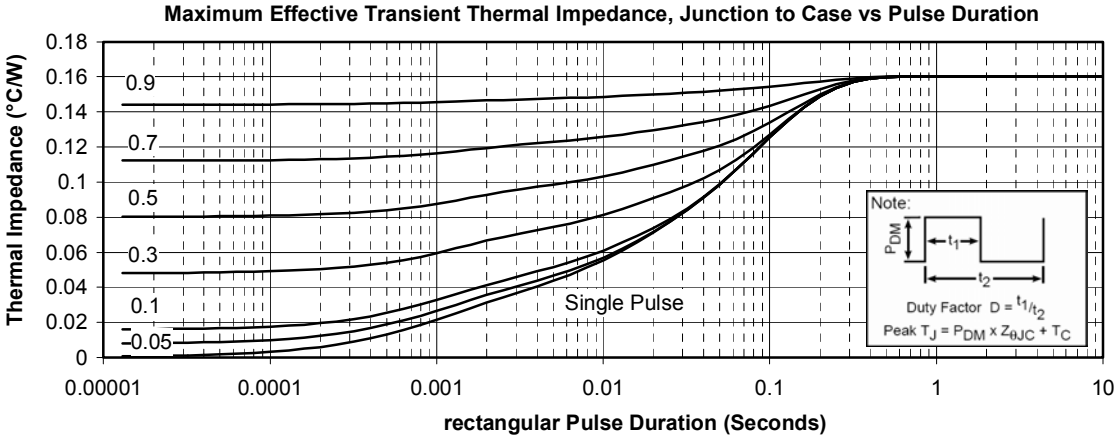

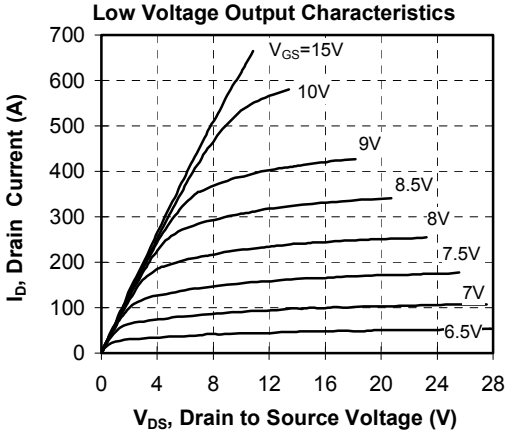


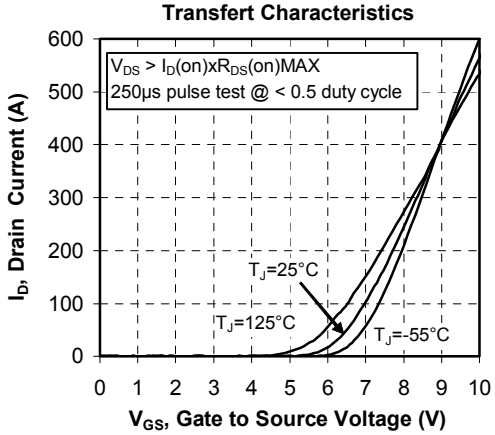

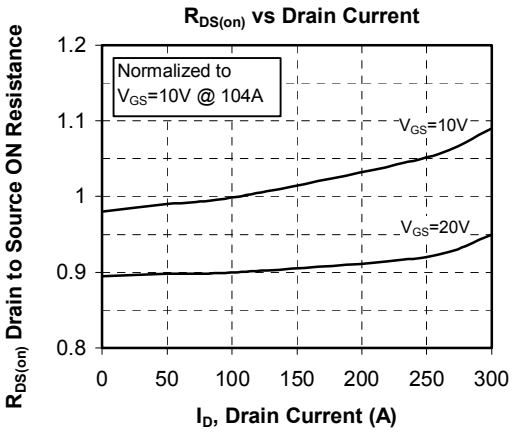


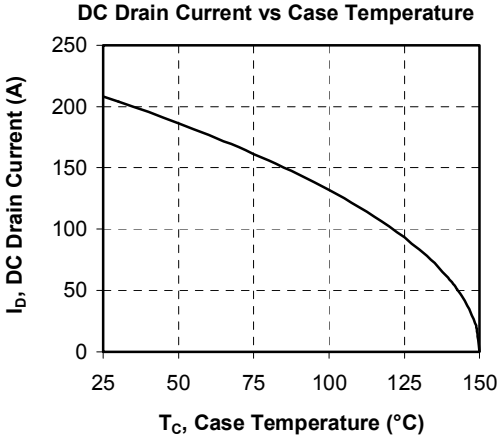


Breakdown Voltage vs Temperature

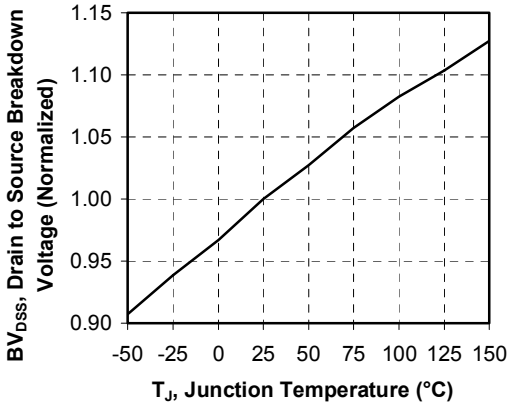


ON resistance vs Temperature

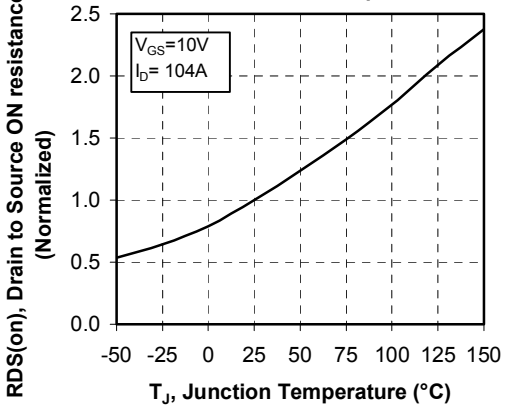


Threshold Voltage vs Temperature

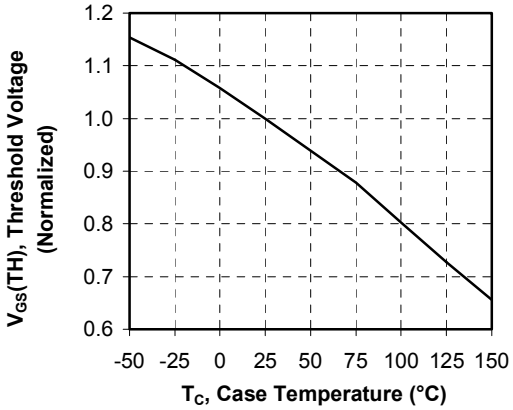


Maximum Safe Operating Area

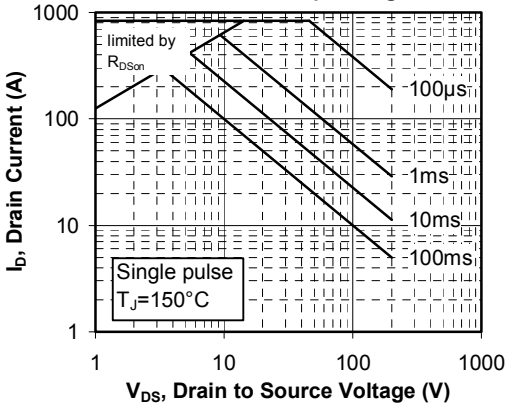


Capacitance vs Drain to Source Voltage

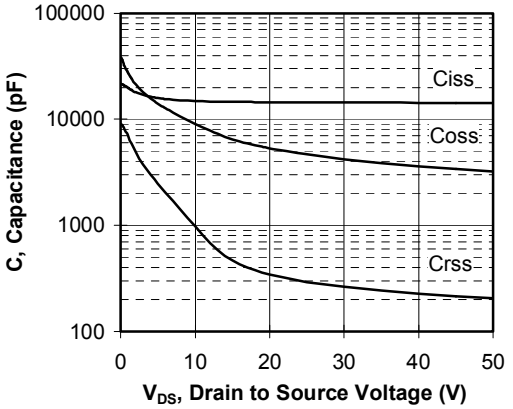


Gate Charge vs Gate to Source Voltage

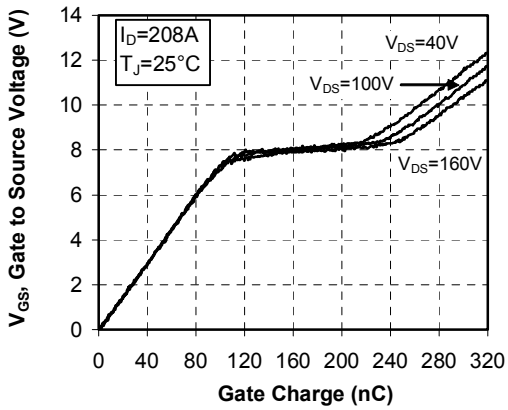


Delay Times vs Current

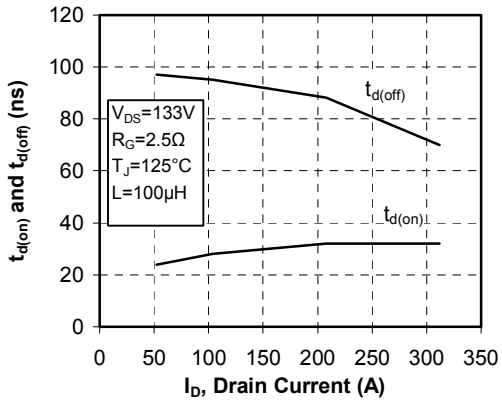


Rise and Fall times vs Current

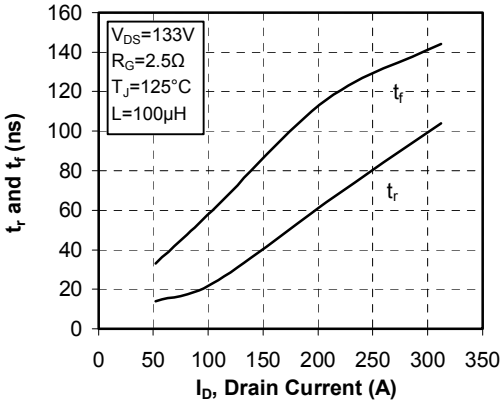


Switching Energy vs Current

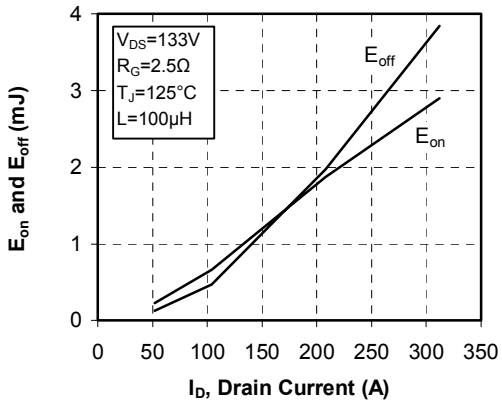


Switching Energy vs Gate Resistance

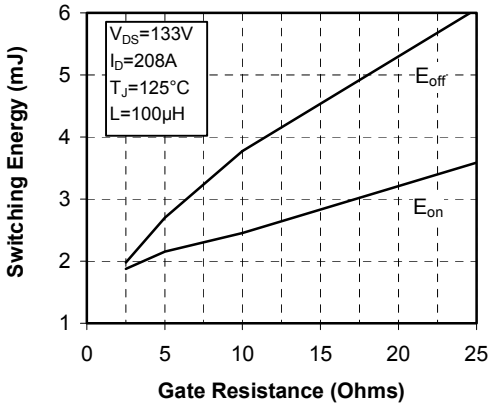

Operating Frequency vs Drain Current

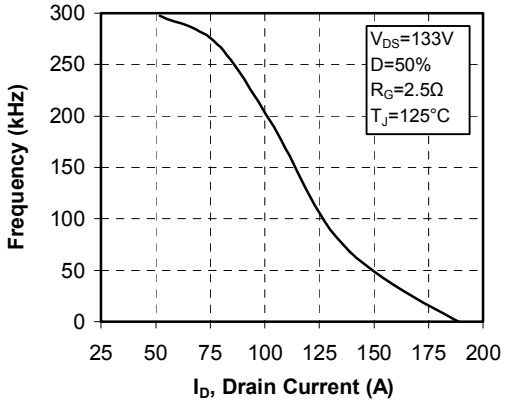

Source to Drain Diode Forward Voltage

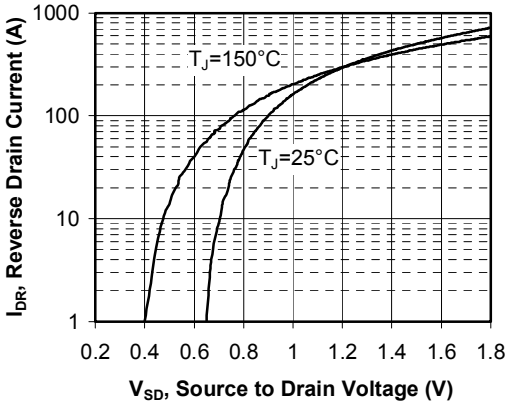

APT reserves the right to change, without notice, the specifications and information contained herein

APT's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.