

HYS72D64301[G/H]BR-[5/6]-B


HYS72D128xxx[G/H]BR-[5/6/7]-B

HYS72D256220[G/H]BR-[5/6/7]-B

HYS72D256320[G/H]BR-[5/6/7]-B

*184 - Pin Registered Double-Data-Rate SDRAM Module  
DDR SDRAM*

*RoHS Compliant Products*

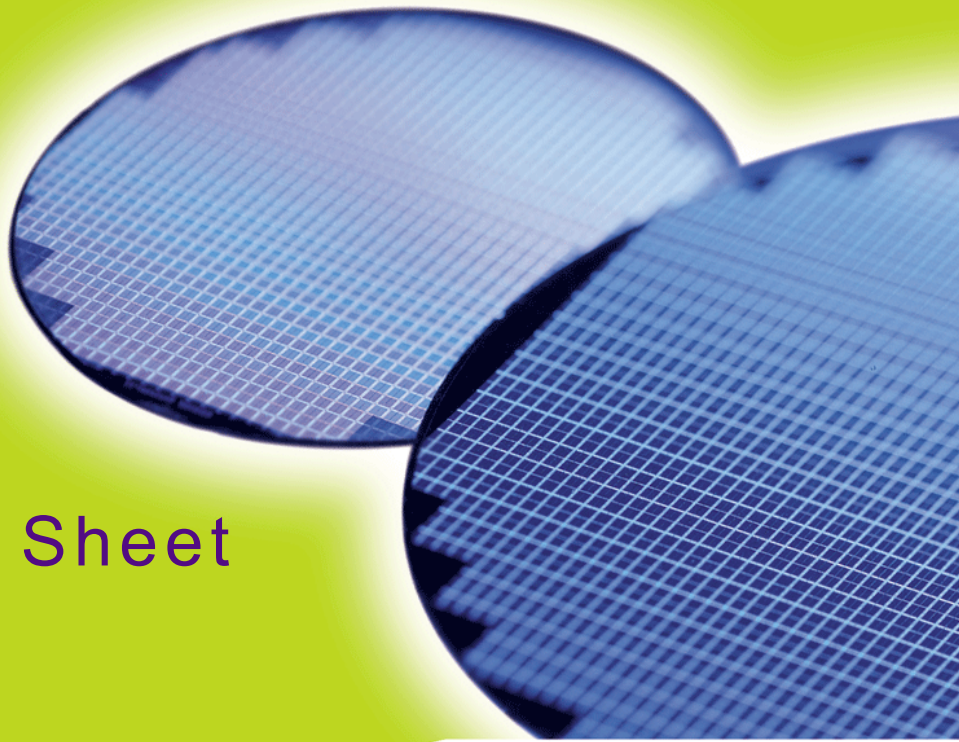

## Internet Data Sheet

*Rev. 1.42*



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

HYS72D64301[G/H]BR-[5/6]-B, HYS72D128xxx[G/H]BR-[5/6/7]-B, HYS72D256220[G/H]BR-[5/6/7]-B, HYS72D256320[G/H]BR-[5/6/7]-B	
<b>Revision History: 2007-01, Rev. 1.42</b>	
All	Qimonda update
All	Adapted internet edition
<b>Previous Revision: 2006-03, Rev. 1.41</b>	
67	Editorial Change
<b>Previous Revision: 2004-05, Rev. 1.4</b>	

**We Listen to Your Comments**

Any information within this document that you feel is wrong, unclear or missing at all?  
Your feedback will help us to continuously improve the quality of this document.  
Please send your proposal (including a reference to this document) to:  
[techdoc@qimonda.com](mailto:techdoc@qimonda.com)



# 1 Overview

## 1.1 Features

- 184-Pin Registered 8-Byte Dual-In-Line DDR SDRAM Module for “1U” PC, Workstation and Server main memory applications
- One rank 128M × 72 and 64M × 72 organization, and two ranks 256M × 72 organization
- Standard Double-Data-Rate Synchronous DRAMs (DDR SDRAM) with a single + 2.5 V (± 0.2 V) power supply and +2.6 V (± 0.1 V) power supply for DDR400
- Built with DDR SDRAMs in P-TFBGA-60 package
- Programmable CAS Latency, Burst Length, and Wrap Sequence (Sequential & Interleave)
- Auto Refresh (CBR) and Self Refresh
- All inputs and outputs SSTL\_2 compatible
- RAS-lockout supported  $t_{RAP}=t_{RCD}$
- Re-drive for all input signals using register and PLL devices.
- Serial Presence Detect with E<sup>2</sup>PROM
- Low Profile Modules form factor: 133.35 mm × 28.58 mm (1.1”) × 4.00 mm and 133.35 mm × 30.48 mm (1.2”) × 4.00 mm
- Standard reference card layout Raw Card “A”, “B”, “C”, “D”.
- Gold plated contacts

**TABLE 1**  
Performance

Part Number Speed Code		-5	-6	-7	Unit	
Speed Grade	Component	DDR400B	DDR333B	DDR266A	—	
	Module	PC3200-3033	PC2700-2533	PC2100-2033	—	
max. Clock Frequency	@CL3	$f_{CK3}$	200	166	—	MHz
	@CL2.5	$f_{CK2.5}$	166	166	143	MHz
	@CL2	$f_{CK2}$	133	133	133	MHz

HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

## 1.2 Description

The HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B are low profile versions of the standard Registered DIMM modules with 1.1" inch (28.58) and 1.2" inch (30,40 mm) height for 1U Server Applications. The Low Profile DIMM versions are available as 64M × 72(512 MB), 128M × 72 (1 GB) and 256M × 72 (2 GB).

The memory array is designed with Double Data Rate Synchronous DRAMs for ECC applications. All control and address signals are re-driven on the DIMM using register devices and a PLL for the clock distribution. This reduces capacitive loading to the system bus, but adds one cycle to the SDRAM timing. A variety of de coupling capacitors are mounted on the PC board. The DIMMs feature serial presence detect based on a serial E<sup>2</sup>PROM device using the 2-pin I<sup>2</sup>C protocol. The first 128 bytes are programmed with configuration data and the second 128 bytes are available to the customer.

**TABLE 2**  
Ordering Information for Lead - Containing Products

Product Type <sup>1)</sup>	Compliance Code <sup>2)</sup>	Description	SDRAM Technology
<b>PC3200 (CL=3)</b>			
HYS72D64301GBR-5-B	PC2700R-30331-A0	one rank 512 MByte Reg. ECC DIMM	512 MBit (×8)
HYS72D128300GBR-5-B	PC3200R-30331-C0	one rank 1 GByte Reg. ECC DIMM	512 MBit (×4)
HYS72D128321GBR-5-B	PC3200R-30331-B0	two ranks 1 GByte Reg. ECC DIMM	512 MBit (×8)
HYS72D256220GBR-5-B	PC3200R-30331-D0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (×4)
<b>PC2700 (CL=2.5)</b>			
HYS72D64301GBR-6-B	PC2700R-25330-A0	one rank 512 MByte Reg. ECC DIMM	512 MBit (×4)
HYS72D128300GBR-6-B	PC2700R-25330-C0	one rank 1 GByte Reg. ECC DIMM	512 MBit (×4)
HYS72D128321GBR-6-B	PC2700R-25330-B0	two ranks 1 GByte Reg. ECC DIMM	512 MBit (×8)
HYS72D256320GBR-6-B	PC2700R-25330-D0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (×4)
HYS72D256220GBR-6-B	PC2700R-25330-D0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (×4)
<b>PC2100 (CL=2)</b>			
HYS72D128300GBR-7-B	PC2100R-20330-C0	one rank 1 GByte Reg. ECC DIMM	512 MBit (×4)
HYS72D128321GBR-7-B	PC2100R-20330-B0	two ranks 1 GByte Reg. ECC DIMM	512 MBit (×8)
HYS72D256220GBR-7-B	PC2100R-20330-D0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (×4)
HYS72D256320GBR-7-B	PC2100R-20330-D0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (×4)

- 1) All product types end with a place code designating the silicon-die revision. Reference information available on request.  
Example: HYS72D128300GBR-5-B, indicating Rev.B die are used for SDRAM components.
- 2) The Compliance Code is printed on the module labels and describes the speed sort (for example "PC2100R"), the latencies (for example "20330" means CAS latency of 2.0 clocks, Row-Column-Delay (RCD) latency of 3 clocks and Row Pre-charge latency of 3 clocks), JEDEC SPD code definition version 0, and the Raw Card used for this module.



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

*green*  
Product

**TABLE 3****Ordering information for Lead - Free (RoHS Compliant) Products**

Product Type <sup>1)2)</sup>	Compliance Code <sup>3)</sup>	Description	SDRAM Technology
<b>PC3200 (CL=3)</b>			
HYS72D64301HBR-5-B	PC3200R-30331-A0	one rank 512 MByte Reg. ECC DIMM	512 MBit (x8)
HYS72D128300HBR-5-B	PC3200R-30331-C0	one rank 1 GByte Reg. ECC DIMM	512 MBit (x4)
HYS72D128321HBR-5-B	PC3200R-30331-B0	two ranks 1 GByte Reg. ECC DIMM	512 MBit (x8)
HYS72D256220HBR-5-B	PC3200R-30331-D0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (x4)
HYS72D256320HBR-5-B	PC3200R-30331-F0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (x4)
<b>PC2700 (CL=2.5)</b>			
HYS72D64301HBR-6-B	PC2700R-25330-A0	one rank 512 MByte Reg. ECC DIMM	512 MBit (x8)
HYS72D128300HBR-6-B	PC2700R-25330-C0	one rank 1 GByte Reg. ECC DIMM	512 MBit (x4)
HYS72D128321HBR-6-B	PC2700R-25330-B0	two ranks 1 GByte Reg. ECC DIMM	512 MBit (x8)
HYS72D256220HBR-6-B	PC2700R-25330-D0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (x4)
HYS72D256320HBR-6-B	PC2700R-25330-F0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (x4)
<b>PC2100 (CL=2)</b>			
HYS72D128300HBR-7-B	PC2100R-20330-C0	one rank 1 GByte Reg. ECC DIMM	512 MBit (x4)
HYS72D128321HBR-7-B	PC2100R-20330-B0	two ranks 1 GByte Reg. ECC DIMM	512 MBit (x8)
HYS72D256220HBR-7-B	PC2100R-20330-D0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (x4)
HYS72D256320HBR-7-B	PC2100R-20330-F0	two ranks 2 GByte Reg. ECC DIMM	512 MBit (x4)

- 1) RoHS Compliant Product: Restriction of the use of certain hazardous substances (RoHS) in electrical and electronic equipment as defined in the directive 2002/95/EC issued by the European Parliament and of the Council of 27 January 2003. These substances include mercury, lead, cadmium, hexavalent chromium, polybrominated biphenyls and polybrominated biphenyl ethers.
- 2) All product types end with a place code designating the silicon-die revision. Reference information available on request.  
Example: HYS72D128300GBR-5-B, indicating Rev.B die are used for SDRAM components.
- 3) The Compliance Code is printed on the module labels and describes the speed sort (for example "PC2100R"), the latencies (for example "20330" means CAS latency of 2.0 clocks, Row-Column-Delay (RCD) latency of 3 clocks and Row Pre-charge latency of 3 clocks), JEDEC SPD code definition version 0, and the Raw Card used for this module.



## 2 Pin Configuration

The pin configuration of the Registered DDR SDRAM DIMM is listed by function in **Table 4** (184 pins). The abbreviations used in columns Pin and Buffer Type are explained in **Table 5** and **Table 6** respectively. The pin numbering is depicted in **Figure 1**.

**TABLE 4**  
Pin Configuration of RDIMM

Pin#	Name	Pin Type	Buffer Type	Function
<b>Clock Signals</b>				
137	CK0	I	SSTL	<b>Clock Signal</b>
138	$\overline{\text{CK0}}$	I	SSTL	<b>Complement Clock</b>
21	CKE0	I	SSTL	<b>Clock Enable Rank 0</b>
111	CKE1	I	SSTL	<b>Clock Enable Rank 1</b> <i>Note: 2-rank module</i>
	NC	NC	SSTL	<i>Note: 1-rank module</i>
<b>Control Signals</b>				
157	$\overline{\text{S0}}$	I	SSTL	<b>Chip Select of Rank 0</b>
158	$\overline{\text{S1}}$	I	SSTL	<b>Chip Select of Rank 1</b> <i>Note: 2-ranks module</i>
	NC	NC	—	<i>Note: 1-rank module</i>
154	$\overline{\text{RAS}}$	I	SSTL	<b>Row Address Strobe</b>
65	$\overline{\text{CAS}}$	I	SSTL	<b>Column Address Strobe</b>
63	$\overline{\text{WE}}$	I	SSTL	<b>Write Enable</b>
10	$\overline{\text{RESET}}$	I	LV-CMOS	<b>Register Reset</b>
<b>Address Signals</b>				
59	BA0	I	SSTL	<b>Bank Address Bus 1:0</b>
52	BA1	I	SSTL	
48	A0	I	SSTL	<b>Address Bus 11:0</b>
43	A1	I	SSTL	
41	A2	I	SSTL	
130	A3	I	SSTL	
37	A4	I	SSTL	
32	A5	I	SSTL	



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Pin#	Name	Pin Type	Buffer Type	Function
125	A6	I	SSTL	Address Bus 11:0
29	A7	I	SSTL	
122	A8	I	SSTL	
27	A9	I	SSTL	
141	A10	I	SSTL	
	AP	I	SSTL	
118	A11	I	SSTL	
115	A12	I	SSTL	<b>Address Signal 12</b> <i>Note: Module based on 256 Mbit or larger dies</i>
	NC	NC	—	<i>Note: 128 Mbit based module</i>
167	A13	I	SSTL	<b>Address Signal 13</b> <i>Note: 1 Gbit based module</i>
	NC	NC	—	<i>Note: Module based on 512 Mbit or smaller dies</i>
<b>Data Signals</b>				
2	DQ0	I/O	SSTL	<b>Data Bus 63:0</b>
4	DQ1	I/O	SSTL	
6	DQ2	I/O	SSTL	
8	DQ3	I/O	SSTL	
94	DQ4	I/O	SSTL	
95	DQ5	I/O	SSTL	
98	DQ6	I/O	SSTL	
99	DQ7	I/O	SSTL	
12	DQ8	I/O	SSTL	
13	DQ9	I/O	SSTL	
19	DQ10	I/O	SSTL	
20	DQ11	I/O	SSTL	
105	DQ12	I/O	SSTL	
106	DQ13	I/O	SSTL	
109	DQ14	I/O	SSTL	
110	DQ15	I/O	SSTL	
23	DQ16	I/O	SSTL	
24	DQ17	I/O	SSTL	
28	DQ18	I/O	SSTL	
31	DQ19	I/O	SSTL	



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Pin#	Name	Pin Type	Buffer Type	Function
114	DQ20	I/O	SSTL	<b>Data Bus 63:0</b>
117	DQ21	I/O	SSTL	
121	DQ22	I/O	SSTL	
123	DQ23	I/O	SSTL	
33	DQ24	I/O	SSTL	
35	DQ25	I/O	SSTL	
39	DQ26	I/O	SSTL	
40	DQ27	I/O	SSTL	
126	DQ28	I/O	SSTL	
127	DQ29	I/O	SSTL	
131	DQ30	I/O	SSTL	
133	DQ31	I/O	SSTL	
53	DQ32	I/O	SSTL	
55	DQ33	I/O	SSTL	
57	DQ34	I/O	SSTL	
60	DQ35	I/O	SSTL	
146	DQ36	I/O	SSTL	
147	DQ37	I/O	SSTL	
150	DQ38	I/O	SSTL	
151	DQ39	I/O	SSTL	
61	DQ40	I/O	SSTL	
64	DQ41	I/O	SSTL	
68	DQ42	I/O	SSTL	
69	DQ43	I/O	SSTL	
153	DQ44	I/O	SSTL	
155	DQ45	I/O	SSTL	
161	DQ46	I/O	SSTL	
162	DQ47	I/O	SSTL	
72	DQ48	I/O	SSTL	
73	DQ49	I/O	SSTL	
79	DQ50	I/O	SSTL	
80	DQ51	I/O	SSTL	
165	DQ52	I/O	SSTL	
166	DQ53	I/O	SSTL	
170	DQ54	I/O	SSTL	
171	DQ55	I/O	SSTL	
83	DQ56	I/O	SSTL	
84	DQ57	I/O	SSTL	
87	DQ58	I/O	SSTL	
88	DQ59	I/O	SSTL	





HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Pin#	Name	Pin Type	Buffer Type	Function
174	DQ60	I/O	SSTL	<b>Data Bus 63:0</b>
175	DQ61	I/O	SSTL	
178	DQ62	I/O	SSTL	
179	DQ63	I/O	SSTL	
44	CB0	I/O	SSTL	<b>Check Bits 7:0</b>
45	CB1	I/O	SSTL	
49	CB2	I/O	SSTL	
51	CB3	I/O	SSTL	
134	CB4	I/O	SSTL	
135	CB5	I/O	SSTL	
142	CB6	I/O	SSTL	
144	CB7	I/O	SSTL	
5	DQS0	I/O	SSTL	<b>Data Strobes 8:0</b>
14	DQS1	I/O	SSTL	
25	DQS2	I/O	SSTL	
36	DQS3	I/O	SSTL	
56	DQS4	I/O	SSTL	
67	DQS5	I/O	SSTL	
78	DQS6	I/O	SSTL	<b>Data Strobes 8:0</b>
86	DQS7	I/O	SSTL	
47	DQS8	I/O	SSTL	
97	DM0	I	SSTL	<b>Data Mask 0</b> <i>Note: ×8 based module</i>
	DQS9	I/O	SSTL	<b>Data Strobe 9</b> <i>Note: ×4 based module</i>
107	DM1	I	SSTL	<b>Data Mask 1</b> <i>Note: ×8 based module</i>
	DQS10	I/O	SSTL	<b>Data Strobe 10</b> <i>Note: ×4 based module</i>
119	DM2	I	SSTL	<b>Data Mask 2</b> <i>Note: ×8 based module</i>
	DQS11	I/O	SSTL	<b>Data Strobe 11</b> <i>Note: ×4 based module</i>
129	DM3	I	SSTL	<b>Data Mask 3</b> <i>Note: ×8 based module</i>
	DQS12	I/O	SSTL	<b>Data Strobe 12</b> <i>Note: ×4 based module</i>
149	DM4	I	SSTL	<b>Data Mask 4</b> <i>Note: ×8 based module</i>
	DQS13	I/O	SSTL	<b>Data Strobe 13</b> <i>Note: ×4 based module</i>



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Pin#	Name	Pin Type	Buffer Type	Function
159	DM5	I	SSTL	<b>Data Mask 5</b> <i>Note: x8 based module</i>
	DQS14	I/O	SSTL	<b>Data Strobe 14</b> <i>Note: x4 based module</i>
169	DM6	I	SSTL	<b>Data Mask 6</b> <i>Note: x8 based module</i>
	DQS15	I/O	SSTL	<b>Data Strobe 15</b> <i>Note: x4 based module</i>
177	DM7	I	SSTL	<b>Data Mask 7</b> <i>Note: x8 based module</i>
	DQS16	I/O	SSTL	<b>Data Strobe 16</b> <i>Note: x4 based module</i>
140	DM8	I	SSTL	<b>Data Mask 8</b> <i>Note: x8 based module</i>
	DQS17	I/O	SSTL	<b>Data Strobe 17</b> <i>Note: x4 based module</i>
<b>EEPROM</b>				
92	SCL	I	CMOS	<b>Serial Bus Clock</b>
91	SDA	I/O	OD	<b>Serial Bus Data</b>
181	SA0	I	CMOS	<b>Slave Address Select Bus 2:0</b>
182	SA1	I	CMOS	
183	SA2	I	CMOS	
<b>Power Supplies</b>				
1	$V_{REF}$	AI	—	<b>I/O Reference Voltage</b>
184	$V_{DDSPD}$	PWR	—	<b>EEPROM Power Supply</b>
15, 22, 30, 54, 62, 77, 96, 104, 112, 128, 136, 143, 156, 164, 172, 180	$V_{DDQ}$	PWR	—	<b>I/O Driver Power Supply</b>
7, 38, 46, 70, 85, 108, 120, 148, 168	$V_{DD}$	PWR	—	<b>Power Supply</b>
3, 11, 18, 26, 34, 42, 50, 58, 66, 74, 81, 89, 93, 100, 116, 124, 132, 139, 145, 152, 160, 176	$V_{SS}$	GND	—	<b>Ground Plane</b>



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Pin#	Name	Pin Type	Buffer Type	Function
<b>Other Pins</b>				
82	V <sub>DDID</sub>	O	OD	V <sub>DD</sub> Identification
9, 16, 17, 71, 75, 76, 90, 101, 102, 103, 113, 163, 173	NC	NC	—	Not connected

**TABLE 5**  
Abbreviations for Pin Type

Abbreviation	Description
I	Standard input-only pin. Digital levels.
O	Output. Digital levels.
I/O	I/O is a bidirectional input/output signal.
AI	Input. Analog levels.
PWR	Power
GND	Ground
NU	Not Usable (JEDEC Standard)
NC	Not Connected (JEDEC Standard)

**TABLE 6**  
Abbreviations for Buffer Type

Abbreviation	Description
SSTL	Serial Stub Terminated Logic (SSTL2)
LV-CMOS	Low Voltage CMOS
CMOS	CMOS Levels
OD	Open Drain. The corresponding pin has 2 operational states, active low and tristate, and allows multiple devices to share as a wire-OR.


**TABLE 7**  
Address Format

Density	Organization	Memory Ranks	SDRAMs	# of SDRAMs	# of row/bank/ column bits	Refresh	Period	Interval
512 MB	64M × 72	1	64M × 8	8	13/2/11	8K	64 ms	7.8 μs
1 GB	128M × 72	1	128M × 4	18	13/2/12	8K	64 ms	7.8 μs
1 GB	128M × 72	2	64M × 8	18	13/2/11	8K	64 ms	7.8 μs
2 GB	256M × 72	2	128M × 4	36	13/2/12	8K	64 ms	7.8 μs



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**FIGURE 1**  
**Pin Configuration 184 Pins, Reg**

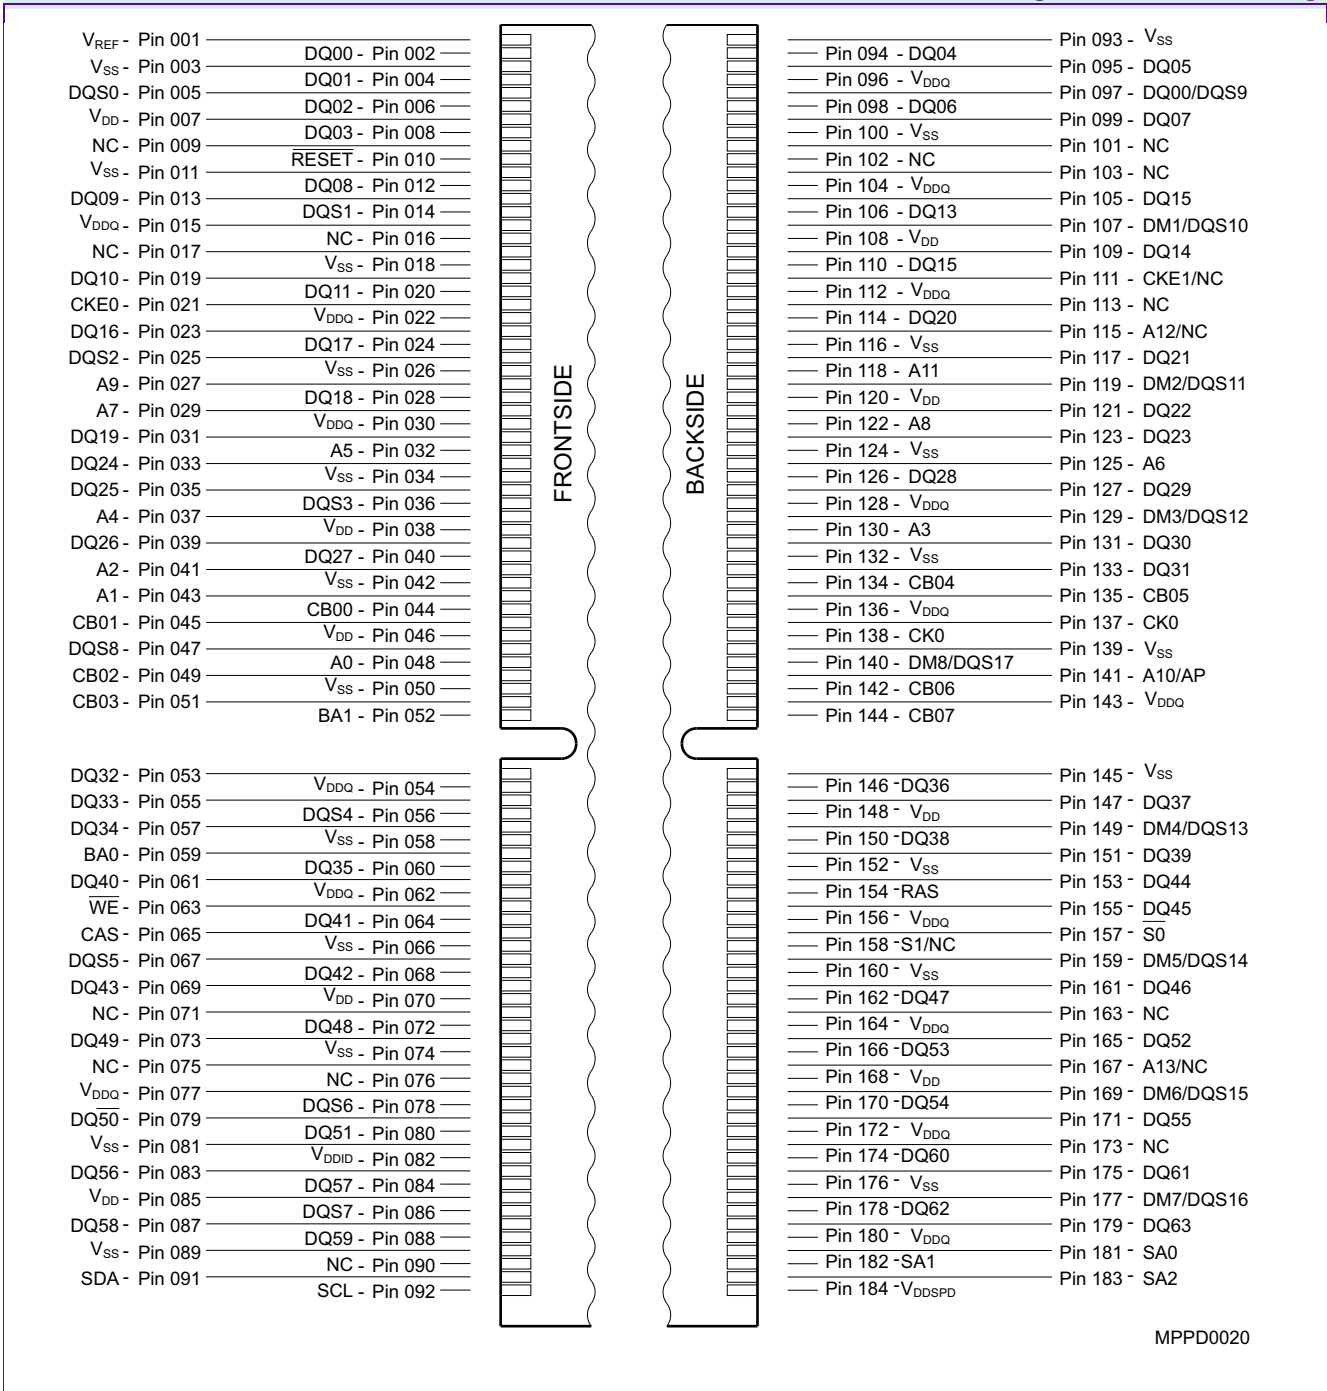

MPPD0020



## 3 Electrical Characteristics

### 3.1 Operating Conditions

**TABLE 8**  
Absolute Maximum Ratings

Parameter	Symbol	Values			Unit	Note/ Test Condition
		Min.	Typ.	Max.		
Voltage on I/O pins relative to $V_{SS}$	$V_{IN}, V_{OUT}$	-0.5	—	$V_{DDQ} + 0.5$	V	—
Voltage on inputs relative to $V_{SS}$	$V_{IN}$	-1	—	+3.6	V	—
Voltage on $V_{DD}$ supply relative to $V_{SS}$	$V_{DD}$	-1	—	+3.6	V	—
Voltage on $V_{DDQ}$ supply relative to $V_{SS}$	$V_{DDQ}$	-1	—	+3.6	V	—
Operating temperature (ambient)	$T_A$	0	—	+70	°C	—
Storage temperature (plastic)	$T_{STG}$	-55	—	+150	°C	—
Power dissipation (per SDRAM component)	$P_D$	—	1	—	W	—
Short circuit output current	$I_{OUT}$	—	50	—	mA	—

**Attention:** Permanent damage to the device may occur if “Absolute Maximum Ratings” are exceeded. This is a stress rating only, and functional operation should be restricted to recommended operation conditions. Exposure to absolute maximum rating conditions for extended periods of time may affect device reliability and exceeding only one of the values may cause irreversible damage to the integrated circuit.



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 9**  
**Electrical Characteristics and DC Operating Conditions**

Parameter	Symbol	Values			Unit	Note/Test Condition <sup>1)</sup>
		Min.	Typ.	Max.		
Device Supply Voltage	$V_{DD}$	2.3	2.5	2.7	V	$f_{CK} \leq 166$ MHz
Device Supply Voltage	$V_{DD}$	2.5	2.6	2.7	V	$f_{CK} > 166$ MHz <sup>2)</sup>
Output Supply Voltage	$V_{DDQ}$	2.3	2.5	2.7	V	$f_{CK} \leq 166$ MHz <sup>3)</sup>
Output Supply Voltage	$V_{DDQ}$	2.5	2.6	2.7	V	$f_{CK} > 166$ MHz <sup>2)3)</sup>
Supply Voltage, I/O Supply Voltage	$V_{SS}, V_{SSQ}$	0	—	0	V	—
Input Reference Voltage	$V_{REF}$	$0.49 \times V_{DDQ}$	$0.5 \times V_{DDQ}$	$0.51 \times V_{DDQ}$	V	4)
I/O Termination Voltage (System)	$V_{TT}$	$V_{REF} - 0.04$	—	$V_{REF} + 0.04$	V	5)
Input High (Logic1) Voltage	$V_{IH(DC)}$	$V_{REF} + 0.15$	—	$V_{DDQ} + 0.3$	V	6)
Input Low (Logic0) Voltage	$V_{IL(DC)}$	-0.3	—	$V_{REF} - 0.15$	V	6)
Input Voltage Level, CK and CK Inputs	$V_{IN(DC)}$	-0.3	—	$V_{DDQ} + 0.3$	V	6)
Input Differential Voltage, CK and $\overline{CK}$ Inputs	$V_{ID(DC)}$	0.36	—	$V_{DDQ} + 0.6$	V	6)7)
VI-Matching Pull-up Current to Pull-down Current	$I_{Ratio}$	0.71	—	1.4	—	8)
Input Leakage Current	$I_I$	-2	—	2	$\mu$ A	Any input $0 \text{ V} \leq V_{IN} \leq V_{DD}$ ; All other pins not under test = $0 \text{ V}$ <sup>9)</sup>
Output Leakage Current	$I_{OZ}$	-5	—	5	$\mu$ A	DQs are disabled; $0 \text{ V} \leq V_{OUT} \leq V_{DDQ}$ <sup>9)</sup>
Output High Current, Normal Strength Driver	$I_{OH}$	—	—	-16.2	mA	$V_{OUT} = 1.95 \text{ V}$
Output Low Current, Normal Strength Driver	$I_{OL}$	16.2	—	—	mA	$V_{OUT} = 0.35 \text{ V}$

- 1)  $0 \text{ }^\circ\text{C} \leq T_A \leq 70 \text{ }^\circ\text{C}$ ;  $V_{DDQ} = 2.5 \text{ V} \pm 0.2 \text{ V}$ ,  $V_{DD} = +2.5 \text{ V} \pm 0.2 \text{ V}$ ;
- 2) DDR400 conditions apply for all clock frequencies above 166 MHz
- 3) Under all conditions,  $V_{DDQ}$  must be less than or equal to  $V_{DD}$ .
- 4) Peak to peak AC noise on  $V_{REF}$  may not exceed  $\pm 2\% V_{REF,DC}$ .  $V_{REF}$  is also expected to track noise variations in  $V_{DDQ}$ .
- 5)  $V_{TT}$  is not applied directly to the device.  $V_{TT}$  is a system supply for signal termination resistors, is expected to be set equal to  $V_{REF}$ , and must track variations in the DC level of  $V_{REF}$ .
- 6) Inputs are not recognized as valid until  $V_{REF}$  stabilizes.
- 7)  $V_{ID}$  is the magnitude of the difference between the input level on CK and the input level on  $\overline{CK}$ .
- 8) The ratio of the pull-up current to the pull-down current is specified for the same temperature and voltage, over the entire temperature and voltage range, for device drain to source voltage from 0.25 to 1.0 V. For a given output, it represents the maximum difference between pull-up and pull-down drivers due to process variation.
- 9) Values are shown per pin.



**TABLE 10**  
 **$I_{DD}$  Conditions**

Parameter	Symbol
<b>Operating Current 0</b> one bank; active/ precharge; DQ, DM, and DQS inputs changing once per clock cycle; address and control inputs changing once every two clock cycles.	$I_{DD0}$
<b>Operating Current 1</b> one bank; active/read/precharge; Burst Length = 4; see component data sheet.	$I_{DD1}$
<b>Precharge Power-Down Standby Current</b> all banks idle; power-down mode; $CKE \leq V_{IL,MAX}$	$I_{DD2P}$
<b>Precharge Floating Standby Current</b> $\overline{CS} \geq V_{IH,MIN}$ , all banks idle; $CKE \geq V_{IH,MIN}$ ; address and other control inputs changing once per clock cycle; $V_{IN} = V_{REF}$ for DQ, DQS and DM.	$I_{DD2F}$
<b>Precharge Quiet Standby Current</b> $\overline{CS} \geq V_{IH,MIN}$ , all banks idle; $CKE \geq V_{IH,MIN}$ ; $V_{IN} = V_{REF}$ for DQ, DQS and DM; address and other control inputs stable at $\geq V_{IH,MIN}$ or $\leq V_{IL,MAX}$ .	$I_{DD2Q}$
<b>Active Power-Down Standby Current</b> one bank active; power-down mode; $CKE \leq V_{IL,MAX}$ ; $V_{IN} = V_{REF}$ for DQ, DQS and DM.	$I_{DD3P}$
<b>Active Standby Current</b> one bank active; $\overline{CS} \geq V_{IH,MIN}$ ; $CKE \geq V_{IH,MIN}$ ; $t_{RC} = t_{RAS,MAX}$ ; DQ, DM and DQS inputs changing twice per clock cycle; address and control inputs changing once per clock cycle.	$I_{DD3N}$
<b>Operating Current Read</b> one bank active; Burst Length = 2; reads; continuous burst; address and control inputs changing once per clock cycle; 50 % of data outputs changing on every clock edge; CL = 2 for DDR266(A), CL = 3 for DDR333 and DDR400B; $I_{OUT} = 0$ mA	$I_{DD4R}$
<b>Operating Current Write</b> one bank active; Burst Length = 2; writes; continuous burst; address and control inputs changing once per clock cycle; 50 % of data outputs changing on every clock edge; CL = 2 for DDR266(A), CL = 3 for DDR333 and DDR400B	$I_{DD4W}$
<b>Auto-Refresh Current</b> $t_{RC} = t_{RFCMIN}$ , burst refresh	$I_{DD5}$
<b>Self-Refresh Current</b> $CKE \leq 0.2$ V; external clock on	$I_{DD6}$
<b>Operating Current 7</b> four bank interleaving with Burst Length = 4; see component data sheet.	$I_{DD7}$



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 11**

**$I_{DD}$  Specification for HYS72D[64/128/256]xxx[G/H]BR-5-B**

Product Type	HYS72D64301GBR-5-B HYS72D64301HBR-5-B		HYS72D128300GBR-5-B HYS72D128300HBR-5-B		HYS72D128321GBR-5-B HYS72D128321HBR-5-B		HYS72D256220GBR-5-B HYS72D256220HBR-5-B HYS72D256320HBR-5-B		Unit	Note/ Test Conditions <sup>1) 2)</sup>
	512 MB		1 GB		1 GB		2 GB			
Organization	×72		×72		×72		×72			
	1 Rank		1 Rank		2 Ranks		2 Ranks			
	-5		-5		-5		-5			
	Symbol	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	
$I_{DD0}$	1230	1460	2250	2660	1880	2180	3550	4110	mA	<sup>3)</sup>
$I_{DD1}$	1450	1690	2560	2980	2100	2410	3860	4430	mA	<sup>3)4)</sup>
$I_{DD2P}$	410	430	690	770	690	770	1320	1440	mA	<sup>5)</sup>
$I_{DD2F}$	880	990	1450	1620	1450	1620	2590	2870	mA	<sup>5)</sup>
$I_{DD2Q}$	530	630	1000	1160	1000	1160	1940	2230	mA	<sup>5)</sup>
$I_{DD3P}$	460	540	870	980	870	980	1690	1870	mA	<sup>5)</sup>
$I_{DD3N}$	960	1090	1610	1820	1610	1820	2910	3260	mA	<sup>5)</sup>
$I_{DD4R}$	1400	1600	2470	2800	2050	2320	3770	4250	mA	<sup>3)4)</sup>
$I_{DD4W}$	1450	1650	2560	2890	2100	2370	3860	4340	mA	<sup>3)</sup>
$I_{DD5}$	2210	2620	4360	5120	2870	3340	5660	6570	mA	<sup>3)</sup>
$I_{DD6}$	360	390	660	740	660	740	1310	1430	mA	<sup>5)</sup>
$I_{DD7}$	2700	3190	5620	6580	3630	4210	6920	8030	mA	<sup>3)4)</sup>

1) Test condition for maximum values:  $V_{DD} = 2.7 V, T_A = 10 °C$

2) Module  $I_{DD}$  is calculated on the basis of component  $I_{DD}$  and includes Register and PLL currents

3) The module  $I_{DD}$  values are calculated from the component  $I_{DD}$  data sheet values are:

$n * I_{DD} \times [\text{component}]$  for single bank modules (n: number of components per module bank)

$n * I_{DD} \times [\text{component}] + n * I_{DD3N} [\text{component}]$  for two bank modules (n: number of components per module bank)

4) DQ I/O ( $I_{DDQ}$ ) currents are not included into calculations: module  $I_{DD}$  values will be measured differently depending on load conditions

5) The module  $I_{DD}$  values are calculated from the component  $I_{DD}$  decathlete values are:

$n * I_{DD} \times [\text{component}]$  for single bank modules (n: number of components per module bank)

$2 * n * I_{DD} \times [\text{component}]$  for single two bank modules (n: number of components per module bank)





HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 12**

**$I_{DD}$  Specification for HYS72D[64/128/256]xxx[G/H]BR-6-B**

Product Type	HYS72D64301GBR-6-B HYS72D64301HBR-6-B		HYS72D128300GBR-6-B HYS72D128300HBR-6-B		HYS72D128321GBR-6-B HYS72D128321HBR-6-B		HYS72D256220GBR-6-B HYS72D256320GBR-6-B HYS72D256220HBR-6-B HYS72D256320HBR-6-B		Unit	Note/ Test Conditions <sup>1) 2)</sup>
	512 MB		1 GB		1 GB		2 GB			
Organization	×72		×72		×72		×72			
	1 Rank		1 Rank		2 Ranks		2 Ranks			
	-6		-6		-6		-6			
	Symbol	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	
$I_{DD0}$	1130	1320	2060	2380	1700	1940	3190	3620	mA	<sup>3)</sup>
$I_{DD1}$	1340	1540	2360	2690	1910	2160	3490	3930	mA	<sup>3)4)</sup>
$I_{DD2P}$	380	400	610	690	610	690	1140	1260	mA	<sup>5)</sup>
$I_{DD2F}$	780	880	1250	1400	1250	1400	2200	2440	mA	<sup>5)</sup>
$I_{DD2Q}$	480	580	890	1050	890	1050	1690	1980	mA	<sup>5)</sup>
$I_{DD3P}$	430	500	780	890	780	890	1480	1660	mA	<sup>5)</sup>
$I_{DD3N}$	870	980	1430	1600	1430	1600	2560	2840	mA	<sup>5)</sup>
$I_{DD4R}$	1270	1450	2210	2510	1840	2070	3340	3750	mA	<sup>3)4)</sup>
$I_{DD4W}$	1310	1500	2290	2600	1870	2110	3420	3840	mA	<sup>3)</sup>
$I_{DD5}$	2010	2360	3920	4590	2570	2970	5050	5820	mA	<sup>3)</sup>
$I_{DD6}$	350	390	600	680	600	680	1150	1270	mA	<sup>5)</sup>
$I_{DD7}$	2440	2880	5040	5910	3250	3770	6170	7150	mA	<sup>3)4)</sup>

- 1) Test condition for maximum values:  $V_{DD} = 2.7\text{ V}$ ,  $T_A = 10\text{ °C}$
- 2) Module  $I_{DD}$  is calculated on the basis of component  $I_{DD}$  and includes Register and PLL currents
- 3) The module  $I_{DD}$  values are calculated from the component  $I_{DD}$  decathlete values are:  
 $n * I_{DD} \times [\text{component}]$  for single bank modules (n: number of components per module bank)  
 $n * I_{DD} \times [\text{component}] + n * I_{DD3N} [\text{component}]$  for two bank modules (n: number of components per module bank)
- 4) DQ I/O ( $I_{DDQ}$ ) currents are not included into calculations: module  $I_{DD}$  values will be measured differently depending on load conditions
- 5) The module  $I_{DD}$  values are calculated from the component  $I_{DD}$  decathlete values are:  
 $n * I_{DD} \times [\text{component}]$  for single bank modules (n: number of components per module bank)  
 $2 * n * I_{DD} \times [\text{component}]$  for single two bank modules (n: number of components per module bank)



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 13**

**$I_{DD}$  Specification for HYS72D[128/256]xxx[G/H]BR-7-B**

Product Type	HYS72D128300GBR-7-B HYS72D128300HBR-7-B		HYS72D128321GBR-7-B HYS72D128321HBR-7-B		HYS72D256220GBR-7-B HYS72D256320GBR-7-B HYS72D256220HBR-7-B HYS72D256320HBR-7-B		Unit	Note/ Test Conditions <sup>1) 2)</sup>
	1 GB		1 GB		2 GB			
Organization	×72		×72		×72			
	1 Rank		2 Ranks		2 Ranks			
	-7		-7		-7			
Symbol	Typ.	Max.	Typ.	Max.	Typ.	Max.		
$I_{DD0}$	1780	2060	1460	1670	2700	3090	mA	3)
$I_{DD1}$	2070	2390	1650	1900	2990	3420	mA	3)4)
$I_{DD2P}$	530	610	530	610	960	1080	mA	5)
$I_{DD2F}$	1050	1180	1050	1180	1810	2010	mA	5)
$I_{DD2Q}$	770	910	770	910	1440	1690	mA	5)
$I_{DD3P}$	660	770	660	770	1230	1400	mA	5)
$I_{DD3N}$	1210	1380	1210	1380	2140	2410	mA	5)
$I_{DD4R}$	1920	2170	1580	1790	2840	3200	mA	3)4)
$I_{DD4W}$	1990	2260	1620	1830	2920	3290	mA	3)
$I_{DD5}$	3570	4230	2300	2700	4490	5260	mA	3)
$I_{DD6}$	540	620	540	620	990	1110	mA	5)
$I_{DD7}$	4390	5140	2810	3270	5310	6170	mA	3)4)

1) Test condition for maximum values:  $V_{DD} = 2.7 V, T_A = 10 °C$

2) Module  $I_{DD}$  is calculated on the basis of component  $I_{DD}$  and includes Register an PLL

3) The module  $I_{DD}$  values are calculated from the component  $I_{DD}$  decathlete values are:

$n * I_{DD} \times [\text{component}]$  for single bank modules (n: number of components per module bank)

$n * I_{DD} \times [\text{component}] + n * I_{DD3N} [\text{component}]$  for two bank modules (n: number of components per module bank)

4) DQ I/O ( $I_{DDQ}$ ) currents are not included into calculations: module  $I_{DD}$  values will be measured differently depending on load conditions

5) The module  $I_{DD}$  values are calculated from the component  $I_{DD}$  decathlete values are:

$n * I_{DD} \times [\text{component}]$  for single bank modules (n: number of components per module bank)

$2 * n * I_{DD} \times [\text{component}]$  for single two bank modules (n: number of components per module bank)



**TABLE 14**  
**AC Timing - Absolute Specifications for PC3200 and PC2700**

Parameter	Symbol	-5		-6		Unit	Note/ Test Condition <sup>1)</sup>
		DDR400B		DDR333			
		Min.	Max.	Min.	Max.		
DQ output access time from CK/CK	$t_{AC}$	-0.5	+0.5	-0.7	+0.7	ns	2)3)4)5)
CK high-level width	$t_{CH}$	0.45	0.55	0.45	0.55	$t_{CK}$	2)3)4)5)
Clock cycle time	$t_{CK}$	5	8	6	12	ns	CL = 3.0 2)3)4)5)
		6	12	6	12	ns	CL = 2.5 2)3)4)5)
		7.5	12	7.5	12	ns	CL = 2.0 2)3)4)5)
CK low-level width	$t_{CL}$	0.45	0.55	0.45	0.55	$t_{CK}$	2)3)4)5)
Auto precharge write recovery + precharge time	$t_{DAL}$	$(t_{WR}/t_{CK})+(t_{RP}/t_{CK})$				$t_{CK}$	2)3)4)5)6)
DQ and DM input hold time	$t_{DH}$	0.4	—	0.45	—	ns	2)3)4)5)
DQ and DM input pulse width (each input)	$t_{DIPW}$	1.75	—	1.75	—	ns	2)3)4)5)6)
DQS output access time from CK/CK	$t_{DQSK}$	-0.6	+0.6	-0.6	+0.6	ns	2)3)4)5)
DQS input low (high) pulse width (write cycle)	$t_{DQSL,H}$	0.35	—	0.35	—	$t_{CK}$	2)3)4)5)
DQS-DQ skew (DQS and associated DQ signals)	$t_{DQSQ}$	—	+0.40	—	+0.40	ns	TFBGA 2)3)4)5)
Write command to 1 <sup>st</sup> DQS latching transition	$t_{DQSS}$	0.72	1.25	0.75	1.25	$t_{CK}$	2)3)4)5)
DQ and DM input setup time	$t_{DS}$	0.4	—	0.45	—	ns	2)3)4)5)
DQS falling edge hold time from CK (write cycle)	$t_{DSH}$	0.2	—	0.2	—	$t_{CK}$	2)3)4)5)
DQS falling edge to CK setup time (write cycle)	$t_{DSS}$	0.2	—	0.2	—	$t_{CK}$	2)3)4)5)
Clock Half Period	$t_{HP}$	Min. ( $t_{CL}$ , $t_{CH}$ )		Min. ( $t_{CL}$ , $t_{CH}$ )		ns	2)3)4)5)
Data-out high-impedance time from CK/CK	$t_{HZ}$	—	+0.7	—	+0.7	ns	2)3)4)5)7)
Address and control input hold time	$t_{IH}$	0.6	—	0.75	—	ns	Fast slew rate 3)4)5)6)8)
		0.7	—	0.8	—	ns	Slow slew rate 3)4)5)6)8)
Control and Addr. input pulse width (each input)	$t_{IPW}$	2.2	—	2.2	—	ns	2)3)4)5)9)
Address and control input setup time	$t_{IS}$	0.6	—	0.75	—	ns	Fast slew rate 3)4)5)6)8)
		0.7	—	0.8	—	ns	Slow slew rate 3)4)5)6)8)



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Parameter	Symbol	-5		-6		Unit	Note/ Test Condition <sup>1)</sup>
		DDR400B		DDR333			
		Min.	Max.	Min.	Max.		
Data-out low-impedance time from CK/ $\overline{\text{CK}}$	$t_{\text{LZ}}$	-0.7	+0.7	-0.7	+0.7	ns	2)3)4)5)7)
Mode register set command cycle time	$t_{\text{MRD}}$	2	—	2	—	$t_{\text{CK}}$	2)3)4)5)
DQ/DQS output hold time from DQS	$t_{\text{QH}}$	$t_{\text{HP}} - t_{\text{QHS}}$	—	$t_{\text{HP}} - t_{\text{QHS}}$	—	ns	2)3)4)5)
Data hold skew factor	$t_{\text{QHS}}$	—	+0.50	—	+0.50	ns	TFBGA 2)3)4)5)
Active to Autoprecharge delay	$t_{\text{RAP}}$	$t_{\text{RCD}}$	—	$t_{\text{RCD}}$	—	ns	2)3)4)5)
Active to Precharge command	$t_{\text{RAS}}$	40	70E+3	42	70E+3	ns	2)3)4)5)
Active to Active/Auto-refresh command period	$t_{\text{RC}}$	55	—	60	—	ns	2)3)4)5)
Active to Read or Write delay	$t_{\text{RCD}}$	15	—	18	—	ns	2)3)4)5)
Average Periodic Refresh Interval	$t_{\text{REFI}}$	—	7.8	—	7.8	$\mu\text{s}$	2)3)4)5)10)
Auto-refresh to Active/Auto-refresh command period	$t_{\text{RFC}}$	65	—	72	—	ns	2)3)4)5)
Precharge command period	$t_{\text{RP}}$	15	—	18	—	ns	2)3)4)5)
Read preamble	$t_{\text{RPRE}}$	0.9	1.1	0.9	1.1	$t_{\text{CK}}$	2)3)4)5)
Read postamble	$t_{\text{RPST}}$	0.40	0.60	0.40	0.60	$t_{\text{CK}}$	2)3)4)5)
Active bank A to Active bank B command	$t_{\text{RRD}}$	10	—	12	—	ns	2)3)4)5)
Write preamble	$t_{\text{WPRE}}$	0.25	—	0.25	—	$t_{\text{CK}}$	2)3)4)5)
Write preamble setup time	$t_{\text{WPRES}}$	0	—	0	—	ns	2)3)4)5)11)
Write postamble	$t_{\text{WPST}}$	0.40	0.60	0.40	0.60	$t_{\text{CK}}$	2)3)4)5)12)
Write recovery time	$t_{\text{WR}}$	15	—	15	—	ns	2)3)4)5)
Internal write to read command delay	$t_{\text{WTR}}$	2	—	1	—	$t_{\text{CK}}$	2)3)4)5)
Exit self-refresh to non-read command	$t_{\text{XSNR}}$	75	—	75	—	ns	2)3)4)5)
Exit self-refresh to read command	$t_{\text{XSRD}}$	200	—	200	—	$t_{\text{CK}}$	2)3)4)5)

- 1)  $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ ;  $V_{\text{DDQ}} = 2.5\text{ V} \pm 0.2\text{ V}$ ,  $V_{\text{DD}} = +2.5\text{ V} \pm 0.2\text{ V}$  (DDR333);  $V_{\text{DDQ}} = 2.6\text{ V} \pm 0.1\text{ V}$ ,  $V_{\text{DD}} = +2.6\text{ V} \pm 0.1\text{ V}$  (DDR400)
- 2) Input slew rate  $\geq 1\text{ V/ns}$  for DDR400, DDR333
- 3) The CK/ $\overline{\text{CK}}$  input reference level (for timing reference to CK/ $\overline{\text{CK}}$ ) is the point at which CK and  $\overline{\text{CK}}$  cross: the input reference level for signals other than CK/ $\overline{\text{CK}}$ , is  $V_{\text{REF}}$ . CK/ $\overline{\text{CK}}$  slew rate are  $\geq 1.0\text{ V/ns}$ .
- 4) Inputs are not recognized as valid until  $V_{\text{REF}}$  stabilizes.
- 5) The Output timing reference level, as measured at the timing reference point indicated in AC Characteristics (note 3) is  $V_{\text{TT}}$ .
- 6) For each of the terms, if not already an integer, round to the next highest integer.  $t_{\text{CK}}$  is equal to the actual system clock cycle time.
- 7)  $t_{\text{HZHZ}}$  and  $t_{\text{LZ}}$  transitions occur in the same access time windows as valid data transitions. These parameters are not referred to a specific voltage level, but specify when the device is no longer driving (HZ), or begins driving (LZ).
- 8) Fast slew rate  $\geq 1.0\text{ V/ns}$ , slow slew rate  $\geq 0.5\text{ V/ns}$  and  $< 1\text{ V/ns}$  for command/address and CK &  $\overline{\text{CK}}$  slew rate  $> 1.0\text{ V/ns}$ , measured between  $V_{\text{IH(ac)}}$  and  $V_{\text{IL(ac)}}$ .
- 9) These parameters guarantee device timing, but they are not necessarily tested on each device.
- 10) A maximum of eight Autorefresh commands can be posted to any given DDR SDRAM device.



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

- 11) The specific requirement is that DQS be valid (HIGH,LOW, or some point on a valid transition) on or before this CK edge. A valid transition is defined as monotonic and meeting the input slew rate specifications of the device. When no writes were previously in progress on the bus, DQS will be transitioning from Hi-Z to logic LOW. If a previous write was in progress, DQS could be HIGH, LOW at this time, depending on  $t_{DQSS}$ .
- 12) The maximum limit for this parameter is not a device limit. The device operates with a greater value for this parameter, but system performance (bus turnaround) degrades accordingly.

**TABLE 15**

**AC Timing - Absolute Specifications for PC2100**

Parameter	Symbol	-7		Unit	Note/Test Condition <sup>1)</sup>
		DDR266A			
		Min.	Max.		
DQ output access time from CK/CK	$t_{AC}$	-0.75	+0.75	ns	2)3)4)5)
CK high-level width	$t_{CH}$	0.45	0.55	$t_{CK}$	2)3)4)5)
Clock cycle time	$t_{CK}$	7	12	—	CL = 3 <sup>2)3)4)5)</sup>
		7.5	12	ns	CL = 2.5 <sup>2)3)4)5)</sup>
		7.5	12	ns	CL = 2.0 <sup>2)3)4)5)</sup>
CK low-level width	$t_{CL}$	0.45	0.55	$t_{CK}$	2)3)4)5)
Auto precharge write recovery + precharge time	$t_{DAL}$	$(t_{WR}/t_{CK})+(t_{RP}/t_{CK})$	—	$t_{CK}$	2)3)4)5)6)
DQ and DM input hold time	$t_{DH}$	0.5	—	ns	2)3)4)5)
DQ and DM input pulse width (each input)	$t_{DIPW}$	1.75	—	ns	2)3)4)5)6)
DQS output access time from CK/CK	$t_{DQSCK}$	-0.75	+0.75	ns	2)3)4)5)
DQS input low (high) pulse width (write cycle)	$t_{DQSL,H}$	0.35	—	$t_{CK}$	2)3)4)5)
DQS-DQ skew (DQS and associated DQ signals)	$t_{DQSQ}$	—	+0.5	ns	FBGA <sup>2)3)4)5)</sup>
Write command to 1 <sup>st</sup> DQS latching transition	$t_{DQSS}$	0.75	1.25	$t_{CK}$	2)3)4)5)
DQ and DM input setup time	$t_{DS}$	0.5	—	ns	2)3)4)5)
DQS falling edge hold time from CK (write cycle)	$t_{DSH}$	0.2	—	$t_{CK}$	2)3)4)5)
DQS falling edge to CK setup time (write cycle)	$t_{DSS}$	0.2	—	$t_{CK}$	2)3)4)5)
Clock Half Period	$t_{HP}$	min. ( $t_{CL}, t_{CH}$ )	—	ns	2)3)4)5)
Data-out high-impedance time from CK/CK	$t_{HZ}$	—	+0.75	ns	2)3)4)5)7)
Address and control input hold time	$t_{IH}$	0.9	—	ns	fast slew rate 3)4)5)6)8)
		1.0	—	ns	slow slew rate 3)4)5)6)8)
Control and Addr. input pulse width (each input)	$t_{IPW}$	2.2	—	ns	2)3)4)5)9)
Address and control input setup time	$t_{IS}$	0.9	—	ns	fast slew rate 3)4)5)6)8)
		1.0	—	ns	slow slew rate 3)4)5)6)8)
Data-out low-impedance time from CK/CK	$t_{LZ}$	-0.75	+0.75	ns	2)3)4)5)7)
Mode register set command cycle time	$t_{MRD}$	2	—	$t_{CK}$	2)3)4)5)
DQ/DQS output hold time from DQS	$t_{QH}$	$t_{HP} - t_{QHS}$	—	ns	2)3)4)5)
Data hold skew factor	$t_{QHS}$	—	0.75	ns	FBGA <sup>2)3)4)5)</sup>



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Parameter	Symbol	-7		Unit	Note/Test Condition <sup>1)</sup>
		DDR266A			
		Min.	Max.		
Active to Read w/AP delay	$t_{RAP}$	$t_{RCD}$	—	ns	2)3)4)5)
Active to Precharge command	$t_{RAS}$	45	120E+3	ns	2)3)4)5)
Active to Active/Auto-refresh command period	$t_{RC}$	65	—	ns	2)3)4)5)
Active to Read or Write delay	$t_{RCD}$	20	—	ns	2)3)4)5)
Average Periodic Refresh Interval	$t_{REFI}$	7.8	—	$\mu$ s	2)3)4)5)10)
Auto-refresh to Active/Auto-refresh command period	$t_{RFC}$	75	—	ns	2)3)4)5)
Precharge command period	$t_{RP}$	20	—	ns	2)3)4)5)
Read preamble	$t_{RPRE}$	0.9	1.1	$t_{CK}$	2)3)4)5)
Read postamble	$t_{RPST}$	0.4	0.6	$t_{CK}$	2)3)4)5)
Active bank A to Active bank B command	$t_{RRD}$	15	—	ns	2)3)4)5)
Write preamble	$t_{WPRE}$	0.25	—	$t_{CK}$	2)3)4)5)
Write preamble setup time	$t_{WPRES}$	0	—	ns	2)3)4)5)11)
Write postamble	$t_{WPST}$	0.4	—	$t_{CK}$	2)3)4)5)12)
Write recovery time	$t_{WR}$	15	—	ns	2)3)4)5)
Internal write to read command delay	$t_{WTR}$	1	—	$t_{CK}$	2)3)4)5)
Exit self-refresh to non-read command	$t_{XSNR}$	75	—	ns	2)3)4)5)13)
Exit self-refresh to read command	$t_{XSRD}$	200	—	$t_{CK}$	2)3)4)5)

- 1)  $V_{DDQ} = 2.5\text{ V} \pm 0.2\text{ V}$ ,  $V_{DD} = +2.5\text{ V} \pm 0.2\text{ V}$ ;  $0\text{ }^\circ\text{C} \leq T_A \leq 70\text{ }^\circ\text{C}$
- 2) Input slew rate  $\geq 1\text{ V/ns}$
- 3) The CK/ $\overline{\text{CK}}$  input reference level (for timing reference to CK/ $\overline{\text{CK}}$ ) is the point at which CK and  $\overline{\text{CK}}$  cross: the input reference level for signals other than CK/ $\overline{\text{CK}}$ , is  $V_{REF}$ . CK/ $\overline{\text{CK}}$  slew rate are  $\geq 1.0\text{ V/ns}$ .
- 4) Inputs are not recognized as valid until  $V_{REF}$  stabilizes.
- 5) The Output timing reference level, as measured at the timing reference point indicated in AC Characteristics (note 3) is  $V_{TT}$ .
- 6) For each of the terms, if not already an integer, round to the next highest integer.  $t_{CK}$  is equal to the actual system clock cycle time.
- 7)  $t_{HZ}$  and  $t_{LZ}$  transitions occur in the same access time windows as valid data transitions. These parameters are not referred to a specific voltage level, but specify when the device is no longer driving (HZ), or begins driving (LZ).
- 8) Fast slew rate  $\geq 1.0\text{ V/ns}$ , slow slew rate  $\geq 0.5\text{ V/ns}$  and  $< 1\text{ V/ns}$  for command/address and CK &  $\overline{\text{CK}}$  slew rate  $> 1.0\text{ V/ns}$ , measured between  $V_{IH(ac)}$  and  $V_{IL(ac)}$ .
- 9) These parameters guarantee device timing, but they are not necessarily tested on each device.
- 10) A maximum of eight Autorefresh commands can be posted to any given DDR SDRAM device.
- 11) The specific requirement is that DQS be valid (HIGH, LOW, or some point on a valid transition) on or before this CK edge. A valid transition is defined as monotonic and meeting the input slew rate specifications of the device. When no writes were previously in progress on the bus, DQS will be transitioning from Hi-Z to logic LOW. If a previous write was in progress, DQS could be HIGH, LOW, or transitioning from HIGH to LOW at this time, depending on  $t_{DQSS}$ .
- 12) The maximum limit for this parameter is not a device limit. The device operates with a greater value for this parameter, but system performance (bus turnaround) degrades accordingly.
- 13) In all circumstances,  $t_{XSNR}$  can be satisfied using  $t_{XSNR} = t_{RFC,min} + 1 \times t_{CK}$



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

# 4 SPD Codes

This chapter lists all hexadecimal byte values stored in the EEPROM of the products described in this data sheet. SPD stands for serial presence detect. All values with XX in the table are module specific bytes which are defined during production.

### List of SPD Code Tables

- Table 16 “HYS72D[64/128/256]xxxGBR-5-B” on Page 23
- Table 17 “HYS72D[64/128/256]xxxGBR-6-B” on Page 27
- Table 18 “HYS72D[128/256]xxxGBR-7-B” on Page 31
- Table 19 “HYS72D[128/256]xxxHBR-5-B” on Page 35
- Table 20 “HYS72D[128/256]xxxHBR-6-B” on Page 39
- Table 21 “HYS72D[128/256]xxxHBR-7-B” on Page 43

**TABLE 16**

**HYS72D[64/128/256]xxxGBR-5-B**

Product Type		HYS72D64301GBR-5-B	HYS72D128300GBR-5-B	HYS72D128321GBR-5-B	HYS72D256220GBR-5-B
Organization		512MB	1 GByte	1 GByte	2 GByte
		×72	×72	×72	×72
		1 Rank (×8)	1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)
Label Code		PC3200R-30331	PC3200R-30331	PC3200R-30331	PC3200R-30331
JEDEC SPD Revision		Rev. 1.0	Rev. 1.0	Rev. 1.0	Rev. 1.0
Byte#	Description	HEX	HEX	HEX	HEX
0	Programmed SPD Bytes in E <sup>2</sup> PROM	80	80	80	80
1	Total number of Bytes in E <sup>2</sup> PROM	08	08	08	08
2	Memory Type (DDR = 07h)	07	07	07	07
3	Number of Row Addresses	0D	0D	0D	0D
4	Number of Column Addresses	0B	0C	0B	0C
5	Number of DIMM Ranks	01	01	02	02
6	Data Width (LSB)	48	48	48	48
7	Data Width (MSB)	00	00	00	00
8	Interface Voltage Levels	04	04	04	04
9	t <sub>CK</sub> @ CL <sub>max</sub> (Byte 18) [ns]	50	50	50	50



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Product Type		HYS72D64301GBR-5-B	HYS72D128300GBR-5-B	HYS72D128321GBR-5-B	HYS72D256220GBR-5-B
Organization		512MB	1 GByte	1 GByte	2 GByte
		×72	×72	×72	×72
		1 Rank (×8)	1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)
Label Code		PC3200R-30331	PC3200R-30331	PC3200R-30331	PC3200R-30331
JEDEC SPD Revision		Rev. 1.0	Rev. 1.0	Rev. 1.0	Rev. 1.0
Byte#	Description	HEX	HEX	HEX	HEX
10	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> (Byte 18) [ns]	50	50	50	50
11	Error Correction Support	02	02	02	02
12	Refresh Rate	82	82	82	82
13	Primary SDRAM Width	08	04	08	04
14	Error Checking SDRAM Width	08	04	08	04
15	t <sub>CCD</sub> [cycles]	01	01	01	01
16	Burst Length Supported	0E	0E	0E	0E
17	Number of Banks on SDRAM Device	04	04	04	04
18	CAS Latency	1C	1C	1C	1C
19	CS Latency	01	01	01	01
20	Write Latency	02	02	02	02
21	DIMM Attributes	26	26	26	26
22	Component Attributes	C1	C1	C1	C1
23	t <sub>CK</sub> @ CL <sub>max</sub> -0.5 (Byte 18) [ns]	60	60	60	60
24	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -0.5 [ns]	50	50	50	50
25	t <sub>CK</sub> @ CL <sub>max</sub> -1 (Byte 18) [ns]	75	75	75	75
26	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -1 [ns]	50	50	50	50
27	t <sub>RPmin</sub> [ns]	3C	3C	3C	3C
28	t <sub>RRDmin</sub> [ns]	28	28	28	28
29	t <sub>RCDmin</sub> [ns]	3C	3C	3C	3C
30	t <sub>RASmin</sub> [ns]	28	28	28	28
31	Module Density per Rank	80	01	80	01
32	t <sub>AS</sub> , t <sub>CS</sub> [ns]	60	60	60	60
33	t <sub>AH</sub> , t <sub>CH</sub> [ns]	60	60	60	60
34	t <sub>DS</sub> [ns]	40	40	40	40





HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Product Type		HYS72D64301GBR-5-B	HYS72D128300GBR-5-B	HYS72D128321GBR-5-B	HYS72D256220GBR-5-B
Organization		512MB	1 GByte	1 GByte	2 GByte
		×72	×72	×72	×72
		1 Rank (×8)	1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)
Label Code		PC3200R-30331	PC3200R-30331	PC3200R-30331	PC3200R-30331
JEDEC SPD Revision		Rev. 1.0	Rev. 1.0	Rev. 1.0	Rev. 1.0
Byte#	Description	HEX	HEX	HEX	HEX
35	t <sub>DH</sub> [ns]	40	40	40	40
36 - 40	Not used	00	00	00	00
41	t <sub>RCmin</sub> [ns]	37	37	37	37
42	t <sub>RFCmin</sub> [ns]	41	41	41	41
43	t <sub>CKmax</sub> [ns]	28	28	28	28
44	t <sub>DQSQmax</sub> [ns]	28	28	28	28
45	t <sub>QHSmax</sub> [ns]	50	50	50	50
46	not used	00	00	00	00
47	DIMM PCB Height	01	01	01	01
48 - 61	Not used	00	00	00	00
62	SPD Revision	10	10	10	10
63	Checksum of Byte 0-62	67	E1	68	E2
64	Manufacturer's JEDEC ID Code (1)	7F	7F	7F	7F
65	Manufacturer's JEDEC ID Code (2)	7F	7F	7F	7F
66	Manufacturer's JEDEC ID Code (3)	7F	7F	7F	7F
67	Manufacturer's JEDEC ID Code (4)	7F	7F	7F	7F
68	Manufacturer's JEDEC ID Code (5)	7F	7F	7F	7F
69	Manufacturer's JEDEC ID Code (6)	51	51	51	51
70	Manufacturer's JEDEC ID Code (7)	00	00	00	00
71	Manufacturer's JEDEC ID Code (8)	00	00	00	00
72	Module Manufacturer Location	xx	xx	xx	xx
73	Part Number, Char 1	37	37	37	37
74	Part Number, Char 2	32	32	32	32
75	Part Number, Char 3	44	44	44	44
76	Part Number, Char 4	36	31	31	32



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D64301GBR-5-B</b>	<b>HYS72D128300GBR-5-B</b>	<b>HYS72D128321GBR-5-B</b>	<b>HYS72D256220GBR-5-B</b>
<b>Organization</b>		<b>512MB</b>	<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×8)</b>	<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC3200R-30331</b>	<b>PC3200R-30331</b>	<b>PC3200R-30331</b>	<b>PC3200R-30331</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 1.0</b>	<b>Rev. 1.0</b>	<b>Rev. 1.0</b>	<b>Rev. 1.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
77	Part Number, Char 5	34	32	32	35
78	Part Number, Char 6	33	38	38	36
79	Part Number, Char 7	30	33	33	32
80	Part Number, Char 8	31	30	32	32
81	Part Number, Char 9	47	30	31	30
82	Part Number, Char 10	42	47	47	47
83	Part Number, Char 11	52	42	42	42
84	Part Number, Char 12	35	52	52	52
85	Part Number, Char 13	42	35	35	35
86	Part Number, Char 14	20	42	42	42
87	Part Number, Char 15	20	20	20	20
88	Part Number, Char 16	20	20	20	20
89	Part Number, Char 17	20	20	20	20
90	Part Number, Char 18	20	20	20	20
91	Module Revision Code	0x	1x	1x	1x
92	Test Program Revision Code	xx	xx	xx	xx
93	Module Manufacturing Date Year	xx	xx	xx	xx
94	Module Manufacturing Date Week	xx	xx	xx	xx
95 - 98	Module Serial Number	xx	xx	xx	xx
99 - 127	Not used	00	00	00	00



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 17**  
**HYS72D[64/128/256]xxxGBR-6-B**

Product Type		HYS72D64301GBR-6-B	HYS72D128300GBR-6-B	HYS72D128321GBR-6-B	HYS72D256320GBR-6-B	HYS72D256220GBR-6-B
Organization		512MB	1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72	×72
		1 Rank (×8)	1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2700R-25331	PC2700R-25330	PC2700R-25330	PC2700R-25330	PC2700R-25331
JEDEC SPD Revision		Rev. 1.0	Rev. 0.0	Rev. 0.0	Rev. 0.0	Rev. 1.0
Byte#	Description	HEX	HEX	HEX	HEX	HEX
0	Programmed SPD Bytes in E <sup>2</sup> PROM	80	80	80	80	80
1	Total number of Bytes in E <sup>2</sup> PROM	08	08	08	08	08
2	Memory Type (DDR = 07h)	07	07	07	07	07
3	Number of Row Addresses	0D	0D	0D	0D	0D
4	Number of Column Addresses	0B	0C	0B	0C	0C
5	Number of DIMM Ranks	01	01	02	02	02
6	Data Width (LSB)	48	48	48	48	48
7	Data Width (MSB)	00	00	00	00	00
8	Interface Voltage Levels	04	04	04	04	04
9	t <sub>CK</sub> @ CL <sub>max</sub> (Byte 18) [ns]	60	60	60	60	60
10	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> (Byte 18) [ns]	70	70	70	70	70
11	Error Correction Support	02	02	02	02	02
12	Refresh Rate	82	82	82	82	82
13	Primary SDRAM Width	08	04	08	04	04
14	Error Checking SDRAM Width	08	04	08	04	04
15	t <sub>CCD</sub> [cycles]	01	01	01	01	01
16	Burst Length Supported	0E	0E	0E	0E	0E
17	Number of Banks on SDRAM Device	04	04	04	04	04
18	CAS Latency	0C	0C	0C	0C	0C
19	CS Latency	01	01	01	01	01
20	Write Latency	02	02	02	02	02
21	DIMM Attributes	26	26	26	26	26



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Product Type		HYS72D64301GBR-6-B	HYS72D128300GBR-6-B	HYS72D128321GBR-6-B	HYS72D256320GBR-6-B	HYS72D256220GBR-6-B
Organization		512MB	1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72	×72
		1 Rank (×8)	1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2700R-25331	PC2700R-25330	PC2700R-25330	PC2700R-25330	PC2700R-25331
JEDEC SPD Revision		Rev. 1.0	Rev. 0.0	Rev. 0.0	Rev. 0.0	Rev. 1.0
Byte#	Description	HEX	HEX	HEX	HEX	HEX
22	Component Attributes	C1	C1	C1	C1	C1
23	t <sub>CK</sub> @ CL <sub>max</sub> -0.5 (Byte 18) [ns]	75	75	75	75	75
24	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -0.5 [ns]	70	70	70	70	70
25	t <sub>CK</sub> @ CL <sub>max</sub> -1 (Byte 18) [ns]	00	00	00	00	00
26	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -1 [ns]	00	00	00	00	00
27	t <sub>RPmin</sub> [ns]	48	48	48	48	48
28	t <sub>RRDmin</sub> [ns]	30	30	30	30	30
29	t <sub>RCDmin</sub> [ns]	48	48	48	48	48
30	t <sub>RASmin</sub> [ns]	2A	2A	2A	2A	2A
31	Module Density per Rank	80	01	80	01	01
32	t <sub>AS</sub> , t <sub>CS</sub> [ns]	75	75	75	75	75
33	t <sub>AH</sub> , t <sub>CH</sub> [ns]	75	75	75	75	75
34	t <sub>DS</sub> [ns]	45	45	45	45	45
35	t <sub>DH</sub> [ns]	45	45	45	45	45
36 - 40	Not used	00	00	00	00	00
41	t <sub>RCmin</sub> [ns]	3C	3C	3C	3C	3C
42	t <sub>RFCmin</sub> [ns]	48	48	48	48	48
43	t <sub>CKmax</sub> [ns]	30	30	30	30	30
44	t <sub>DQSQmax</sub> [ns]	28	28	28	28	28
45	t <sub>QHSmax</sub> [ns]	50	50	50	50	50
46	not used	00	00	00	00	00
47	DIMM PCB Height	01	00	00	00	01
48 - 61	Not used	00	00	00	00	00
62	SPD Revision	10	00	00	00	10
63	Checksum of Byte 0-62	61	CA	51	CB	DC



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D64301GBR-6-B</b>	<b>HYS72D128300GBR-6-B</b>	<b>HYS72D128321GBR-6-B</b>	<b>HYS72D256320GBR-6-B</b>	<b>HYS72D256220GBR-6-B</b>
<b>Organization</b>		<b>512MB</b>	<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×8)</b>	<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC2700R-25331</b>	<b>PC2700R-25330</b>	<b>PC2700R-25330</b>	<b>PC2700R-25330</b>	<b>PC2700R-25331</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 1.0</b>	<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 1.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
64	Manufacturer's JEDEC ID Code (1)	7F	7F	7F	7F	7F
65	Manufacturer's JEDEC ID Code (2)	7F	7F	7F	7F	7F
66	Manufacturer's JEDEC ID Code (3)	7F	7F	7F	7F	7F
67	Manufacturer's JEDEC ID Code (4)	7F	7F	7F	7F	7F
68	Manufacturer's JEDEC ID Code (5)	7F	7F	7F	7F	7F
69	Manufacturer's JEDEC ID Code (6)	51	51	51	51	51
70	Manufacturer's JEDEC ID Code (7)	00	00	00	00	00
71	Manufacturer's JEDEC ID Code (8)	00	00	00	00	00
72	Module Manufacturer Location	xx	xx	xx	xx	xx
73	Part Number, Char 1	37	37	37	37	37
74	Part Number, Char 2	32	32	32	32	32
75	Part Number, Char 3	44	44	44	44	44
76	Part Number, Char 4	36	31	31	32	32
77	Part Number, Char 5	34	32	32	35	35
78	Part Number, Char 6	33	38	38	36	36
79	Part Number, Char 7	30	33	33	33	32
80	Part Number, Char 8	31	30	32	32	32
81	Part Number, Char 9	47	30	31	30	30
82	Part Number, Char 10	42	47	47	47	47
83	Part Number, Char 11	52	42	42	42	42
84	Part Number, Char 12	36	52	52	52	52
85	Part Number, Char 13	42	36	36	36	36
86	Part Number, Char 14	20	42	42	42	42
87	Part Number, Char 15	20	20	20	20	20
88	Part Number, Char 16	20	20	20	20	20



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D64301GBR-6-B</b>	<b>HYS72D128300GBR-6-B</b>	<b>HYS72D128321GBR-6-B</b>	<b>HYS72D256320GBR-6-B</b>	<b>HYS72D256220GBR-6-B</b>
<b>Organization</b>		<b>512MB</b>	<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×8)</b>	<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC2700R-25331</b>	<b>PC2700R-25330</b>	<b>PC2700R-25330</b>	<b>PC2700R-25330</b>	<b>PC2700R-25331</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 1.0</b>	<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 1.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
89	Part Number, Char 17	20	20	20	20	20
90	Part Number, Char 18	20	20	20	20	20
91	Module Revision Code	0x	1x	1x	1x	1x
92	Test Program Revision Code	xx	xx	xx	xx	xx
93	Module Manufacturing Date Year	xx	xx	xx	xx	xx
94	Module Manufacturing Date Week	xx	xx	xx	xx	xx
95 - 98	Module Serial Number	xx	xx	xx	xx	xx
99 - 127	Not used	00	00	00	00	00



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 18**  
HYS72D[128/256]xxxGBR-7-B

Product Type		HYS72D128300GBR-7-B	HYS72D128321GBR-7-B	HYS72D256220GBR-7-B	HYS72D256320GBR-7-B
Organization		1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72
		1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2100R-20330	PC2100R-20330	PC2100R-20331	PC2100R-20330
JEDEC SPD Revision		Rev. 0.0	Rev. 0.0	Rev. 1.0	Rev. 0.0
Byte#	Description	HEX	HEX	HEX	HEX
0	Programmed SPD Bytes in E <sup>2</sup> PROM	80	80	80	80
1	Total number of Bytes in E <sup>2</sup> PROM	08	08	08	08
2	Memory Type (DDR = 07h)	07	07	07	07
3	Number of Row Addresses	0D	0D	0D	0D
4	Number of Column Addresses	0C	0B	0C	0C
5	Number of DIMM Ranks	01	02	02	02
6	Data Width (LSB)	48	48	48	48
7	Data Width (MSB)	00	00	00	00
8	Interface Voltage Levels	04	04	04	04
9	t <sub>CK</sub> @ CL <sub>max</sub> (Byte 18) [ns]	70	70	70	70
10	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> (Byte 18) [ns]	75	75	75	75
11	Error Correction Support	02	02	02	02
12	Refresh Rate	82	82	82	82
13	Primary SDRAM Width	04	08	04	04
14	Error Checking SDRAM Width	04	08	04	04
15	t <sub>CCD</sub> [cycles]	01	01	01	01
16	Burst Length Supported	0E	0E	0E	0E
17	Number of Banks on SDRAM Device	04	04	04	04
18	CAS Latency	0C	0C	0C	0C
19	CS Latency	01	01	01	01
20	Write Latency	02	02	02	02
21	DIMM Attributes	26	26	26	26
22	Component Attributes	C1	C1	C1	C1



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Product Type		HYS72D128300GBR-7-B	HYS72D128321GBR-7-B	HYS72D256220GBR-7-B	HYS72D256320GBR-7-B
Organization		1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72
		1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2100R-20330	PC2100R-20330	PC2100R-20331	PC2100R-20330
JEDEC SPD Revision		Rev. 0.0	Rev. 0.0	Rev. 1.0	Rev. 0.0
Byte#	Description	HEX	HEX	HEX	HEX
23	t <sub>CK</sub> @ CL <sub>max</sub> -0.5 (Byte 18) [ns]	75	75	75	75
24	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -0.5 [ns]	75	75	75	75
25	t <sub>CK</sub> @ CL <sub>max</sub> -1 (Byte 18) [ns]	00	00	00	00
26	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -1 [ns]	00	00	00	00
27	t <sub>RPmin</sub> [ns]	50	50	50	50
28	t <sub>RRDmin</sub> [ns]	3C	3C	3C	3C
29	t <sub>RCDmin</sub> [ns]	50	50	50	50
30	t <sub>RASmin</sub> [ns]	2D	2D	2D	2D
31	Module Density per Rank	01	80	01	01
32	t <sub>AS</sub> , t <sub>CS</sub> [ns]	90	90	90	90
33	t <sub>AH</sub> , t <sub>CH</sub> [ns]	90	90	90	90
34	t <sub>DS</sub> [ns]	50	50	50	50
35	t <sub>DH</sub> [ns]	50	50	50	50
36 - 40	Not used	00	00	00	00
41	t <sub>RCmin</sub> [ns]	41	41	41	41
42	t <sub>RFCmin</sub> [ns]	4B	4B	4B	4B
43	t <sub>CKmax</sub> [ns]	30	30	30	30
44	t <sub>DQSQmax</sub> [ns]	32	32	32	32
45	t <sub>QHSmax</sub> [ns]	75	75	75	75
46	not used	00	00	00	00
47	DIMM PCB Height	00	00	01	00
48 - 61	Not used	00	00	00	00
62	SPD Revision	00	00	10	00
63	Checksum of Byte 0-62	86	0D	98	87
64	Manufacturer's JEDEC ID Code (1)	7F	7F	7F	7F





HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Product Type		HYS72D128300GBR-7-B	HYS72D128321GBR-7-B	HYS72D256220GBR-7-B	HYS72D256320GBR-7-B
Organization		1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72
		1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2100R-20330	PC2100R-20330	PC2100R-20331	PC2100R-20330
JEDEC SPD Revision		Rev. 0.0	Rev. 0.0	Rev. 1.0	Rev. 0.0
Byte#	Description	HEX	HEX	HEX	HEX
65	Manufacturer's JEDEC ID Code (2)	7F	7F	7F	7F
66	Manufacturer's JEDEC ID Code (3)	7F	7F	7F	7F
67	Manufacturer's JEDEC ID Code (4)	7F	7F	7F	7F
68	Manufacturer's JEDEC ID Code (5)	7F	7F	7F	7F
69	Manufacturer's JEDEC ID Code (6)	51	51	51	51
70	Manufacturer's JEDEC ID Code (7)	00	00	00	00
71	Manufacturer's JEDEC ID Code (8)	00	00	00	00
72	Module Manufacturer Location	xx	xx	xx	xx
73	Part Number, Char 1	37	37	37	37
74	Part Number, Char 2	32	32	32	32
75	Part Number, Char 3	44	44	44	44
76	Part Number, Char 4	31	31	32	32
77	Part Number, Char 5	32	32	35	35
78	Part Number, Char 6	38	38	36	36
79	Part Number, Char 7	33	33	32	33
80	Part Number, Char 8	30	32	32	32
81	Part Number, Char 9	30	31	30	30
82	Part Number, Char 10	47	47	47	47
83	Part Number, Char 11	42	42	42	42
84	Part Number, Char 12	52	52	52	52
85	Part Number, Char 13	37	37	37	37
86	Part Number, Char 14	42	42	42	42
87	Part Number, Char 15	20	20	20	20
88	Part Number, Char 16	20	20	20	20
89	Part Number, Char 17	20	20	20	20



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D128300GBR-7-B</b>	<b>HYS72D128321GBR-7-B</b>	<b>HYS72D256220GBR-7-B</b>	<b>HYS72D256320GBR-7-B</b>
<b>Organization</b>		<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC2100R-20330</b>	<b>PC2100R-20330</b>	<b>PC2100R-20331</b>	<b>PC2100R-20330</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 1.0</b>	<b>Rev. 0.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
90	Part Number, Char 18	20	20	20	20
91	Module Revision Code	1x	1x	1x	1x
92	Test Program Revision Code	xx	xx	xx	xx
93	Module Manufacturing Date Year	xx	xx	xx	xx
94	Module Manufacturing Date Week	xx	xx	xx	xx
95 - 98	Module Serial Number	xx	xx	xx	xx
99 - 127	Not used	00	00	00	00



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 19**  
**HYS72D[128/256]xxxHBR-5-B**

Product Type		HYS72D64301HBR-5-B	HYS72D128300HBR-5-B	HYS72D128321HBR-5-B	HYS72D256220HBR-5-B	HYS72D256320HBR-5-B
Organization		512MB	1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72	×72
		1 Rank (×8)	1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC3200R-30331	PC3200R-30331	PC3200R-30331	PC3200R-30331	PC3200R-30331
JEDEC SPD Revision		Rev. 1.0	Rev. 1.0	Rev. 1.0	Rev. 1.0	Rev. 1.0
Byte#	Description	HEX	HEX	HEX	HEX	HEX
0	Programmed SPD Bytes in E <sup>2</sup> PROM	80	80	80	80	80
1	Total number of Bytes in E <sup>2</sup> PROM	08	08	08	08	08
2	Memory Type (DDR = 07h)	07	07	07	07	07
3	Number of Row Addresses	0D	0D	0D	0D	0D
4	Number of Column Addresses	0B	0C	0B	0C	0C
5	Number of DIMM Ranks	01	01	02	02	02
6	Data Width (LSB)	48	48	48	48	48
7	Data Width (MSB)	00	00	00	00	00
8	Interface Voltage Levels	04	04	04	04	04
9	t <sub>CK</sub> @ CL <sub>max</sub> (Byte 18) [ns]	50	50	50	50	50
10	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> (Byte 18) [ns]	50	50	50	50	50
11	Error Correction Support	02	02	02	02	02
12	Refresh Rate	82	82	82	82	82
13	Primary SDRAM Width	08	04	08	04	04
14	Error Checking SDRAM Width	08	04	08	04	04
15	t <sub>CCD</sub> [cycles]	01	01	01	01	01
16	Burst Length Supported	0E	0E	0E	0E	0E
17	Number of Banks on SDRAM Device	04	04	04	04	04
18	CAS Latency	1C	1C	1C	1C	1C
19	CS Latency	01	01	01	01	01
20	Write Latency	02	02	02	02	02
21	DIMM Attributes	26	26	26	26	26



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Product Type		HYS72D64301HBR-5-B	HYS72D128300HBR-5-B	HYS72D128321HBR-5-B	HYS72D256220HBR-5-B	HYS72D256320HBR-5-B
Organization		512MB ×72 1 Rank (×8)	1 GByte ×72 1 Rank (×4)	1 GByte ×72 2 Ranks (×8)	2 GByte ×72 2 Ranks (×4)	2 GByte ×72 2 Ranks (×4)
Label Code		PC3200R-30331	PC3200R-30331	PC3200R-30331	PC3200R-30331	PC3200R-30331
JEDEC SPD Revision		Rev. 1.0	Rev. 1.0	Rev. 1.0	Rev. 1.0	Rev. 1.0
Byte#	Description	HEX	HEX	HEX	HEX	HEX
22	Component Attributes	C1	C1	C1	C1	C1
23	t <sub>CK</sub> @ CL <sub>max</sub> -0.5 (Byte 18) [ns]	60	60	60	60	60
24	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -0.5 [ns]	50	50	50	50	50
25	t <sub>CK</sub> @ CL <sub>max</sub> -1 (Byte 18) [ns]	75	75	75	75	75
26	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -1 [ns]	50	50	50	50	50
27	t <sub>RPmin</sub> [ns]	3C	3C	3C	3C	3C
28	t <sub>RRDmin</sub> [ns]	28	28	28	28	28
29	t <sub>RCDmin</sub> [ns]	3C	3C	3C	3C	3C
30	t <sub>RASmin</sub> [ns]	28	28	28	28	28
31	Module Density per Rank	80	01	80	01	01
32	t <sub>AS</sub> , t <sub>CS</sub> [ns]	60	60	60	60	60
33	t <sub>AH</sub> , t <sub>CH</sub> [ns]	60	60	60	60	60
34	t <sub>DS</sub> [ns]	40	40	40	40	40
35	t <sub>DH</sub> [ns]	40	40	40	40	40
36 - 40	Not used	00	00	00	00	00
41	t <sub>RCmin</sub> [ns]	37	37	37	37	37
42	t <sub>RFCmin</sub> [ns]	41	41	41	41	41
43	t <sub>CKmax</sub> [ns]	28	28	28	28	28
44	t <sub>DQSQmax</sub> [ns]	28	28	28	28	28
45	t <sub>QHSmax</sub> [ns]	50	50	50	50	50
46	not used	00	00	00	00	00
47	DIMM PCB Height	01	01	01	01	01
48 - 61	Not used	00	00	00	00	00
62	SPD Revision	10	10	10	10	10
63	Checksum of Byte 0-62	67	E1	68	E2	E2



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D64301HBR-5-B</b>	<b>HYS72D128300HBR-5-B</b>	<b>HYS72D128321HBR-5-B</b>	<b>HYS72D256220HBR-5-B</b>	<b>HYS72D256320HBR-5-B</b>
<b>Organization</b>		<b>512MB</b>	<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×8)</b>	<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC3200R-30331</b>	<b>PC3200R-30331</b>	<b>PC3200R-30331</b>	<b>PC3200R-30331</b>	<b>PC3200R-30331</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 1.0</b>	<b>Rev. 1.0</b>	<b>Rev. 1.0</b>	<b>Rev. 1.0</b>	<b>Rev. 1.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
64	Manufacturer's JEDEC ID Code (1)	7F	7F	7F	7F	7F
65	Manufacturer's JEDEC ID Code (2)	7F	7F	7F	7F	7F
66	Manufacturer's JEDEC ID Code (3)	7F	7F	7F	7F	7F
67	Manufacturer's JEDEC ID Code (4)	7F	7F	7F	7F	7F
68	Manufacturer's JEDEC ID Code (5)	7F	7F	7F	7F	7F
69	Manufacturer's JEDEC ID Code (6)	51	51	51	51	51
70	Manufacturer's JEDEC ID Code (7)	00	00	00	00	00
71	Manufacturer's JEDEC ID Code (8)	00	00	00	00	00
72	Module Manufacturer Location	xx	xx	xx	xx	xx
73	Part Number, Char 1	37	37	37	37	37
74	Part Number, Char 2	32	32	32	32	32
75	Part Number, Char 3	44	44	44	44	44
76	Part Number, Char 4	36	31	31	32	32
77	Part Number, Char 5	34	32	32	35	35
78	Part Number, Char 6	33	38	38	36	36
79	Part Number, Char 7	30	33	33	32	33
80	Part Number, Char 8	31	30	32	32	32
81	Part Number, Char 9	48	30	31	30	30
82	Part Number, Char 10	42	48	48	48	48
83	Part Number, Char 11	52	42	42	42	42
84	Part Number, Char 12	35	52	52	52	52
85	Part Number, Char 13	42	35	35	35	35
86	Part Number, Char 14	20	42	42	42	42
87	Part Number, Char 15	20	20	20	20	20
88	Part Number, Char 16	20	20	20	20	20



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D64301HBR-5-B</b>	<b>HYS72D128300HBR-5-B</b>	<b>HYS72D128321HBR-5-B</b>	<b>HYS72D256220HBR-5-B</b>	<b>HYS72D256320HBR-5-B</b>
<b>Organization</b>		<b>512MB</b>	<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×8)</b>	<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC3200R-30331</b>	<b>PC3200R-30331</b>	<b>PC3200R-30331</b>	<b>PC3200R-30331</b>	<b>PC3200R-30331</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 1.0</b>	<b>Rev. 1.0</b>	<b>Rev. 1.0</b>	<b>Rev. 1.0</b>	<b>Rev. 1.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
89	Part Number, Char 17	20	20	20	20	20
90	Part Number, Char 18	20	20	20	20	20
91	Module Revision Code	1x	1x	1x	1x	1x
92	Test Program Revision Code	xx	xx	xx	xx	xx
93	Module Manufacturing Date Year	xx	xx	xx	xx	xx
94	Module Manufacturing Date Week	xx	xx	xx	xx	xx
95 - 98	Module Serial Number	xx	xx	xx	xx	xx
99 - 127	Not used	00	00	00	00	00



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 20**  
**HYS72D[128/256]xxxHBR-6-B**

Product Type		HYS72D64301HBR-6-B	HYS72D128300HBR-6-B	HYS72D128321HBR-6-B	HYS72D256220HBR-6-B	HYS72D256320HBR-6-B
Organization		512MB	1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72	×72
		1 Rank (×8)	1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2700R-25331	PC2700R-25330	PC2700R-25330	PC2700R-25331	PC2700R-25330
JEDEC SPD Revision		Rev. 1.0	Rev. 0.0	Rev. 0.0	Rev. 1.0	Rev. 0.0
Byte#	Description	HEX	HEX	HEX	HEX	HEX
0	Programmed SPD Bytes in E <sup>2</sup> PROM	80	80	80	80	80
1	Total number of Bytes in E <sup>2</sup> PROM	08	08	08	08	08
2	Memory Type (DDR = 07h)	07	07	07	07	07
3	Number of Row Addresses	0D	0D	0D	0D	0D
4	Number of Column Addresses	0B	0C	0B	0C	0C
5	Number of DIMM Ranks	01	01	02	02	02
6	Data Width (LSB)	48	48	48	48	48
7	Data Width (MSB)	00	00	00	00	00
8	Interface Voltage Levels	04	04	04	04	04
9	t <sub>CK</sub> @ CL <sub>max</sub> (Byte 18) [ns]	60	60	60	60	60
10	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> (Byte 18) [ns]	70	70	70	70	70
11	Error Correction Support	02	02	02	02	02
12	Refresh Rate	82	82	82	82	82
13	Primary SDRAM Width	08	04	08	04	04
14	Error Checking SDRAM Width	08	04	08	04	04
15	t <sub>CCD</sub> [cycles]	01	01	01	01	01
16	Burst Length Supported	0E	0E	0E	0E	0E
17	Number of Banks on SDRAM Device	04	04	04	04	04
18	CAS Latency	0C	0C	0C	0C	0C
19	CS Latency	01	01	01	01	01
20	Write Latency	02	02	02	02	02
21	DIMM Attributes	26	26	26	26	26



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Product Type		HYS72D64301HBR-6-B	HYS72D128300HBR-6-B	HYS72D128321HBR-6-B	HYS72D256220HBR-6-B	HYS72D256320HBR-6-B
Organization		512MB	1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72	×72
		1 Rank (×8)	1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2700R-25331	PC2700R-25330	PC2700R-25330	PC2700R-25331	PC2700R-25330
JEDEC SPD Revision		Rev. 1.0	Rev. 0.0	Rev. 0.0	Rev. 1.0	Rev. 0.0
Byte#	Description	HEX	HEX	HEX	HEX	HEX
22	Component Attributes	C1	C1	C1	C1	C1
23	t <sub>CK</sub> @ CL <sub>max</sub> -0.5 (Byte 18) [ns]	75	75	75	75	75
24	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -0.5 [ns]	70	70	70	70	70
25	t <sub>CK</sub> @ CL <sub>max</sub> -1 (Byte 18) [ns]	00	00	00	00	00
26	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -1 [ns]	00	00	00	00	00
27	t <sub>RPmin</sub> [ns]	48	48	48	48	48
28	t <sub>RRDmin</sub> [ns]	30	30	30	30	30
29	t <sub>RCDmin</sub> [ns]	48	48	48	48	48
30	t <sub>RASmin</sub> [ns]	2A	2A	2A	2A	2A
31	Module Density per Rank	80	01	80	01	01
32	t <sub>AS</sub> , t <sub>CS</sub> [ns]	75	75	75	75	75
33	t <sub>AH</sub> , t <sub>CH</sub> [ns]	75	75	75	75	75
34	t <sub>DS</sub> [ns]	45	45	45	45	45
35	t <sub>DH</sub> [ns]	45	45	45	45	45
36 - 40	Not used	00	00	00	00	00
41	t <sub>RCmin</sub> [ns]	3C	3C	3C	3C	3C
42	t <sub>RFCmin</sub> [ns]	48	48	48	48	48
43	t <sub>CKmax</sub> [ns]	30	30	30	30	30
44	t <sub>DQSQmax</sub> [ns]	28	28	28	28	28
45	t <sub>QHSmax</sub> [ns]	50	50	50	50	50
46	not used	00	00	00	00	00
47	DIMM PCB Height	01	00	00	01	00
48 - 61	Not used	00	00	00	00	00
62	SPD Revision	10	00	00	10	00
63	Checksum of Byte 0-62	61	CA	51	DC	CB





HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D64301HBR-6-B</b>	<b>HYS72D128300HBR-6-B</b>	<b>HYS72D128321HBR-6-B</b>	<b>HYS72D256220HBR-6-B</b>	<b>HYS72D256320HBR-6-B</b>
<b>Organization</b>		<b>512MB</b>	<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×8)</b>	<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC2700R-25331</b>	<b>PC2700R-25330</b>	<b>PC2700R-25330</b>	<b>PC2700R-25331</b>	<b>PC2700R-25330</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 1.0</b>	<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 1.0</b>	<b>Rev. 0.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
64	Manufacturer's JEDEC ID Code (1)	7F	7F	7F	7F	7F
65	Manufacturer's JEDEC ID Code (2)	7F	7F	7F	7F	7F
66	Manufacturer's JEDEC ID Code (3)	7F	7F	7F	7F	7F
67	Manufacturer's JEDEC ID Code (4)	7F	7F	7F	7F	7F
68	Manufacturer's JEDEC ID Code (5)	7F	7F	7F	7F	7F
69	Manufacturer's JEDEC ID Code (6)	51	51	51	51	51
70	Manufacturer's JEDEC ID Code (7)	00	00	00	00	00
71	Manufacturer's JEDEC ID Code (8)	00	00	00	00	00
72	Module Manufacturer Location	xx	xx	xx	xx	xx
73	Part Number, Char 1	37	37	37	37	37
74	Part Number, Char 2	32	32	32	32	32
75	Part Number, Char 3	44	44	44	44	44
76	Part Number, Char 4	36	31	31	32	32
77	Part Number, Char 5	34	32	32	35	35
78	Part Number, Char 6	33	38	38	36	36
79	Part Number, Char 7	30	33	33	32	33
80	Part Number, Char 8	31	30	32	32	32
81	Part Number, Char 9	48	30	31	30	30
82	Part Number, Char 10	42	48	48	48	48
83	Part Number, Char 11	52	42	42	42	42
84	Part Number, Char 12	36	52	52	52	52
85	Part Number, Char 13	42	36	36	36	36
86	Part Number, Char 14	20	42	42	42	42
87	Part Number, Char 15	20	20	20	20	20
88	Part Number, Char 16	20	20	20	20	20



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D64301HBR-6-B</b>	<b>HYS72D128300HBR-6-B</b>	<b>HYS72D128321HBR-6-B</b>	<b>HYS72D256220HBR-6-B</b>	<b>HYS72D256320HBR-6-B</b>
<b>Organization</b>		<b>512MB</b>	<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×8)</b>	<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC2700R -25331</b>	<b>PC2700R -25330</b>	<b>PC2700R -25330</b>	<b>PC2700R -25331</b>	<b>PC2700R -25330</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 1.0</b>	<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 1.0</b>	<b>Rev. 0.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
89	Part Number, Char 17	20	20	20	20	20
90	Part Number, Char 18	20	20	20	20	20
91	Module Revision Code	1x	1x	1x	1x	1x
92	Test Program Revision Code	xx	xx	xx	xx	xx
93	Module Manufacturing Date Year	xx	xx	xx	xx	xx
94	Module Manufacturing Date Week	xx	xx	xx	xx	xx
95 - 98	Module Serial Number	xx	xx	xx	xx	xx
99 - 127	Not used	00	00	00	00	00



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**TABLE 21**  
**HYS72D[128/256]xxxHBR-7-B**

Product Type		HYS72D128300HBR-7-B	HYS72D128321HBR-7-B	HYS72D256220HBR-7-B	HYS72D256320HBR-7-B
Organization		1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72
		1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2100R-20330	PC2100R-20330	PC2100R-20331	PC2100R-20330
JEDEC SPD Revision		Rev. 0.0	Rev. 0.0	Rev. 1.0	Rev. 0.0
Byte#	Description	HEX	HEX	HEX	HEX
0	Programmed SPD Bytes in E <sup>2</sup> PROM	80	80	80	80
1	Total number of Bytes in E <sup>2</sup> PROM	08	08	08	08
2	Memory Type (DDR = 07h)	07	07	07	07
3	Number of Row Addresses	0D	0D	0D	0D
4	Number of Column Addresses	0C	0B	0C	0C
5	Number of DIMM Ranks	01	02	02	02
6	Data Width (LSB)	48	48	48	48
7	Data Width (MSB)	00	00	00	00
8	Interface Voltage Levels	04	04	04	04
9	t <sub>CK</sub> @ CL <sub>max</sub> (Byte 18) [ns]	70	70	70	70
10	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> (Byte 18) [ns]	75	75	75	75
11	Error Correction Support	02	02	02	02
12	Refresh Rate	82	82	82	82
13	Primary SDRAM Width	04	08	04	04
14	Error Checking SDRAM Width	04	08	04	04
15	t <sub>CCD</sub> [cycles]	01	01	01	01
16	Burst Length Supported	0E	0E	0E	0E
17	Number of Banks on SDRAM Device	04	04	04	04
18	CAS Latency	0C	0C	0C	0C
19	CS Latency	01	01	01	01
20	Write Latency	02	02	02	02
21	DIMM Attributes	26	26	26	26
22	Component Attributes	C1	C1	C1	C1



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

Product Type		HYS72D128300HBR-7-B	HYS72D128321HBR-7-B	HYS72D256220HBR-7-B	HYS72D256320HBR-7-B
Organization		1 GByte	1 GByte	2 GByte	2 GByte
		×72	×72	×72	×72
		1 Rank (×4)	2 Ranks (×8)	2 Ranks (×4)	2 Ranks (×4)
Label Code		PC2100R-20330	PC2100R-20330	PC2100R-20331	PC2100R-20330
JEDEC SPD Revision		Rev. 0.0	Rev. 0.0	Rev. 1.0	Rev. 0.0
Byte#	Description	HEX	HEX	HEX	HEX
23	t <sub>CK</sub> @ CL <sub>max</sub> -0.5 (Byte 18) [ns]	75	75	75	75
24	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -0.5 [ns]	75	75	75	75
25	t <sub>CK</sub> @ CL <sub>max</sub> -1 (Byte 18) [ns]	00	00	00	00
26	t <sub>AC</sub> SDRAM @ CL <sub>max</sub> -1 [ns]	00	00	00	00
27	t <sub>RPmin</sub> [ns]	50	50	50	50
28	t <sub>RRDmin</sub> [ns]	3C	3C	3C	3C
29	t <sub>RCDmin</sub> [ns]	50	50	50	50
30	t <sub>RASmin</sub> [ns]	2D	2D	2D	2D
31	Module Density per Rank	01	80	01	01
32	t <sub>AS</sub> , t <sub>CS</sub> [ns]	90	90	90	90
33	t <sub>AH</sub> , t <sub>CH</sub> [ns]	90	90	90	90
34	t <sub>DS</sub> [ns]	50	50	50	50
35	t <sub>DH</sub> [ns]	50	50	50	50
36 - 40	Not used	00	00	00	00
41	t <sub>RCmin</sub> [ns]	41	41	41	41
42	t <sub>RFCmin</sub> [ns]	4B	4B	4B	4B
43	t <sub>CKmax</sub> [ns]	30	30	30	30
44	t <sub>DQSQmax</sub> [ns]	32	32	32	32
45	t <sub>QHSmax</sub> [ns]	75	75	75	75
46	not used	00	00	00	00
47	DIMM PCB Height	00	00	01	00
48 - 61	Not used	00	00	00	00
62	SPD Revision	00	00	10	00
63	Checksum of Byte 0-62	86	0D	98	87
64	Manufacturer's JEDEC ID Code (1)	7F	7F	7F	7F
65	Manufacturer's JEDEC ID Code (2)	7F	7F	7F	7F



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D128300HBR-7-B</b>	<b>HYS72D128321HBR-7-B</b>	<b>HYS72D256220HBR-7-B</b>	<b>HYS72D256320HBR-7-B</b>
<b>Organization</b>		<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC2100R-20330</b>	<b>PC2100R-20330</b>	<b>PC2100R-20331</b>	<b>PC2100R-20330</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 1.0</b>	<b>Rev. 0.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
66	Manufacturer's JEDEC ID Code (3)	7F	7F	7F	7F
67	Manufacturer's JEDEC ID Code (4)	7F	7F	7F	7F
68	Manufacturer's JEDEC ID Code (5)	7F	7F	7F	7F
69	Manufacturer's JEDEC ID Code (6)	51	51	51	51
70	Manufacturer's JEDEC ID Code (7)	00	00	00	00
71	Manufacturer's JEDEC ID Code (8)	00	00	00	00
72	Module Manufacturer Location	xx	xx	xx	xx
73	Part Number, Char 1	37	37	37	37
74	Part Number, Char 2	32	32	32	32
75	Part Number, Char 3	44	44	44	44
76	Part Number, Char 4	31	31	32	32
77	Part Number, Char 5	32	32	35	35
78	Part Number, Char 6	38	38	36	36
79	Part Number, Char 7	33	33	32	33
80	Part Number, Char 8	30	32	32	32
81	Part Number, Char 9	30	31	30	30
82	Part Number, Char 10	48	48	48	48
83	Part Number, Char 11	42	42	42	42
84	Part Number, Char 12	52	52	52	52
85	Part Number, Char 13	37	37	37	37
86	Part Number, Char 14	42	42	42	42
87	Part Number, Char 15	20	20	20	20
88	Part Number, Char 16	20	20	20	20
89	Part Number, Char 17	20	20	20	20
90	Part Number, Char 18	20	20	20	20
91	Module Revision Code	1x	1x	1x	1x




HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

<b>Product Type</b>		<b>HYS72D128300HBR-7-B</b>	<b>HYS72D128321HBR-7-B</b>	<b>HYS72D256220HBR-7-B</b>	<b>HYS72D256320HBR-7-B</b>
<b>Organization</b>		<b>1 GByte</b>	<b>1 GByte</b>	<b>2 GByte</b>	<b>2 GByte</b>
		<b>×72</b>	<b>×72</b>	<b>×72</b>	<b>×72</b>
		<b>1 Rank (×4)</b>	<b>2 Ranks (×8)</b>	<b>2 Ranks (×4)</b>	<b>2 Ranks (×4)</b>
<b>Label Code</b>		<b>PC2100R-20330</b>	<b>PC2100R-20330</b>	<b>PC2100R-20331</b>	<b>PC2100R-20330</b>
<b>JEDEC SPD Revision</b>		<b>Rev. 0.0</b>	<b>Rev. 0.0</b>	<b>Rev. 1.0</b>	<b>Rev. 0.0</b>
<b>Byte#</b>	<b>Description</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>	<b>HEX</b>
92	Test Program Revision Code	xx	xx	xx	xx
93	Module Manufacturing Date Year	xx	xx	xx	xx
94	Module Manufacturing Date Week	xx	xx	xx	xx
95 - 98	Module Serial Number	xx	xx	xx	xx
99 - 127	Not used	00	00	00	00



# 5 Package Outline

**FIGURE 2**  
Package Outline Raw Card C - L-DIM-184-22-2

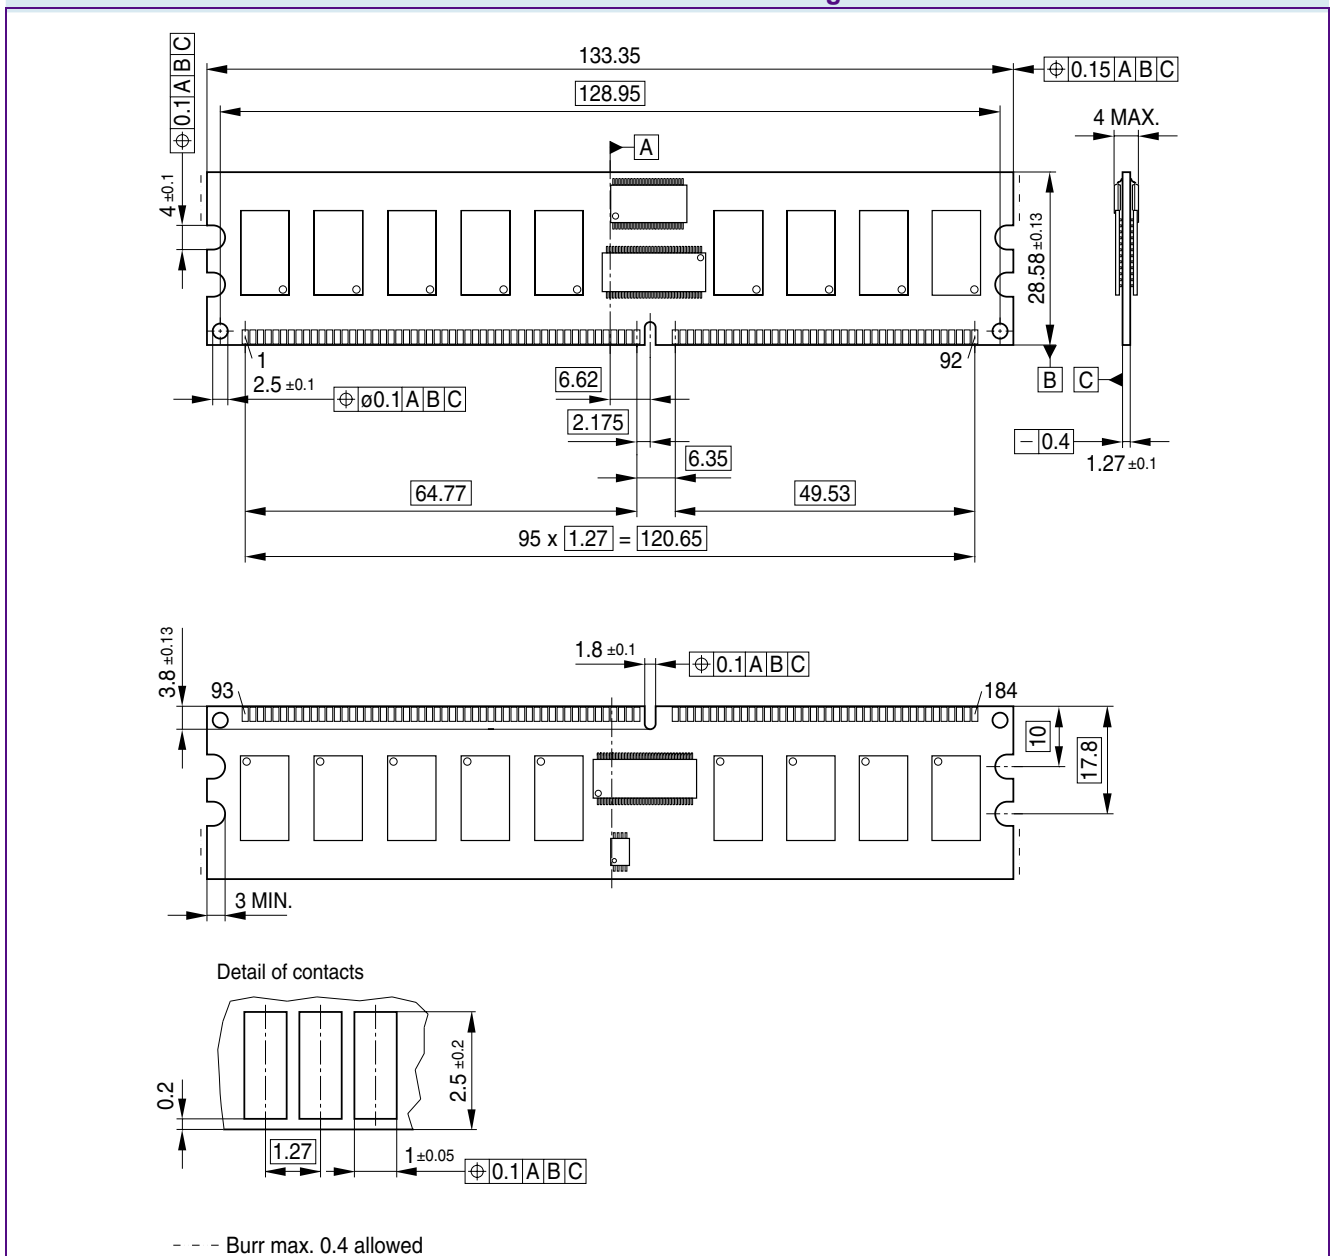


## Notes

1. Drawing according to ISO 8015
2. Dimensions in mm
3. General tolerances +/- 0.15



**FIGURE 3**  
Package Outline Raw Card B - L-DIM-184-23-2

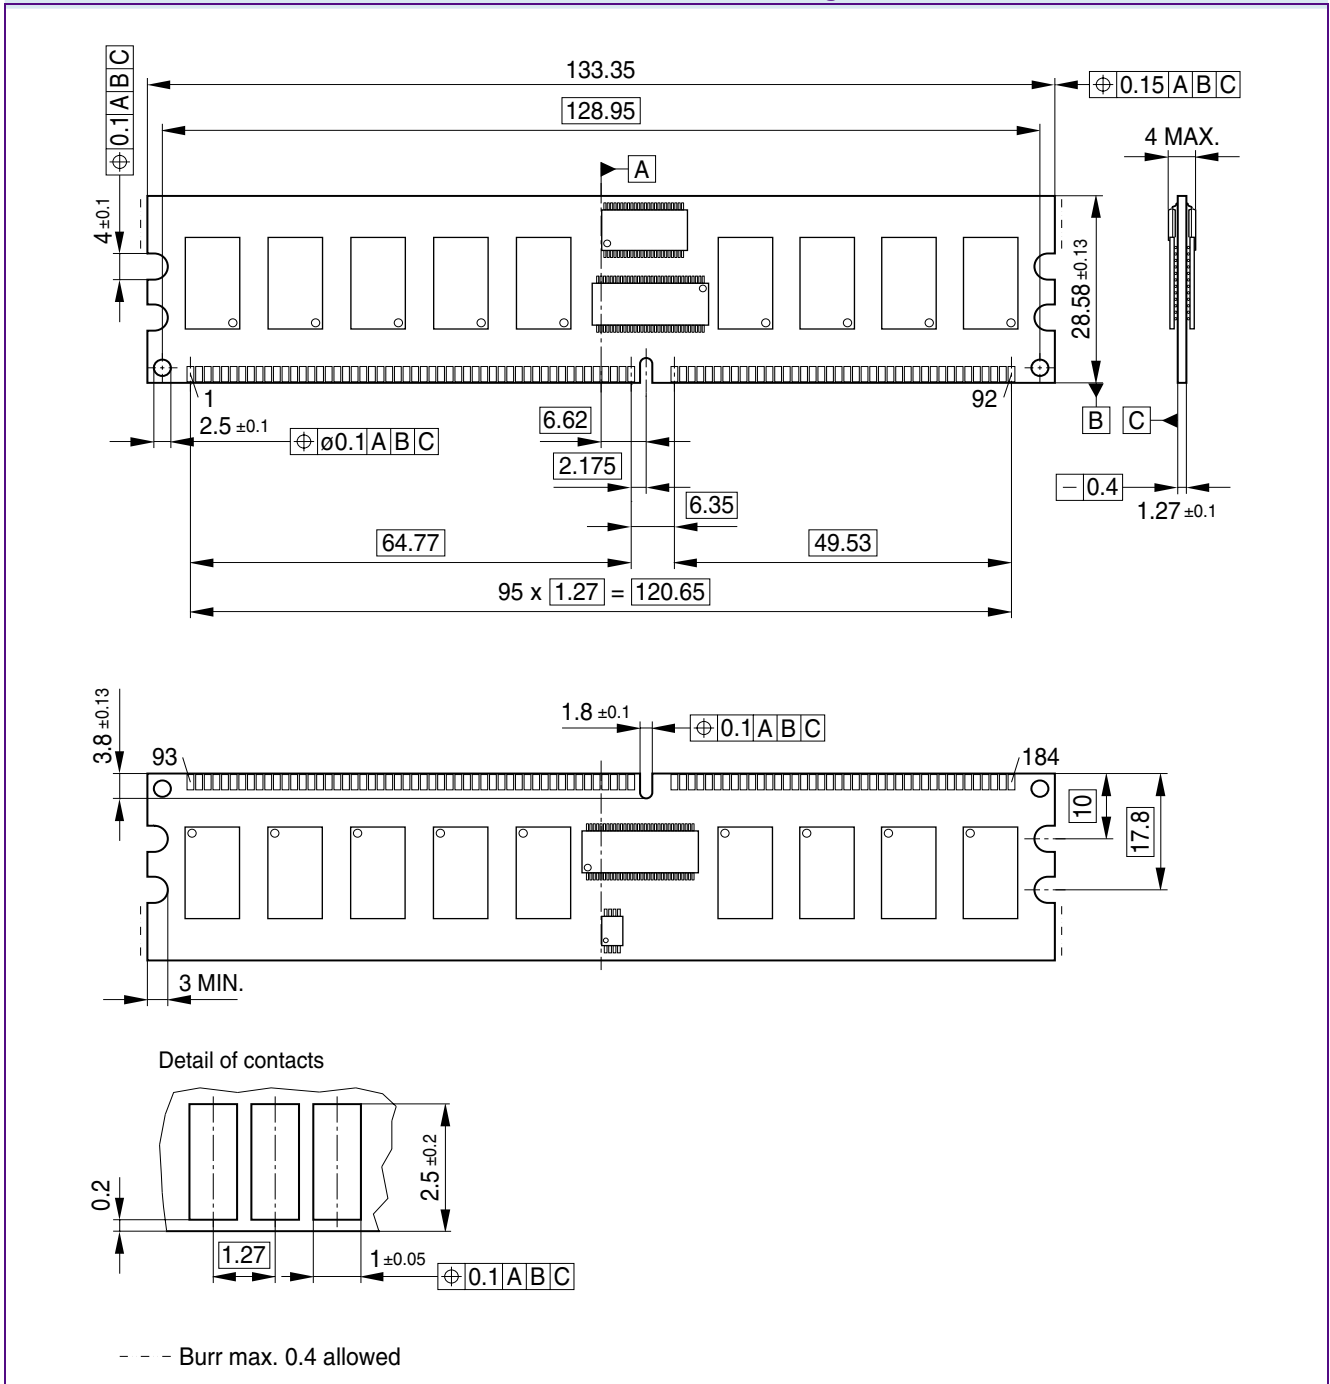

**Notes**


1. Drawing according to ISO 8015
2. Dimensions in mm
3. General tolerances +/- 0.15





HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

**FIGURE 4**  
Package Outline Raw Card F – L-DIM-184-25

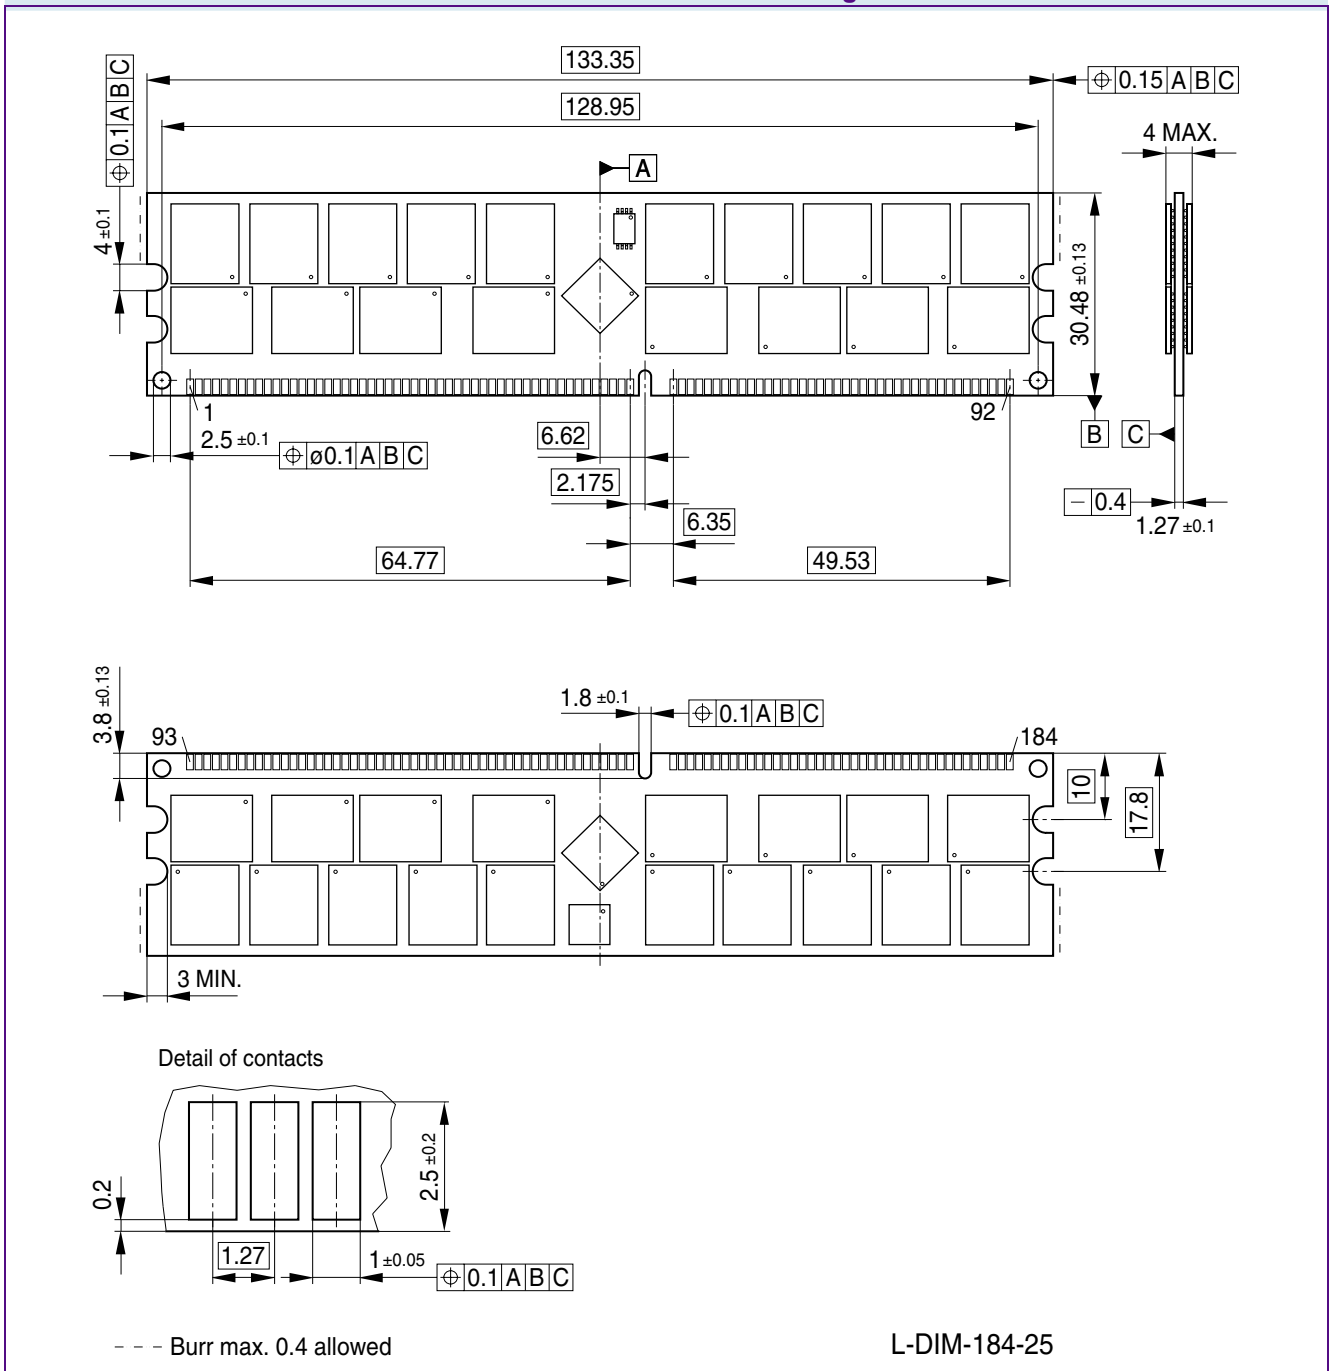

**Notes**

1. Drawing according to ISO 8015
2. Dimensions in mm
3. General tolerances +/- 0.15



HYS72D[64/128/256]xxx[G/H]BR-[5/6/7]-B  
Registered DDR SDRAM Module

# Table of Contents

<b>1</b>	<b>Overview</b> .....	<b>3</b>
1.1	Features .....	3
1.2	Description .....	4
<b>2</b>	<b>Pin Configuration</b> .....	<b>6</b>
<b>3</b>	<b>Electrical Characteristics</b> .....	<b>13</b>
3.1	Operating Conditions .....	13
<b>4</b>	<b>SPD Codes</b> .....	<b>23</b>
<b>5</b>	<b>Package Outline</b> .....	<b>47</b>
	<b>Table of Contents</b> .....	<b>50</b>

**Edition 2007-01**  
**Published by Qimonda AG**  
**Gustav-Heinemann-Ring 212**  
**D-81739 München, Germany**  
**© Qimonda AG 2007.**  
**All Rights Reserved.**

#### **Legal Disclaimer**

The information given in this Internet Data Sheet shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Qimonda hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

#### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Qimonda Office.

#### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Qimonda Office.

Qimonda Components may only be used in life-support devices or systems with the express written approval of Qimonda, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.