
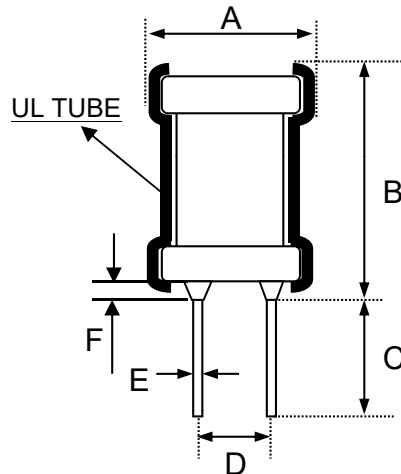


SPECIFICATION FOR APPROVAL

CUSTOMER		CUST P/N.	
ITEM	Radial Choke Inductor	Description	RL0810N-100M
PART NO.	303-75259	DATE	2018.06.28

(1) DIMENSION(UNIT:mm)



A	10.5 (Max)	mm
B	13.0 (Max)	mm
C	3.5 ± 0.5	mm
D	5.0 ± 0.5	mm
E	∅0.65 ± 0.1	mm
F	2.0(Max)	mm
G		mm
H		mm

(2)ELECTRICAL REQUIREMENTS

TEST CONDITION		FREQUENCY	(3) TEST INSTRUMENTS	
		VOLTAGE	LCR-METER:	
L	10.0μH±20%	1KHz 0.25V	V	HP-4291A WK3260B
DCR	26.2mΩ(Max)	KHz V	V	DC RESISTANCE METER: WK3260B
IDC	3.5A (Max)	1KHz 0.25V	V	CURRENT SOURCE: TH2816B+1320
L _{IDC}	drop10%TYP	KHz V	V	RFIMPEDANCE/MATERIAL ANALYZER TH2816B+1320
		MHz V		GW PUNCTURE INSULATION TESTER

(4)TURN: 17Ts (REF)

(5)MATERIAL LIST

ITEM	MATERIAL	DESCRIPTION	Supplier of the material	UL
1	CORE	SR60 DR8×10D-31	SUNRISE	
2	WIRE	∅0.55mm(2UEW)130℃(TYPU-130)	HENG YA	E197768
3	TUBE	UL ∅8×12 mm印"100"(RSFR-H)	WOER	E203950
4				

REMARK:	APPROVED	CHECKED	DRAWN BY
	姜杰文	姜法寶	王艷