


**H654****LINEAR INTEGRATED CIRCUIT****COMPLEMENTARY OUTPUT
HALL EFFECT LATCH****DESCRIPTION**

The UTC **H654** is integrated Hall sensors with complementary output drivers designed for electronic commutation of brushless DC Fan. It composed of an on-chip Hall voltage generator, a differential amplifier, Schmitt trigger, an open-collector output on a single chip. Furthermore, an internal bandgap regulator allows temperature compensated operations and a wide operating supply range. An on-chip protection diode is implemented to prevent reverse power fault.

When the magnetic flux density larger than threshold B_{OP} , DO will be turned on(low) and DOB be turned off(high). The output state is held until the magnetic flux density is lower than B_{RP} , and then DO is reversal to turned off and DOB turned on.

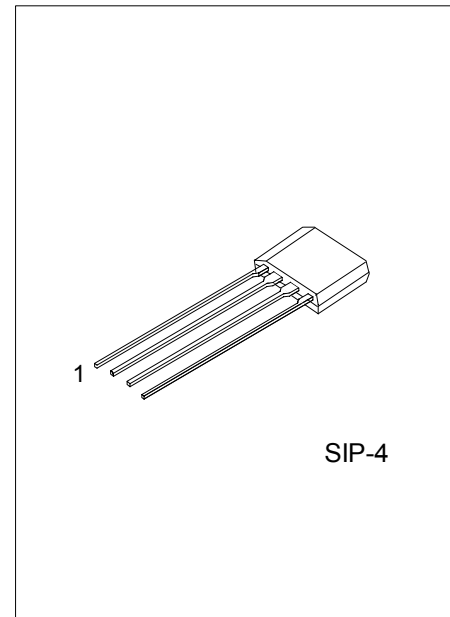

*Pb-free plating product number: H654L

FEATURES

- * Operate from 3.5V ~ 20V supply voltage.
- * On-chip Hall sensor with two different sensitivity and hysteresis settings.
- * High output sinking capability up to 300mA for driving large load.
- * Lower current change rate reduces the peak output voltages during switching.
- * Build-in protecting diode for chip reversal power connecting.(Note1)

ORDERING INFORMATION


Order Number		Package	Packing
Normal	Lead Free Plating		
H654-G04-K	H654L-G04-K	SIP-4	Bulk

H654L-G04-K (1)Packing Type (2)Package Type (3)Lead Plating	(1) B: Bulk (2) G04: SIP-4 (3) L: Lead Free Plating, Blank: Pb/Sn
---	--

PIN DESCRIPTION

PIN NO.	PIN NAME	P/I/O	DESCRIPTION
1	V_{CC}	P	Positive Power Supply
2	DO	O	Output Pin
3	DOB	O	Output Pin
4	V_{SS}	P	Ground

■ BLOCK DIAGRAM

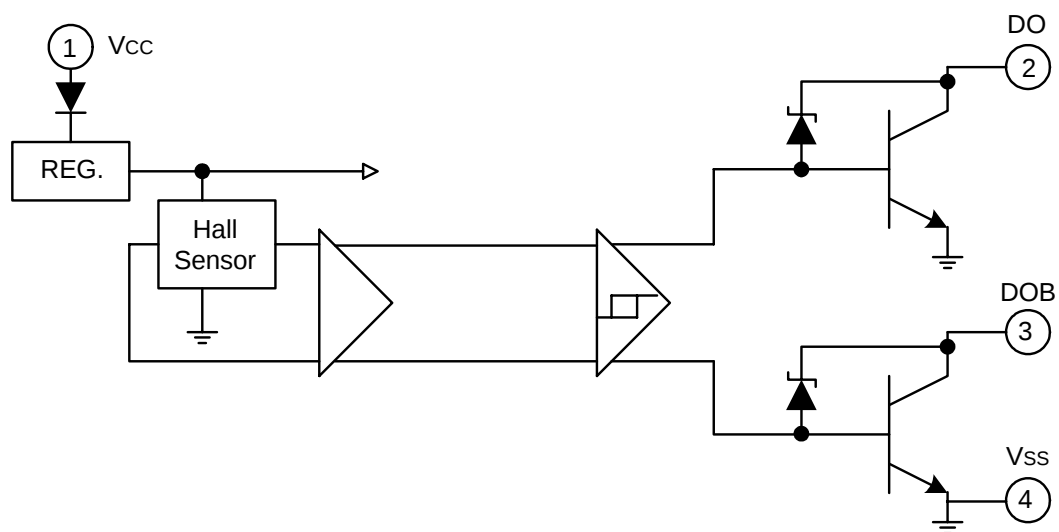

■ ABSOLUTE MAXIMUM RATINGS (Ta=25)

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V_{CC}	20	V
Reverse V_{CC} Polarity Voltage		V_{RCC}	-35	V
Output OFF Voltage		V_{CE}	50	V
Magnetic flux density		B	Unlimited	
Output ON Current	Continuous	I_C	0.3	A
	Hold		0.4	
	Peak (Start Up)		0.7	
Power Dissipation		P_D	500	mW
Junction Temperature		T_J	+150	
Operating Temperature		T_{OPR}	-20 ~ +85	
Storage Temperature		T_{STG}	-65 ~ +150	

Note 1: Output Zener protection voltage


■ ELECTRICAL CHARACTERISTICS (Ta =25 , unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Low Supply Voltage	V_{CE}	$V_{CC}=3.5V, I_L=100mA$		0.4		V
Supply Voltage	V_{CC}		3.5		20	V
Output Saturation Voltage	$V_{CE(SAT)}$	$V_{CC}=14V, I_L=300mA$		0.3	0.6	V
Output Leakage Current	I_{CEX}	$V_{CE}=14V, V_{CC}=14V$		<0.1	10	μA
Supply Current	I_{CC}	$V_{CC}=20V$, Output Open		16	25	mA
Output Rise Time	t_R	$V_{CC}=14V, R_L=820\Omega, C_L=20pF$		3.0	10	μS
Output Falling Time	t_F	$V_{CC}=14V, R_L=820\Omega, C_L=20pF$		0.3	1.5	μS
Switch Time Differential	Δt	$V_{CC}=14V, R_L=820\Omega, C_L=20pF$		3.0	10	μS


■ MAGNETIC CHARACTERISTICS

PARAMETR	SYMBOL	Ta= 25		Ta= 0 ~ +70		UNIT
		MIN	MAX	MIN	MAX	
Operate Point	B_{OP}		100		100	G
Release Point	B_{RP}	-100		-100		G
Hysteresis	B_{HYS}	50	200	30	200	G


■ HYSTERESIS CHARACTERISTICS

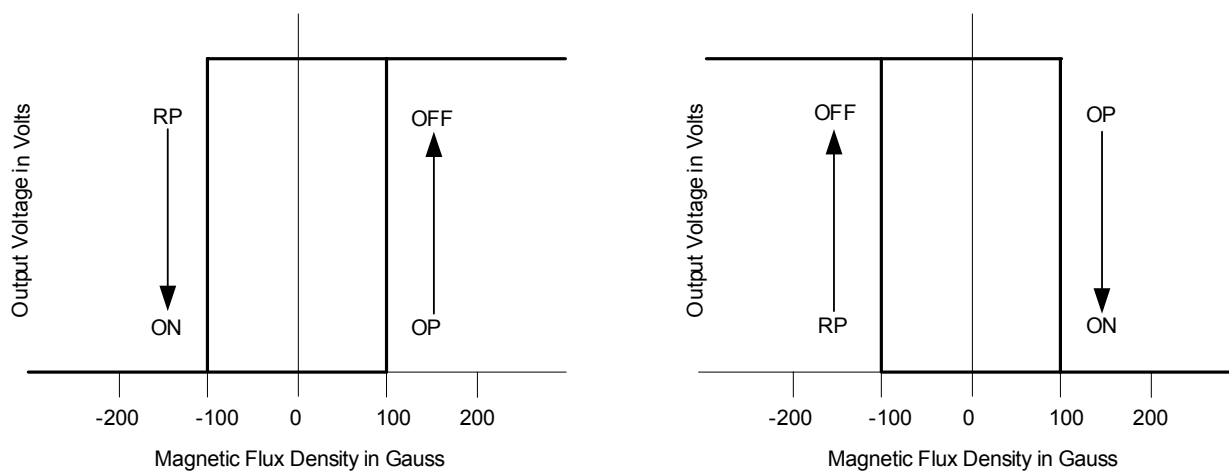

■ TYPICAL APPLICATION CIRCUIT



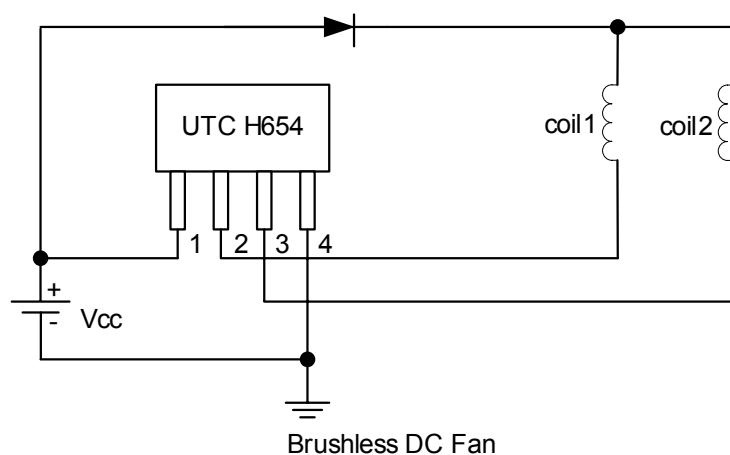


■ TEST CIRCUIT

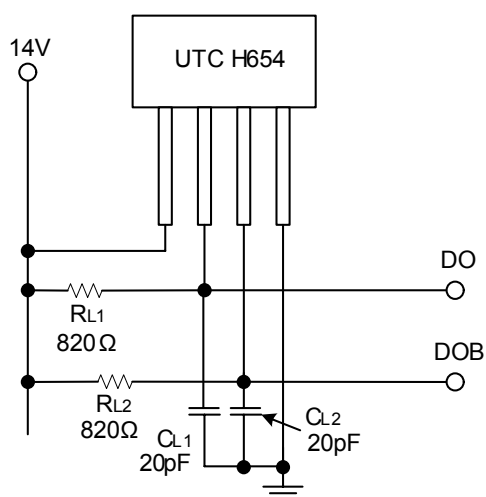

■ PERFORMANCE CHARACTERISTICS

Ta()	25	50	60	70	80	85	90	95	100	105	110	115	120
P _D (mW)	550	525	515	505	485	475	465	455	445	425	405	385	365

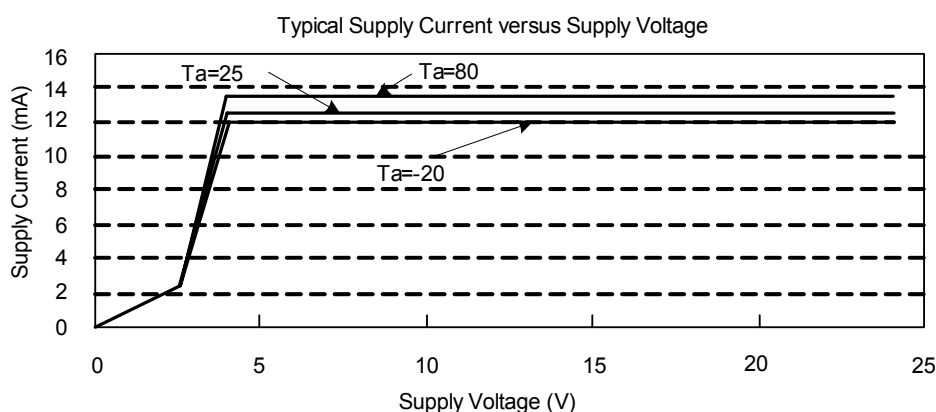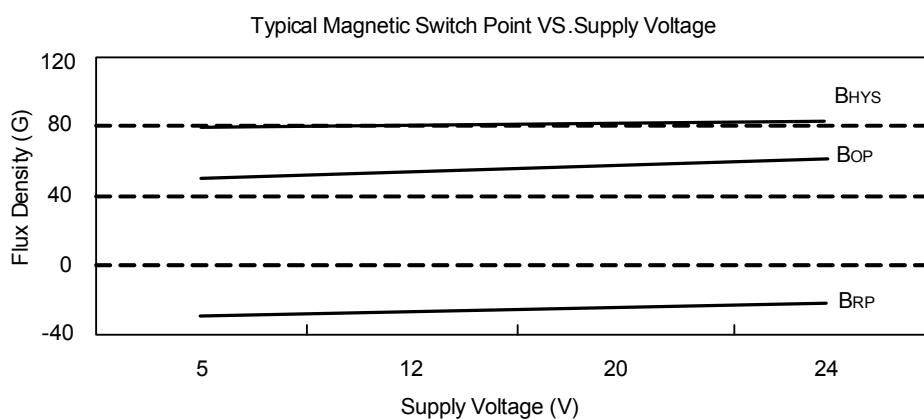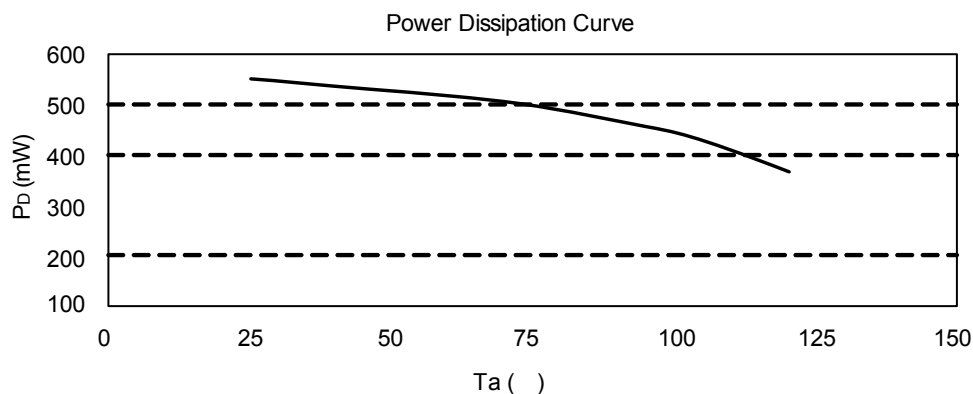

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.