


# DATASHEET

## PROFIBUS DPV1 Slave for CompactLogix ILX69-PBS

The ILX69 PROFIBUS Slave module is an in-chassis PROFIBUS DPV1 Slave for CompactLogix, supporting cyclic PROFIBUS I/O data and acyclic messaging. Explicit ladder logic CIP message blocks provide slave status diagnostic data and the ability for acyclic messaging.

The ILX69 interface appears to the CompactLogix controller as a standard I/O module allowing it to be configured via Studio/RSLogix™ 5000. The cyclic PROFIBUS I/O data can be configured in Studio/RSLogix™ 5000, or configuration can be transferred from the Master to the slave module. The Ethernet interface allows for remote diagnostic and troubleshooting. Complete program examples for simple and quick start-up are available.

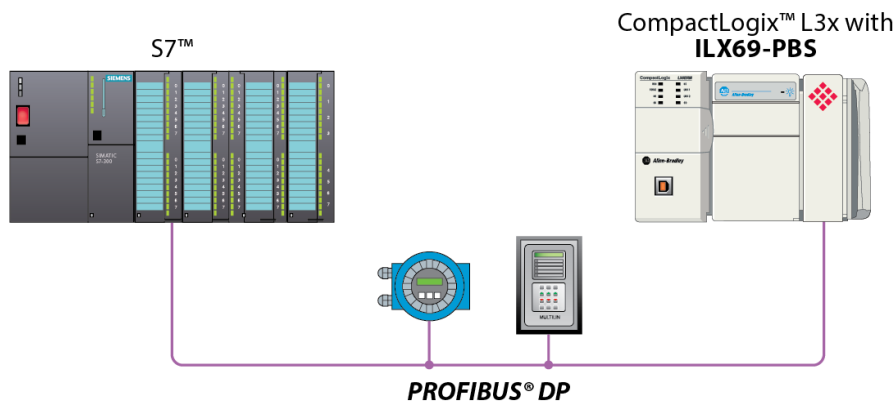

### Features

- ◆ Rockwell Automation Encompass Approved
- ◆ PI Certified
- ◆ Remote diagnostics via Ethernet
- ◆ Supports DPV1 Acyclic Messaging
- ◆ Field-tested with multiple PROFIBUS Masters from multiple vendors
- ◆ AOP provided to allow for seamless integration to Studio 5000 and RSLogix 5000
- ◆ Video setup tutorial provided on [www.prosoft-technology.com](http://www.prosoft-technology.com)

## PROFIBUS DP Specifications

Specification	Description
PROFIBUS DP Cyclic Data	244 Bytes IN / 244 Bytes OUT
Acyclic Read/Writes	240 Bytes
Acyclic communication	DPV1 Class 1 Read/Write DPV1 Class 1 Alarm DP V1 Class 2 Read/Write/Data Transport
Baud rate	9.6 kBaud, 19.2 kBaud, 45.45 kBaud, 93.75 kBaud, 187.5 kBaud, 500 kBaud 1.5 MBaud, 3 MBaud, 6 MBaud, 12 MBaud Auto-detection mode is supported

## Hardware Specification

Specification	Description
PROFIBUS Interface	RS-485, max. 12 Mbps, potential free, according EN 50170
Diagnostic Interface	10/100 Ethernet, RJ45
Power Supply	+5 V $\pm$ 5 % / 570 mA
Max. Distance Rating	2 slot
Dimensions	Standard 1769 Single-slot module
Burst	EN 61000-4-4, 2 kV, 5 kHz
Surge	EN 61000-4-5, 2 kV common mode, 1 kV differential mode
ESD	EN 61000-4-2, 4 kV contact, 8 kV air, 4 kV indirect
Radiated/Conducted Immunity	EN 61000-4-3, 10 V/m, 30...1000 MHz, 80% AM, 1 kHz sine wave EN 61000-4-6, 10 V, 0,15...30 MHz
Radiated/Conducted Emission	EN 55011 Class A
Vibration/Shock	IEC 600068-2-6, 10-150 Hz, $\pm$ 0,75 mm, $\pm$ 1 g, 1 Octave/min IEC 600068-2-27, 15 g, 11 ms
Operating Temperature	0°C to 60°C (32°C to 140°F)
Relative Humidity	5 to 95% (non-condensing)
PROFIBUS conformance	Certified

## Agency Approvals and Certifications

PROFIBUS PI Certified
CE Mark
UL/cUL Class 1 Div 2
ATEX Zone 2
CB Safety



Where Automation  
Connects™

## Global Distribution

ProSoft Technology® products are distributed and supported worldwide through a network of over 500 distributors in over 50 countries. Our knowledgeable distributors are familiar with your application needs. For a complete list of distributors, go to: [www.prosoft-technology.com](http://www.prosoft-technology.com)

## Ordering Information

To order this product, please use the following:

## PROFIBUS Slave Network Interface Module for CompactLogix

ILX69-PBS

To place an order, please contact your local ProSoft Technology distributor. For a list of ProSoft Technology distributors near you, go to: [www.prosoft-technology.com](http://www.prosoft-technology.com) and select *Where to Buy* from the menu.

Copyright © 2014 ProSoft Technology, Inc. All Rights Reserved. 12/5/2014

Specifications subject to change without notice.