
Edal

SERIES SB105

Silicon Schottky Barrier Rectifiers

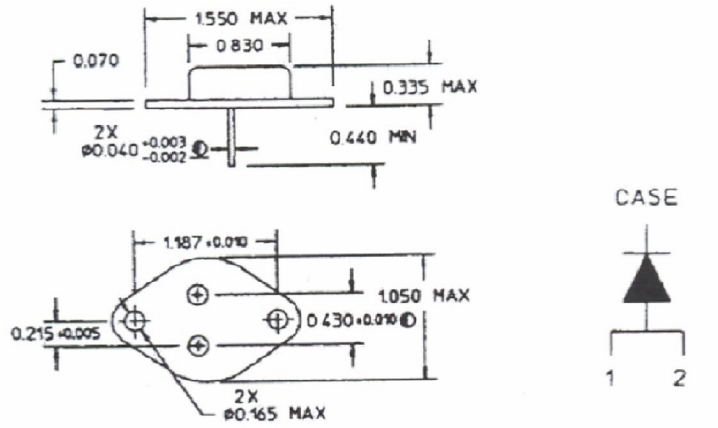

ELECTRICAL RATINGS

Peak Inverse Voltage	45 VOLTS
Io AMPS @ 120 ^{O}C Case	30 AMPS
Maximum Surge Current	
Single Cycle Amps	600 AMPS
Maximum Forward Drop @ 25^{O}C Case	
Io Amps	30 AMPS
Vf Volts	.47 VOLTS
Maximum Reverse Current	
@ 25^{O}C @ PRV	1 m AMPS
Storage Temperature ^{O}C	-65 to 175
Operating Temperature ^{O}C	-65 to 150
Jedec Style	TO-3

(203) 467-2591 TEL
(203) 469-5928 FAX
Email: Info@ edal.com
Internet:http://www.edal.com

EDAL industries, inc.
51 Commerce St. East Haven, CT 06512