




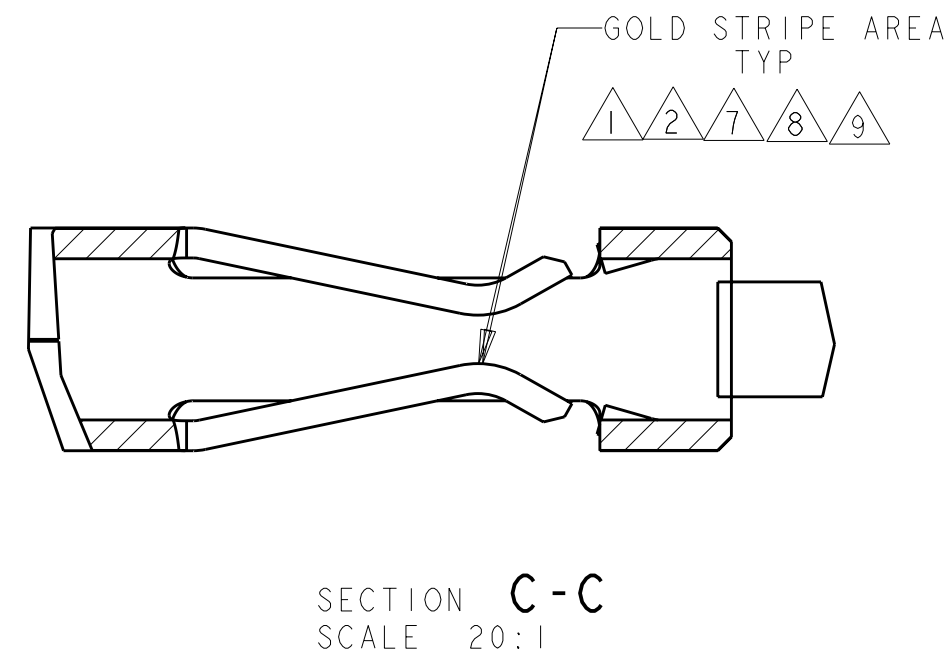

- ① 0.000762 MIN THK GOLD STRIPE IN THE GOLD PLATE AREA,
BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.
- ② 0.000381 THK GOLD STRIPE IN THE GOLD PLATE AREA,
BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.
- ③ 0.0015 - 0.0040 THK BRIGHT TIN.
4. WIRE RANGE: 20 - 24 AWG.
5. INSULATION RANGE 0.89 - 1.524.
- ⑥ AMP LOGO LOCATED APPROXIMATELY AS SHOWN.
- ⑦ 0.000762 THK GOLD STRIPE IN THE GOLD PLATE AREA,
BRIGHT TIN-LEAD IN THE CRIMP AREA, OVER NICKEL PLATE.
- ⑧ 0.000381 THK GOLD STRIPE IN THE GOLD PLATE AREA,
BRIGHT TIN-LEAD IN THE CRIMP AREA, OVER NICKEL PLATE.
- ⑨ 0.00102 MIN THK GOLD STRIPE IN THE GOLD PLATE AREA,
BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.

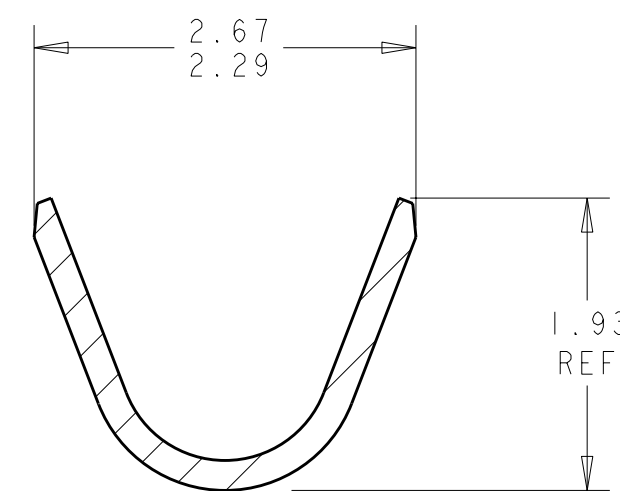

SECTION B - B
SCALE 20:1

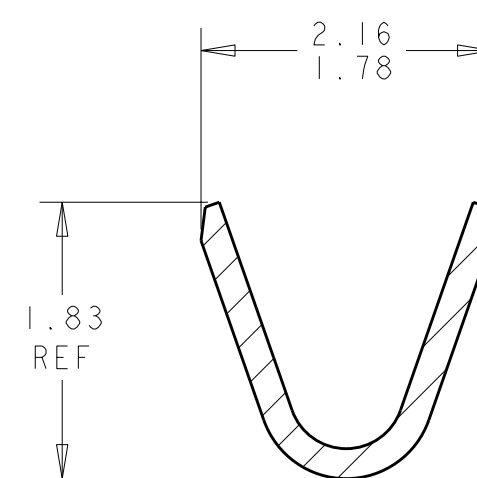

SECTION A - A
SCALE 20:1



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12-OCT-1999		 TE Connectivity		NUMBER				
DIMENSIONS:		CHK K. COBLE 12-OCT-1999				REV				
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CONTACT, RECEPTACLE, CRIMP, SNAP-IN, MICRO MATE-N-LOK(TM)						
		APVD K. COBLE 12-OCT-1999								
		PRODUCT SPEC								
		108-1836								
		APPLICATION SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL		FINISH		WEIGHT		A200779		C-794606	-	
0.2 PH BRZ		SEE TABLE		CUSTOMER DRAWING		SCALE		SHEET	OF	REV
						10		1		H3