
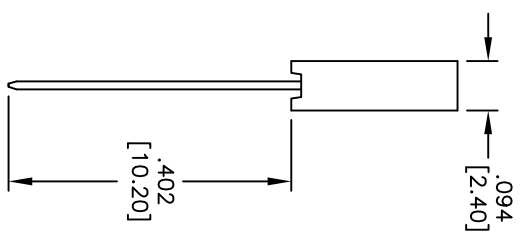
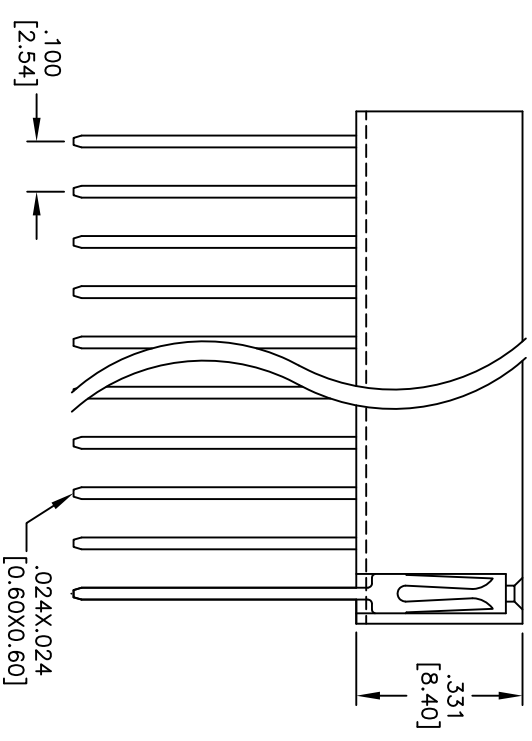
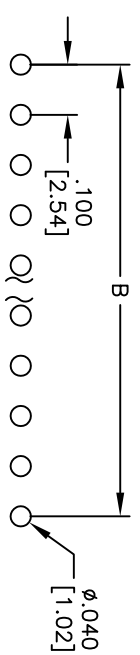


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/07/10	

APPROVED: _____
 DATE: _____ TITLE: _____

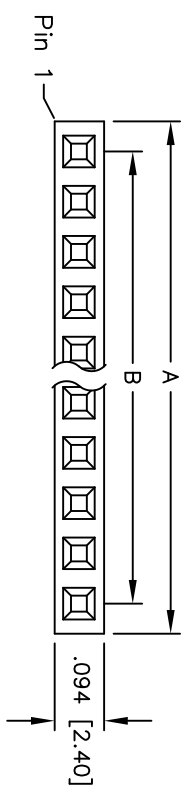

Positions: 02 thru 40
 A = .100 [2.54] x No. of Positions per Row + .020 [0.50]
 B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:

Material: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall

Electrical:
 Current rating: 3 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +105°C



Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	
	6/07/10

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] SINGLE ROW RECEPTACLE STRIP
 .331 [8.40] HEIGHT, GOLD PLATED

SIZE: X PART NO.: RS1-XX-G-.402
 REF: S0069T SCALE: NTS SHEET 1 OF 1