



SHEET 1 OF 1

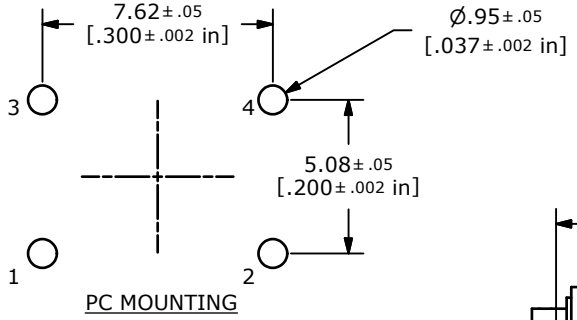





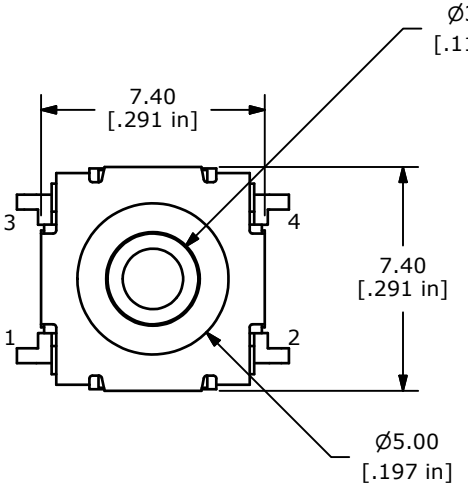



▲ CIRCUIT: SPST

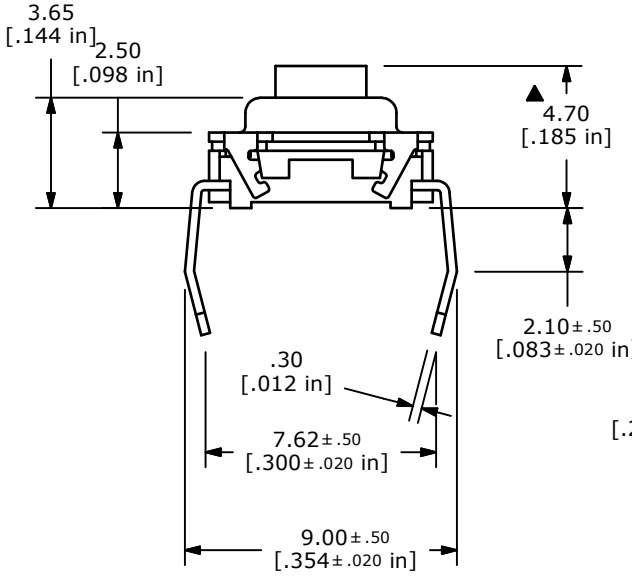

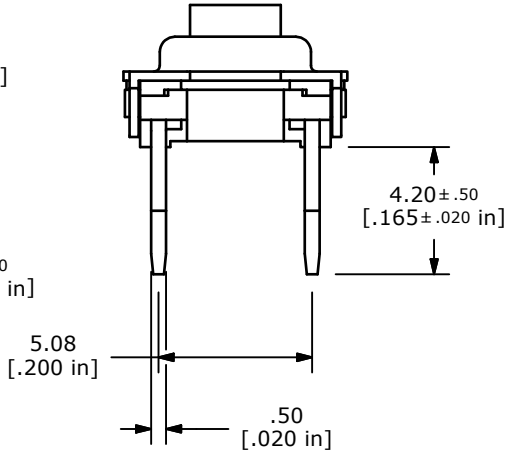

NOTES
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
▲4. OPERATING FORCE: 130±50gf
5. OPERATING LIFE: 1,000,000 CYCLES
6. TRAVEL: 0.5±0.15mm
7. CONTACT RATING: 12VDC @ 50mA
8. CONTACT RESISTANCE: 100m Ω MAX
9. INSULATION RESISTANCE: 100M Ω MIN @ 100VDC.
▲10. CONTACT MATERIAL: SILVER
11. OPERATING TEMPERATURE: -40˚C TO 85˚C
12. PACKAGING: TUBE 60 PCS. PER
13. ▲DENOTES CRITICAL PARAMETER
14. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	21179	New Release	7/23/13	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL6100AF130QP

SCALE	DATE	DR	DWG	REV
	5/31/2013	rc	T350006	A