
BFO N48-XC-02K-MZG-32-0,9
Order Code: BFO00EA

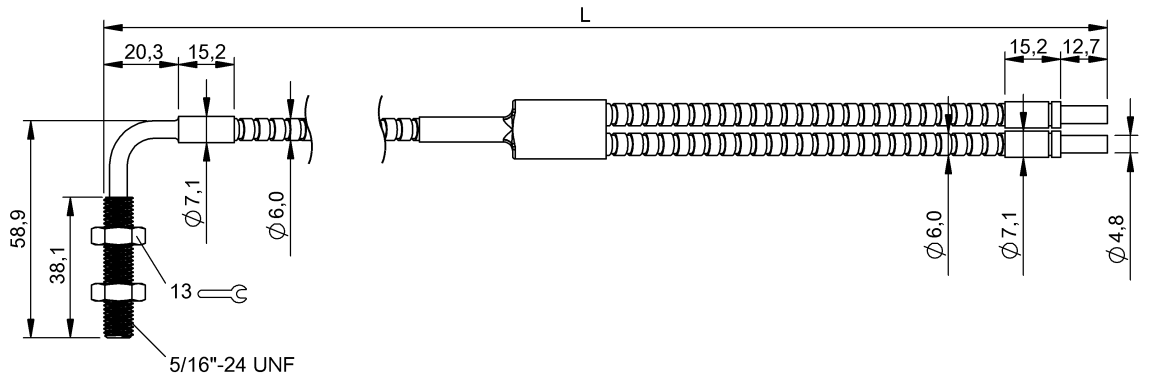

Basic features

Basic standard	IEC 60947-5-2
Reference base unit	BOS 16K-..-.FI-..
Version	UNF threads, 90° connection

Environmental conditions

Ambient temperature	-45...275 °C
Ambient temperature connection area	Acc. to fiber optic sensor

Material

Active surface, fiber arrangement	Homogeneous bundle
Fiber type material	Glass
Housing material	Brass
Material jacket	Stainless steel

Mechanical data

Active surface, fibers	Bundle Ø 3.2 mm
Cable length L	0.9 m
Cable, bending radius min.	25 mm
Connection	Ø 4.8 mm
Connection type	Adapter sleeve, 0.90 m, Stainless steel
Fiber optic cable, structure	Fiber bundle in metal coil
Mounting part	Nut 5/16"-24UNF
Tensile load max. at 20 °C	67 N

Range/Distance

Range	80 mm
Rated operating distance Sn	80 mm
Real switching distance sr	80 mm

Opto Symbols

