

isc Silicon NPN Power Transistor


2SC5449

DESCRIPTION

- High Breakdown Voltage
- High Switching Speed
- Low Saturation Voltage
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation


APPLICATIONS

- Character display horizontal deflection output

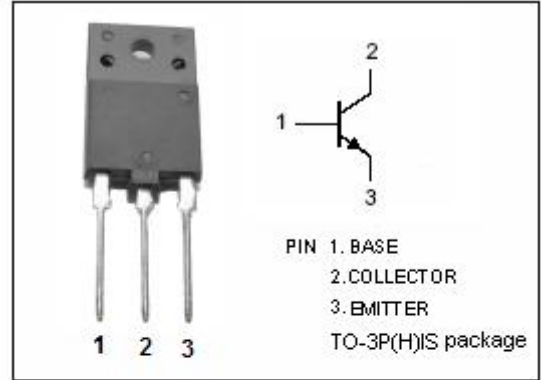

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	1500	V
V _{CEO}	Collector-Emitter Voltage	700	V
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current- Continuous	12	A
I _{CM}	Collector Current- Continuous	24	A
I _B	Base Current- Continuous	3	A
P _C	Collector Power Dissipation @ T _C =25°C	50	W
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature Range	-55~150	°C

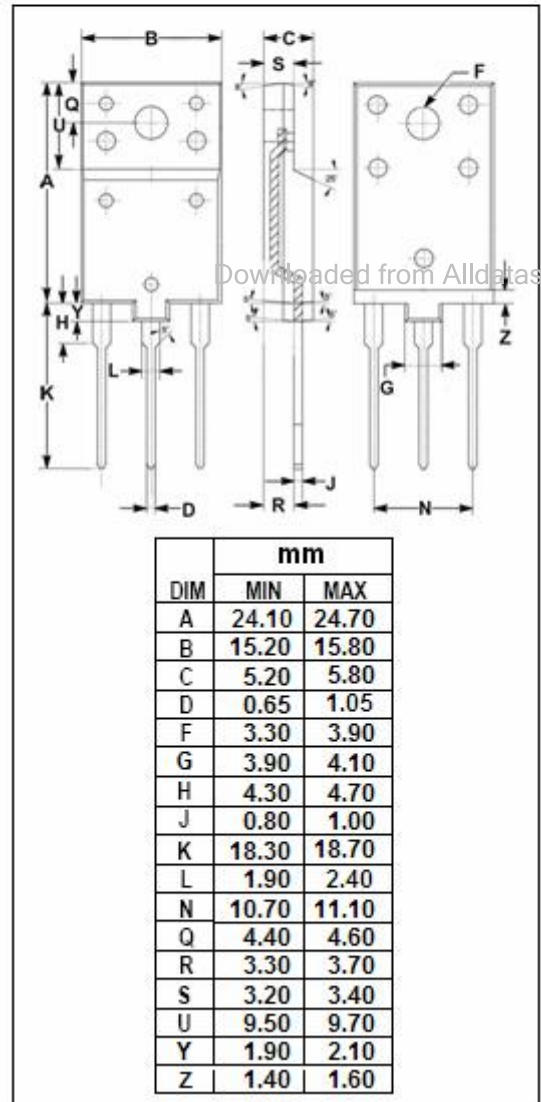

isc Silicon NPN Power Transistor**2SC5449****ELECTRICAL CHARACTERISTICS** $T_c=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=7\text{A}; I_B=1.8\text{A}$			5.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=7\text{A}; I_B=1.8\text{A}$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=1500\text{V}; I_E=0$			1.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=6\text{V}; I_C=0$			100	μA
h_{FE-1}	DC Current Gain	$I_C=1\text{A}; V_{CE}=5\text{V}$	10		30	
h_{FE-2}	DC Current Gain	$I_C=7\text{A}; V_{CE}=5\text{V}$	3.5		6.5	

Switching Times

Downloaded from Alldatasheet.com

t_f	Fall Time	$I_{CP}=6\text{A}; I_{B1}=2\text{A}; R_L=31.5\text{K}\Omega$			0.4	μs
t_f	Fall Time	$I_{CP}=6\text{A}; I_{B1}=2\text{A}; R_L=64\text{K}\Omega$		0.15		μs