

## HCMOS 14 pin DIL, 'V' Group

- 14 pin DIL hermetically-sealed package
- Wide frequency range: 27.0MHz to 200.0MHz
- Supply voltage 3.3 Volts
- Frequency stability from  $\pm 1$ ppm over  $-30$  to  $+75^{\circ}\text{C}$
- RoHS compliant

### DESCRIPTION

EMV14GT series TCXOs are packaged in a 14 pin DIL hermetically sealed package. With squarewave (CMOS) output, tolerances are available from  $\pm 1.0$ ppm over  $-30^{\circ}$  to  $+75^{\circ}\text{C}$ . The part has a  $0.01\mu\text{F}$  decoupling capacitor built in.


### SPECIFICATION

|                               |                                                                                                             |
|-------------------------------|-------------------------------------------------------------------------------------------------------------|
| Product Series Code           | TCXO: EMV14GT<br>VCTCXO: VEMV14GT                                                                           |
| Frequency Range:              | 27.0MHz to 200.0MHz                                                                                         |
| Output Waveform:              | Squarewave, HCMOS                                                                                           |
| Initial Calibration Tolerance |                                                                                                             |
| Models without trimmer:       | $< \pm 2.0$ ppm                                                                                             |
| Models with trimmer:          | $< \pm 1.0$ ppm                                                                                             |
| Standard Frequencies:         | 30.0, 32.768, 38.880, 40.0, 50.0, 54.0, 64.0, 65.536, 77.76, 80.0, 128.0, 160.0 and 200.0MHz (Partial list) |
| Operating Temperature Range:  | See table                                                                                                   |
| Mechanical Frequency Tuning:  | $\pm 3.0$ ppm minimum                                                                                       |
| Frequency Stability           |                                                                                                             |
| vs. Ageing:                   | $\pm 1.0$ ppm max. first year                                                                               |
| vs. Voltage Change:           | $\pm 0.3$ ppm max. $\pm 5\%$ change                                                                         |
| vs. Load Change:              | $\pm 0.3$ ppm max. $\pm 10\%$ change                                                                        |
| vs. Reflow (SMD type):        | $\pm 1.0$ ppm max. for one reflow (Measured after 24 hours)                                                 |
| Supply Voltage:               | +3.3 Volts                                                                                                  |
| Output Logic Levels:          | Logic High: 90% Vdd min.<br>Logic Low: 10% Vdd max.                                                         |
| Current Consumption:          | 40mA maximum                                                                                                |
| Rise and Fall Times:          | 10ns typical                                                                                                |
| Duty Cycle:                   | $50\% \pm 10\%$ standard,                                                                                   |
| Start-up Time:                | 5ms typical, 10ms max.                                                                                      |
| Current Consumption:          | See table below                                                                                             |
| Output Load:                  | 15pF                                                                                                        |
| Storage Temperature:          | $-55 \sim +125^{\circ}\text{C}$                                                                             |


### FREQUENCY STABILITY

| Stability (ppm)                    | $\pm 0.5$ | $\pm 1.0$ | $\pm 1.5$ | $\pm 2.0$ | $\pm 2.5$ | $\pm 3.0$ |
|------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Temp. Range ( $^{\circ}\text{C}$ ) |           |           |           |           |           |           |
| 0 ~ +50                            | ✓         | ✓         | ✓         | ✓         | ✓         | ✓         |
| -10 ~ +60                          | ASK       | ✓         | ✓         | ✓         | ✓         | ✓         |
| -20 ~ +70                          | X         | ✓         | ✓         | ✓         | ✓         | ✓         |
| -30 ~ +75                          | X         | ✓         | ✓         | ✓         | ✓         | ✓         |
| -40 ~ +85                          | X         | X         | X         | ASK       | ASK       | ✓         |

✓ = available, x = not available, ASK = call Technical Sales



### EMV14GT - OUTLINES AND DIMENSIONS

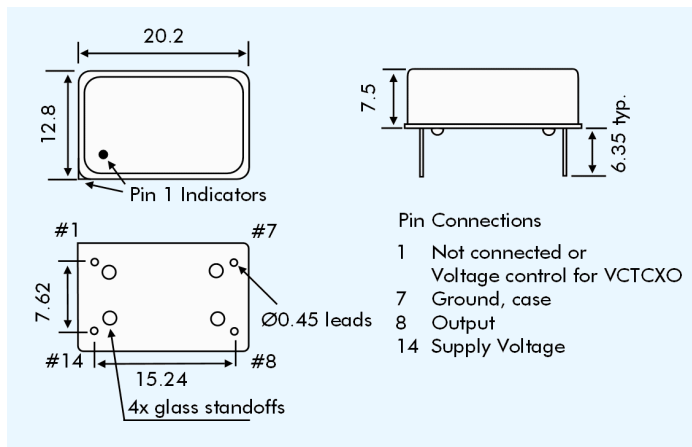

### VEMV14GT VOLTAGE CONTROL SPECIFICATION

|                       |                                                                                                                        |
|-----------------------|------------------------------------------------------------------------------------------------------------------------|
| Control Voltage:      | Standard = $+1.5 \pm 1.0$ Volts for all input voltages. (Contact technical sales if $+2.5 \pm 2.0$ Volts is required.) |
| Frequency Deviation:  | $\pm 6.0$ ppm min. ( $V_{con} = +4.5V \pm 1.0V$ )                                                                      |
| Slope Polarity:       | Positive (increase of control voltage increases output frequency.)                                                     |
| Input Impedance:      | $2M\Omega$ minimum                                                                                                     |
| Modulation Bandwidth: | 25kHz minimum                                                                                                          |
| Linearity:            | $\pm 10\%$ maximum                                                                                                     |

### SSB PHASE NOISE at $25^{\circ}\text{C}$

| Offset                 | 10Hz | 100Hz | 1kHz | 10kHz | 100kHz |
|------------------------|------|-------|------|-------|--------|
| Part = EMV14GT33       |      |       |      |       |        |
| at 77.760MHz (dBc/Hz)  | -80  | -110  | -135 | -130  | -132   |
| at 155.520MHz (dBc/Hz) | -80  | -110  | -125 | -120  | -125   |

### PART NUMBERING SCHEDULE

Example: **EMV14GT33-200.00-2.5/-30+75**

|                                                          |                 |
|----------------------------------------------------------|-----------------|
| Series Description                                       | TCXO = EMV14GT* |
| VCTCXO = VEMV14GT                                        |                 |
| Supply Voltage                                           | 33 = 3.3 VDC    |
| Frequency (MHz)                                          | 200.00          |
| Stability over OTR ( $\pm$ ppm)                          | 2.5             |
| Operating Temperature Range (OTR) ( $^{\circ}\text{C}$ ) | -30 +75         |
| Lower and upper limits                                   |                 |

\* Note, 'G' indicates RoHS Compliant part