SPECIFICATION

Part No. : **CBD02.07.0100C**

Product Name : 5.8GHz Cable Dipole Antenna

Feature : 5.15GHz to 5.85GHz Wi-Fi Antenna
Lightweight (1.47g) and Thin for UAV Applications
Flexible for easy integration
High Efficiency >70%
3.9dBi Peak Gain
Omnidirectional
Linear Polarization
100mm Ø1.37mm Micro-Coaxial Cable
With IPEX MHF1(U.FL) Connector
Cable and Connector Customizable
RoHS Compliant



1. Introduction

The CBD.02 5.8 GHz antenna is a coax cable dipole antenna with omnidirectional radiation pattern which has high efficiency of over 70% from 5150 to 5850 MHz. These attributes make it ideal for use on 5.8GHz UAV applications for FPV (First-Person View) and contribute to a more reliable link. The CBD02 antenna comes in a small form factor which is very lightweight and easy to attach. The standard product comes with 100mm low loss 1.37mm coaxial cable and IPEX MHFI (U.FL) connector.

The cable routes conveniently directly out of the bottom of the antenna, reducing the volume the antenna takes up in the device to an absolute minimum compared to other designs. The Cable Dipole Antenna is the ideal antenna solution for fitting into narrow spaces and still maintaining high performance.

Due to the potential for detuning or nearby interference in a device environment, Taoglas recommends that you contact us at our regional sales office for integration support, testing, and optimization of the antenna in your device before going to production. Customized cable and connector versions available, subject to minimum order quantities.


2. Specification Table

ELECTRICAL	
Operation Frequency (MHz)	5150-5850 MHz
Polarization	Linear
Impedance	50 Ohms
Max VSWR	2:1
Max Return Loss (dB)	<-10
Peak Gain (dBi)	3.94
Efficiency (%)	70.92%
Average Gain (dBi)	-1.50
Radiation Properties	Omnidirectional
Max Input Power	2 W
MECHANICAL	
Dimensions (mm)	25 (Maximum Diameter: 4.7mm)
Cable Type	Ø1.37mm coaxial cable
Cable Length(mm)	100
Connector	IPEX MHFHT
Housing Material	PE Heat Shrink
Weight	1.01g
ENVIRONMENTAL	
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Relative Humidity	40% to 95%
RoHs Compliant	Yes


* Tested in free space

3. Antenna Characteristics


3.1. Return Loss (Free Space)

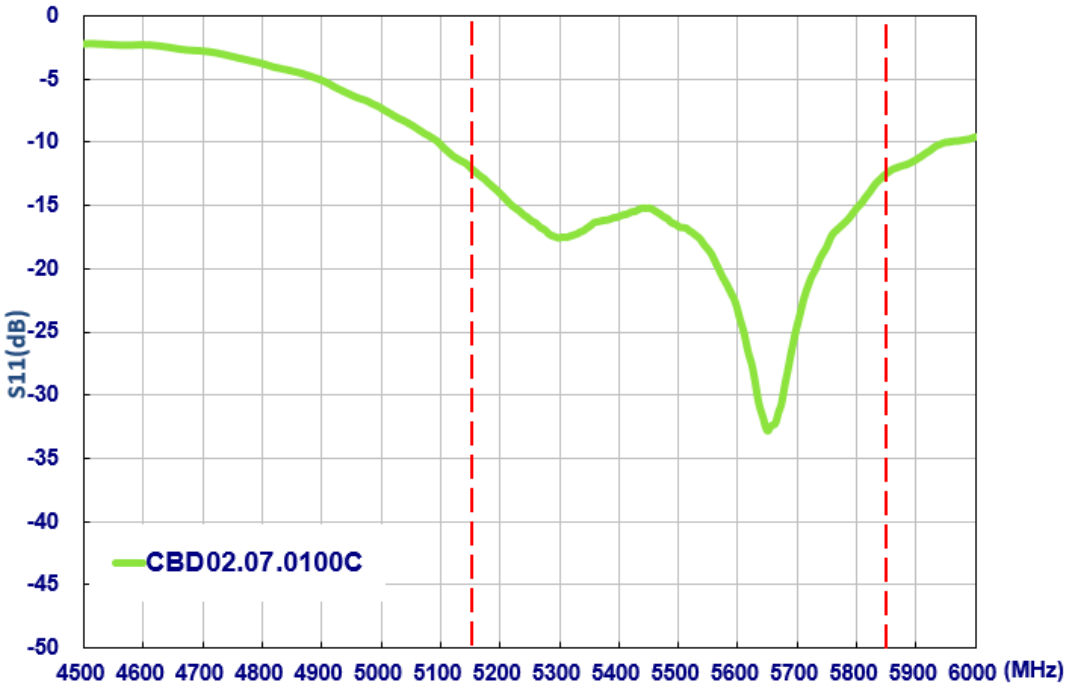


3.2. Efficiency (Free Space)

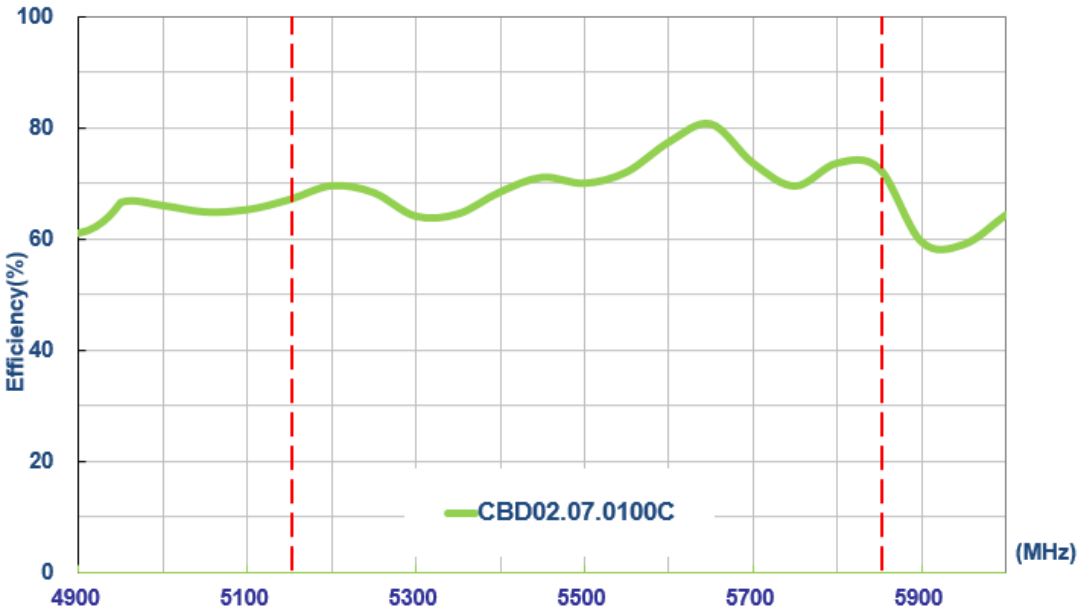

3.3. Peak Gain (Free Space)

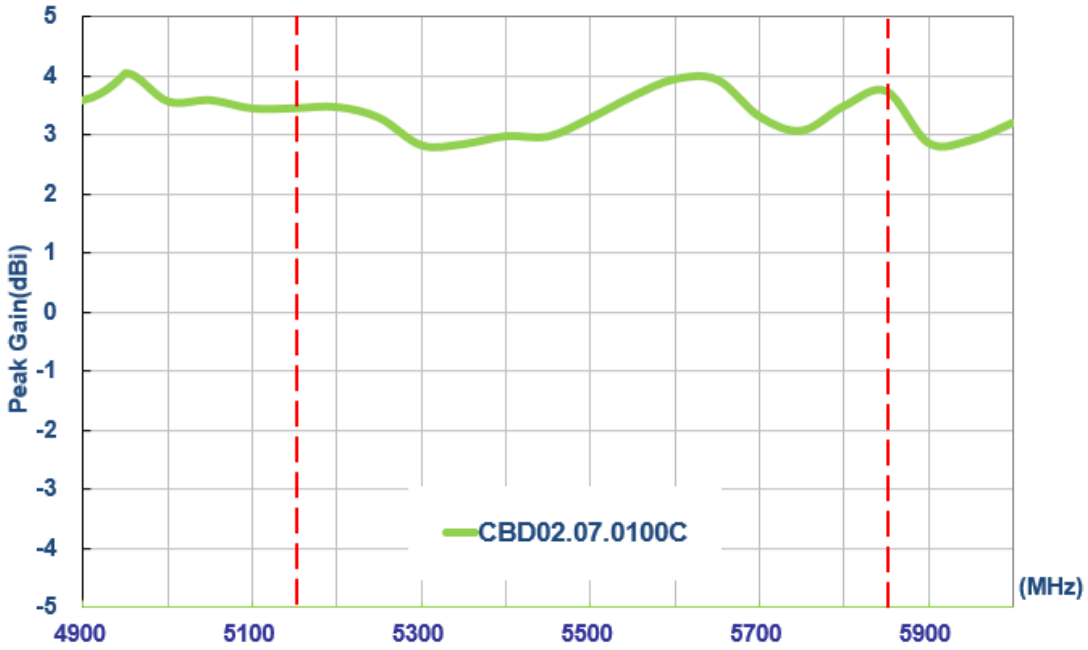


3.4. Average Gain (Free Space)

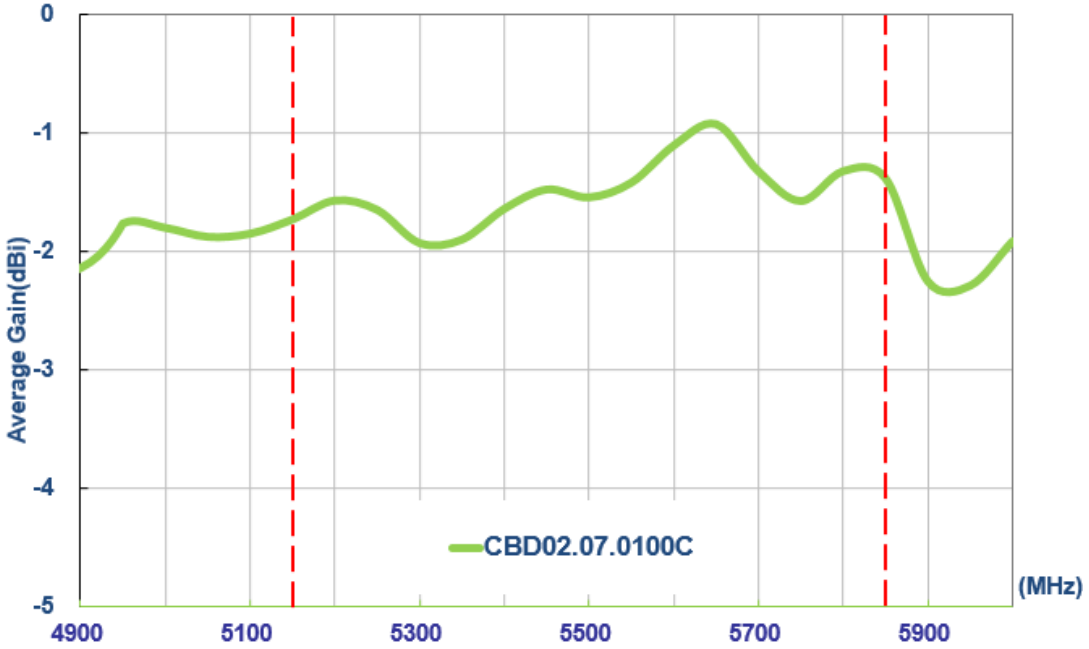


3.5. Testing Setup


The antenna was measured in a CTIA certified ETS-Lindgren Anechoic Chamber.

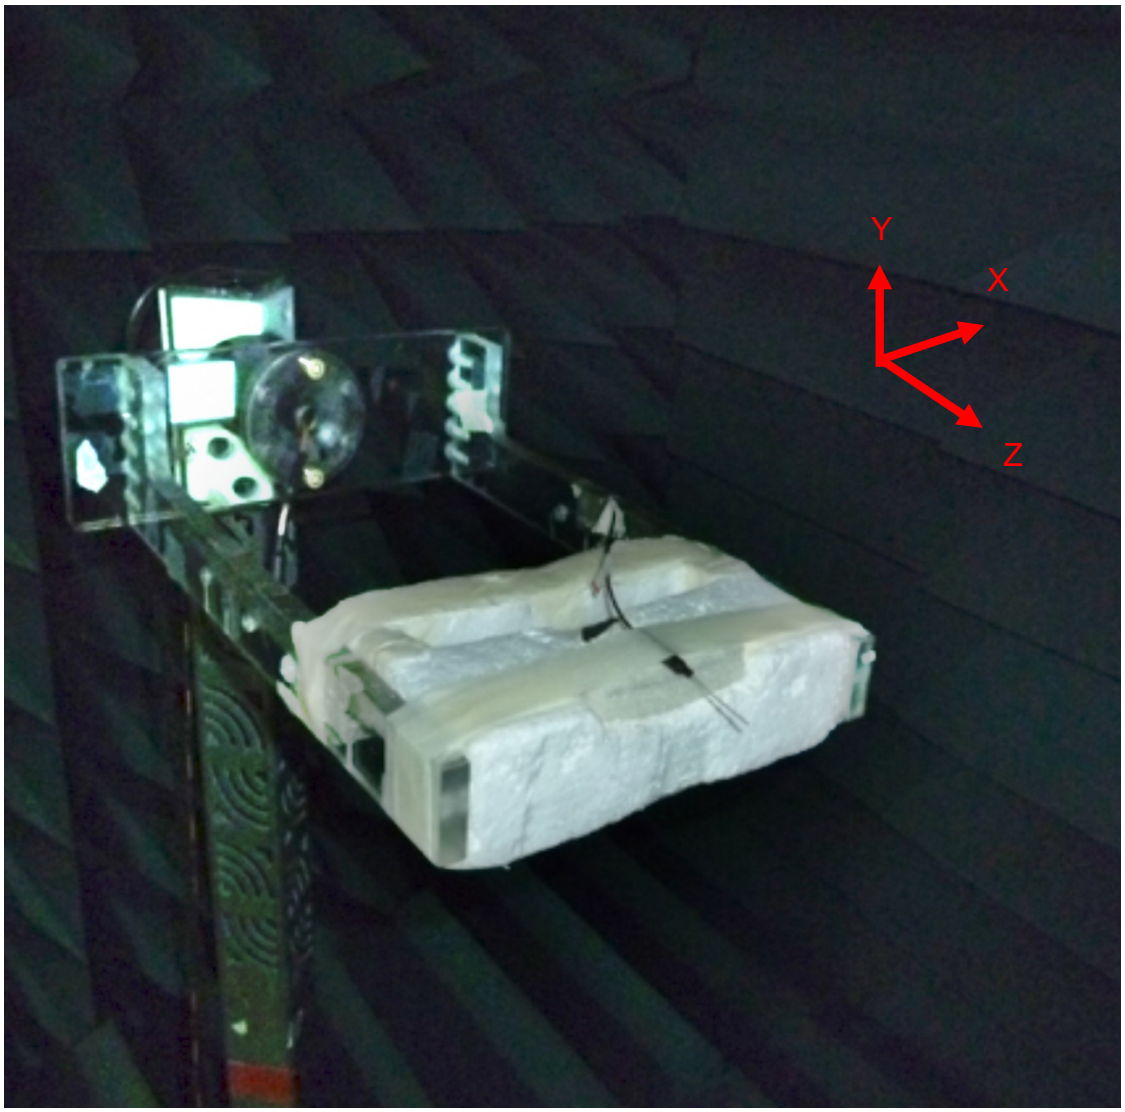


3.6. 3D Radiation Pattern

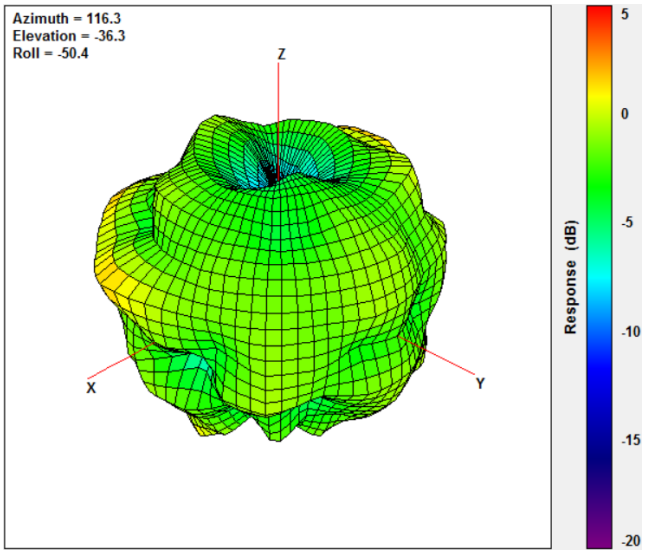

5150MHz

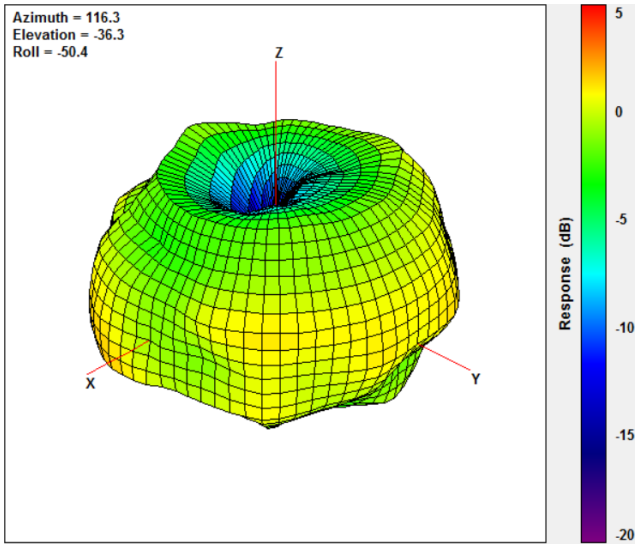


5550MHz

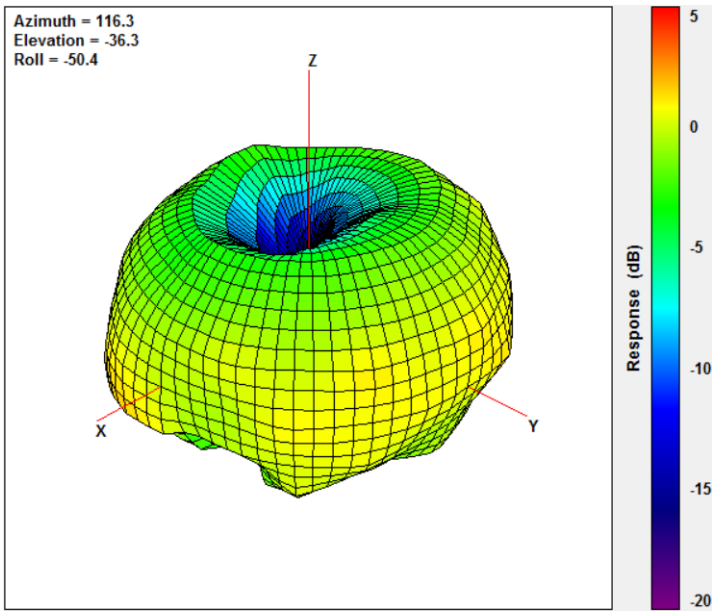


5850MHz

3.7. 2D Radiation Pattern


XY Plane

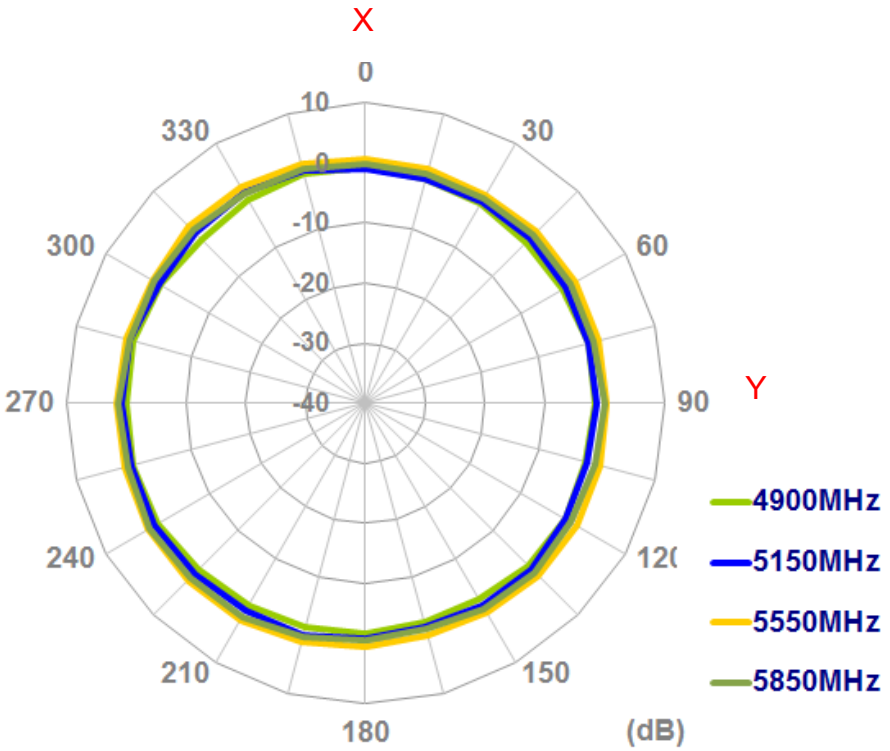


XZ Plane

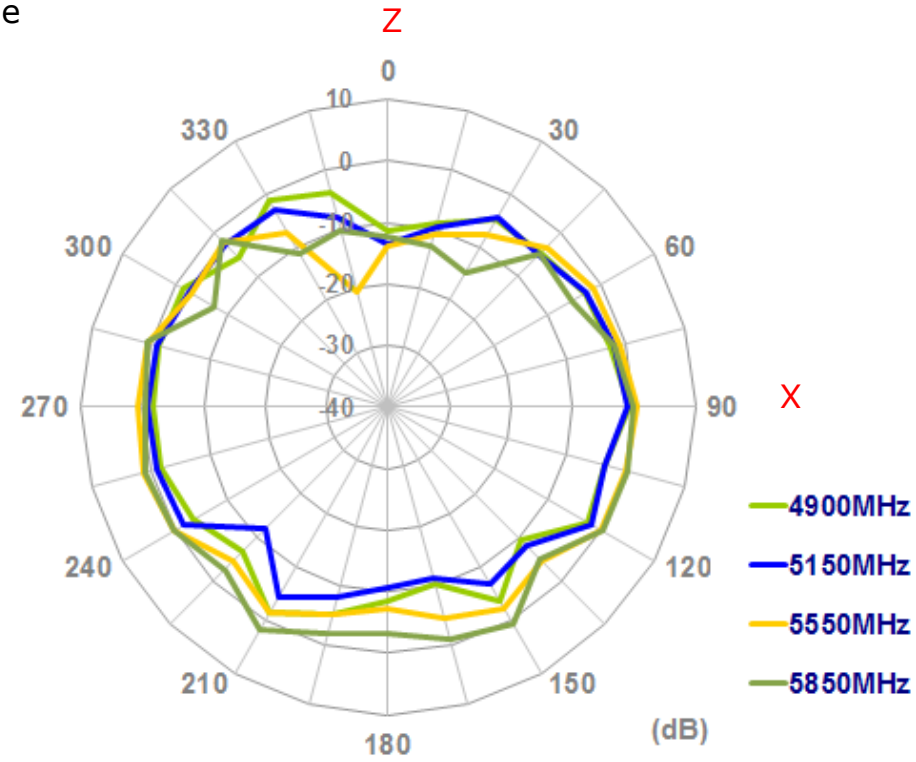

YZ Plane

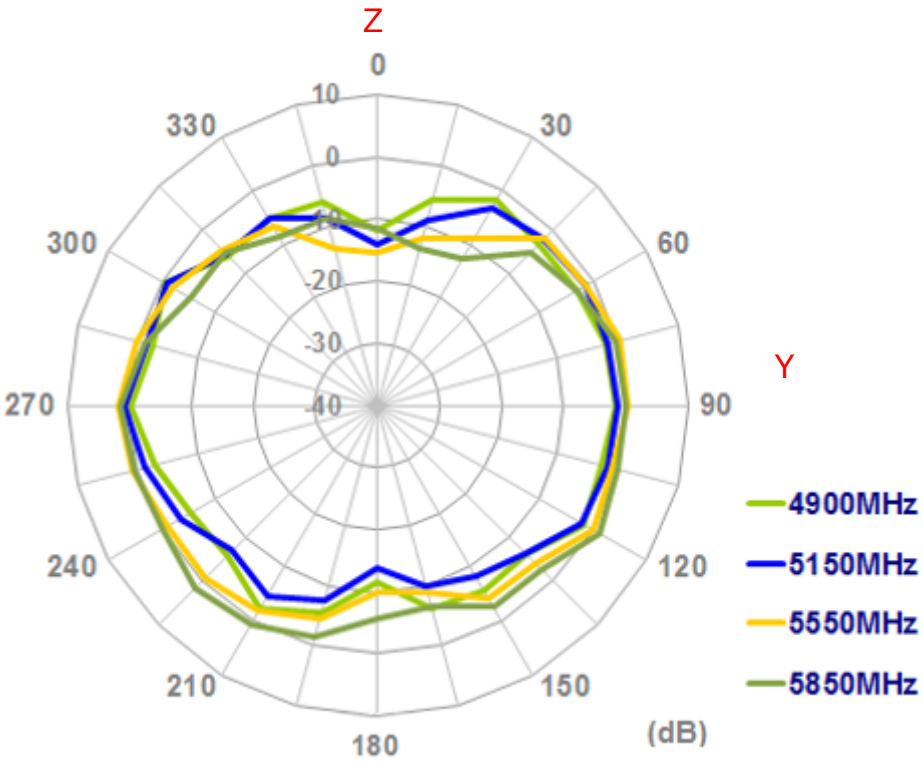
Z
0
30
60
90
120
150
180
210
240
270
300
330
10
0
-10
-20
-30
-40
Y
(dB)
4900MHz
5150MHz
5550MHz
5850MHz


4. Drawing (Unit: mm)

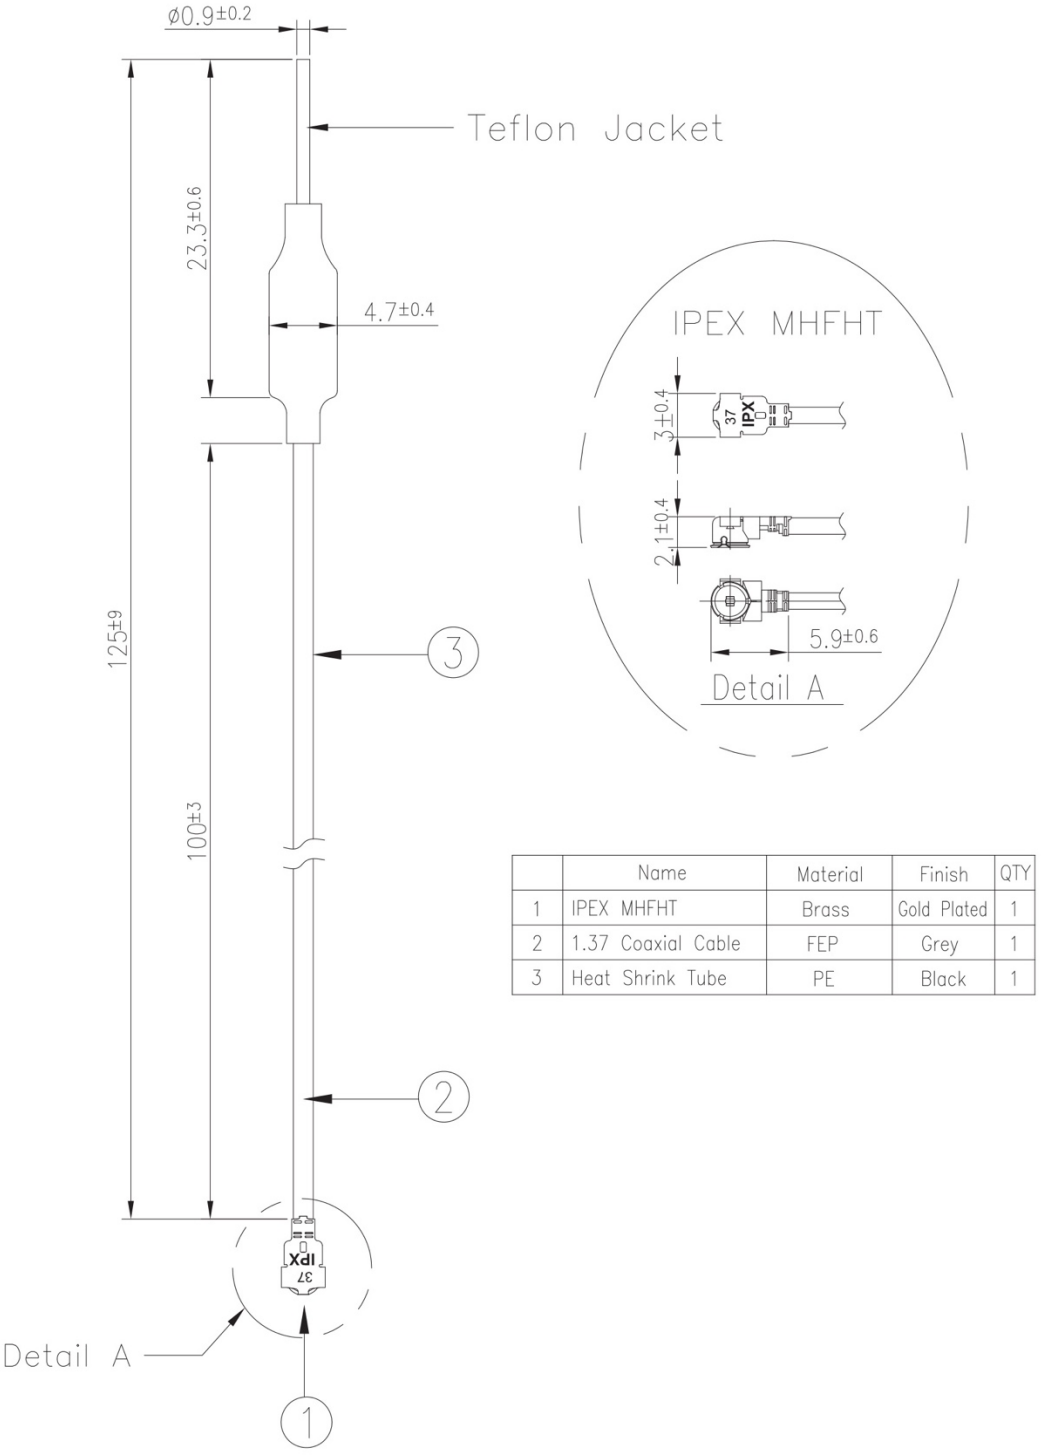


	Name	Material	Finish	QTY
1	IPEX MHFHT	Brass	Gold Plated	1
2	1.37 Coaxial Cable	FEP	Grey	1
3	Heat Shrink Tube	PE	Black	1

5. Packaging


100 pcs CBD02.07.0100C per PE Bag
PE Bag Dimensions - 220*130mm
Weight - 104g

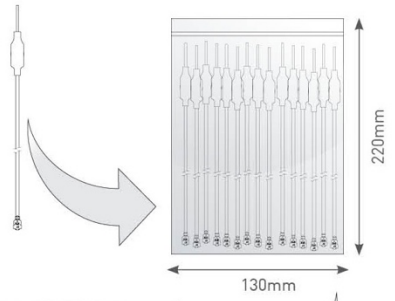


10 PE Bags per Large PE Bag
1000 pcs CBD02.07.0100C per Large PE Bag
Large PE Bag Dimensions - 466*380mm
Weight - 1.1kg

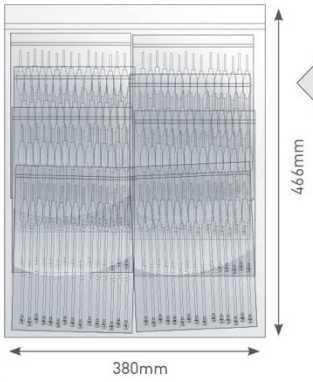

350 Large PE Bags per carton
3500pcs CBD02.07.0100C per carton
Carton Dimensions - 360*310*170mm
Weight - 4.2kg

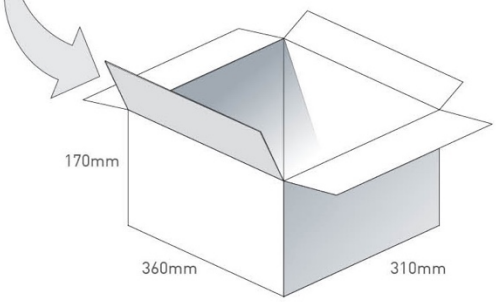


Pallet Dimensions 1080mm*930mm*1340mm
63 Cartons per Pallet
9 Cartons per layer
7 Layers

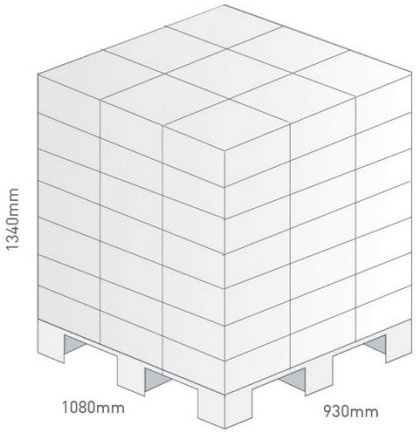


6. Installation

5.8GHz remote control receivers usually need two separate 5.8GHz receiver antennas for receive diversity.

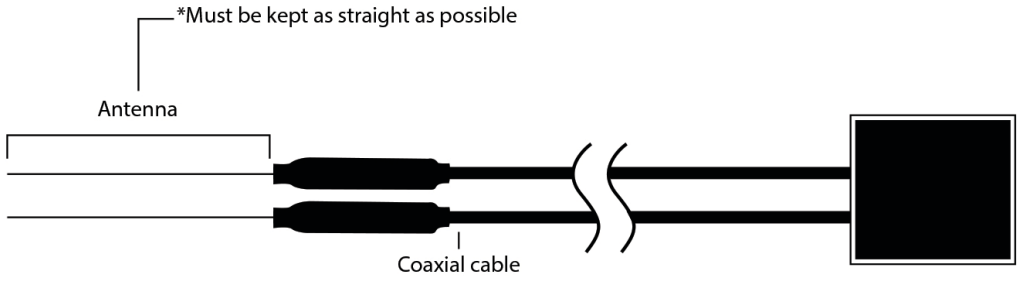


* 5.8GHz remote control receivers + 5.8GHz receiver antennas

In practice, client can change two CBD.02 antennas to connect on 5.8GHz remote control receiver. The two antennas should be placed at 90 degrees to each other. They should be kept as straight as possible but also kept away from each other as much as possible. If not, effective range could be reduced.

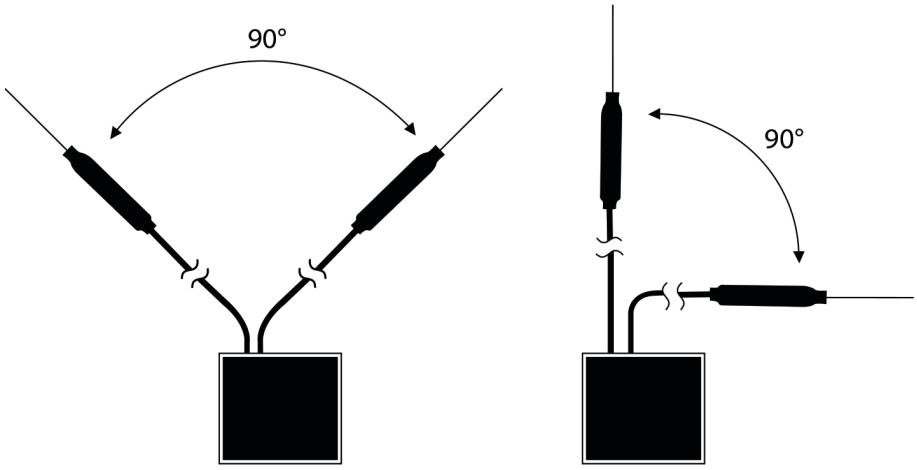

Our antennas should be placed at both sides of the 5.8GHz remote receiver. Then the best RF signal condition can be obtained at any flying attitude. The antennas must be kept 15mm away from metal materials.

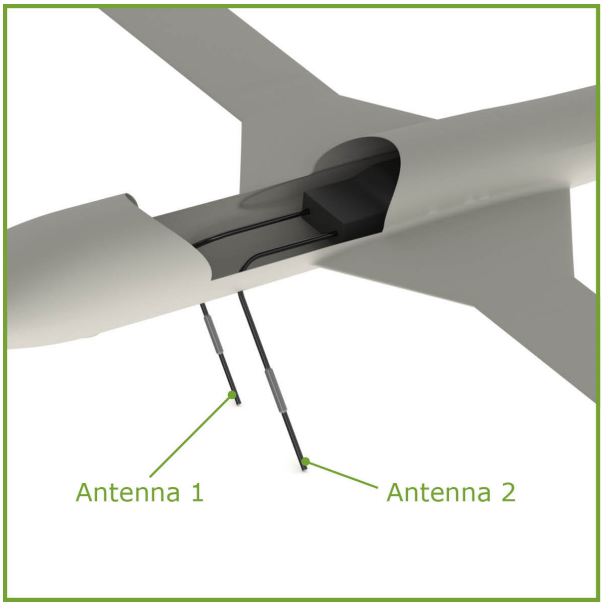



Cable ties or adhesive can be used on the bottom of the filter jacket for the most reliable mounting solution. Ideally, the antenna is mounted close to the outer edge of the UAV device to allow it to radiate outwards and receive signals without obstruction from internal components in the device.


In order to have best maximum antenna efficiency, it is suggested that the antenna is installed on plastic or fiberglass surfaces. Also it is important to keep the antennas away from the motor, ESC, and other electrical noise sources to reduce interference entering the receiver.

7. Application Note

7.1 2 Port Isolation


The antennas should be spaced at least 20mm apart to have minimum coupling interference, showing a similar return loss as in free space. Testing results for MIMO applications as follows:

Test set up

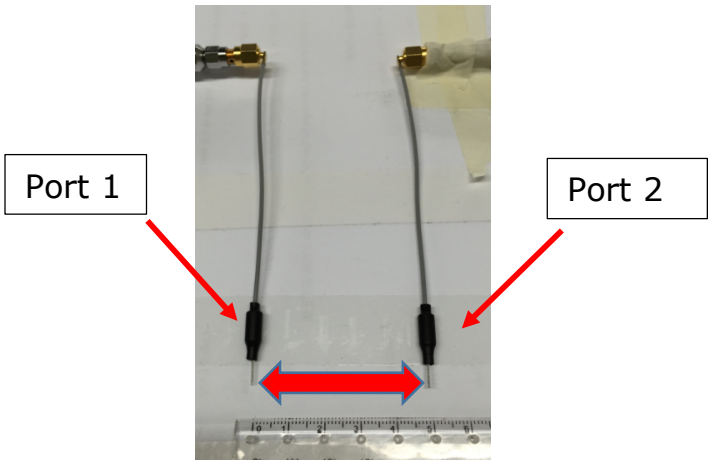


20mm


Port 1 S11,

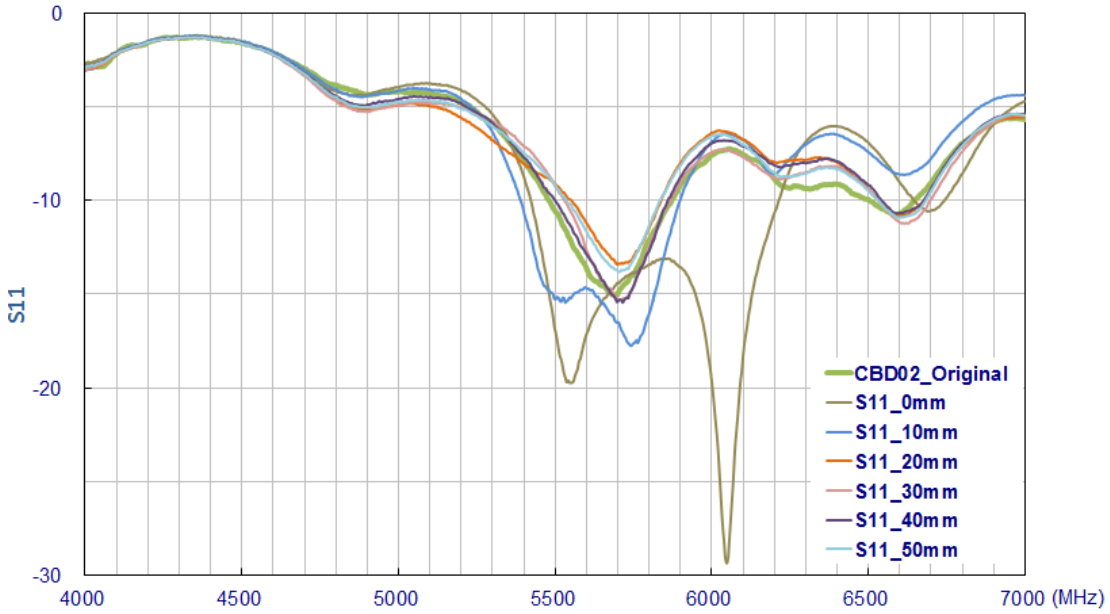
0
-10
-20
-30
S11
4000
4500
5000
5500
6000
6500
7000 (MHz)
CBD02_Original
S11_0mm
S11_10mm
S11_20mm
S11_30mm
S11_40mm
S11_50mm

Port 2 S11,

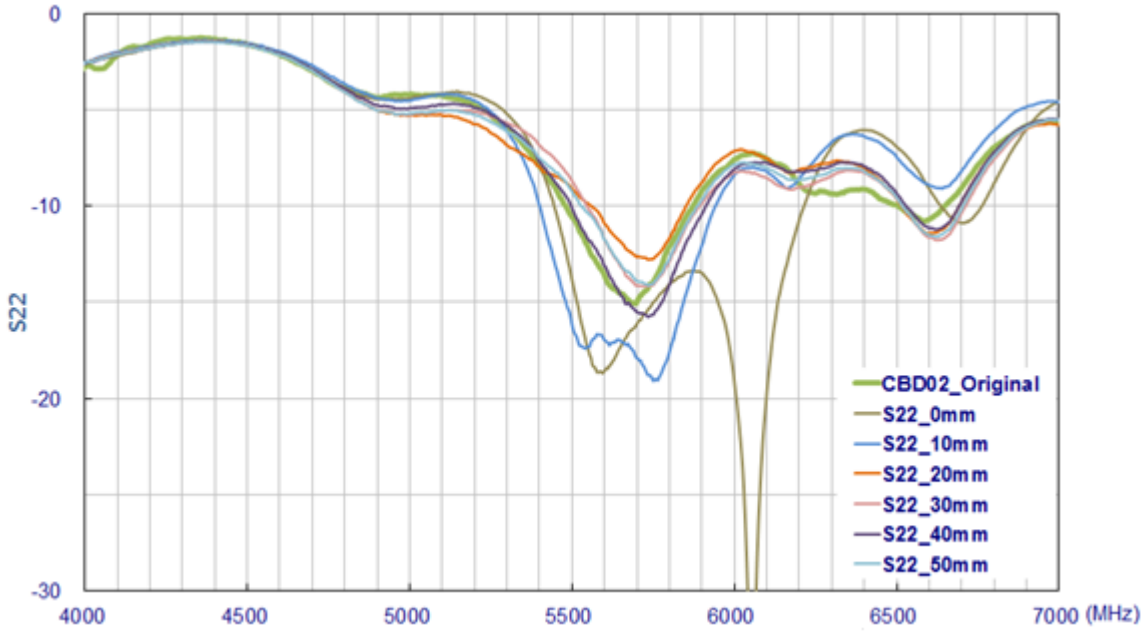

Two Ports Isolation

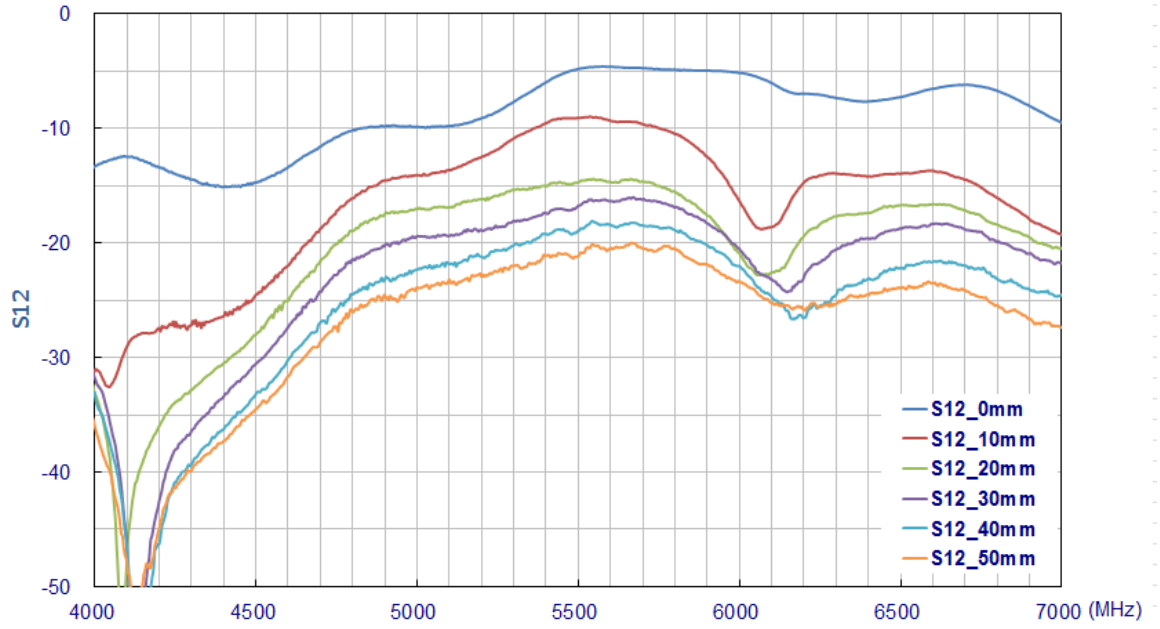

7.2


Ground Approximate Effects

The Antenna needs to be at least 21mm away from a comparatively large metal surface to have similar return loss as in free space. In order to maintain good antenna performance, we suggest that a suitable distance to large metal planes are reserved. If the distance is smaller than 21mm, Taoglas can offer the fine tuning service to prepare custom antennas, subject to minimum order quantities.

Test Set Up




21mm from Ground

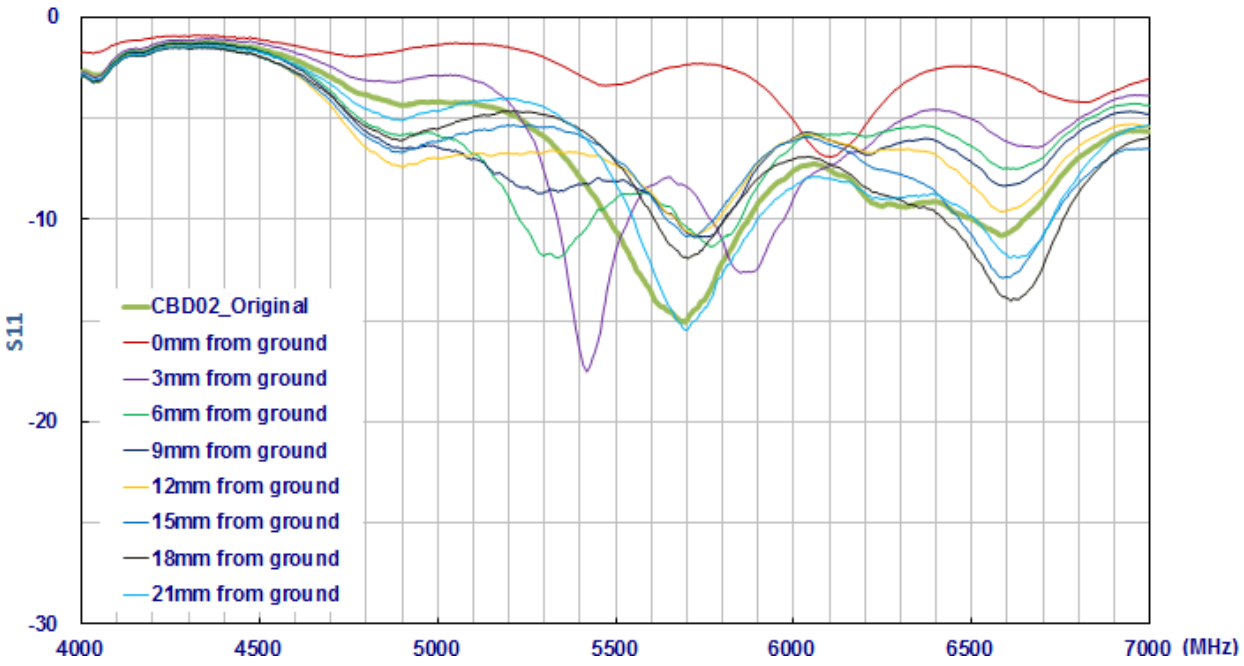


7.3 Bending Angle On Antenna Main Body

Due to the dipole antenna structure, cable routing of the antenna itself does not have much effect on performance. In real life scenarios however, the antenna matching and efficiency may be changed through bending the main body. The test setup and results below show the antennas response to bending.

Test Set up

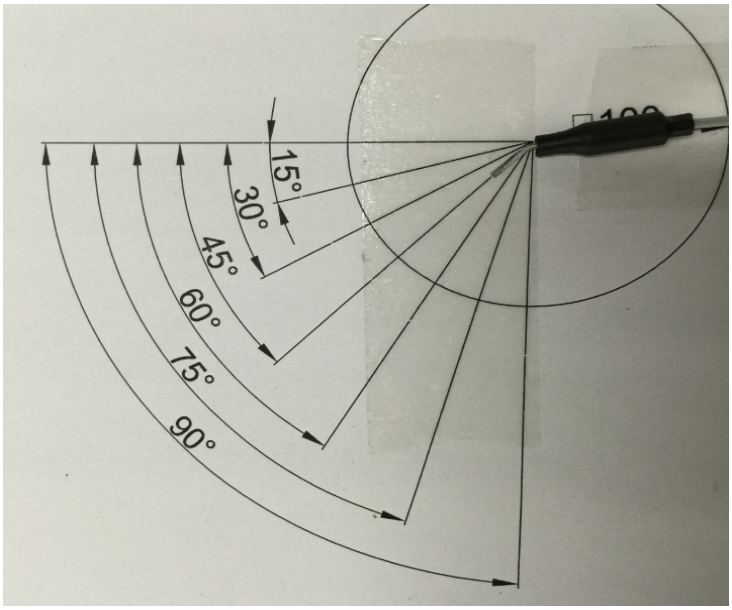


@45°

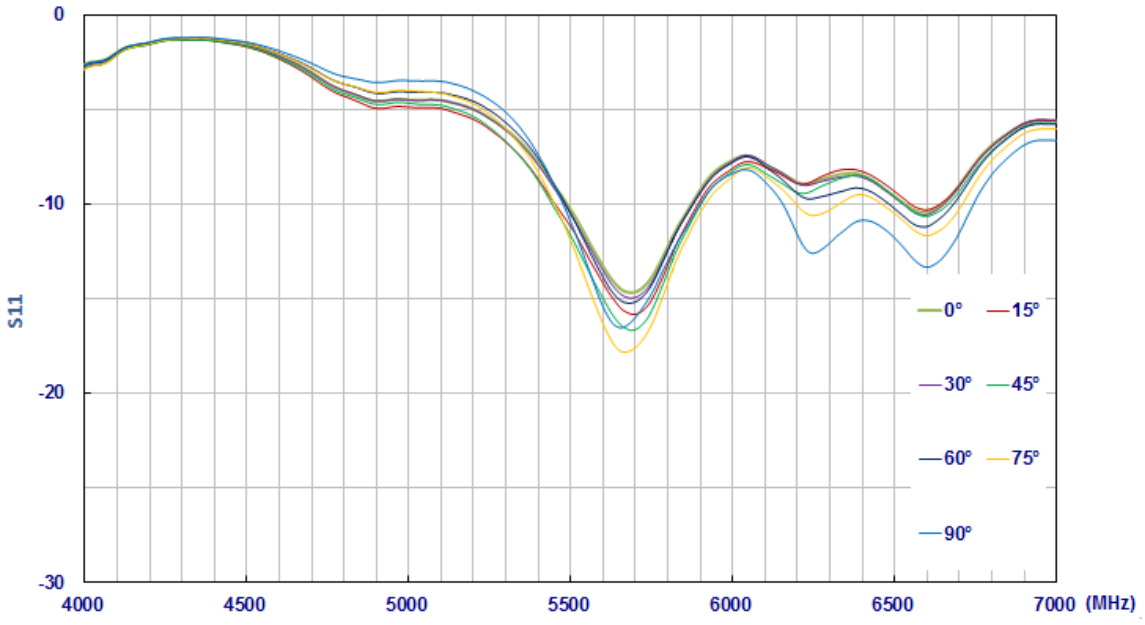


7.4 ABS Plastic

Proximity to plastic enclosures will affect antenna resonance. The test setup and return loss in free space, on 2mm thick ABS plastic (a common plastic housing and material thickness), and also, in between two pieces of 2mm thick ABS plastic, are shown below.

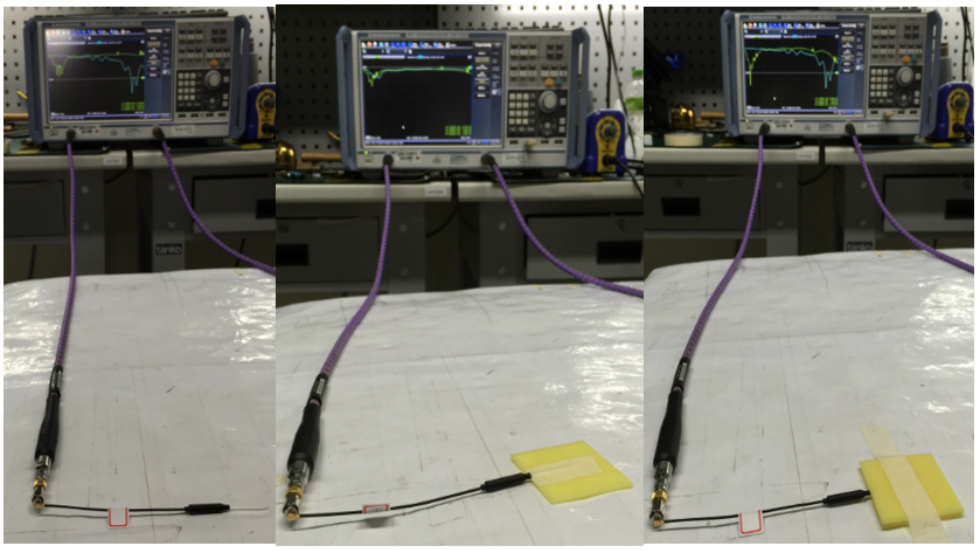

Free Space | On 2mm ABS | Between two 2mm ABS

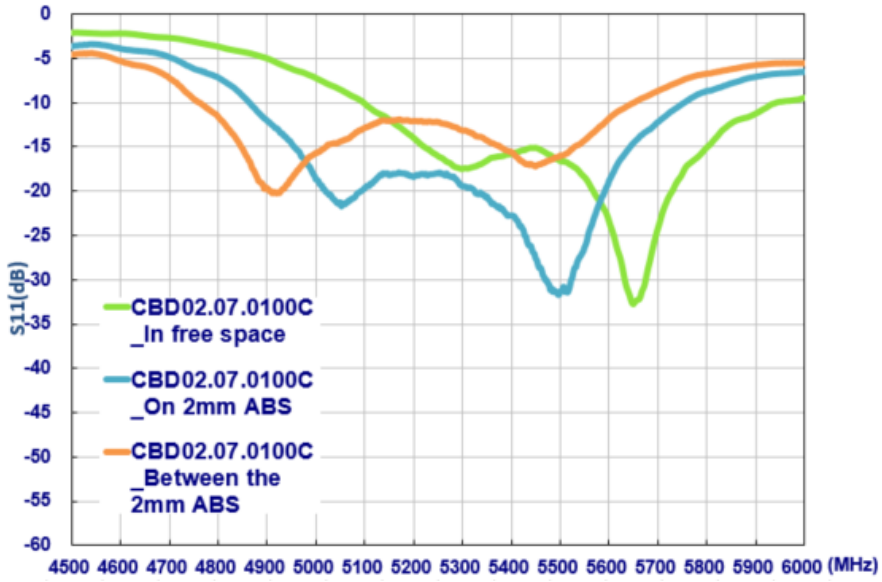

*Taoglas provides fine tuning service in order to get the best antenna performance in customer's device.

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.