

61 KRENG

Screw terminal blocks, pitch 3.5/5.0/10.0 mm




Screw terminal block for mains supply, with lift clamp
with protection against misplacing, upright version,
stringable without loss of pitch

State: Active

Approvals:   

61 KRENG

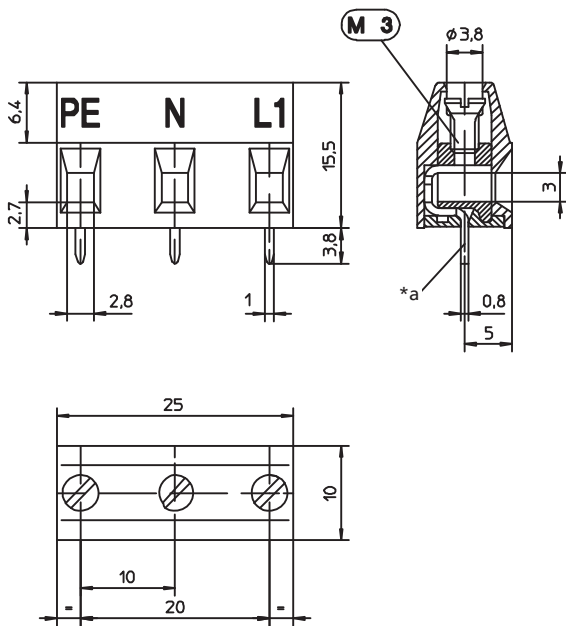

*a bore hole of printed circuit board $\varnothing 1.3$ mm

Environmental conditions

Temperature range -25 °C/+100 °C

Materials

Insulating body PA, V-2 according to UL94
Clamp CuZn, nickel-plated
Wire protector CuZn, pre-nickel and tin-plated
Screw steel, zinc-plated and chromatiert

Mechanical data

Screw size M3
Tightening torque screw 0,5 Nm

Connectable conductors for screw clamp

Section $\leq 4,0 \text{ mm}^2$

Electrical data (at $T_{\text{amb}} 20 \text{ °C}$)

Rated current 15 A
Rated voltage 500 V AC, ohne Leiterplatte
Rated impulse voltage 4,5 kV/60 s
Tracking resistance CTI 600
Creepage distance $\geq 8,6 \text{ mm}$
Clearance $\geq 8,6 \text{ mm}$

61 KRENG

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
KRENG 03	3	200	2000	25

Packaging:

in bulk, in a cardboard box