

Midget Fuse, 10.3 x 38 mm, 1000 VDC, Photovoltaic, gPV

new



Standard

PCB version

1000VDC · gPV

See below:

[Approvals and Compliances](#)

Description

- Meets the new UL and IEC photovoltaic standards
- UL Recognized for 1000 VDC
- High breaking capacity of 20 kA @ 1000 VDC
- Low min. interrupting rating of 1.35 x In
- Meets the requirements of IEC 61730-2 for PV module safety

Applications

- All photovoltaic applications
- Inverters
- Battery charge controllers
- In-line protection
- String fuses

References

Corresponding Fuseholder [FSO](#); [CSO](#); [231660](#)

Corresponding Cover [ESO 10.3x38](#)

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

Technical Data

Rated Voltage	1000VDC
Rated current	1 - 30A
Breaking Capacity	20kA
Characteristic	gPV
Mounting	Insert, PCB/THT
Admissible Ambient Air Temp.	-50 °C to 125 °C
Unit Weight	8.3 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Type, Rated current, Rated Voltage, Breaking Capacity, Characteristic, Approvals

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: ASO 10.3x38

Approval Logo	Certificates	Certification Body	Description
	UL Approvals	UL	UL File Number: E345791

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.

Compliances

The product complies with following Guide Lines


Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
RoHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
e	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]


Standard

10.3 mm

Panel cut-out for front mounting

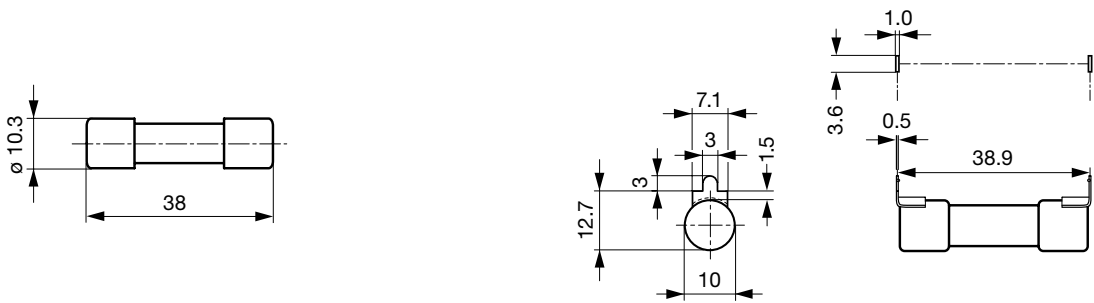


Derating Curves

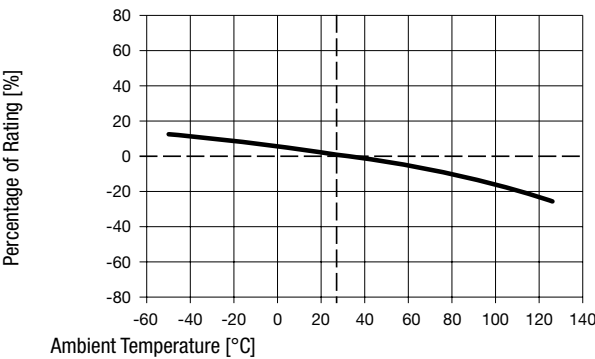

Pre-Arcing Time

Rated Current In	1.0 x In min.	1.13 x In min.	1.35 x In max.	1.45 x In max.	2.0 x In max.
1 A - 30 A	60 min	60 min	60 min	60 min	4 min

Time-Current-Curves

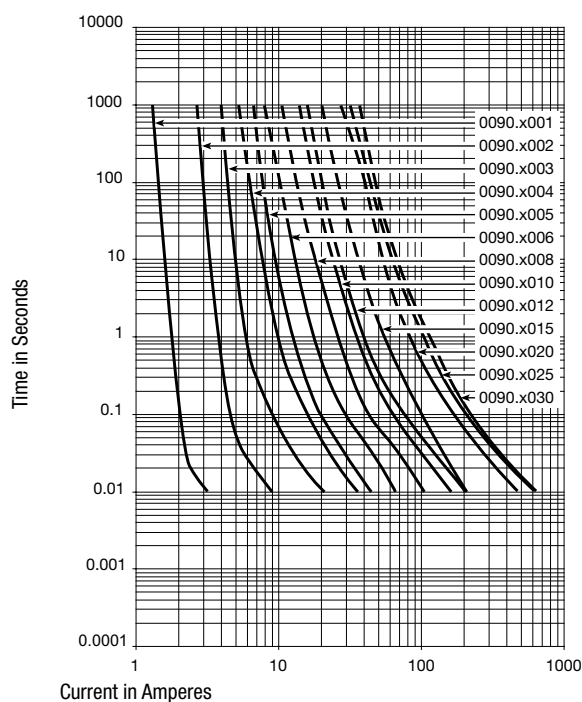

All Variants

Rated Current [A]	Mounting	Rated Voltage [VDC]	Breaking Capacity	Power Dissipation 1.0 I _n typ. [mW]	Melting I ² t 20 kA typ. [A ² s]	Order Number	
1	Standard	1000	1)	602	0.554	0090.0001	■
2	Standard	1000	1)	1586	4.755	0090.0002	■
3	Standard	1000	1)	1504	7.882	0090.0003	■
4	Standard	1000	1)	1491	23.03	0090.0004	■
5	Standard	1000	1)	1465	42.6	0090.0005	■
6	Standard	1000	1)	1348	80.25	0090.0006	■
8	Standard	1000	1)	1610	199	0090.0008	■
10	Standard	1000	1)	1760	401	0090.0010	■
12	Standard	1000	1)	1965	642	0090.0012	■
15	Standard	1000	1)	1914	505	0090.0015	■
20	Standard	1000	1)	2810	1313	0090.0020	■
25	Standard	1000	1)	2981	2371	0090.0025	■
30	Standard	1000	1)	3923	2679	0090.0030	■
1	PCB	1000	1)	602	0.554	0090.1001	
2	PCB	1000	1)	1586	4.755	0090.1002	
3	PCB	1000	1)	1504	7.882	0090.1003	
4	PCB	1000	1)	1491	23.03	0090.1004	
5	PCB	1000	1)	1465	42.6	0090.1005	
6	PCB	1000	1)	1348	80.25	0090.1006	
8	PCB	1000	1)	1610	199	0090.1008	
10	PCB	1000	1)	1760	401	0090.1010	
12	PCB	1000	1)	1965	642	0090.1012	
15	PCB	1000	1)	2282	505	0090.1015	
20	PCB	1000	1)	2810	1313	0090.1020	
25	PCB	1000	1)	2981	2371	0090.1025	
30	PCB	1000	1)	3923	2679	0090.1030	

■ Most Popular.

Rated Cur- rent [A]	Mounting	Rated Vol- tage [VDC]	Breaking Capacity	Power Dissi- pation 1.0 I _n typ. [mW]	Melting I²t 20 kA typ. [A²s]	Order Number
------------------------	----------	--------------------------	----------------------	--	---------------------------------	--------------

Availability for all products can be searched real-time:<https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 20 kA @ 1000 VDC, L/R < 2ms

Packaging Unit	Standard version	Bulk (10 pcs.)
	PCB version	Bulk (100 pcs.)

Zubehör

Description



[ES0 10.3x38](#)
Fuse Inserter/Extractor with Cover Function for 10.3x38 mm Fuses in Clips, Patent Pending