RECTRON
SEMICONDUCTOR
TECHNICAL SPECIFICATION

IHER1601C THRU IHER1606C

HIGH EFFICIENCY RECTIFIER

VOLTAGE RANGE 50 to 600 Volts CURRENT 16.0 Amperes

FEATURES


* Low power loss, high efficiency
* Low forward voltage drop
* Low thermal resistance
* High current capability
* High speed switching
* High surge capability
* High reliability

MECHANICAL DATA

* Case: ITO-220 molded plastic
* Epoxy: Device has UL flammability classification 94V-O
* Lead: MIL-STD-202E method 208C guaranteed
* Mounting position: Any
* Weight: 2.24 grams
* Polarity: As marked



ITO-220

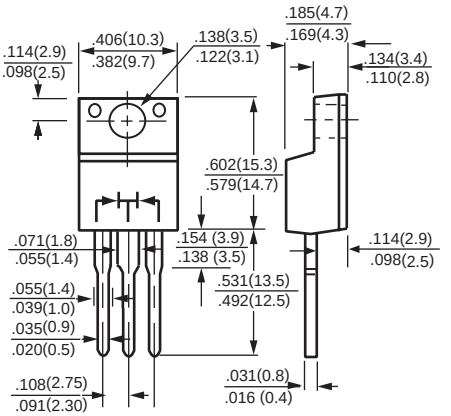

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At T_A = 25°C unless otherwise noted)

RATINGS	SYMBOL	IHER1601C	IHER1602C	IHER1603C	IHER1604C	IHER1605C	IHER1606C	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	Volts
Maximum Average Forward Rectified Current at T_C = 75°C	I_O	16.0						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	200						Amps
Typical Thermal Resistance	$R_{\theta JC}$	2.5						°C/W
Typical Junction Capacitance (Note 2)	C_J	40						pF
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to + 150						°C

ELECTRICAL CHARACTERISTICS (At T_A = 25°C unless otherwise noted)

CHARACTERISTICS		SYMBOL	IHER1601C	IHER1602C	IHER1603C	IHER1604C	IHER1605C	IHER1606C	UNITS
Maximum Instantaneous Forward Voltage at 8.0A DC		V_F	1.0			1.3		1.7	Volts
Maximum DC Reverse Current	@T_C = 25°C	I_R	10						uAmps
at Rated DC Blocking Voltage	@T_C = 100°C		150						
Maximum Reverse Recovery Time (Note 1)		trr	50					75	nSec

NOTES : 1. Test Conditions: I_F = 0.5A, I_R = -1.0A, I_{RR} = -0.25A
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
3. Suffix "A" = Common Anode.

2002-11

RATING AND CHARACTERISTIC CURVES (IHER1601C THRU IHER1606C)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

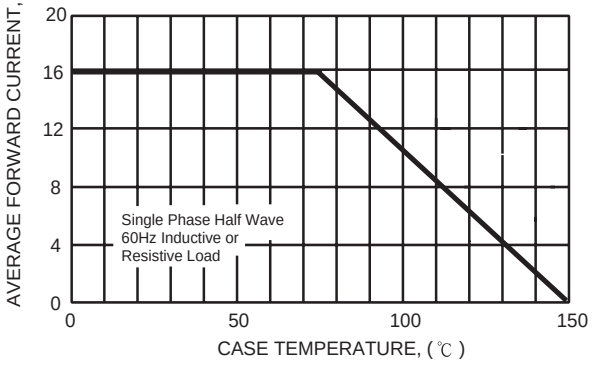


FIG. 2 - TYPICAL REVERSE CHARACTERISTICS

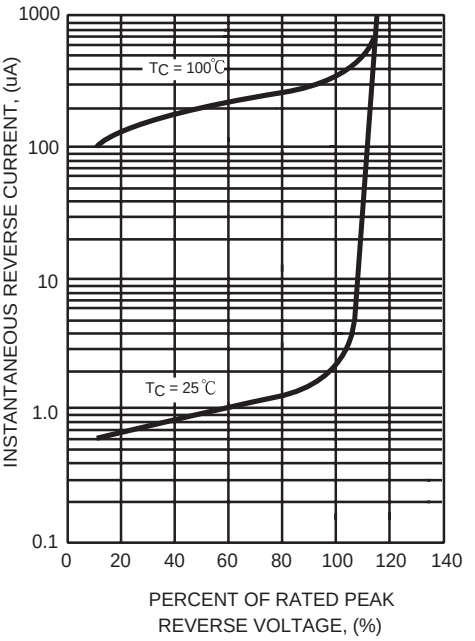


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

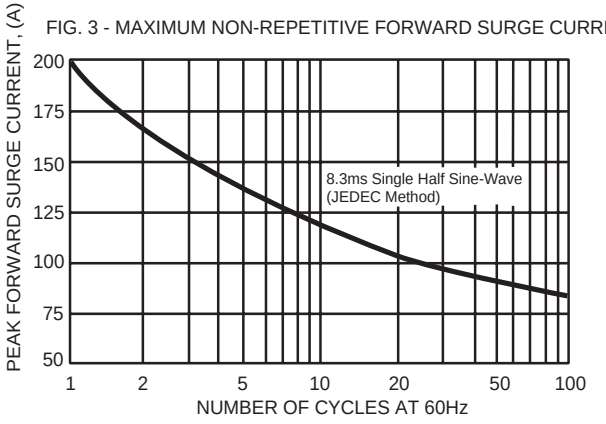


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

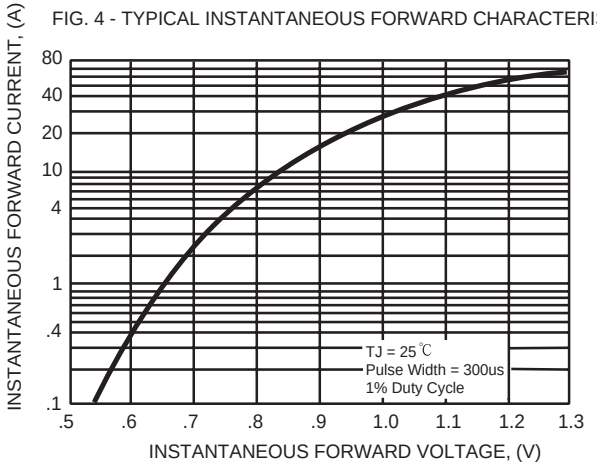


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

