
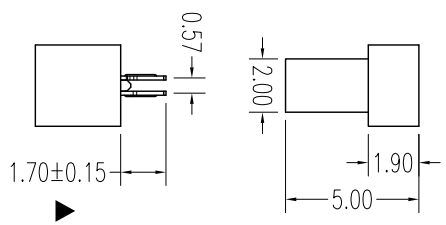
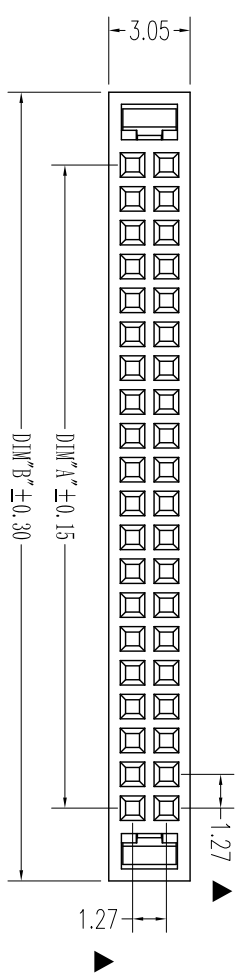
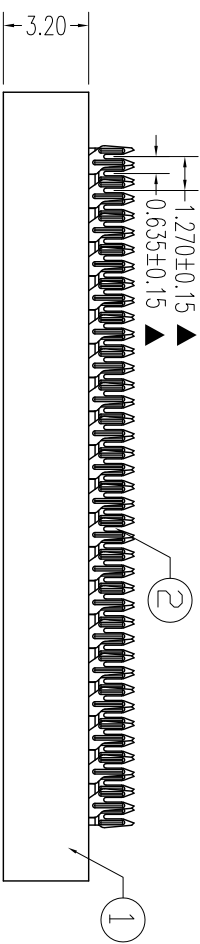
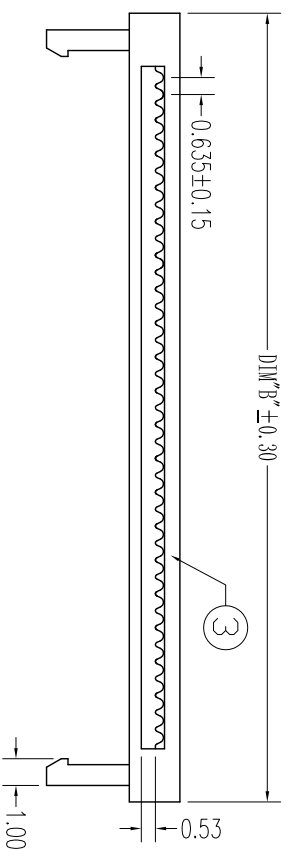


REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12

NOTES:  
 Insulator Material: PBT, UL 94V-0  
 Contact Plating: flash gold  
 Contact Material: Brass

Current Rating : 1A AC,DC  
 Contact Resistance: 20MΩ Max.  
 Dielectric Withstanding: AC 500V  
 Insulator Resistance: 1000MΩ Min.  
 Operating Temp.: -40°C~+105°C

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	2.54	8.00
08	3.81	9.27
10	5.08	10.54
12	6.35	11.81
14	7.62	13.08
16	8.89	14.35
20	11.43	16.89
24	13.97	19.43
26	15.24	20.70
30	17.78	23.24
34	20.32	25.78
40	24.13	29.59
44	26.67	32.13
50	30.48	35.94
60	36.83	42.29
64	39.37	44.83
66	40.64	46.10
68	41.91	47.37
70	43.18	48.64
74	45.72	51.18
76	46.99	52.45
80	49.53	54.99

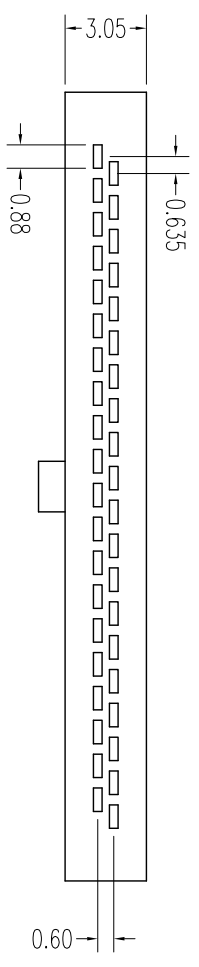

UNLESS TOLERANCE		DRAW	BY	<h1>CnC Tech, LLC</h1>
GENERAL	ANGLE	DESIGN	BY	
X ± 0.30	X° ± 3.0°	CHECK	BY	
.X ± 0.20	.X° ± 2.0°	APPROVE	BY	
.XX ± 0.15	.XX° ± 1.0°	SCALE 1:1 SHEET 1/1 UNIT MM		Port NO. 3230-XX-0101-00
.XXX ± 0.10	.XXX° ± 0.5°	SCALE 1:1 SHEET 1/1 UNIT MM		Draw NO.: REV: A

