
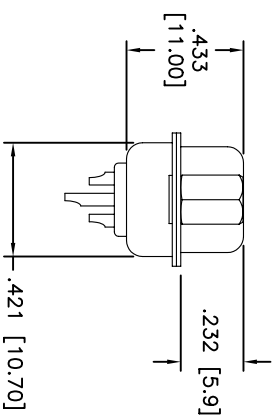
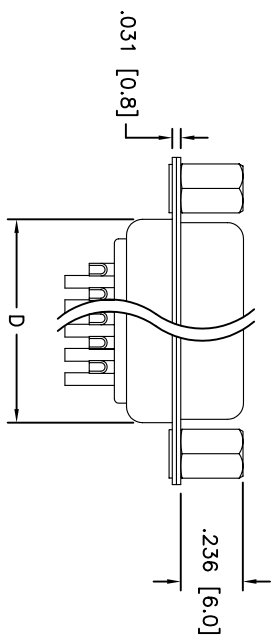


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/15/04	

APPROVED: _____
 DATE: _____ TITLE: _____

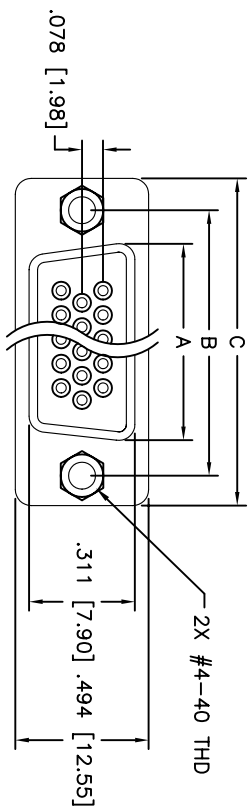

Unit: Inch / mm

POSITIONS	Socket Dimensions			
	A	B	C	D
15	.643 (16.33)	.984 (24.99)	1.213 (30.81)	.759 (19.28)
26	.971 (24.66)	1.312 (33.32)	1.541 (39.14)	1.083 (27.51)
44	1.511 (38.38)	1.852 (47.04)	2.008 (53.04)	1.626 (41.30)
62	2.159 (54.84)	2.500 (63.50)	2.729 (69.32)	2.272 (57.71)

SPECIFICATIONS:
 Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold Flash over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -65°C to +125°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

D-SUB, HIGH DENSITY, STRAIGHT FEMALE SOLDER CUP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	SS	11/15/04	
CHECKED			
APPROVED			
TITLE		SIZE	PART NO.
D-SUB, HIGH DENSITY, STRAIGHT FEMALE SOLDER CUP		X	HDTXX-SD-JS
REF:		SCALE:	SHEET 1 OF 1