



NOTES:


1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE:  $X.X \pm 0.4$   
 $X.XX \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC  
350mA, 110V AC/DC
5. CONTACT RATING (NON-SWITCHING) 5A
6. CONTACT MATERIAL: SILVER over COPPER ALLOY.
7. OPERATING FORCE:  $425 \pm 100$  CM/STANDARD
8. OPERATING TEMP.  $-30^{\circ}$  to  $85^{\circ}\text{C}$
9. CIRCUIT SP. 5 POSITIONS,  $30^{\circ}$  INDEX.
10. DIELECTRIC STRENGTH 1000V RMS min. @ SEA LEVEL
11. DESIGNATE MAJOR DIMENSIONS
12. LOCK NUT AND WASHER NOT SHOWN.



CONTACT CONFIGURATION  
Timing: Non-Shorting (BBM)

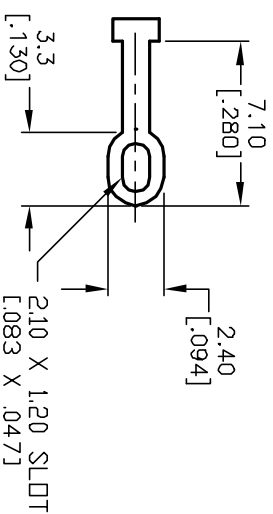

TERMINATION DETAIL  
SCALE 2X

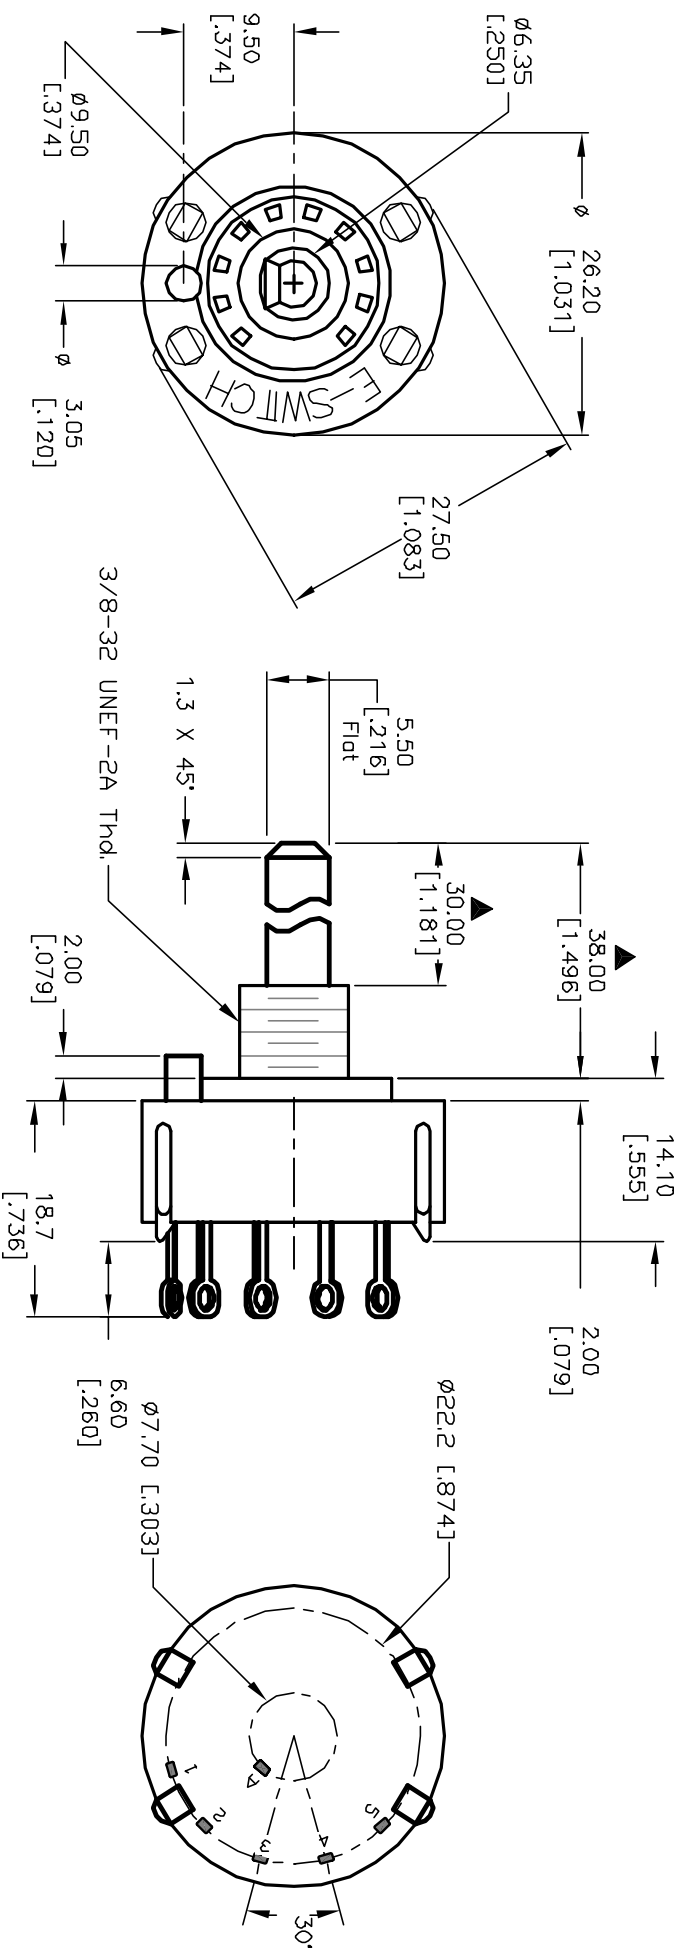

|                                                                                                                              |  |         |     |         |
|------------------------------------------------------------------------------------------------------------------------------|--|---------|-----|---------|
| <div style="text-align: center;">  </div> |  |         |     |         |
| TITLE                                                                                                                        |  |         |     |         |
| KC-15-A (30.0mm) 01-N-L-S                                                                                                    |  |         |     |         |
| SCALE                                                                                                                        |  | DATE    | DR  | DWG     |
| 1.5:1                                                                                                                        |  | 6/12/02 | CJB | G527535 |
| REV                                                                                                                          |  | A       |     |         |