


HSF

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: PBT+15%G.F UL94V-0

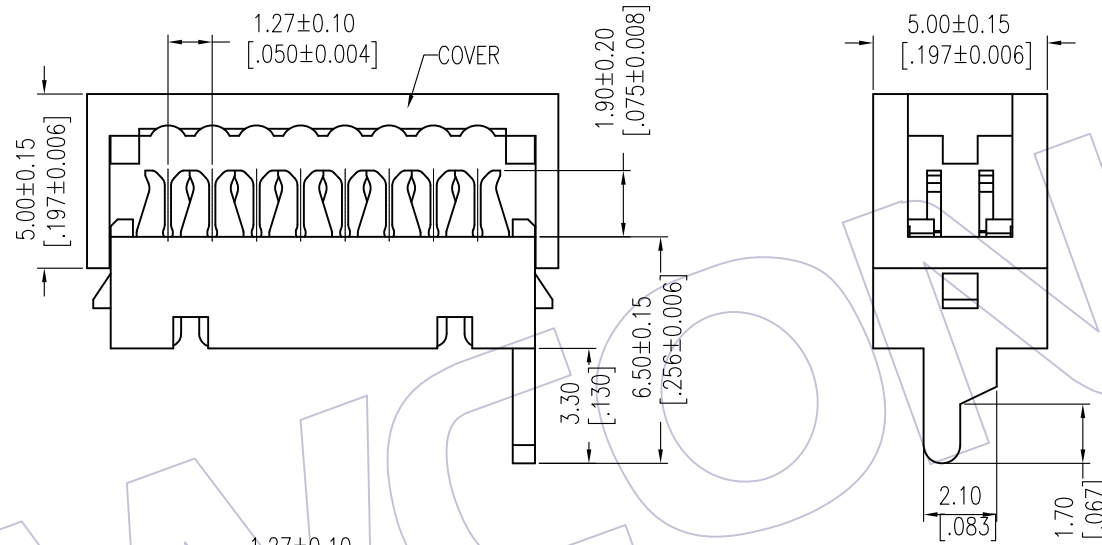


Ordering Information

3900- XX MI SN A N T 0 2

No. of Pins
 04P 12P
 06P 14P
 08P 16P
 10P 18P
 20P

Contact Plating
 SN= Tin
 T= Tube

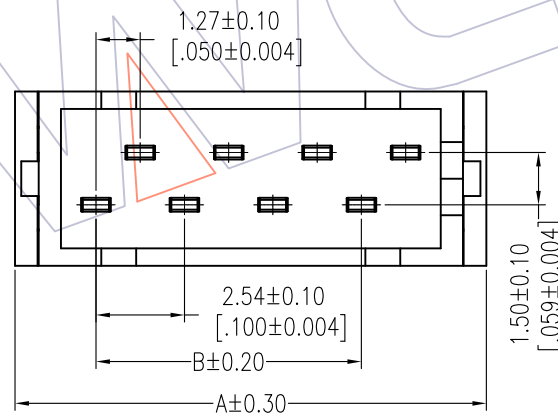

Dimension & Ordering Information

Circuit	Part No.	Dimension		Q'ty /Tube
		A	B	
04	3900-04MISNANT02	8.45	2.54	68pcs
06	3900-06MISNANT02	10.99	5.08	52pcs
08	3900-08MISNANT02	13.53	7.62	42pcs
10	3900-10MISNANT02	16.07	10.16	36pcs
12	3900-12MISNANT02	18.61	12.70	31pcs
14	3900-14MISNANT02	21.15	15.24	27pcs
16	3900-16MISNANT02	23.69	17.78	24pcs
18	3900-18MISNANT02	26.23	20.32	22pcs
20	3900-20MISNANT02	28.77	22.86	20pcs

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2018/05/15	MINI MATCH--1.27mm MRC Connector	-----	x.X ±0.40	Ding	2018/05/15	UNIT	mm	SEE TABLE
A1	2014/05/28	Micro Match --Mini Match	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27mm MRC Connector Box Header IDC type
A0	2012/10/12	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com