

## PI 13067 TYPE


### ●FEATURE

1. Shielded construction
2. Frequency range up to 5MHz, Low DCR( $\Omega$ ), Low Buzz Noise


### ●Applications

1. Notebook, server application, High current power supplier

### ●Shape and Dimension

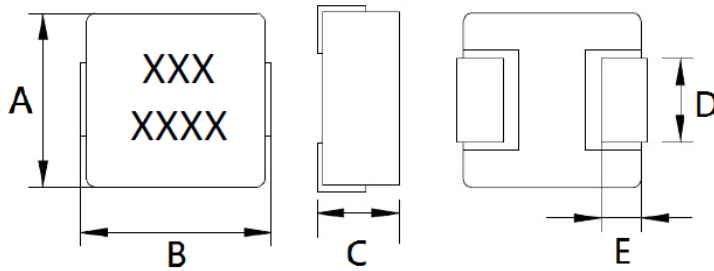

### ●Schematics and Land Patterns(mm)

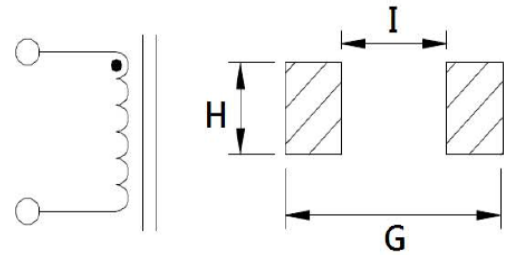

A=12.90m/m Max ; B=14.00m/m Max ; C=6.70m/m Max. ; D=refer Note.7;  
 E=2.40m/m Ref. ; G=14.00m/m Ref. ; H=5.15m/m Ref. ; I=7.60m/m Ref.

### ●Specification

P/N	L ( $\mu$ H)	RDC (m $\Omega$ ) Typical	RDC (m $\Omega$ )Max	Isat (A)	Irms (A)
PI13067-R10N	0.10 $\pm$ 30%	0.25	0.50	80.0	60.0
PI13067-R22M	0.22 $\pm$ 20%	0.45	0.70	75.0	53.0
PI13067-R30M	0.30 $\pm$ 20%	0.50	0.80	72.0	48.0
PI13067-R33M	0.33 $\pm$ 20%	0.51	0.80	65.0	46.0
PI13067-R40M	0.40 $\pm$ 20%	0.60	1.00	64.0	44.0
PI13067-R47M	0.47 $\pm$ 20%	0.75	1.20	63.0	41.0
PI13067-R56M	0.56 $\pm$ 20%	0.90	1.40	62.0	37.0
PI13067-R68M	0.68 $\pm$ 20%	1.00	1.60	51.0	35.0
PI13067-R82M	0.82 $\pm$ 20%	1.55	1.90	50.0	33.0
PI13067-1R0M	1.0 $\pm$ 20%	1.85	2.00	49.0	32.0
PI13067-1R2M	1.2 $\pm$ 20%	2.30	2.50	45.0	30.0
PI13067-1R5M	1.5 $\pm$ 20%	2.30	3.00	40.0	25.0
PI13067-2R2M	2.2 $\pm$ 20%	3.50	4.20	33.0	22.0
PI13067-3R3M	3.3 $\pm$ 20%	5.50	6.80	29.0	18.0
PI13067-4R7M	4.7 $\pm$ 20%	9.80	11.2	25.0	13.5
PI13067-5R6M	5.6 $\pm$ 20%	10.5	11.5	21.0	12.0
PI13067-6R8M	6.8 $\pm$ 20%	13.8	14.9	16.5	11.5
PI13067-8R2M	8.2 $\pm$ 20%	15.1	16.6	16.0	10.5
PI13067-100M	10 $\pm$ 20%	17.5	18.5	15.5	10.0

P/N	L ( $\mu$ H)	RDC (m $\Omega$ ) Typical	RDC (m $\Omega$ )Max	Isat (A)	Irms (A)
PI13067-150M	15 $\pm$ 20%	27.5	32	11	7
PI13067-220M	22 $\pm$ 20%	35	45	8	5
PI13067-330M	33 $\pm$ 20%	72	82	7	4.5
PI13067-470M	47 $\pm$ 20%	85	90	5.5	4.0
PI13067-680M	68 $\pm$ 20%	160	172	6	3.0

Note1. Measurement frequency of Inductance value : at 100KHz, 0.25V

Note2. Measurement ambient temperature of L, DCR and IDC : at 25 $^{\circ}$ C

Note3. Isat: DC current at which the inductance drops 20%(typ) from its value without current

Note4. Irms: Average current for 40 $^{\circ}$ C temperature rise from 25 $^{\circ}$ C ambient(typical)


Note5. Inductance tolerance: M:  $\pm$ 20% ; N:  $\pm$ 30%

Note6. Packaging: Taping ; Quantity: 250pcs/reel


Note7. D Dimension range: R10~1R5, D=4.0 $\pm$ 0.5mm ; 2R2, D=3.0 $\pm$ 0.5mm ; 3R3~680, D=4.7 $\pm$ 0.3 mm

● Typical Electrical Curve: SRF


PI13067-R10

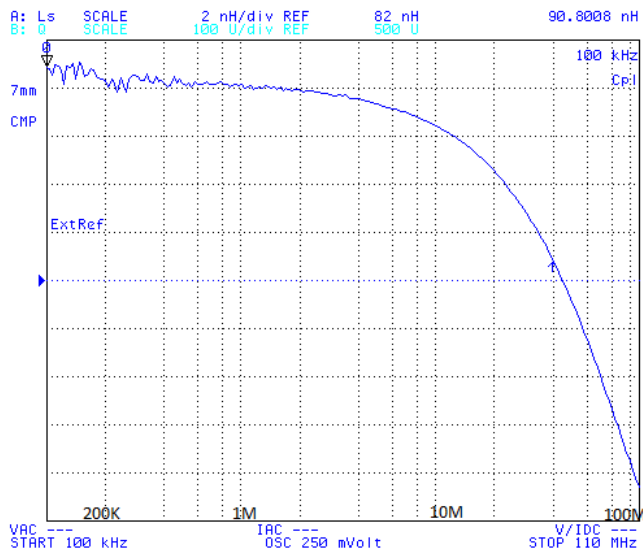


PI13067-R22

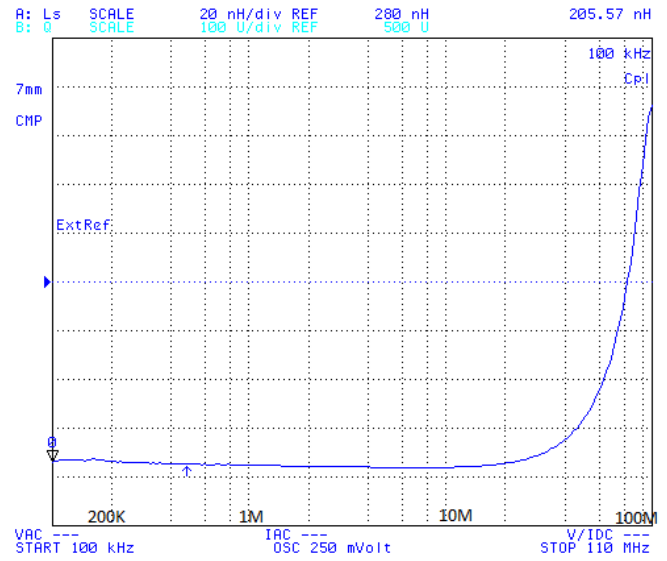


PI13067-R30

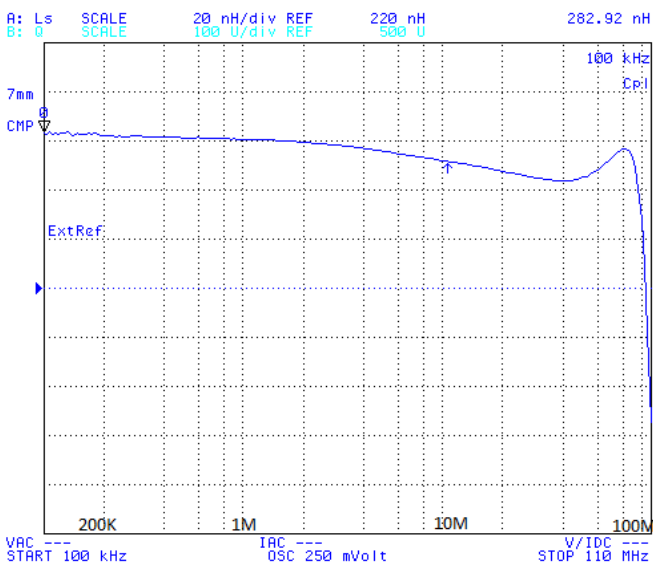


PI13067-R33

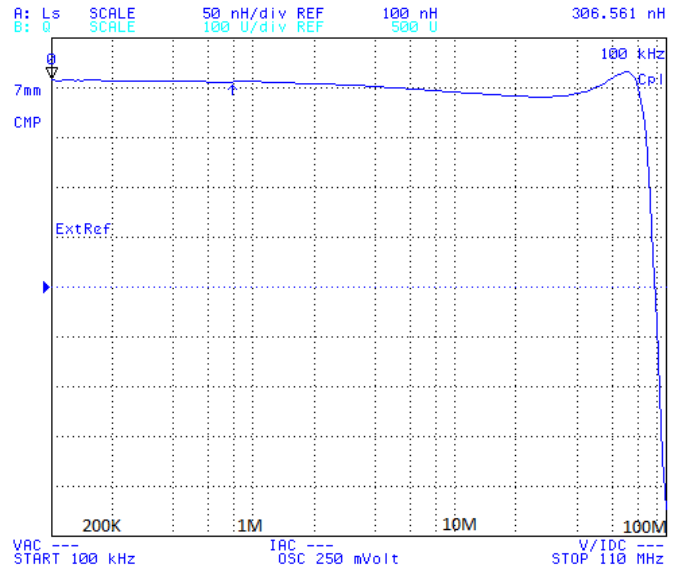


PI13067-R40

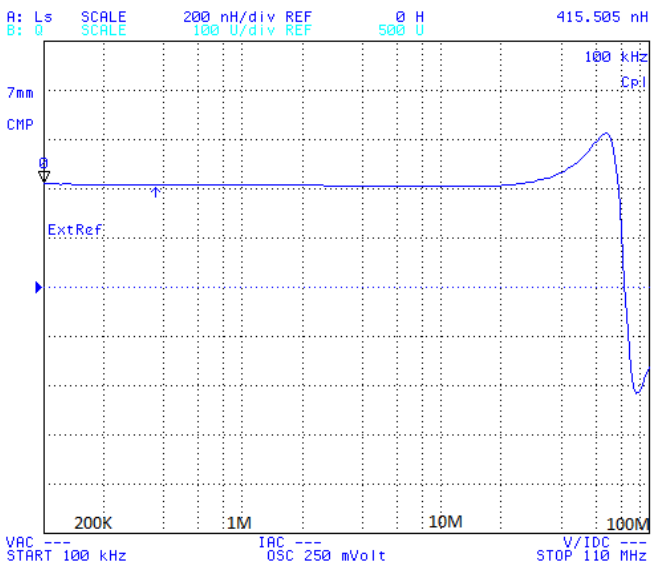


PI13067-R47

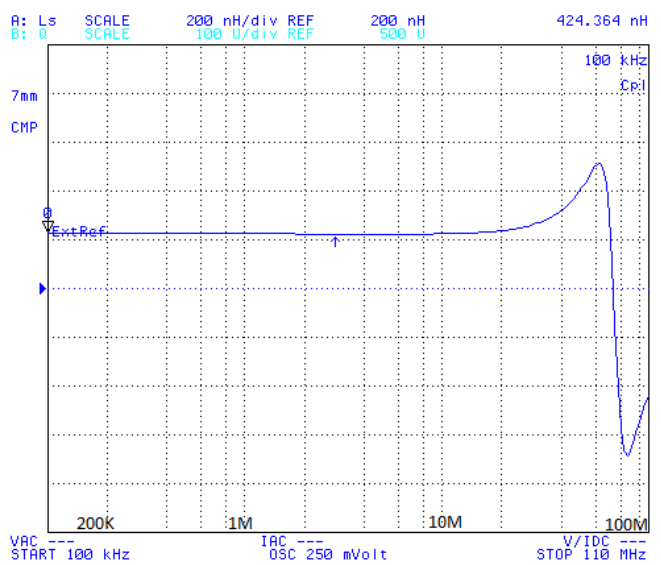


PI13067-R56

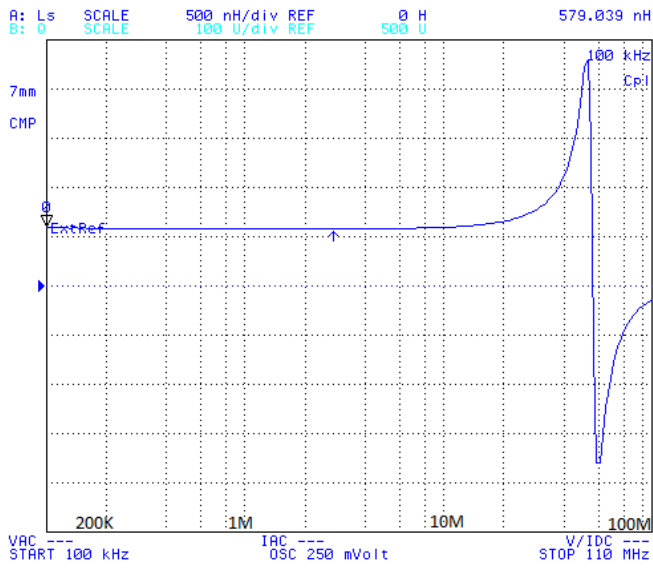


PI13067-R68

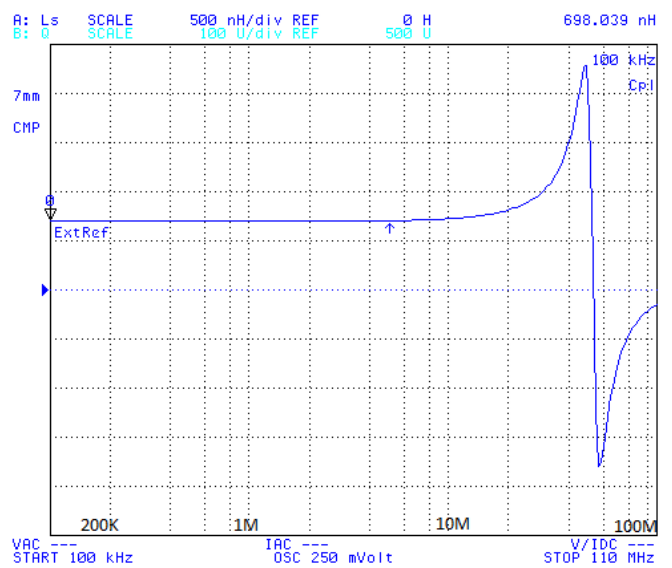


PI13067-R82

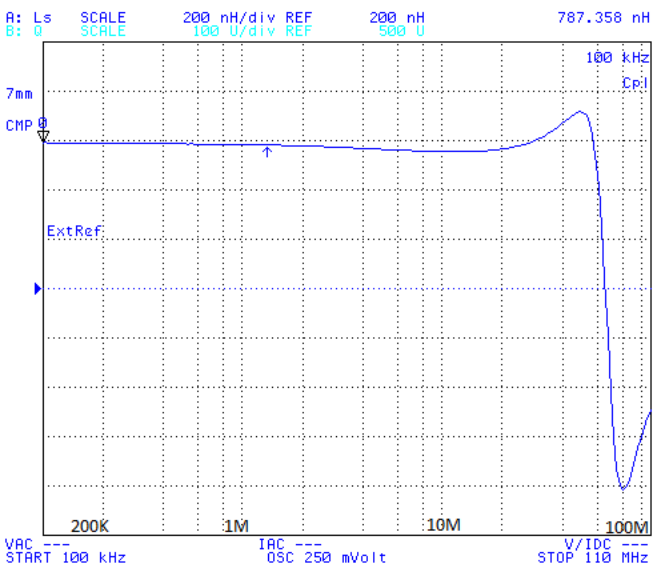


PI13067-1R0

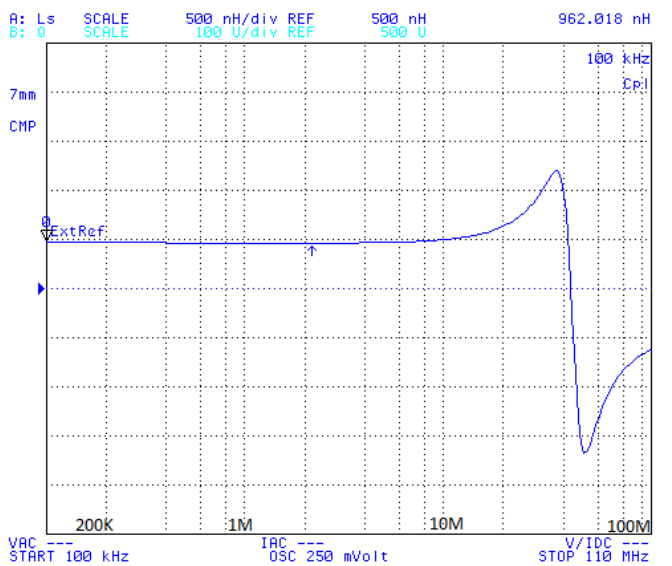


PI13067-1R2

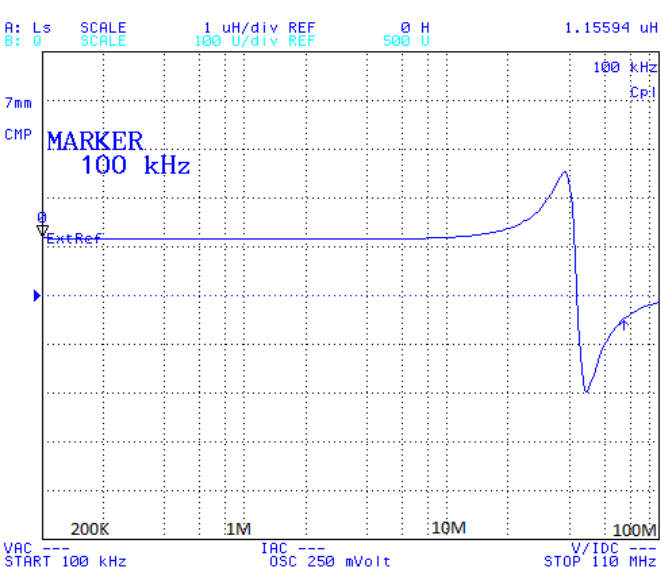


PI13067-1R5

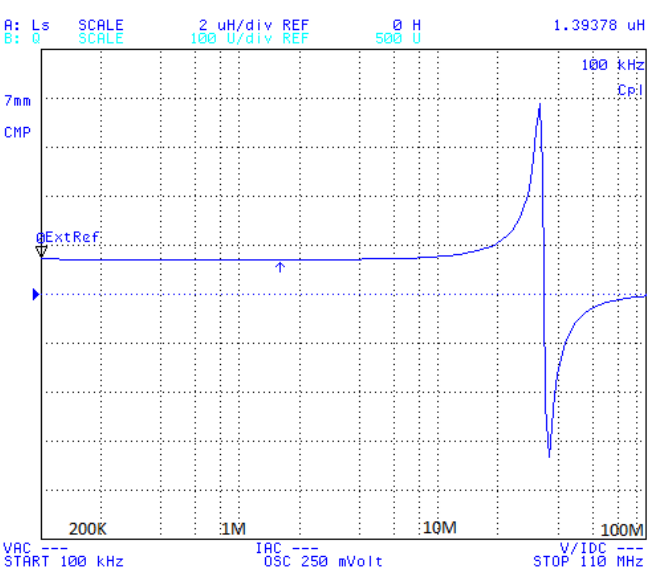


PI13067-2R2

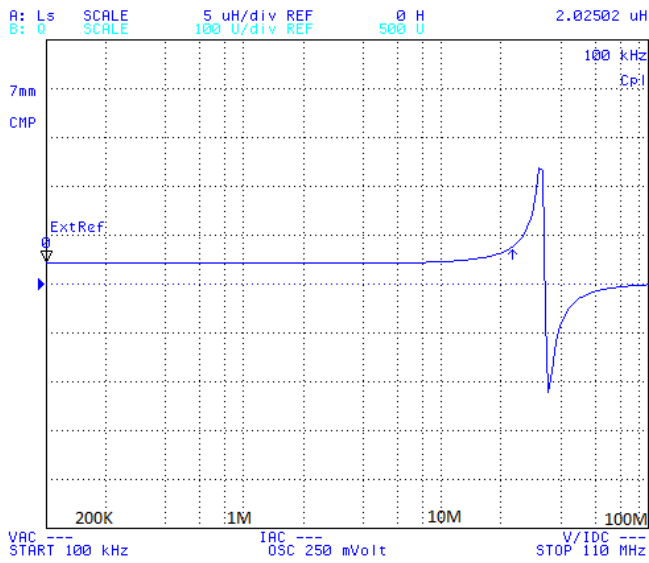


PI13067-3R3

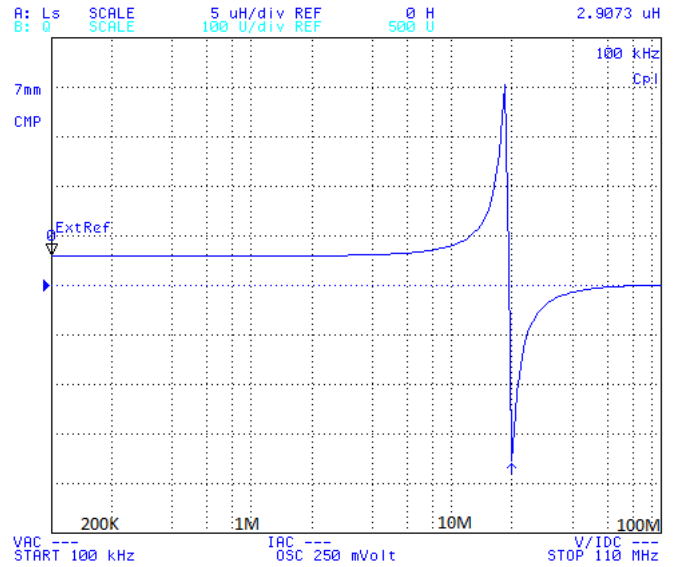


PI13067-4R7

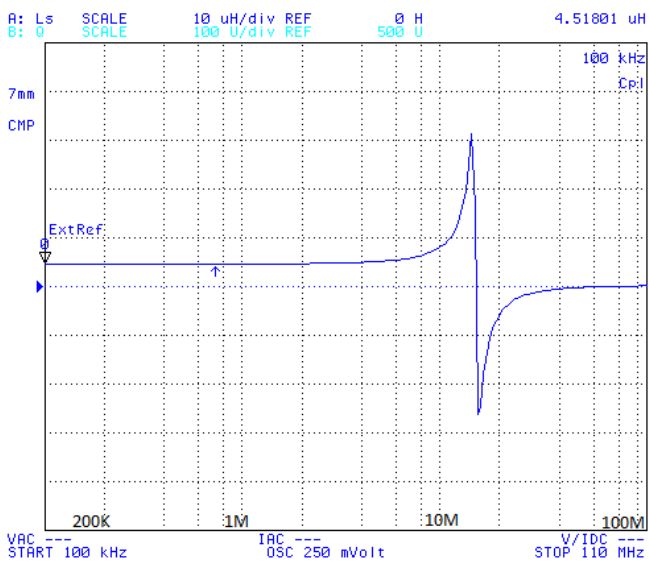


PI13067-5R6

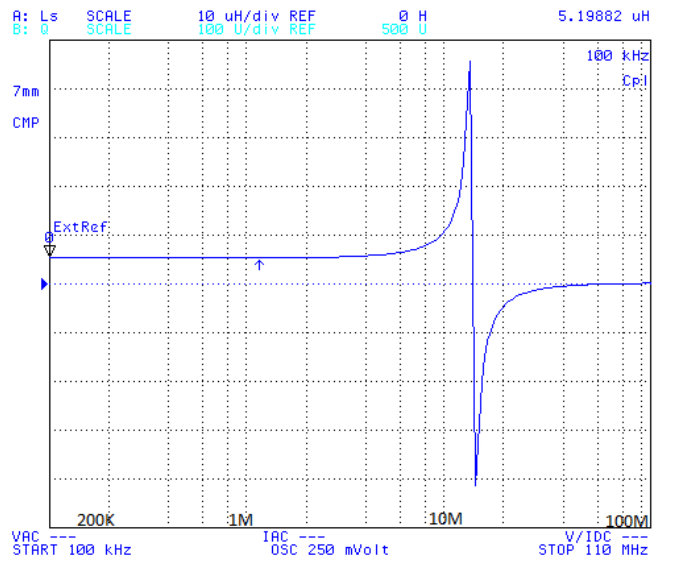


PI13067-6R8

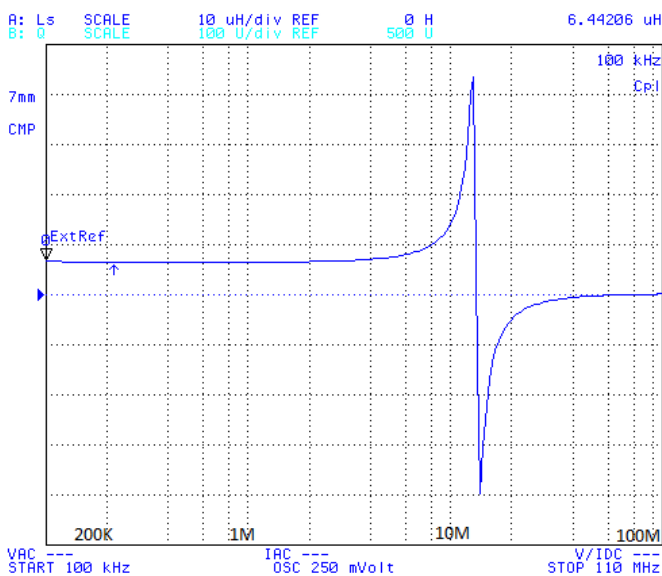

PI13067-8R2

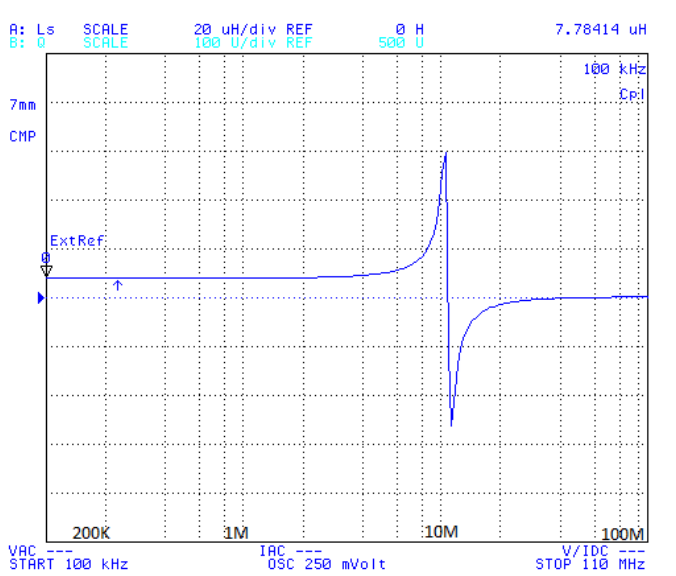


PI13067-100

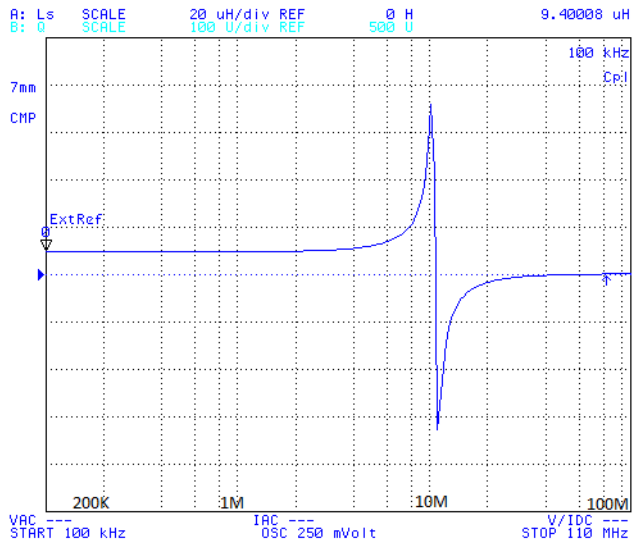

## GENERAL CHARACTERISTICS


1. Operating temperature range: -55 TO + 125°C (Includes temperature when the coil is heated)
2. External appearance: On visual inspection, the coil has no external defects.
3. Terminal strength: After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.

Terminal should not peel off. (refer to figure at right) 5. 0N 60 sec.

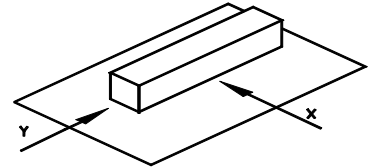

4. Insulating resistance: Over 100MΩ at 100V D.C. between coil and core.
5. Dielectric strength: No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
6. Temperature characteristics: Inductance coefficient  $(0\sim 2,000)\times 10^{-6}/^{\circ}\text{C}$   $(-25\sim +80^{\circ}\text{C})$ .
7. Humidity characteristics(Moisture Resistance): Inductance deviation within  $\pm 5\%$ , after 96 hours in 90~95% relative humidity at  $40 \pm 2^{\circ}\text{C}$  and 1 hour drying under normal condition.
8. Vibration resistance: Inductance deviation within  $\pm 5\%$ , after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance: Inductance deviation within  $\pm 5\%$ , after being dropped once with 981m/s<sup>2</sup> (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
10. Resistance to Soldering Heat: 260°C, 10 seconds(See attached recommend reflow)
11. Storage environment: Storage condition: Temperature Range: 10°C ~ 35°C (Generally: 21°C ~ 31°C) , Humidity Range: 50% ~ 80% RH (Generally: 65% ~ 75%) ; Transportation condition: Temperature Range: -35°C ~ 85°C , Humidity Range: 50% ~ 95% RH
12. Use components within 12 months. If 12 months or more have elapsed, check solderability before use.
13. Reflow profile recommend:

Lead-free heat endurance test

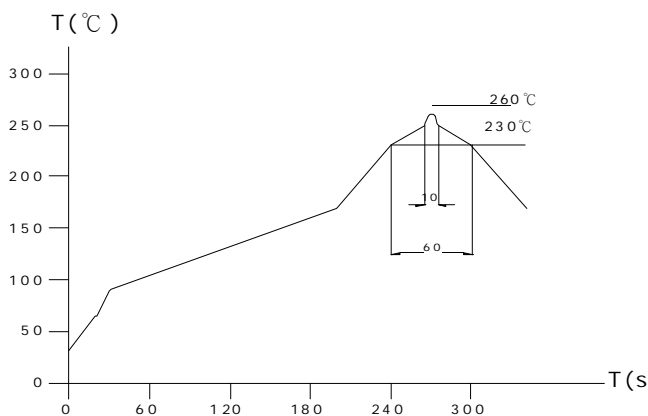

Lead-free the recommended reflow condition

