


1. Mechanical Dimensions:



2. Schematic:

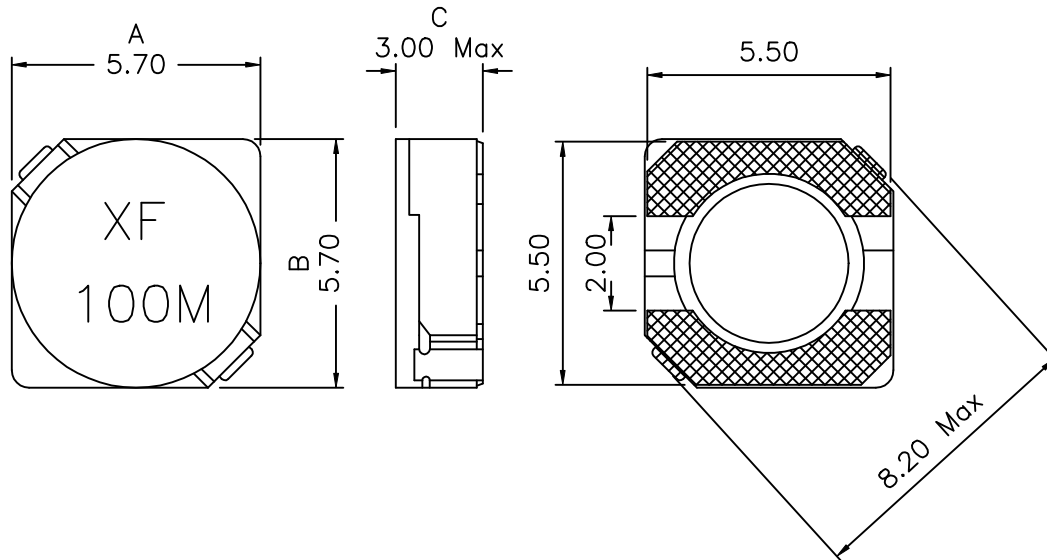

3. Electrical Specifications:

OCL: 10uH±20% @100KHz, 0.25V
 DCR: 65 mOhms Max.
 IDC: 1.3 A

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV A/2

XFMRS Inc	Title: INDUCTORS		
	UNLESS OTHERWISE SPECIFIED	P/N: XFTPRH5D28-100M	REV. A
TOLERANCES:	DWN.	李小锋	Jan-9-03
.xx ±0.25	CHK.	廖玉坤	Jan-9-03
Dimensions in MM	APP.	BW	Jan-9-03
SHT 1 OF 1			