

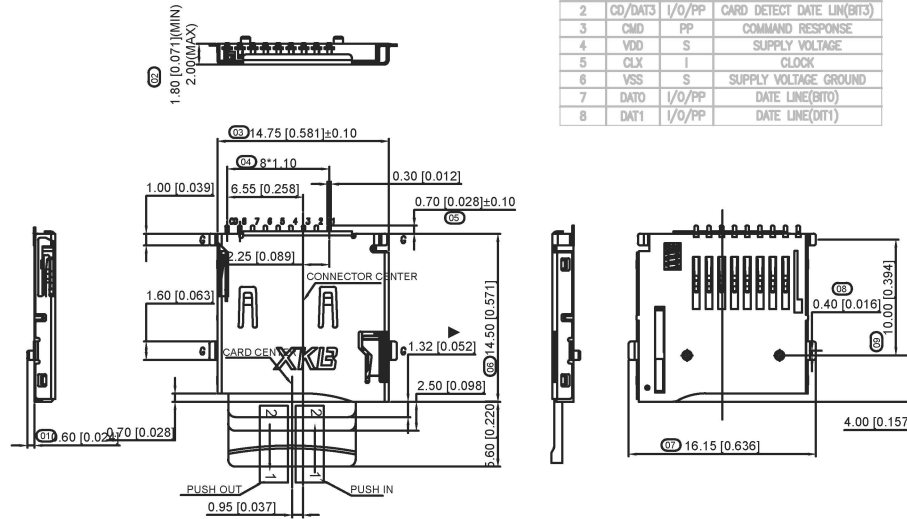


PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(BIT1)

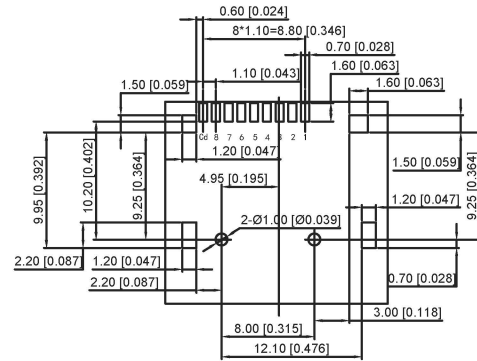

- Specification:
- Electrical Characteristics:
 Contact Current Rating:0.5 Amperes.
 Dielectric Withstanding Voltage:AC500V r.m.s.
 Insulation Resistance:1000 MΩ Minimum.
 Contact Resistance:40 mΩ Maximum.
 - Environmental:
 Operating Temperature:-25°C~+90°C.
 - Environmental:
 Mating Cycles:5,000 Insertions.
 - Mechanical Characteristics:
 Card Push Insertion/Out Force:0.2~1.40kgf.
 Contact Separation Force:0.20kgf Minimum.
 - Material:
 Insulator:HI-Temp Plastic UL 94V-0 Rated.
 Contact:Copper Alloy(t=0.15mm).
 Shell:Stainless Steel(t=0.15mm).
 Spring:SWP.
 - Make is FAI test Dimension
 ▼ Make is major test Dimension



RECOMMENDED P.C.B HOLE LAYOUT
 COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

XKTF-015-X

G=GOLD 1u"
 N=NICKEL 80u"

ITEM	PART NAME	QTY	MATERIAL	FINISHING
④	Spring	1	SWP	
③	Shell	1	SUS	
②	Terminal	9	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

广东星坤科技股份有限公司

生效日期

文件工程章

www.helloxkb.com www.helloxkb.com www.helloxkb.com

DSND		DATE		SCALE: N/A	MODEL TYPE: TF CARD CONN
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	XKTF-015-X
UNSPECIFIED TOLERANCES				XKB INDUSTRIAL PRECISION CO.,LIMITED	
		WEIGHT	SHEET	REVISION	
		1.0g	1/1	A0	