

ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART						
					CONVERT TO	PART NUMBERS REQUIRED					
	2150184-2	A	FINE CRIMP HEIGHT ADJUST	PNEUMATIC	SERVO LATCH PLATE SMART APPLICATOR	2119951-1	1803052-1	8-2150184-5	-	-	2168400-7 (QUANTITY 2)
	2150184-5	A	FINE CRIMP HEIGHT ADJUST	SERVO LATCH PLATE	PNEUMATIC FEED	2119950-1	2031314-1	-	2119641-1	-	2063440-1
	2150184-6	A	NON-CRIMP HEIGHT ADJUST	SERVO LATCH PLATE	-	-	-	-	-	-	-
	2150184-7	A	FINE CRIMP HEIGHT ADJUST	NONE	-	-	-	-	-	-	-
	7-2150184-7	A	CRIMP TOOLING KIT	-	-	-	-	-	-	-	-

APPLICATOR DATA		
CRIMP SIZE	WIRE	TYPE
2.29 mm [.090]	2.29 mm [.090]	F
3.56 mm [.140]	3.56 mm [.140]	F
APPLICATOR INSTRUCTIONS 408-10390		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: RECPT, POSITIVE-LOCK, .187 SERIES			
WIRE STRIP LENGTH	INSULATION DIAMETER RANGE		
4.40-5.16 mm [.173-.203 IN]	Ø1.52-2.79 mm [.060-.110 IN]		
TERMINAL APPLICATION SPECIFICATION	114-2074		
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
63498-1	63498-2		

WIRE SIZE	CRIMP HEIGHT mm [INCH]	CRIMP HEIGHT REFERENCE SETTING
16 AWG	1.45 +/- 0.05 [0.057 +/- .002]	3.7
18 AWG	1.27 +/- 0.05 [0.050 +/- .002]	5.8
0.75mm2	1.22 +/- 0.05 [0.048 +/- .002]	6.5
20 AWG	1.14 +/- 0.05 [0.045 +/- .002]	7.3

- 1 RECOMMENDED SPARE PARTS
- 2 GREASE BEARING SURFACES LIGHTLY
- 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- 4 APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2150184-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2150184-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2150184-6
- 5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- 6 APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 50, 62 & 242. FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 37, 50 & 242.
- 7 GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.
- 8 MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- 9 CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- 10 TERMINAL PITCH NOT COMPATIBLE WITH MECHANICAL FEED.
- 11 WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT

***WARNING**
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

-77	-7	-6	-5	-2	PART NO	DESCRIPTION	ITEM NO
-	-	1	-	-	2119957-2	APPLICATOR SHIM PACK	260
-	1	-	1	1	8-21084-0	O-RING, .676 ID, .070 DIA. MAT.	252
-	-	-	-	1	2119640-1	PUSH ROD, AIR FEED	250






ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

LOC	DIST	REVISIONS			
A	66	REV	DATE	BY	APPD
		1	DEVELOPMENT	13SEP2012	L.Z S.X
		2	CHANGE PARTS	25APR2013	YY UG
		A	RELEASED	01AUG2013	BH TE
		A1	ECR-14-002559	20FEB2014	YY UG

REV	DATE	BY	APPD	DESCRIPTION	ITEM NO	
-	-	-	-	1	2079988-1 BUSHING, LCH5-12, MISUMI	249
-	-	-	-	1	2119641-1 FEED CAM, AIR FEED	248
-	1	-	1	1	2119798-1 DETENT PIN	247
-	1	-	1	1	1-22279-3 SPRING, COMPRESSION	246
-	-	1	-	-	2119759-1 RAM, AMP STYLE, END FEED, NON-ADJUST	245
-	1	1	1	1	2119082-9 CAM, SNAIL, INSULATION ADJUSTMENT	244
-	1	1	1	1	2079764-1 WASHER, WAVE SPRING, CREST-TO-CREST	243
-	1	1	1	1	2119083-1 RETAINER, INSULATION DIAL	242
-	-	2	2	-	2168400-7 SHCS, LOW HEAD, RoHS, M5 X 10	240
-	-	-	-	1	2063440-1 AIR FEED MODULE	238
-	-	1	1	-	2119740-2 TAG, IDENTIFICATION	213
-	-	1	1	-	1803052-1 FEED FINGER ASSEMBLY, EF	183
-	1	1	1	1	6-993111-6 PIN, SLOTTED SPRING 3.0 X 14.0	177
-	1	1	1	1	8-22280-7 SPRING, COMPRESSION	176
-	1	1	1	1	1752353-2 GUIDE PIN, HOLDDOWN	175
-	1	1	1	1	1901680-2 GUIDE PIN, HOLDDOWN	174
-	-	-	-	2	21045-3 RING, RETAIN, EXTERN, 3/16 CRESCENT	172
-	1	1	1	1	994969-1 MAGNET, RARE EARTH HIGH ENERGY	166
-	REF	REF	REF	REF	994970-2 COUNTER, MAGNETIC	164
-	-	-	-	1	240638-1 SPRING, FEED FINGER	163
-	-	-	-	1	3-23627-7 PIN, RETAIN, GRVD, 3/16 X .854	137
-	-	REF	REF	-	SEE NOTE 4 MEMORY CHIP, PROGRAMMED	135
-	-	1	1	-	1633743-1 SERVO FEED LATCH ASM	133
-	1	1	1	1	455888-6 SPACER, CRIMPER	82
-	1	1	1	1	2119956-2 DOCUMENTATION PACKAGE	71
-	2	2	2	2	2-18032-2 SCR, SET, FLT POINT M3 X 10.0	70
-	1	-	-	1	2119740-1 TAG, IDENTIFICATION	67
-	2	2	2	2	2168078-1 SCREW, DRIVE, RH, RoHS, 2 x .188	66
-	1	1	1	1	1901681-9 HOLDDOWN, TERMINAL	65
-	2	2	2	2	2168400-5 SHCS, LOW HEAD, RoHS, M4 X 20	64
-	1	-	1	1	2119793-1 LIMITER, ADJUSTMENT BOLT	63
-	3	-	3	3	992763-5 SCR, SET, SOC, CONE POINT, M3 X 4.0	62
-	1	1	1	1	2079383-4 SCR, BHSC, RoHS (M4 X 8)	60
-	3	3	3	3	2168400-4 SHCS, LOW HEAD, RoHS, M4 X 8	57
-	2	2	2	2	2168083-3 SCR, SKT HD CAP, RoHS, M4 X 12.0	56
-	2	2	2	2	5018030-2 NUT, HEX, REG, RoHS, M4	55
-	2	2	2	2	5018030-1 NUT, HEX, REG, RoHS, M3	54
-	2	2	2	2	986965-8 NUT, LOCK, HEX, TORQUE (M4)	53
-	1	1	1	1	1-5018030-0 NUT, HEX, REG, RoHS, M3.5	52
-	-	-	-	1	2031314-1 FEED FINGER SUBASSEMBLY	51
-	1	1	1	1	1752354-8 STANDOFF, HOLD-DOWN	50
-	-	-	-	1	18023-9 SCR, SKT HD CAP M4 X 6.0	49
-	1	1	1	1	2119655-5 APPLICATOR BASIC ASSEMBLY, EF	46
-	1	-	1	1	2119369-1 RAM, AMP STYLE, END FEED	44
-	1	1	1	1	2079383-7 SCR, BHSC, RoHS (M8 X 25)	41
-	1	-	1	1	2119645-1 DISC, NUMBERED FA WIRE ADJUSTMENT	40
-	1	-	1	1	2119957-1 APPLICATOR SHIM PACK	39
-	1	1	1	1	2119644-1 RAM WASHER, PRECISION	38
-	1	1	1	1	2119085-1 FA HEAD, ATLANTIC STYLE	37
-	1	-	1	1	2119092-1 BOLT, ADJUSTMENT	35
-	7	7	7	7	1-18028-2 WASHER, FLAT, REG M4	33
-	2	2	2	2	2168083-9 SCR, SKT HD CAP, RoHS, M4 X 20	31
-	2	2	2	2	1-2168083-0 SCR, SKT HD CAP, RoHS, M4 X 10	29
-	1	1	1	1	240639-1 STRIPPER (MACHINING)	27
-	2	2	2	2	1320906-1 STUD, THREADED	25
-	1	1	1	1	2-1752371-1 PLATE, STRIP GUIDE	24
-	1	1	1	1	240825-4 PLATE, STRIP HOLD DOWN	23
-	2	2	2	2	2-22281-3 SPRING, COMPRESSION	22
-	1	1	1	1	1752373-4 DRAG	20
-	2	2	2	2	1901259-4 GUIDE, LOWER STRIP	18
-	4	4	4	4	1-2079383-1 SCR, BHSC, RoHS (M6 X 12)	17
-	1	1	1	1	8-240641-6 SPACER	16
-	1	1	1	1	1752360-1 SPACER, HOLD-DOWN	13
-	1	1	1	1	240833-7 PLATE, REAR SHEAR	11
-	-	-	-	-	-	10
-	1	1	1	1	690482-5 PLATE, FRONT SHEAR	9
-	1	1	1	1	2-1633383-4 ANVIL, COMBINATION	8
-	1	1	1	1	2217206-7 BLADE, SLUG	7
-	1	1	1	1	240641-3 SPACER	5
-	1	1	1	1	238009-1 BLOCK, FL CRIMPER SPACER	4
-	1	1	1	1	5-2119582-2 CRIMPER, INSULATION F PREMIUM	3
-	1	1	1	1	455888-4 SPACER, CRIMPER	2
-	1	1	1	1	4-456406-7 CRIMPER, WIRE PREMIUM	1


DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	OWN	CHK	DATE	NAME
mm	0 PLC ±.5 1 PLC ±.3 2 PLC ±.13 3 PLC ±.013 4 PLC ±.0001 ANGLES ±.1	L. ZHANG	L. ZHANG	13SEP2012	TE Connectivity Harrisburg, PA 17105-3608
		S. XI	S. XI	13SEP2012	Ocean End Feed Applicator
MATERIAL:	FINISH:	APPROVED:	APPROVED:	DATE:	SIZE: A1
		Customer Accessible Production Drawing	SCALE: 1:1	SHEET 1 OF 4	REV A1

LOC		DIST		REVISIONS			
A	66	P	LTM	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1			

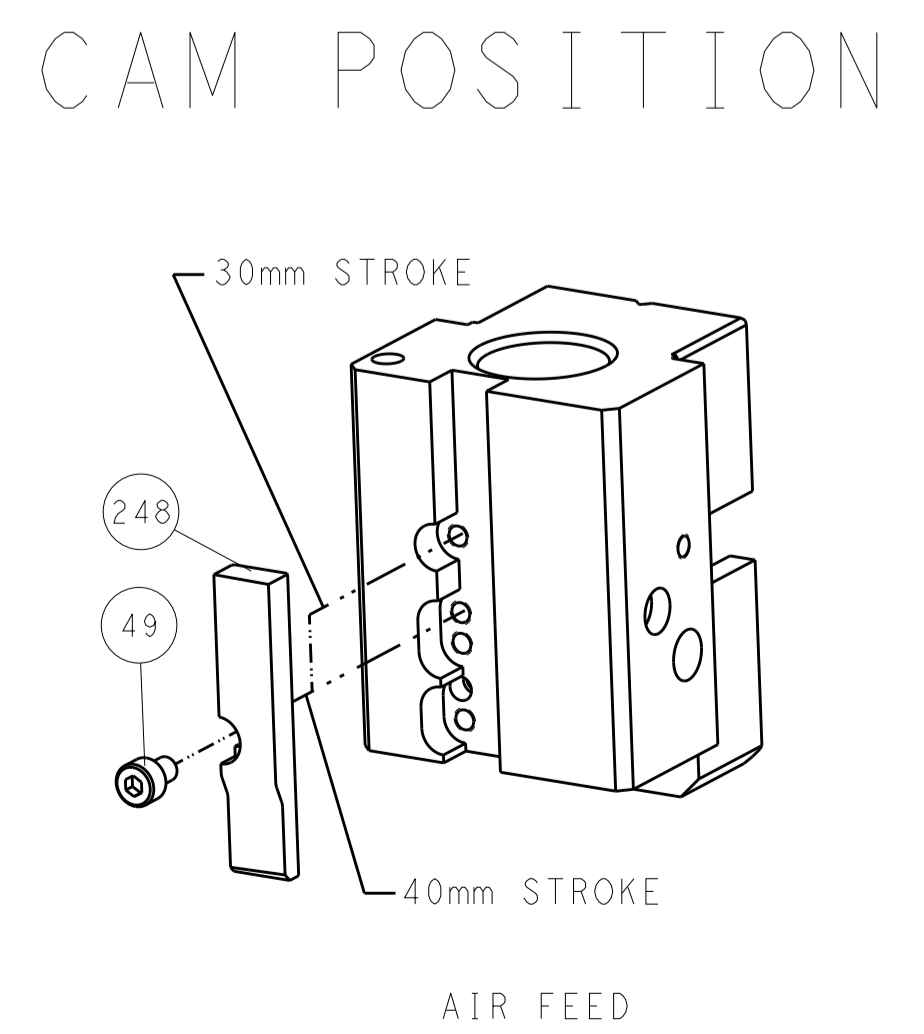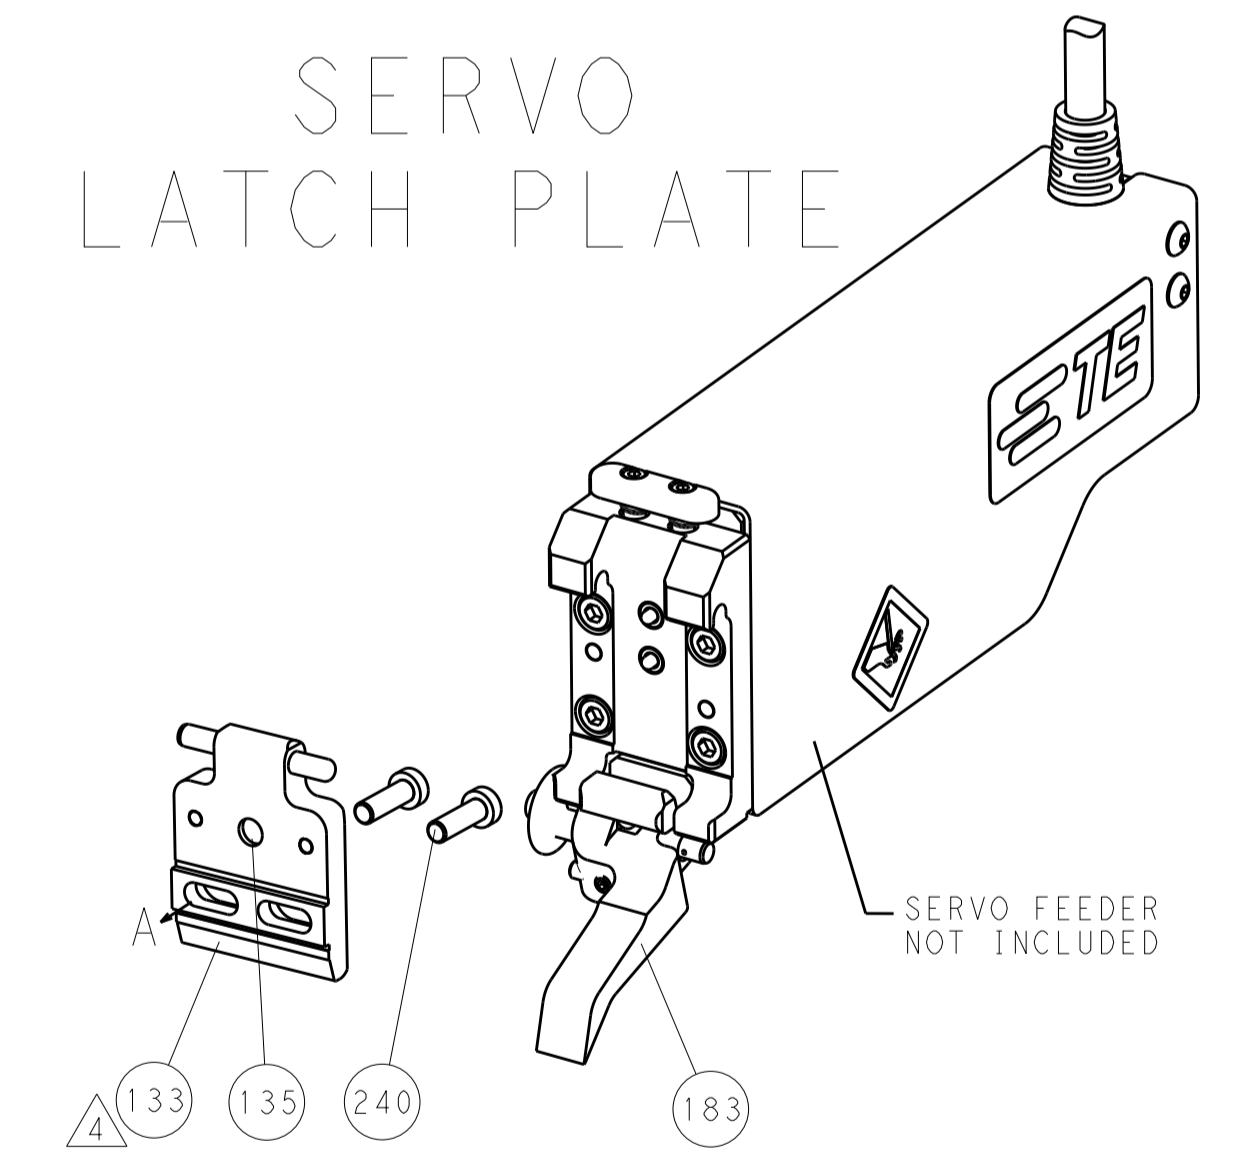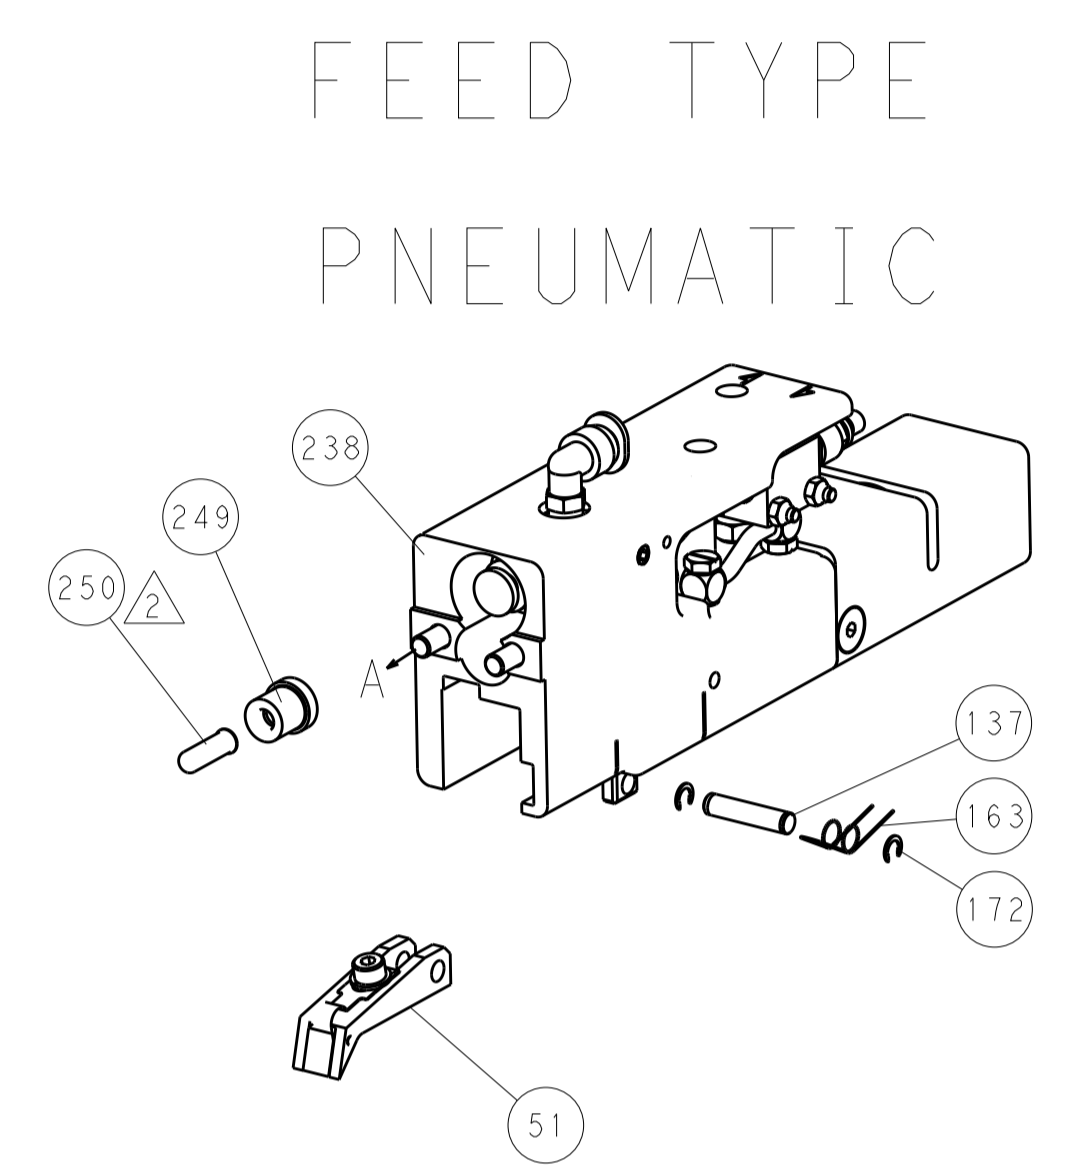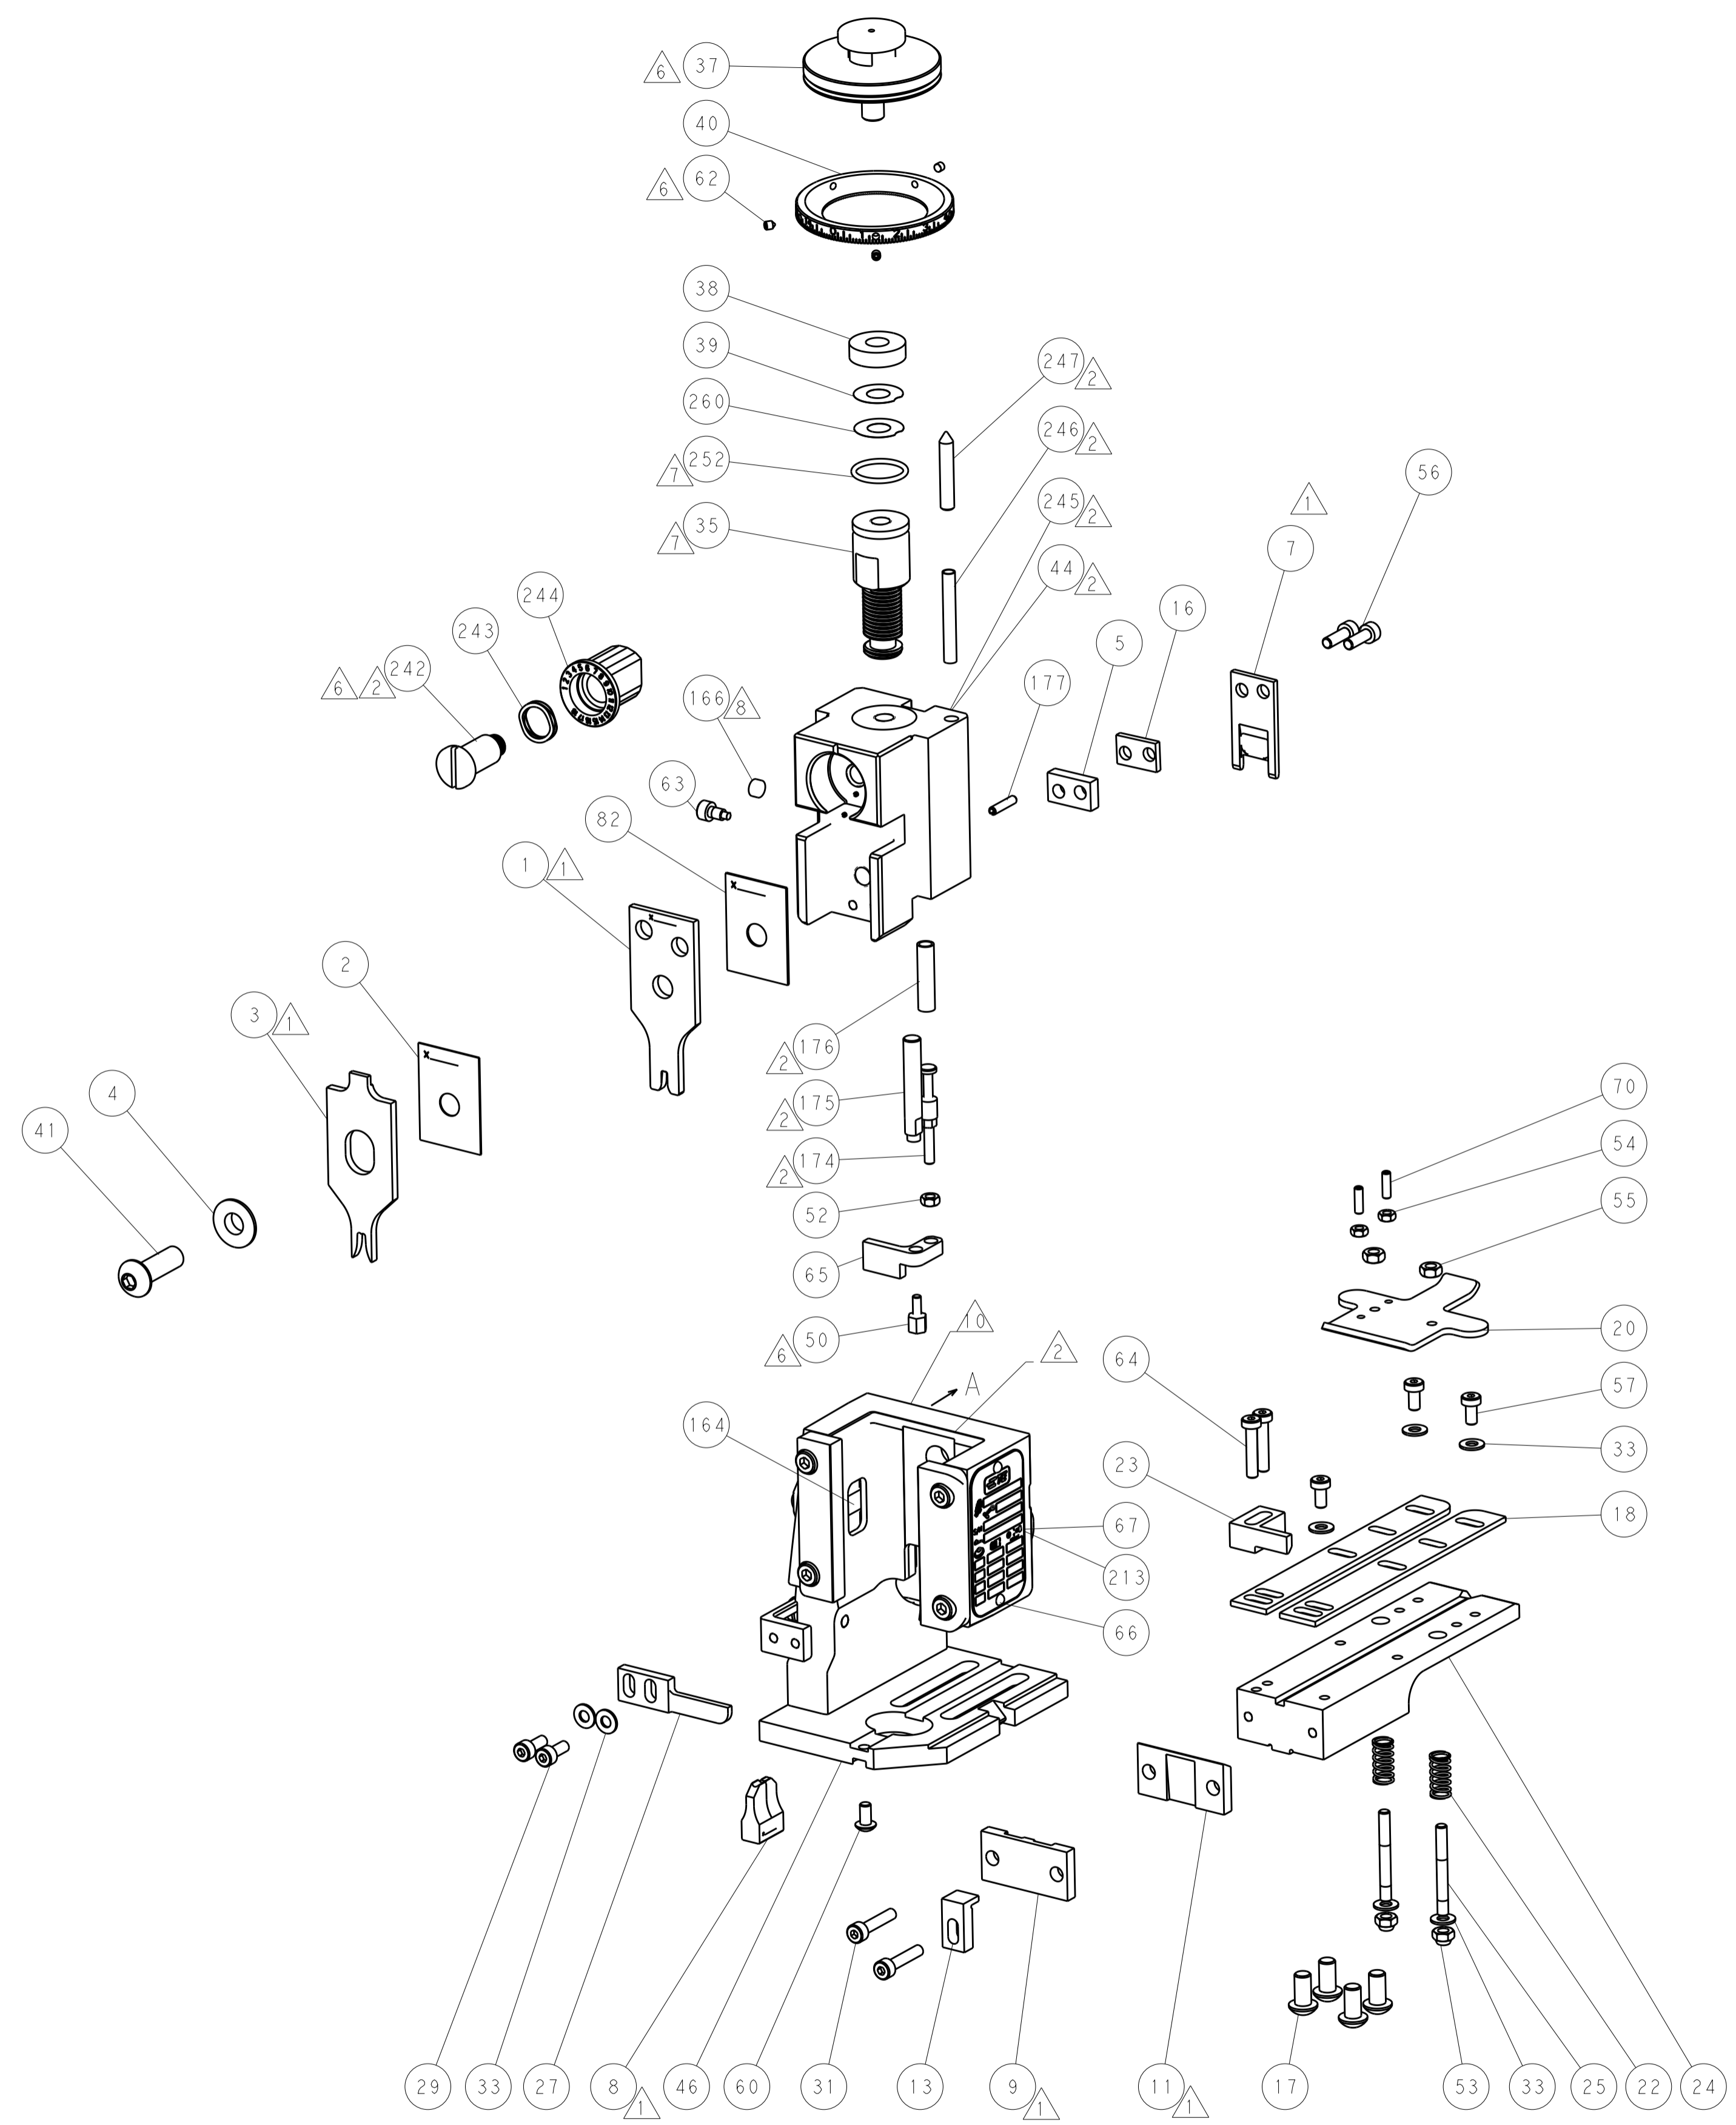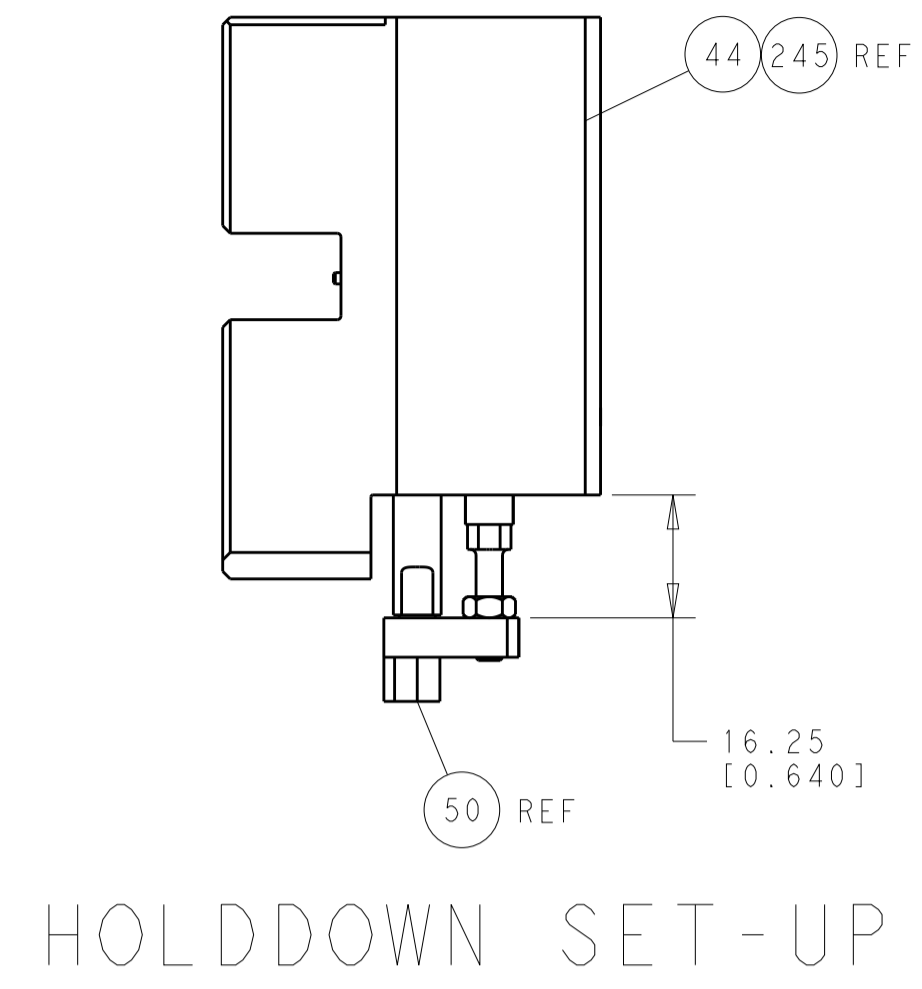

ATLANTIC VERSION
 Shown on sheets 1 of 4 & 2 of 4
 (Pacific version shown on sheets 3 of 4 & 4 of 4)

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.5 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.001 ANGLES ±.1		DWN L. ZHANG 13SEP2012 CHK L. ZHANG 13SEP2012 APVD S. XI 13SEP2012		TE Connectivity Harrisburg, PA 17105-3608	
MATERIAL: - FINISH: -		WEIGHT: -		NAME: Ocean End Feed Applier SIZE: A1 CAGE CODE: 00779 DRAWING NO: 2150184		RESTRICTED TO: - SCALE: 1:1 SHEET: 2 of 4 REV: A1	

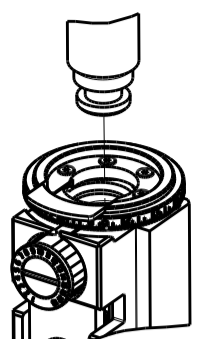PACIFIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART						
					CONVERT TO	PART NUMBERS REQUIRED					
	2-2150184-2	A	FINE CRIMP HEIGHT ADJUST	PNEUMATIC	SERVO LATCH PLATE SMART APPLICATOR	2119951-1	1803052-1	8-2150184-5	-	-	2168400-7 (QUANTITY 2)
	2-2150184-5	A	FINE CRIMP HEIGHT ADJUST	SERVO LATCH PLATE	PNEUMATIC FEED	2119950-1	2031314-1	-	2119641-2	-	2063440-1
	2-2150184-7	A	FINE CRIMP HEIGHT ADJUST	NONE	-	-	-	-	-	-	-
	7-2150184-7	A	CRIMP TOOLING KIT	-	-	-	-	-	-	-	-

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.29 mm (.090)	F
INSUL	3.56 mm (.140)	F
APPLICATOR INSTRUCTIONS 408-10390		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION
TERMINAL NAME: RECPT, POSITIVE-LOCK, .187 SERIES		
WIRE STRIP LENGTH 4.40-5.16 mm (.173-.203 IN)	INSULATION DIAMETER RANGE Ø1.52-2.79 mm (.060-.110 IN)	
TERMINAL APPLICATION SPECIFICATION 114-2074		
TERMINALS APPLIED		
TE TERMINAL 63498-1	TE TERMINAL 63498-2	

WIRE SIZE	CRIMP HEIGHT mm [INCH]	CRIMP HEIGHT REFERENCE SETTING
16 AWG	1.45 +/- 0.05 [.057 +/- .002]	3.7
18 AWG	1.27 +/- 0.05 [.050 +/- .002]	5.8
0.75mm ²	1.22 +/- 0.05 [.048 +/- .002]	6.5
20 AWG	1.14 +/- 0.05 [.045 +/- .002]	7.3

- RECOMMENDED SPARE PARTS
- GREASE BEARING SURFACES LIGHTLY
- LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
 PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2150184-4
 SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2150184-5
- ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 50, 62 & 242.
- GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 153.
- MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- TERMINAL PITCH NOT COMPATIBLE WITH MECHANICAL FEED.

***WARNING**
 ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

-	1	1	1	2119782-1	FINE ADJUST HEAD ASM, PACIFIC STYLE	251	
-	77	-	27	-	PART NO	DESCRIPTION	ITEM NO


PACIFIC VERSION
 Shown on sheets 3 of 4 & 4 of 4
 (Atlantic version shown on sheets 1 of 4 & 2 of 4)

SET UP GAUGE	LOC	DIST	REVISIONS			
2119599-2	A	66	REV	DATE	BY	APPV
			-	SEE SHEET 1	-	-


-	-	-	1	2119640-1	PUSH ROD, AIR FEED	250
-	-	-	1	2079988-1	BUSHING, LCH5-12, MISUMI	249
-	1	1	1	1-22279-3	SPRING, COMPRESSION	246
-	1	1	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
-	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
-	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
-	-	2	-	2168400-7	SHCS, LOW HEAD, RoHS, M5 X 10	240
-	-	-	1	2063440-1	AIR FEED MODULE	238
-	-	1	-	2119740-2	TAG, IDENTIFICATION	213
-	4	4	4	2079383-9	SCR, BHSC, RoHS (M6 X 20)	186
-	-	1	-	1803052-1	FEED FINGER ASSEMBLY, EF	183
-	1	1	1	6-993111-6	PIN, SLOTTED SPRING 3.0 X 14.0	177
-	1	1	1	8-22280-7	SPRING, COMPRESSION	176
-	1	1	1	1752353-2	GUIDE PIN, HOLDDOWN	175
-	1	1	1	1901680-2	GUIDE PIN, HOLDDOWN	174
-	-	-	2	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
-	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166
-	REF	REF	REF	994970-2	COUNTER, MAGNETIC	164
-	-	-	1	240638-1	SPRING, FEED FINGER	163
-	-	-	1	8-21084-1	O-RING, .801 ID, .070 DIA. MAT.	153
-	-	-	1	2119641-2	FEED CAM, AIR FEED	152
-	1	1	1	2119798-2	DETENT PIN	145
-	1	1	1	2079383-8	SCR, BHSC, RoHS (M4 X 16)	144
-	1	1	1	2119655-6	APPLICATOR BASIC ASSEMBLY, EF	141
-	1	1	1	2119651-1	RAM, ASIAN STYLE, END FEED	140
-	1	1	1	2119092-2	BOLT, ADJUSTMENT	139
-	-	-	1	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137
-	-	REF	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135
-	-	1	-	1633743-1	SERVO FEED LATCH ASM	133
-	1	1	1	455888-6	SPACER, CRIMPER	82
-	1	1	1	2119956-2	DOCUMENTATION PACKAGE	71
-	2	2	2	2-18032-2	SCR, SET, FLT POINT M3 X 10.0	70
-	1	-	1	2119740-1	TAG, IDENTIFICATION	67
-	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
-	1	1	1	1901681-9	HOLDDOWN, TERMINAL	65
-	2	2	2	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	64
-	1	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63
-	3	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 X 4.0	62
-	3	3	3	2168400-4	SHCS, LOW HEAD, RoHS, M4 X 8	57
-	2	2	2	2168083-3	SCR, SKT HD CAP, RoHS, M4 X 12.0	56
-	2	2	2	5018030-2	NUT, HEX, REG, RoHS, M4	55
-	2	2	2	5018030-1	NUT, HEX, REG, RoHS, M3	54
-	2	2	2	986965-8	NUT, LOCK, HEX, TORQUE (M4)	53
-	1	1	1	1-5018030-0	NUT, HEX, REG, RoHS, M3.5	52
-	-	-	1	2031314-1	FEED FINGER SUBASSEMBLY	51
-	1	1	1	1752354-8	STANDOFF, HOLD-DOWN	50
-	-	-	1	18023-9	SCR, SKT HD CAP M4 X 6.0	49
-	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41
-	1	1	1	2119645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40
-	1	1	1	2119957-1	APPLICATOR SHIM PACK	39
-	1	1	1	2119644-1	RAM WASHER, PRECISION	38
-	7	7	7	1-18028-2	WASHER, FLAT, REG M4	33
-	2	2	2	2168083-9	SCR, SKT HD CAP, RoHS, M4 X 20	31
-	2	2	2	1-2168083-0	SCR, SKT HD CAP, RoHS, M4 X 10	29
-	1	1	1	240639-1	STRIPPER (MACHINING)	27
-	2	2	2	1320906-1	STUD, THREADED	25
-	1	1	1	2-1752371-1	PLATE, STRIP GUIDE	24
-	1	1	1	240825-4	PLATE, STRIP HOLD DOWN	23
-	2	2	2	2-22281-3	SPRING, COMPRESSION	22
-	1	1	1	1752373-4	DRAG	20
-	2	2	2	1901259-4	GUIDE, LOWER STRIP	18
-	1	1	1	8-240641-6	SPACER	16
-	1	1	1	1752360-1	SPACER, HOLD-DOWN	13
-	1	1	1	240833-7	PLATE, REAR SHEAR	11
-	-	-	-	-	-	10
-	1	1	1	690482-5	PLATE, FRONT SHEAR	9
-	1	1	1	2-1633383-4	ANVIL, COMBINATION	8
-	1	1	1	2217206-7	BLADE, SLUG	7
-	1	1	1	240641-3	SPACER	5
-	1	1	1	238009-1	BLOCK, FL CRIMPER SPACER	4
-	1	1	1	5-2119582-2	CRIMPER, INSULATION F PREMIUM	3
-	1	1	1	455888-4	SPACER, CRIMPER	2
-	1	1	1	4-456406-7	CRIMPER, WIRE PREMIUM	1

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWING NO	
mm	0 PLC ±.5	1 PLC ±.5	2 PLC ±.13	3 PLC ±.013	4 PLC ±.0001
	ANGLES ±.0001				
MATERIAL	FINISH	WEIGHT	SCALE	SHEET	REV
			1:1	3 OF 4	A1


LOC	DIST	REV	DATE	BY	APPV
A	66				

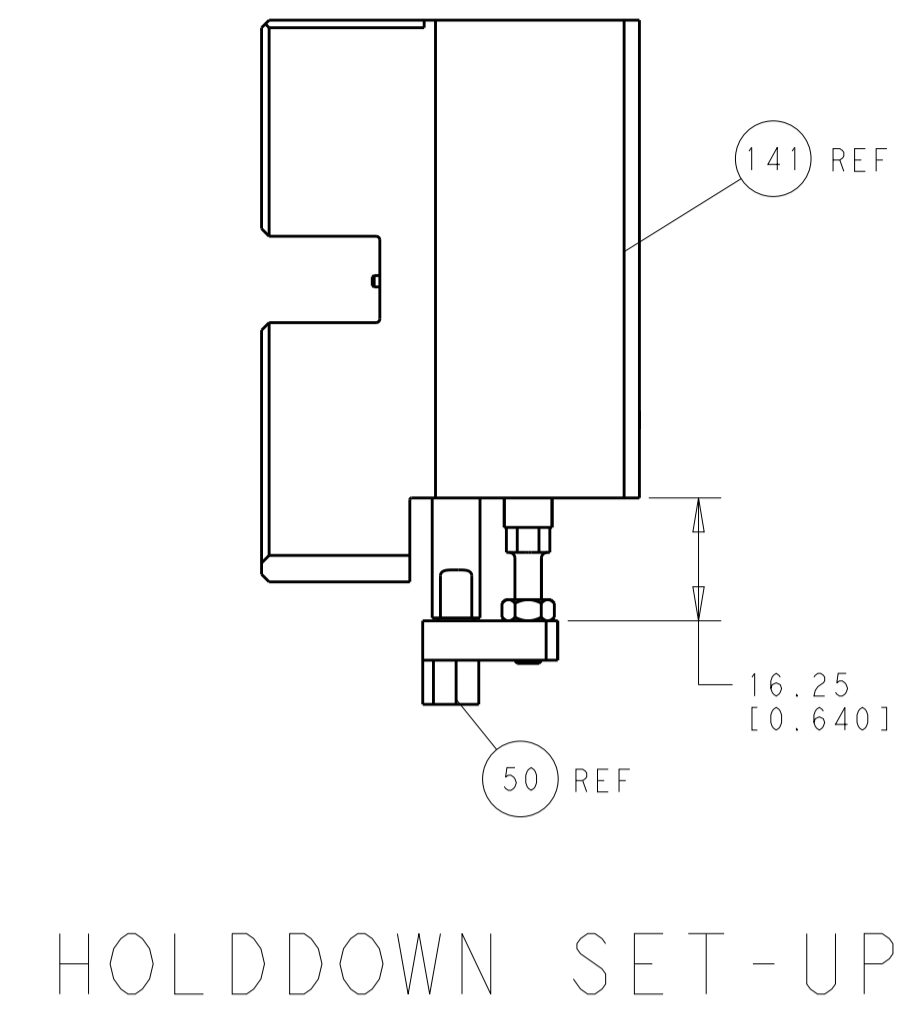



FEED TYPE
 PNEUMATIC

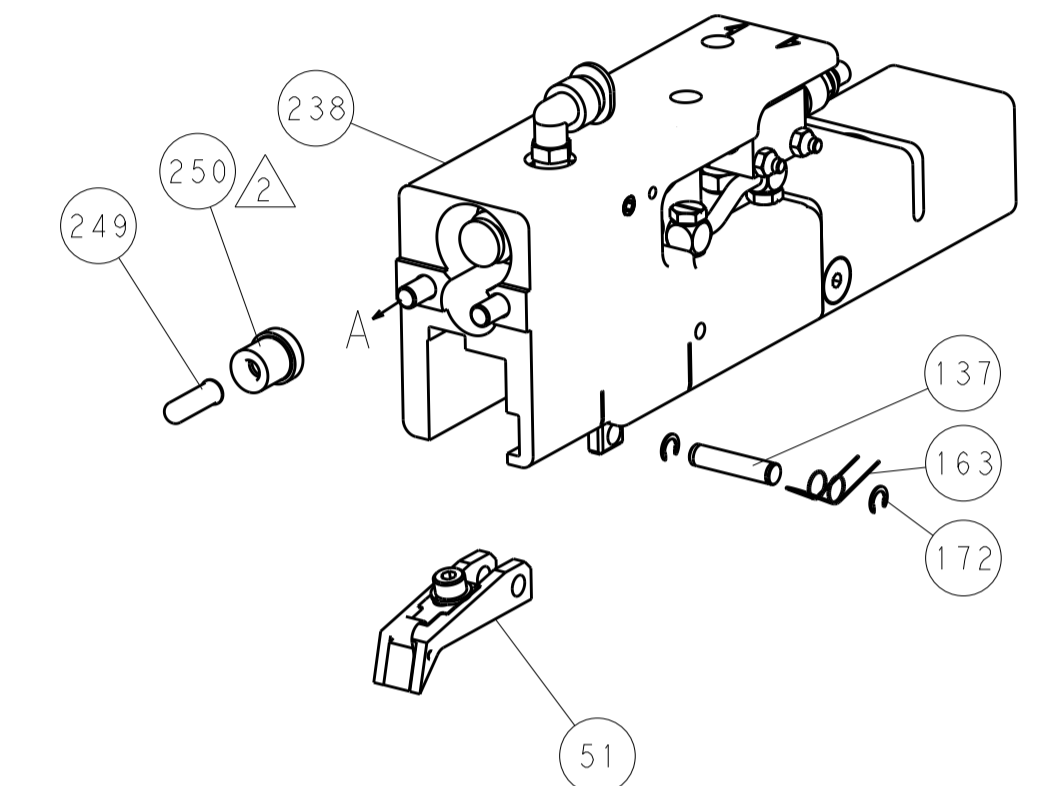

SERVO
 LATCH PLATE

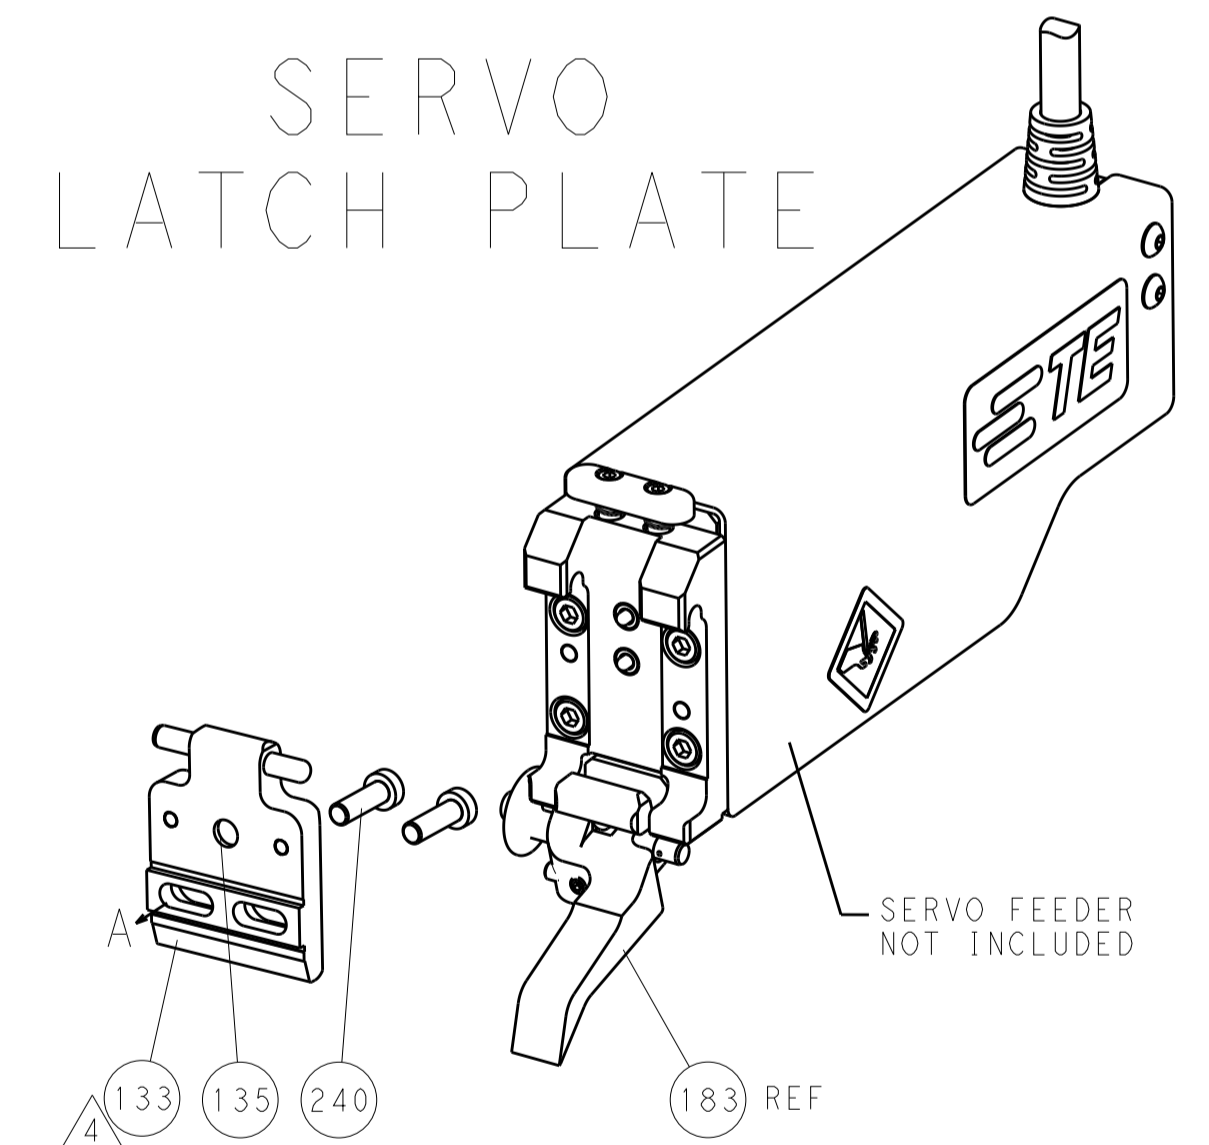

CAM POSITION

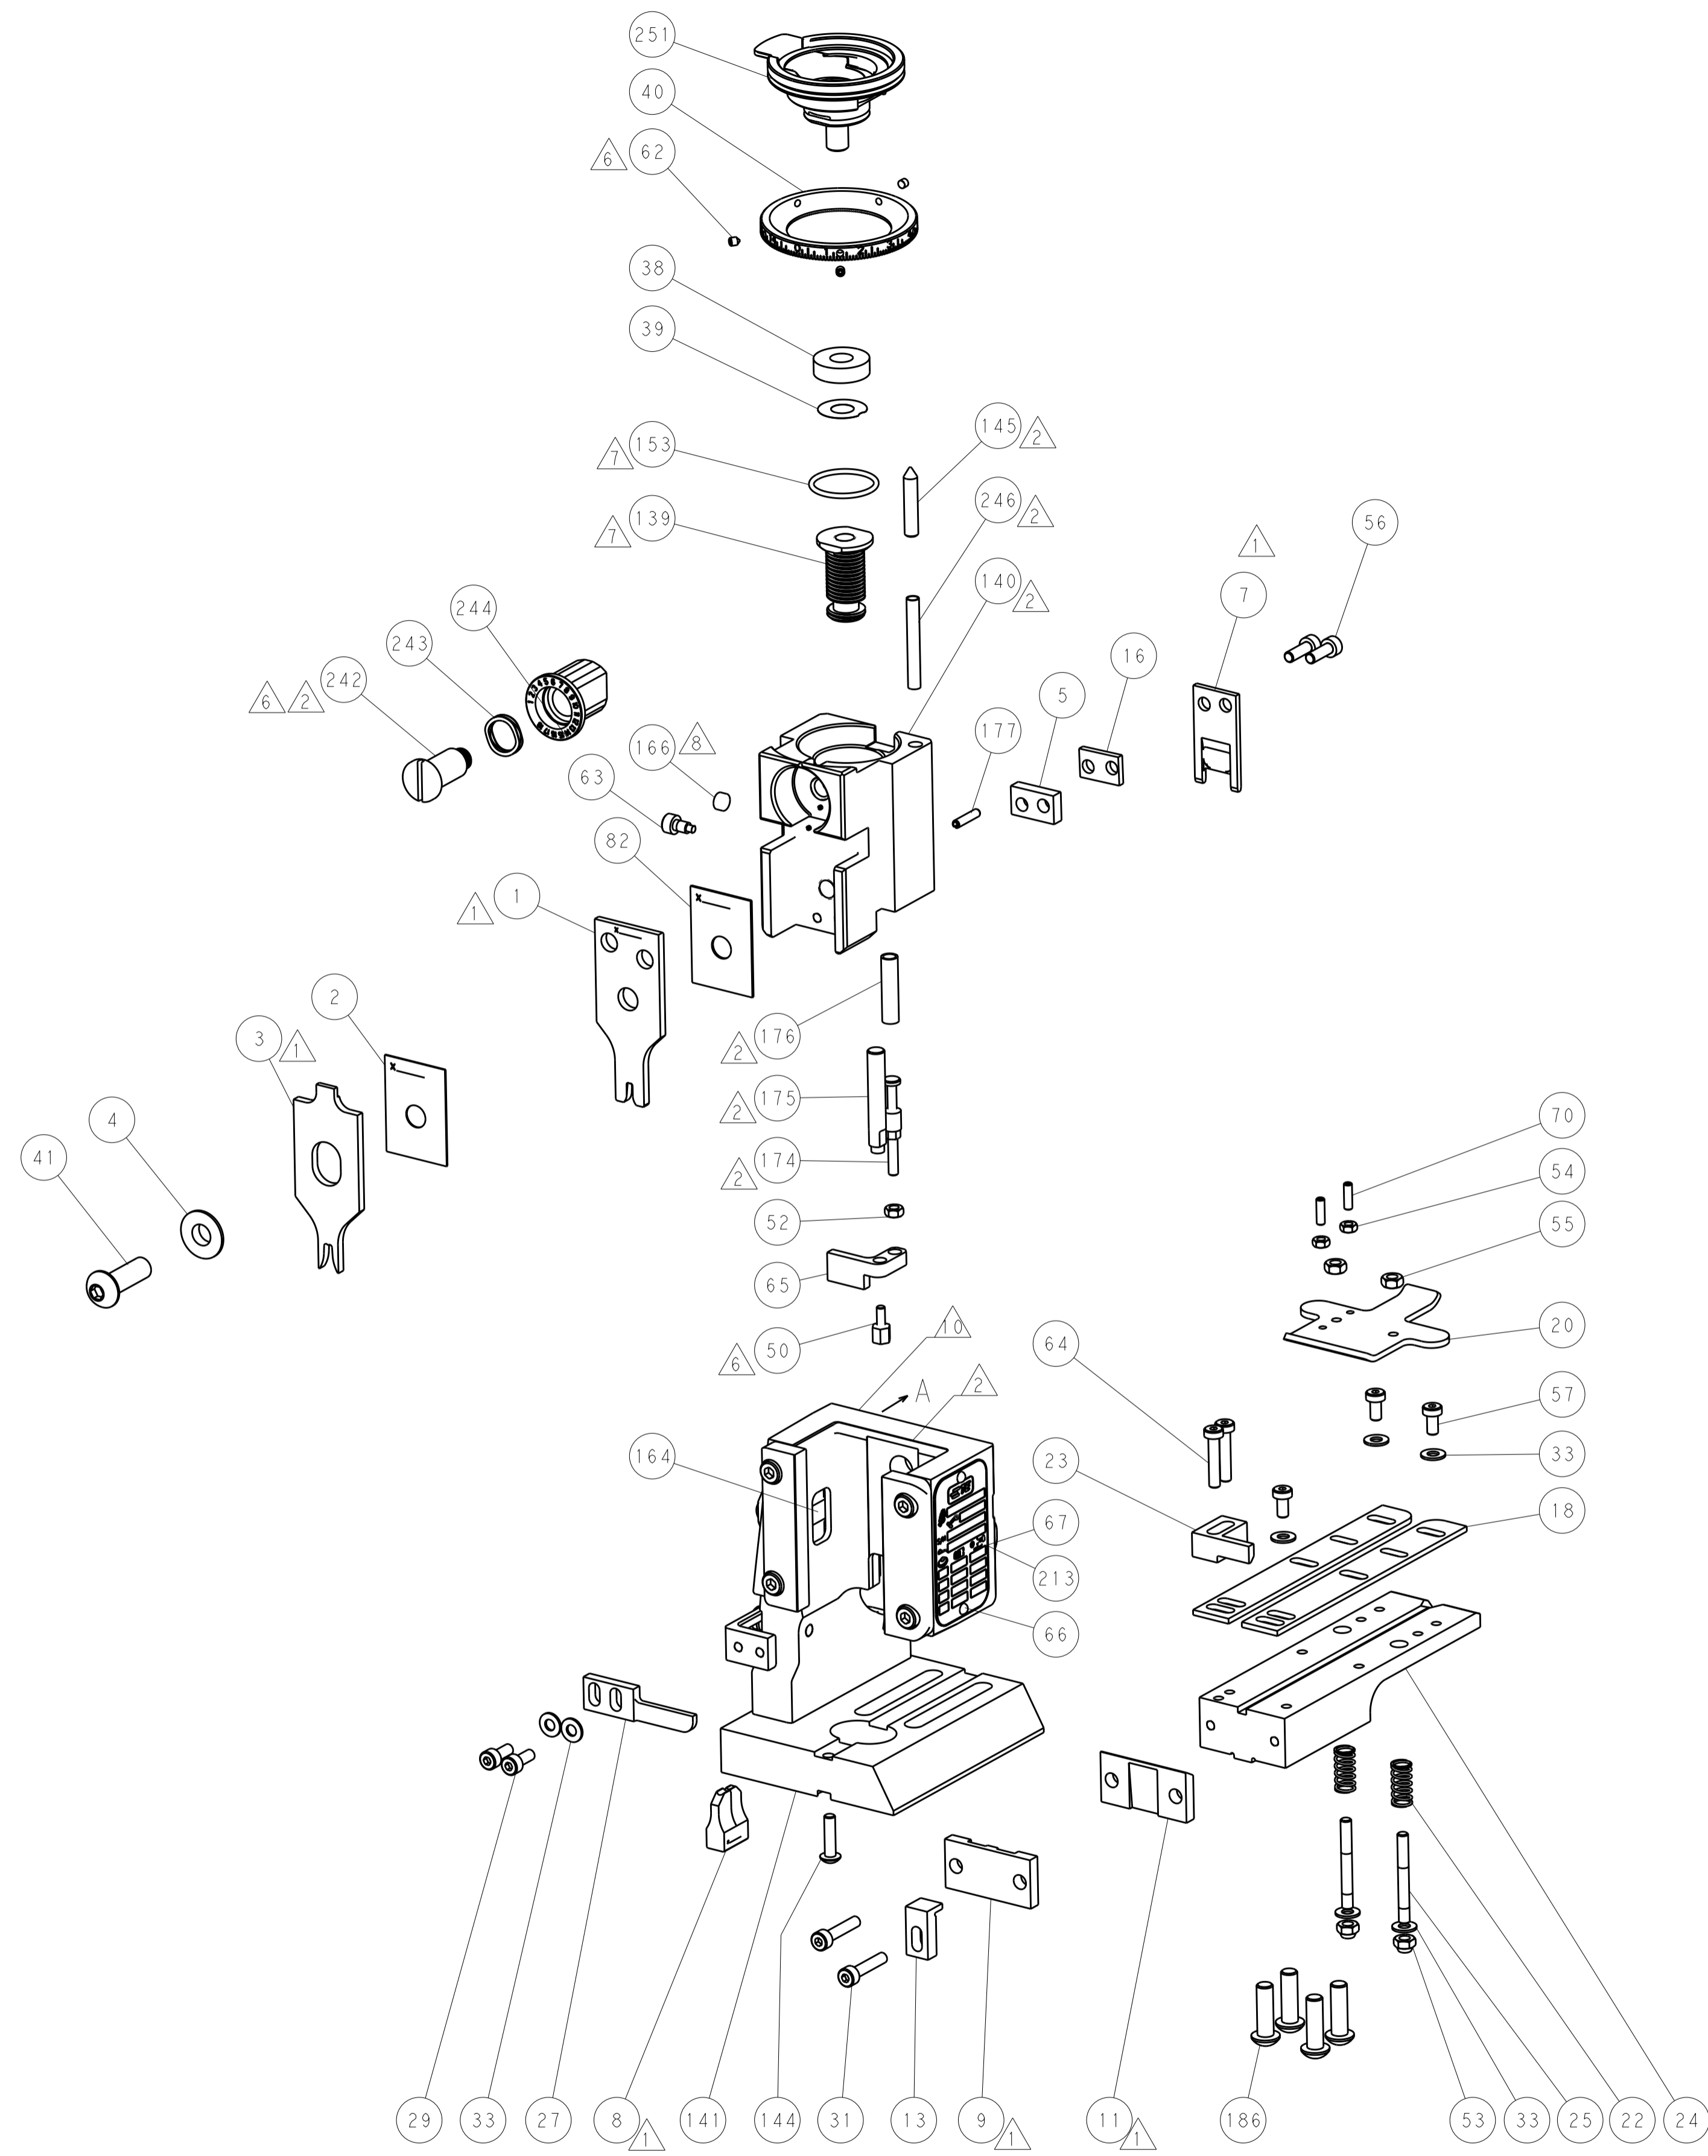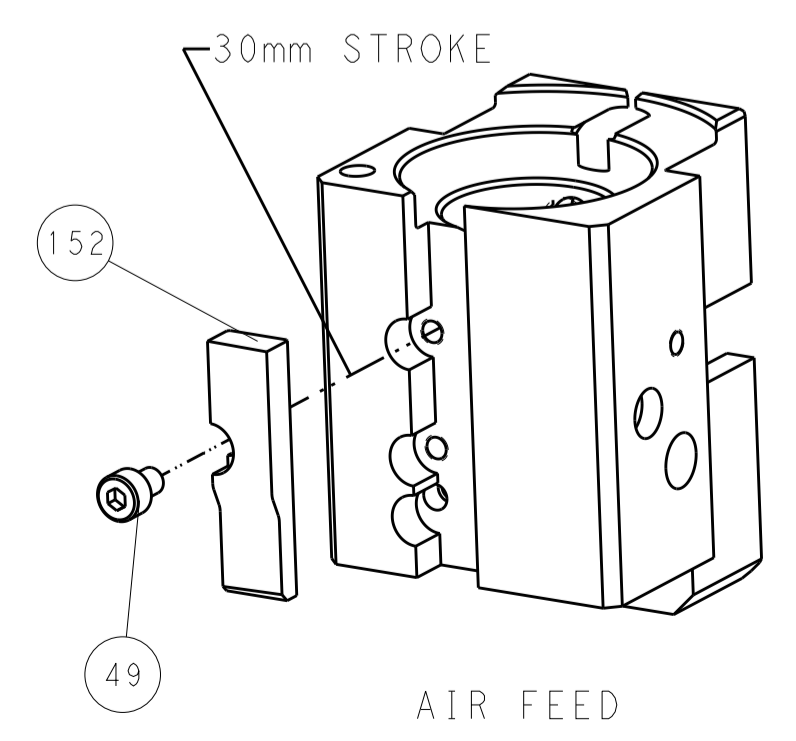

PACIFIC VERSION
 Shown on sheets 3 of 4 & 4 of 4
 (Atlantic version shown on sheets 1 of 4 & 2 of 4)

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.5 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.001 ANGLES ±.1		DWN L. ZHANG 13SEP2012 CHK L. ZHANG 13SEP2012 S. XI 13SEP2012 NAME PRODUCT SPEC APPLICATION SPEC WEIGHT Customer Accessible Production Drawing		STE TE Connectivity Harrisburg, PA 17105-3608 Ocean End Feed Applicator SIZE CAGE CODE DRAWING NO A1 00779 C=2150184 SCALE 1:1 SHEET 4 OF 4 REV A1	
-----------------------	--	--	--	---	--	--	--