

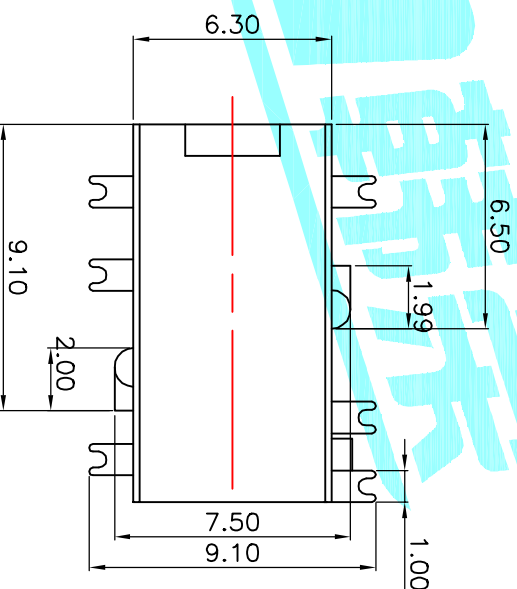
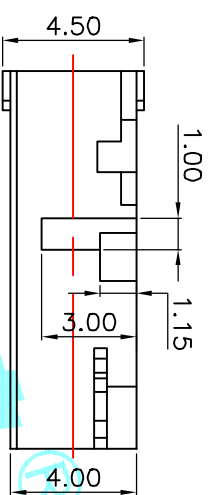


P.C.B Layout (copper-sided view)

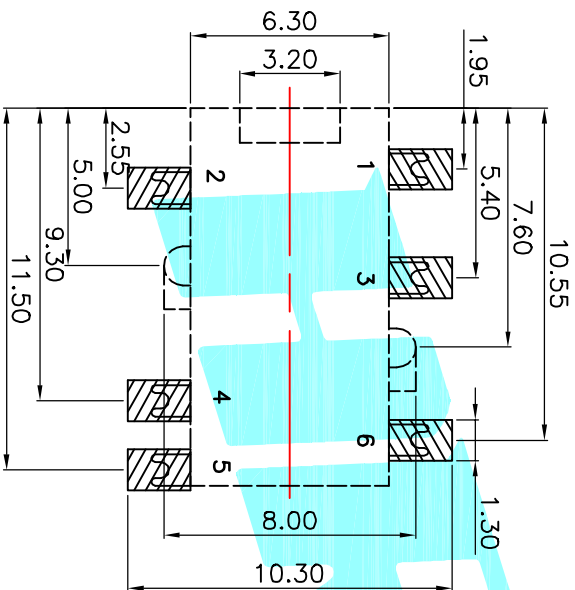

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature: -20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

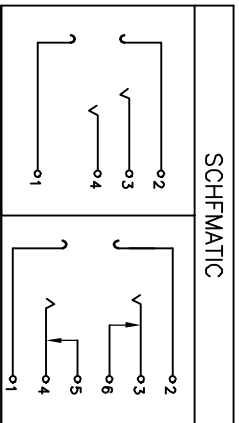

| | | | | | | |
|---------|------|-------|--------------|----------|--------|--------|
| ECN NO. | REV. | DATE. | DESCRIPTION. | DRAWN | CHECK. | APPRO. |
| | B | | | | | |
| | A | | 变更后增加引脚 | 20161019 | | |
| | | | NEW | | | |

| ② | Terminal | 5 | Phosphor bronze | Au Plating | | |
|----------------|-----------|------------|-----------------|---------------------|-------------|--------------------|
| ① | Housing | 1 | Nylon | Black | | |
| ITEM | PART NAME | TER.NO. | QTY. | MATERIAL | FINISHING | REMARK |
| APPROVALS | | DATE | | | | |
| DRAWN | J.X.Zhang | 2013/11/11 | | TITLE: PHONE JACKES | | |
| CHECKED | | | | PART NO. PU-399J | | |
| APPROVALS | | | | SCALE: 1:1 | | |
| TOLERANCES ARE | | 30~0.15 | ±0.30 | ANGLE | UNIT: mm | PROJ. SHEET 1 OF 1 |
| | 10~0.30 | ±0.20 | | ±2° | DRAWING NO. | |
| | 5~10 | ±0.15 | | | | |
| | ~5 | ±0.10 | | | | |



ELECTRONICS CO.,LTD