


SHEET 1 OF 1




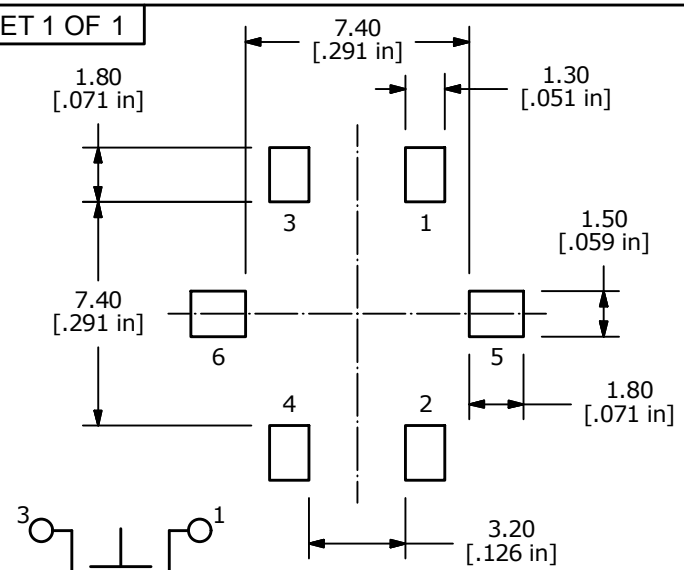


CIRCUIT: SPST
OFF - (ON)



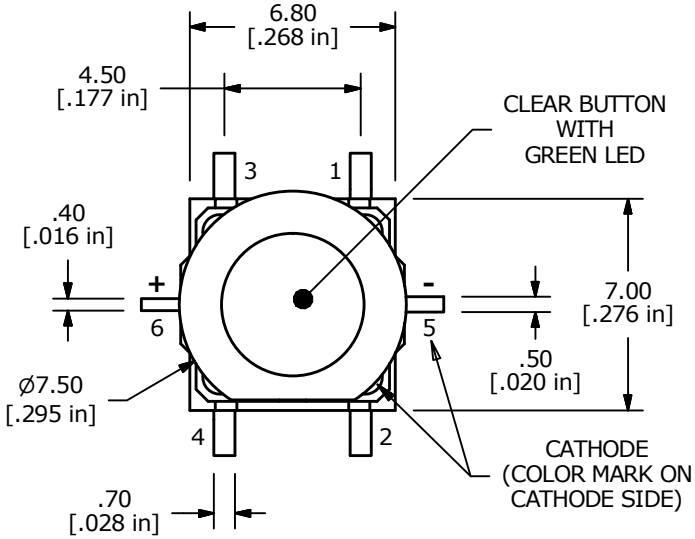

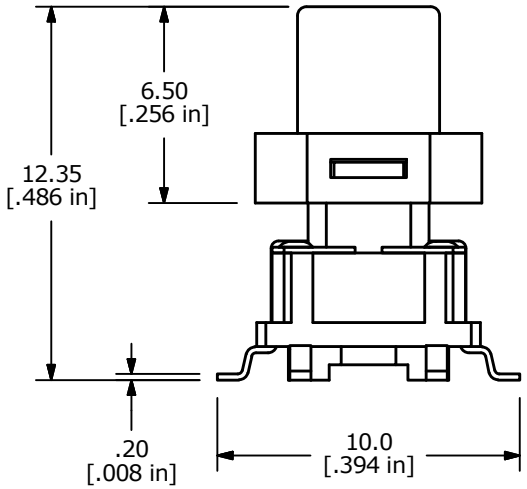

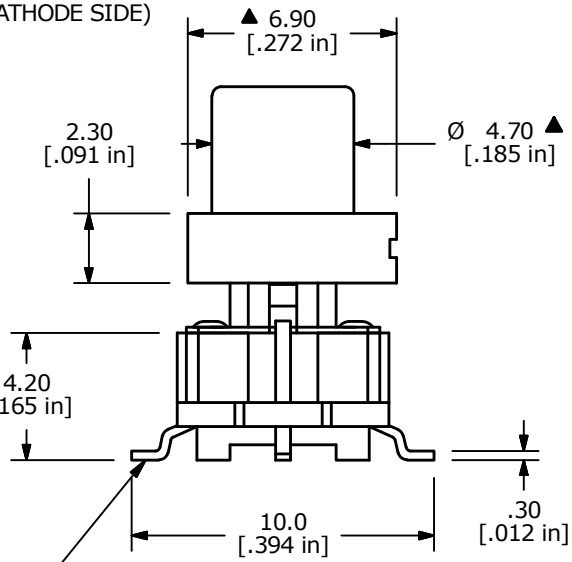

ALL TERMINALS TO BE
COPLANER WITHIN
0.1mm(0.004")

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
6. OPERATING FORCE: 160± 50gf
7. TRAVEL: 0.2± 0.1mm
8. OPERATING TEMPURATURE: -40°C to 85°C
9. OPEREATING LIFE 500,000 CYCLES
10. ▲ LED COLOR: GREEN
11. ▲ DENOTED CRITICAL PARAMETER
12. 2011/65/EU (ROHS) COMPLIANT
13. PACKAGE: SWITCHES ARE 450 PIECES PER REEL
    BUTTONS WILL BE BAGGED SEPERATELY
    450 BUTTONS PER BAG
14. PART TO BE HALOGEN FREE.
15. BUTTONS TO BE ASSEMBLED ONTO THE SWITCH AFTER SOLDERING.

LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.1 TYP. - 2.5 MAX.
LUMINOUS INTENSITY	MCD	800 TYP.

REV	PCR NO	DESCRIPTION	DATE	BY
B	23036	update Package Note	10/9/17	MW
A	22935	New Release	7/20/17	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

TITLE TL3265GQTCLR

SCALE	DATE	DR	DWG	REV
4:1	7/5/2017	rc	B200077	B