

## RX210 Group Renesas MCUs

R01DS0041EJ0150

Rev.1.50

Oct 18, 2013

50-MHz 32-bit RX MCUs, 78 DMIPS, up to 1-MB flash memory,  
12-bit A/D, 10-bit D/A, ELC, MPC, RTC, up to 15 comms channels;  
incorporating functions for IEC60730 compliance

## Features

### ■ 32-bit RX CPU core

- Max. operating frequency: 50 MHz  
Capable of 78 DMIPS in operation at 50 MHz
- Accumulator handles 64-bit results (for a single instruction) from 32- × 32-bit operations
- Multiplication and division unit handles 32- × 32-bit operations (multiplication instructions take one CPU clock cycle)
- Fast interrupt
- CISC Harvard architecture with 5-stage pipeline
- Variable-length instructions, ultra-compact code
- On-chip debugging circuit

### ■ Low power design and architecture

- Operation from a single 1.62-V to 5.5-V supply
- 1.62-V operation available (at up to 20 MHz)
- Deep software standby mode with RTC remaining usable
- Four low power consumption modes

### ■ On-chip flash memory for code, no wait states

- 50-MHz operation, 20-ns read cycle
- No wait states for reading at full CPU speed
- 64-K to 1-Mbyte capacities
- User code programmable via the SCI
- Programmable at 1.62 V
- For instructions and operands

### ■ On-chip data flash memory

- 8 Kbytes  
(Number of times of reprogramming: 100,000)
- Erasing and programming impose no load on the CPU.

### ■ On-chip SRAM, no wait states

- 12-K to 96-Kbyte size capacities

### ■ DMA

- DMAC: Incorporates four channels
- DTC: Four transfer modes

### ■ ELC

- Module operation can be initiated by event signals without going through interrupts.
- Modules can operate while the CPU is sleeping.

### ■ Reset and supply management

- Nine types of reset, including the power-on reset (POR)
- Low voltage detection (LVD) with voltage settings

### ■ Clock functions


- Frequency of external clock: Up to 20 MHz
- Frequency of the oscillator for sub-clock generation: 32.768 kHz
- PLL circuit input: 4 MHz to 12.5 MHz
- On-chip low- and high-speed oscillators, dedicated on-chip low-speed oscillator for the IWDT
- Generation of a dedicated 32.768-kHz clock for the RTC
- Clock frequency accuracy measurement circuit (CAC)

### ■ Realtime clock

- Adjustment functions (30 seconds, leap year, and error)
- Year and month display or 32-bit second display (binary counter) is selectable
- Time capture function
- Time capture on event-signal input through external pins
- RTC capable of initiating return from deep software standby mode

### ■ Independent watchdog timer

- 125-kHz on-chip oscillator produces a dedicated clock signal to drive IWDT operation.

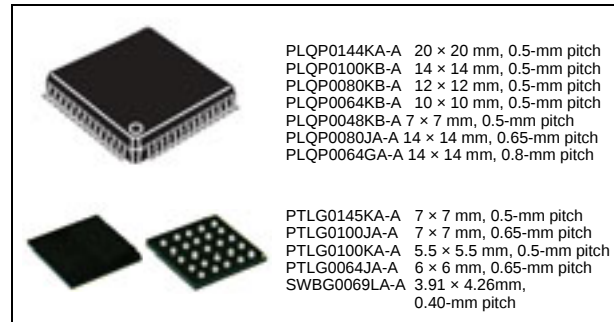

### ■ Useful functions for IEC60730 compliance

- Self-diagnostic and disconnection-detection assistance functions for the A/D converter, clock frequency accuracy measurement circuit, independent watchdog timer, functions to assist in RAM testing, etc.

### ■ Up to 15 communications channels

- SCI with many useful functions (up to 13 channels)  
Asynchronous mode, clock synchronous mode, smart card interface
- I<sup>2</sup>C bus interface: Transfer at up to 400 kbps, capable of SMBus operation (one channel)
- RSPI (one channel): Transfer at up to 16 Mbps (768-Kbyte/1-Mbyte flash memory or 144/145-pin products)

### ■ External address space

- Four CS areas (4 × 16 Mbytes)
- 8- or 16-bit bus space is selectable per area

### ■ Up to 20 extended-function timers

- 16-bit MTU: input capture, output compare, complementary PWM output, phase counting mode (six channels)
- 16-bit TPU: input capture, output capture, phase counting mode (six channels)
- 8-bit TMR (four channels)
- 16-bit compare-match timers (four channels)

### ■ 12-bit A/D converter

- Capable of conversion within 1 μs
- Sample-and-hold circuits (for three channels)
- Three-channel synchronized sampling available
- Self-diagnostic function and analog input disconnection detection assistance function

### ■ 10-bit D/A converter

### ■ Analog comparator

### ■ General I/O ports

- 5-V tolerant, open drain, input pull-up, switching of driving ability

### ■ MPC

- Multiple locations are selectable for I/O pins of peripheral functions

### ■ Temperature sensor

### ■ Operating temp. range

- -40°C to +85°C
- -40°C to +105°C

### ■ Applications

- 69WLPGA (SWBG0069LA-A): General consumer equipment
- Other than above package: General industrial and consumer equipment

## 1. Overview

### 1.1 Outline of Specifications

Table 1.1 lists the specifications in outline, and Table 1.2 gives a comparison of the functions of products in different packages.

Table 1.1 is for products with the greatest number of functions, so numbers of peripheral modules and channels will differ in accord with the package. For details, see Table 1.2, Comparison of Functions for Different Packages.

This product includes chip version A (part no.: R5F5210xAxxx), chip version B (part no.: R5F5210xBxxx), and chip version C (part no.: R5F5210xCxxx).

For the specification differences between chip versions A, B, and C, see Table 1, Specification Differences Depending on Chip Versions.

**Table 1.1 Outline of Specifications (1 / 5)**

| Classification     | Module/Function                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU                | CPU                               | <ul style="list-style-type: none"> <li>Maximum operating frequency: 50 MHz</li> <li>32-bit RX CPU</li> <li>Minimum instruction execution time: One instruction per state (cycle of the system clock)</li> <li>Address space: 4-Gbyte linear</li> <li>Register               <ul style="list-style-type: none"> <li>General purpose: Sixteen 32-bit registers</li> <li>Control: Eight 32-bit registers</li> <li>Accumulator: One 64-bit register</li> </ul> </li> <li>Basic instructions: 73</li> <li>DSP instructions: 9</li> <li>Addressing modes: 10</li> <li>Data arrangement               <ul style="list-style-type: none"> <li>Instructions: Little endian</li> <li>Data: Selectable as little endian or big endian</li> </ul> </li> <li>On-chip 32-bit multiplier: <math>32 \times 32 \rightarrow 64</math> bits</li> <li>On-chip divider: <math>32 / 32 \rightarrow 32</math> bits</li> <li>Barrel shifter: 32 bits</li> </ul>                                                             |
| Memory             | ROM                               | <ul style="list-style-type: none"> <li>Capacity: 64 K/96 K/128 K/256 K/384 K/512 K/768 Kbytes/1 Mbyte</li> <li>50 MHz, no-wait memory access</li> <li>On-board programming: 3 types</li> <li>Off-board programming</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                    | RAM                               | <ul style="list-style-type: none"> <li>Capacity: 12 K/16 K/20 K/32 K/64 K/96 Kbytes</li> <li>50 MHz, no-wait memory access</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                    | E2 DataFlash                      | <ul style="list-style-type: none"> <li>Capacity: 8 Kbytes</li> <li>Number of times for programming/erasing: 100,000</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| MCU operating mode |                                   | Single-chip mode, on-chip ROM enabled expansion mode, and on-chip ROM disabled expansion mode (software switching)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Clock              | Clock generation circuit          | <ul style="list-style-type: none"> <li>Main clock oscillator, sub-clock oscillator, low-speed on-chip oscillator, high-speed on-chip oscillator, PLL frequency synthesizer, and IWDG-dedicated on-chip oscillator</li> <li>Oscillation stop detection</li> <li>Measuring circuit for accuracy of clock frequency (clock-accuracy check: CAC)</li> <li>Independent settings for the system clock (ICLK), peripheral module clock (PCLK), external bus clock (BCLK), and FlashIF clock (FCLK)</li> <li>The CPU and system sections such as other bus masters run in synchronization with the system clock (ICLK): 50 MHz (at max.)</li> <li>Peripheral modules run in synchronization with the peripheral module clock (PCLK): 32 MHz (at max.)</li> <li>Devices connected to the external bus run in synchronization with the external bus clock (BCLK): 12.5 MHz (at max.)</li> <li>The flash peripheral circuit runs in synchronization with the FlashIF clock (FCLK): 32 MHz (at max.)</li> </ul> |
| Reset              |                                   | RES# pin reset, power-on reset, voltage monitoring reset, watchdog timer reset, independent watchdog timer reset, deep software standby reset, and software reset                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Voltage detection  | Voltage detection circuit (LVDAa) | <ul style="list-style-type: none"> <li>When the voltage on VCC falls below the voltage detection level, an internal reset or internal interrupt is generated.</li> <li>Voltage detection circuit 0 is capable of selecting the detection voltage from 4 levels</li> <li>Voltage detection circuit 1 is capable of selecting the detection voltage from 16 levels</li> <li>Voltage detection circuit 2 is capable of selecting the detection voltage from 16 levels</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**Table 1.1 Outline of Specifications (2 / 5)**

| Classification                      | Module/Function                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low power consumption               | Low power consumption facilities               | <ul style="list-style-type: none"> <li>Module stop function</li> <li>Four low power consumption modes<br/>Sleep mode, all-module clock stop mode, software standby mode, and deep software standby mode</li> </ul>                                                                                                                                                                                                                                                                                                                                            |
|                                     | Function for lower operating power consumption | <ul style="list-style-type: none"> <li>Operating power control modes<br/>[Chip versions A and C]<br/>High-speed operating mode, middle-speed operating mode 1A, middle-speed operating mode 1B, low-speed operating mode 1, low-speed operating mode 2<br/>[Chip version B]<br/>High-speed operating mode, middle-speed operating mode 1A, middle-speed operating mode 1B, middle-speed operating mode 2A, middle-speed operating mode 2B, low-speed operating mode 1, low-speed operating mode 2</li> </ul>                                                  |
| Interrupt                           | Interrupt controller (ICUb)                    | <ul style="list-style-type: none"> <li>Interrupt vectors: 167</li> <li>External interrupts: 9 (NMI, IRQ0 to IRQ7 pins)</li> <li>Non-maskable interrupts: 6 (the NMI pin, oscillation stop detection interrupt, voltage monitoring 1 interrupt, voltage monitoring 2 interrupt, WDT interrupt, and IWDI interrupt)</li> <li>16 levels specifiable for the order of priority</li> </ul>                                                                                                                                                                         |
| External bus extension              |                                                | <ul style="list-style-type: none"> <li>The external address space can be divided into four areas (CS0 to CS3), each with independent control of access settings.<br/>Capacity of each area: 16 Mbytes (CS0 to CS3)<br/>A chip-select signal (CS0# to CS3#) can be output for each area.<br/>Each area is specifiable as an 8-bit or 16-bit bus space<br/>The data arrangement in each area is selectable as little or big endian (only for data).<br/>Bus format: Separate bus, multiplex bus</li> <li>Wait control</li> <li>Write buffer facility</li> </ul> |
| DMA                                 | DMA controller (DMACA)                         | <ul style="list-style-type: none"> <li>4 channels</li> <li>Three transfer modes: Normal transfer, repeat transfer, and block transfer</li> <li>Activation sources: Software trigger, external interrupts, and interrupt requests from peripheral functions</li> </ul>                                                                                                                                                                                                                                                                                         |
|                                     | Data transfer controller (DTCa)                | <ul style="list-style-type: none"> <li>Three transfer modes: Normal transfer, repeat transfer, and block transfer</li> <li>Activation sources: Interrupts</li> <li>Chain transfer function</li> </ul>                                                                                                                                                                                                                                                                                                                                                         |
| I/O ports                           | General I/O ports                              | 145-pin/144-pin/100-pin/80-pin/69-pin/64-pin/48-pin<br><ul style="list-style-type: none"> <li>I/O: 122/122/84/64/48/48/34</li> <li>Input: 1/1/1/1/1/1/1</li> <li>Pull-up resistors: 122/122/84/64/48/48/34</li> <li>Open-drain outputs: 76/76/54/44/35/35/26</li> <li>5-V tolerance: 4/4/4/4/2/2*1/2</li> </ul>                                                                                                                                                                                                                                               |
| Event link controller (ELC)         |                                                | <ul style="list-style-type: none"> <li>Event signals of 59 types can be directly connected to the module</li> <li>Operations of timer modules are selectable at event input</li> <li>Capable of event link operation for ports B and E</li> </ul>                                                                                                                                                                                                                                                                                                             |
| Multi-function pin controller (MPC) |                                                | <ul style="list-style-type: none"> <li>Capable of selecting input/output function from multiple pins</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**Table 1.1 Outline of Specifications (3 / 5)**

| Classification | Module/Function                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Timers         | 16-bit timer pulse unit (TPUa)            | <ul style="list-style-type: none"> <li>• (16 bits × 6 channels) × 1 unit</li> <li>• Maximum of 16 pulse-input/output possible</li> <li>• Select from among seven or eight counter-input clock signals for each channel</li> <li>• Supports the input capture/output compare function</li> <li>• Output of PWM waveforms in up to 15 phases in PWM mode</li> <li>• Support for buffered operation, phase-counting mode (two-phase encoder input) and cascade-connected operation (32 bits × 2 channels) depending on the channel.</li> <li>• Capable of generating conversion start triggers for the A/D converters</li> <li>• Signals from the input capture pins are input via a digital filter</li> <li>• Clock frequency measuring method<br/>(Products with 144 or more pins incorporate a TPU.)</li> </ul> |
|                | Multi-function timer pulse unit 2 (MTU2a) | <ul style="list-style-type: none"> <li>• (16 bits × 6 channels) × 1 unit</li> <li>• Up to 16 pulse-input/output lines and three pulse-input lines are available with six 16-bit timer channels</li> <li>• Select from among eight or seven counter-input clock signals for each channel (PCLK/1, PCLK/4, PCLK/16, PCLK/64, PCLK/256, PCLK/1024, MTCLKA, MTCLKB, MTCLKC, MTCLKD) other than channel 5, for which only four signals are available.</li> <li>• Input capture function</li> <li>• 21 output compare/input capture registers</li> <li>• Pulse output mode</li> <li>• Complementary PWM output mode</li> <li>• Reset synchronous PWM mode</li> <li>• Phase-counting mode</li> <li>• Generation of triggers for A/D converter conversion</li> </ul>                                                    |
|                | Port output enable 2 (POE2a)              | Controls the high-impedance state of the MTU's waveform output pins                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                | 8-bit timer (TMR)                         | <ul style="list-style-type: none"> <li>• (8 bits × 2 channels) × 2 units</li> <li>• Select from among seven internal clock signals (PCLK1, PCLK/2, PCLK/8, PCLK/32, PCLK/64, PCLK/1024, PCLK/8192) and one external clock signal</li> <li>• Capable of output of pulse trains with desired duty cycles or of PWM signals</li> <li>• The 2 channels of each unit can be cascaded to create a 16-bit timer</li> <li>• Capable of generating baud-rate clocks for SCI5, SCI6, and SCI12</li> </ul>                                                                                                                                                                                                                                                                                                                 |
|                | Compare match timer (CMT)                 | <ul style="list-style-type: none"> <li>• (16 bits × 2 channels) × 2 units</li> <li>• Select from among four clock signals (PCLK/8, PCLK/32, PCLK/128, PCLK/512)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                | Watchdog timer (WDTA)                     | <ul style="list-style-type: none"> <li>• 14 bits × 1 channel</li> <li>• Select from among six counter-input clock signals (PCLK/4, PCLK/64, PCLK/128, PCLK/512, PCLK/2048, PCLK/8192)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                | Independent watchdog timer (IWDTa)        | <ul style="list-style-type: none"> <li>• 14 bits × 1 channel</li> <li>• Counter-input clock: IWDt-dedicated on-chip oscillator<br/>Frequency divided by 1, 16, 32, 64, 128, or 256</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                | Realtime clock (RTCb)                     | <ul style="list-style-type: none"> <li>• Clock source: Sub-clock</li> <li>• Time/calendar</li> <li>• Interrupt sources: Alarm interrupt, periodic interrupt, and carry interrupt</li> <li>• Time-capture facility for three values</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Table 1.1 Outline of Specifications (4 / 5)**

| Classification                           | Module/Function                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Communication functions                  | Serial communications interfaces (SC1c, SC1d) | <ul style="list-style-type: none"> <li>13 channels (channel 0 to 11: SC1c, channel 12: SC1d)</li> <li>Serial communications modes: <ul style="list-style-type: none"> <li>Asynchronous, clock synchronous, and smart-card interface</li> </ul> </li> <li>On-chip baud rate generator allows selection of the desired bit rate</li> <li>Choice of LSB-first or MSB-first transfer</li> <li>Average transfer rate clock can be input from TMR timers (SCI5, SCI6, and SCI12)</li> <li>Simple IIC</li> <li>Simple SPI</li> <li>Master/slave mode supported (SC1d only)</li> <li>Start frame and information frame are included (SC1d only)</li> </ul>                                                                                                                                                                                                                                                                                    |
|                                          | I <sup>2</sup> C bus interface (RIIC)         | <ul style="list-style-type: none"> <li>1 channel</li> <li>Communications formats: <ul style="list-style-type: none"> <li>I<sup>2</sup>C bus format/SMBus format</li> </ul> </li> <li>Master/slave selectable</li> <li>Supports the fast mode</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                          | Serial peripheral interface (RSPI)            | <ul style="list-style-type: none"> <li>1 channel</li> <li>Transfer facility <ul style="list-style-type: none"> <li>Using the MOSI (master out, slave in), MISO (master in, slave out), SSL (slave select), and RSPI clock (RSPCK) signals enables serial transfer through SPI operation (four lines) or clock-synchronous operation (three lines)</li> </ul> </li> <li>Capable of handling serial transfer as a master or slave</li> <li>Data formats <ul style="list-style-type: none"> <li>Choice of LSB-first or MSB-first transfer</li> </ul> </li> <li>The number of bits in each transfer can be changed to any number of bits from 8 to 16, 20, 24, or 32 bits.</li> <li>128-bit buffers for transmission and reception</li> <li>Up to four frames can be transmitted or received in a single transfer operation (with each frame having up to 32 bits)</li> <li>Double buffers for both transmission and reception</li> </ul> |
| 12-bit A/D converter (S12ADb)            |                                               | <ul style="list-style-type: none"> <li>12 bits (16 channels × 1 unit)</li> <li>12-bit resolution</li> <li>Minimum conversion time: 1.0 μs per channel (in operation with ADCLK at 50 MHz)</li> <li>Operating modes <ul style="list-style-type: none"> <li>Scan mode (single scan mode, continuous scan mode, and group scan mode)</li> </ul> </li> <li>Sample-and-hold function</li> <li>Self-diagnosis for the A/D converter</li> <li>Assistance in detecting disconnected analog inputs</li> <li>Double-trigger mode (duplication of A/D conversion data)</li> <li>A/D conversion start conditions <ul style="list-style-type: none"> <li>A software trigger, a trigger from a timer (MTU), an external trigger signal, or ELC</li> </ul> </li> </ul>                                                                                                                                                                               |
| Temperature sensor (TEMPsa)              |                                               | <ul style="list-style-type: none"> <li>Outputs the voltage that changes depending on the temperature</li> <li>PGA gain switchable: Four levels according to the voltage range</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| D/A converter (DA)                       |                                               | <ul style="list-style-type: none"> <li>2 channels</li> <li>10-bit resolution</li> <li>Output voltage: 0 V to VREFH</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| CRC calculator (CRC)                     |                                               | <ul style="list-style-type: none"> <li>CRC code generation for arbitrary amounts of data in 8-bit units</li> <li>Select any of three generating polynomials: <ul style="list-style-type: none"> <li><math>X^8 + X^2 + X + 1</math>, <math>X^{16} + X^{15} + X^2 + 1</math>, or <math>X^{16} + X^{12} + X^5 + 1</math></li> </ul> </li> <li>Generation of CRC codes for use with LSB-first or MSB-first communications is selectable.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Comparator A (CMPA)                      |                                               | <ul style="list-style-type: none"> <li>2 channels</li> <li>Comparison of reference voltage and analog input voltage</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Comparator B (CMPB)                      |                                               | <ul style="list-style-type: none"> <li>2 channels</li> <li>Comparison of reference voltage and analog input voltage</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Data Operation Circuit (DOC)             |                                               | Comparison, addition, and subtraction of 16-bit data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Power supply voltage/Operating frequency |                                               | VCC = 1.62 to 1.8 V: 20 MHz, VCC = 1.8 to 2.7 V: 32 MHz, VCC = 2.7 to 5.5 V: 50 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Operating temperature                    |                                               | D version: -40 to +85°C, G version: -40 to +105°C*2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Table 1.1 Outline of Specifications (5 / 5)**

| Classification           | Module/Function | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packages                 | Chip version A  | 100-pin TFLGA (PTLG0100JA-A) 7 × 7 mm, 0.65-mm pitch<br>100-pin LQFP (PLQP0100KB-A) 14 × 14 mm, 0.5-mm pitch<br>80-pin LQFP (PLQP0080KB-A) 12 × 12 mm, 0.5-mm pitch<br>64-pin LQFP (PLQP0064KB-A) 10 × 10 mm, 0.5-mm pitch                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                          | Chip version B  | 145-pin TFLGA (PTLG0145KA-A) 7 × 7 mm, 0.5-mm pitch<br>100-pin TFLGA (PTLG0100JA-A) 7 × 7 mm, 0.65-mm pitch<br>100-pin TFLGA (PTLG0100KA-A) 5.5 × 5.5 mm, 0.5-mm pitch<br>64-pin TFLGA (PTLG0064JA-A) 6 × 6 mm, 0.65-mm pitch<br>144-pin LQFP (PLQP0144KA-A) 20 × 20 mm, 0.5-mm pitch<br>100-pin LQFP (PLQP0100KB-A) 14 × 14 mm, 0.5-mm pitch<br>80-pin LQFP (PLQP0080KB-A) 12 × 12 mm, 0.5-mm pitch<br>80-pin LQFP (PLQP0080JA-A) 14 × 14 mm, 0.65-mm pitch<br>64-pin LQFP (PLQP0064KB-A) 10 × 10 mm, 0.5-mm pitch<br>64-pin LQFP (PLQP0064GA-A) 14 × 14 mm, 0.8-mm pitch<br>48-pin LQFP (PLQP0048KB-A) 7 × 7 mm, 0.5-mm pitch<br>69-pin WLBGA (SWBG0069LA-A) 3.91 × 4.26mm, 0.40-mm pitch |
|                          | Chip version C  | 100-pin TFLGA (PTLG0100JA-A) 7 × 7 mm, 0.65-mm pitch<br>100-pin LQFP (PLQP0100KB-A) 14 × 14 mm, 0.5-mm pitch<br>80-pin LQFP (PLQP0080KB-A) 12 × 12 mm, 0.5-mm pitch<br>80-pin LQFP (PLQP0080JA-A) 14 × 14 mm, 0.65-mm pitch<br>64-pin LQFP (PLQP0064KB-A) 10 × 10 mm, 0.5-mm pitch<br>64-pin LQFP (PLQP0064GA-A) 14 × 14 mm, 0.8-mm pitch                                                                                                                                                                                                                                                                                                                                                   |
| On-chip debugging system |                 | E1 emulator (FINE interface)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Note 1. In chip version A of the part numbers below, port P17 is not 5 V tolerant. Therefore there is only one port in these products.  
R5F52108ADFM, R5F52107ADFM, R5F52106ADFM, and R5F52105ADFM

Note 2. Please contact Renesas Electronics sales office for derating of operation under Ta = +85°C to +105°C. Derating is the systematic reduction of load for the sake of improved reliability.

**Table 1.2 Comparison of Functions for Different Packages**

| Module/Functions        |                                        | RX210 Group                   |                                  |                              |                                                     |                                                    |
|-------------------------|----------------------------------------|-------------------------------|----------------------------------|------------------------------|-----------------------------------------------------|----------------------------------------------------|
|                         |                                        | 144, 145 Pins                 | 100 Pins                         | 80 Pins                      | 64, 69 Pins                                         | 48 Pins                                            |
| External bus            | External bus width                     | 16 bits                       |                                  | Not supported                |                                                     |                                                    |
| Interrupt               | External interrupts                    | NMI, IRQ0 to IRQ7             |                                  |                              | NMI, IRQ0 to IRQ2, IRQ4 to IRQ7                     | NMI, IRQ0, IRQ1, IRQ4 to IRQ7                      |
| DMA                     | DMA controller                         | 4 channels (DMAC0 to DMAC3)   |                                  |                              |                                                     |                                                    |
|                         | Data transfer controller               | Supported                     |                                  |                              |                                                     |                                                    |
| Timers                  | 16-bit timer pulse unit                | 6 channels (TPU0 to TPU5)     | Not supported                    |                              |                                                     |                                                    |
|                         | Multi-function timer pulse unit 2      | 6 channels (MTU0 to MTU5)     |                                  |                              |                                                     |                                                    |
|                         | Port output enable 2                   | POE0# to POE3#, POE8#         |                                  |                              |                                                     |                                                    |
|                         | 8-bit timer                            | 2 channels × 2 units          |                                  |                              |                                                     |                                                    |
|                         | Compare match timer                    | 2 channels × 2 units          |                                  |                              |                                                     |                                                    |
|                         | Realtime clock                         | Supported                     |                                  |                              |                                                     | Not supported                                      |
|                         | Watchdog timer                         | Supported                     |                                  |                              |                                                     |                                                    |
|                         | Independent watchdog timer             | Supported                     |                                  |                              |                                                     |                                                    |
| Communication functions | Serial communications interface (SClC) | 12 channels (SCl0 to 11)      | 6 channels (SCl0, 1, 5, 6, 8, 9) |                              | 5 channels (SCl1, 5, 6, 8, 9)                       | 4 channels (SCl1, 5, 6, 8)                         |
|                         | Serial communications interface (SClD) | 1 channel (SCl12)             |                                  |                              |                                                     |                                                    |
|                         | I <sup>2</sup> C bus interface         | 1 channel                     |                                  |                              |                                                     |                                                    |
|                         | Serial peripheral interface            | 1 channel                     |                                  |                              |                                                     |                                                    |
| 12-bit A/D converter    |                                        | 16 channels (AN000 to AN015)  |                                  | 14 channels (AN000 to AN013) | 12 channels (AN000 to AN004, AN006, AN008 to AN013) | 8 channels (AN000 to AN002, AN006, AN009 to AN012) |
| Temperature sensor      |                                        | Supported                     |                                  |                              |                                                     |                                                    |
| D/A converter           |                                        | 2 channels                    |                                  |                              |                                                     | Not supported                                      |
| CRC calculator          |                                        | Supported                     |                                  |                              |                                                     |                                                    |
| Event link controller   |                                        | Supported                     |                                  |                              |                                                     |                                                    |
| Comparator A            |                                        | 2 channels                    |                                  |                              |                                                     |                                                    |
| Comparator B            |                                        | 2 channels                    |                                  |                              |                                                     |                                                    |
| Packages                |                                        | 145-pin TFLGA<br>144-pin LQFP | 100-pin TFLGA<br>100-pin LQFP    | 80-pin LQFP                  | 69-pin WLBGA<br>64-pin TFLGA<br>64-pin LQFP         | 48-pin LQFP                                        |

## 1.2 List of Products

Table 1.3 to Table 1.7 are a list of products, and Figure 1.1 shows how to read the product part no., memory capacity, and package type.

**Table 1.3 List of Products Chip Version A: D Version (Ta = –40 to +85°C)**

| Group | Part No.     | Orderable Part No. | Package      | ROM Capacity | RAM Capacity | E2 DataFlash | Operating Frequency (Max.) | Operating Temperature |
|-------|--------------|--------------------|--------------|--------------|--------------|--------------|----------------------------|-----------------------|
| RX210 | R5F52108ADFP | R5F52108ADFP#V0    | PLQP0100KB-A | 512 Kbytes   | 64 Kbytes    | 8 Kbytes     | 50 MHz                     | −40 to +85°C          |
|       | R5F52108ADFN | R5F52108ADFN#V0    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52108ADFM | R5F52108ADFM#V0    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52108ADLJ | R5F52108ADLJ#U0    | PTLG0100JA-A |              |              |              |                            |                       |
|       | R5F52107ADFP | R5F52107ADFP#V0    | PLQP0100KB-A | 384 Kbytes   |              |              |                            |                       |
|       | R5F52107ADFN | R5F52107ADFN#V0    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52107ADFM | R5F52107ADFM#V0    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52107ADLJ | R5F52107ADLJ#U0    | PTLG0100JA-A |              |              |              |                            |                       |
|       | R5F52106ADFP | R5F52106ADFP#V0    | PLQP0100KB-A | 256 Kbytes   | 32 Kbytes    |              |                            |                       |
|       | R5F52106ADFN | R5F52106ADFN#V0    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52106ADFM | R5F52106ADFM#V0    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52106ADLJ | R5F52106ADLJ#U0    | PTLG0100JA-A |              |              |              |                            |                       |
|       | R5F52105ADFP | R5F52105ADFP#V0    | PLQP0100KB-A | 128 Kbytes   | 20 Kbytes    |              |                            |                       |
|       | R5F52105ADFN | R5F52105ADFN#V0    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52105ADFM | R5F52105ADFM#V0    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52105ADLJ | R5F52105ADLJ#U0    | PTLG0100JA-A |              |              |              |                            |                       |

Note: • Orderable part numbers are current as of when this manual was published. Please make sure to refer to the relevant product page on the Renesas website for the latest part numbers.

**Table 1.4 List of Products Chip Version B: D Version (Ta = –40 to +85°C)**

| Group | Part No.          | Orderable Part No.   | Package      | ROM Capacity | RAM Capacity | E2 DataFlash | Operating Frequency (Max.) | Operating Temperature |            |           |
|-------|-------------------|----------------------|--------------|--------------|--------------|--------------|----------------------------|-----------------------|------------|-----------|
| RX210 | R5F5210BBDFFB     | R5F5210BBDFFB#30     | PLQP0144KA-A | 1 Mbytes     | 96 Kbytes    | 8 Kbytes     | 50 MHz                     | −40 to +85°C          |            |           |
|       | R5F5210BBDLK      | R5F5210BBDLK#U0      | PTLG0145KA-A |              |              |              |                            |                       |            |           |
|       | R5F5210BBDFFP     | R5F5210BBDFFP#30     | PLQP0100KB-A |              |              |              |                            |                       |            |           |
|       | R5F5210BBDLJ      | R5F5210BBDLJ#U0      | PTLG0100JA-A |              |              |              |                            |                       |            |           |
|       | R5F5210ABDFFB     | R5F5210ABDFFB#30     | PLQP0144KA-A | 768 Kbytes   |              |              |                            |                       |            |           |
|       | R5F5210ABDLK      | R5F5210ABDLK#U0      | PTLG0145KA-A |              |              |              |                            |                       |            |           |
|       | R5F5210ABDFFP     | R5F5210ABDFFP#30     | PLQP0100KB-A |              |              |              |                            |                       |            |           |
|       | R5F5210ABDLJ      | R5F5210ABDLJ#U0      | PTLG0100JA-A |              |              |              |                            |                       |            |           |
|       | R5F52108BBDFFB    | R5F52108BBDFFB#30    | PLQP0144KA-A | 512 Kbytes   | 64 Kbytes    |              |                            |                       |            |           |
|       | R5F52108BDLK      | R5F52108BDLK#U0      | PTLG0145KA-A |              |              |              |                            |                       |            |           |
|       | R5F52107BBDFFB    | R5F52107BBDFFB#30    | PLQP0144KA-A | 384 Kbytes   |              |              |                            |                       |            |           |
|       | R5F52107BDLK      | R5F52107BDLK#U0      | PTLG0145KA-A |              |              |              |                            |                       |            |           |
|       | R5F52106BBDFFB    | R5F52106BBDFFB#30    | PLQP0144KA-A | 256 Kbytes   | 32 Kbytes    |              |                            |                       |            |           |
|       | R5F52106BDLK      | R5F52106BDLK#U0      | PTLG0145KA-A |              |              |              |                            |                       |            |           |
|       | R5F52106BBDFFP    | R5F52106BBDFFP#30    | PLQP0100KB-A |              |              |              |                            |                       |            |           |
|       | R5F52106BBDFFN    | R5F52106BBDFFN#30    | PLQP0080KB-A |              |              |              |                            |                       |            |           |
|       | R5F52106BBDFFM    | R5F52106BBDFFM#30    | PLQP0064KB-A |              |              |              |                            |                       |            |           |
|       | R5F52106BBDFFL    | R5F52106BBDFFL#30    | PLQP0048KB-A |              |              |              |                            |                       |            |           |
|       | R5F52106BDLJ      | R5F52106BDLJ#U0      | PTLG0100JA-A |              |              |              |                            |                       |            |           |
|       | R5F52106BDLA      | R5F52106BDLA#U0      | PTLG0100KA-A |              |              |              |                            |                       |            |           |
|       | R5F52106BBDFFV    | R5F52106BBDFFV#V0    | PLQP0080JA-A |              |              |              |                            |                       |            |           |
|       | R5F52106BBDFFK    | R5F52106BBDFFK#30    | PLQP0064GA-A |              |              |              |                            |                       |            |           |
|       | R5F52106BDLH      | R5F52106BDLH#U0      | PTLG0064JA-A |              |              |              |                            |                       |            |           |
|       | R5F52106BBDFFM *1 | R5F52106BBDFFM#W0 *1 | SWBG0069LA-A |              |              |              |                            |                       |            |           |
|       | R5F52105BBDFFB    | R5F52105BBDFFB#30    | PLQP0144KA-A |              |              |              |                            |                       | 128 Kbytes | 20 Kbytes |
|       | R5F52105BDLK      | R5F52105BDLK#U0      | PTLG0145KA-A |              |              |              |                            |                       |            |           |
|       | R5F52105BBDFFP    | R5F52105BBDFFP#30    | PLQP0100KB-A |              |              |              |                            |                       |            |           |
|       | R5F52105BBDFFN    | R5F52105BBDFFN#30    | PLQP0080KB-A |              |              |              |                            |                       |            |           |
|       | R5F52105BBDFFM    | R5F52105BBDFFM#30    | PLQP0064KB-A |              |              |              |                            |                       |            |           |
|       | R5F52105BBDFFL    | R5F52105BBDFFL#30    | PLQP0048KB-A |              |              |              |                            |                       |            |           |
|       | R5F52105BDLJ      | R5F52105BDLJ#U0      | PTLG0100JA-A |              |              |              |                            |                       |            |           |
|       | R5F52105BDLA      | R5F52105BDLA#U0      | PTLG0100KA-A |              |              |              |                            |                       |            |           |
|       | R5F52105BBDFFV    | R5F52105BBDFFV#V0    | PLQP0080JA-A |              |              |              |                            |                       |            |           |
|       | R5F52105BBDFFK    | R5F52105BBDFFK#30    | PLQP0064GA-A |              |              |              |                            |                       |            |           |
|       | R5F52105BDLH      | R5F52105BDLH#U0      | PTLG0064JA-A |              |              |              |                            |                       |            |           |
|       | R5F52105BBDFFM *1 | R5F52105BBDFFM#W0 *1 | SWBG0069LA-A |              |              |              |                            |                       |            |           |
|       | R5F52104BBDFFM    | R5F52104BBDFFM#30    | PLQP0064KB-A | 96 Kbytes    | 16 Kbytes    |              |                            |                       |            |           |
|       | R5F52104BBDFFL    | R5F52104BBDFFL#30    | PLQP0048KB-A |              |              |              |                            |                       |            |           |
|       | R5F52104BBDFFV    | R5F52104BBDFFV#V0    | PLQP0080JA-A |              |              |              |                            |                       |            |           |
|       | R5F52104BDLH      | R5F52104BDLH#U0      | PTLG0064JA-A |              |              |              |                            |                       |            |           |
|       | R5F52103BBDFFM    | R5F52103BBDFFM#30    | PLQP0064KB-A | 64 Kbytes    | 12 Kbytes    |              |                            |                       |            |           |
|       | R5F52103BBDFFL    | R5F52103BBDFFL#30    | PLQP0048KB-A |              |              |              |                            |                       |            |           |
|       | R5F52103BBDFFV    | R5F52103BBDFFV#V0    | PLQP0080JA-A |              |              |              |                            |                       |            |           |
|       | R5F52103BDLH      | R5F52103BDLH#U0      | PTLG0064JA-A |              |              |              |                            |                       |            |           |

Note: • Orderable part numbers are current as of when this manual was published. Please make sure to refer to the relevant product page on the Renesas website for the latest part numbers.

Note 1. These products are available for general consumer equipment only.

**Table 1.5 List of Products Chip Version B: G Version (Ta = –40 to +105°C)**

| Group | Part No.     | Orderable Part No. | Package      | ROM Capacity | RAM Capacity | E2 DataFlash | Operating Frequency (Max.) | Operating Temperature |
|-------|--------------|--------------------|--------------|--------------|--------------|--------------|----------------------------|-----------------------|
| RX210 | R5F5210BBGFB | R5F5210BBGFB#30    | PLQP0144KA-A | 1 Mbytes     | 96 Kbytes    | 8 Kbytes     | 50 MHz                     | −40 to +105°C         |
|       | R5F5210BBGFP | R5F5210BBGFP#30    | PLQP0100KB-A |              |              |              |                            |                       |
|       | R5F5210ABGFB | R5F5210ABGFB#30    | PLQP0144KA-A | 768 Kbytes   | 64 Kbytes    |              |                            |                       |
|       | R5F5210ABGFP | R5F5210ABGFP#30    | PLQP0100KB-A |              |              |              |                            |                       |
|       | R5F52108BGFB | R5F52108BGFB#30    | PLQP0144KA-A | 512 Kbytes   |              |              |                            |                       |
|       | R5F52107BGFB | R5F52107BGFB#30    | PLQP0144KA-A | 384 Kbytes   |              |              |                            |                       |
|       | R5F52106BGFB | R5F52106BGFB#30    | PLQP0144KA-A | 256 Kbytes   | 32 Kbytes    |              |                            |                       |
|       | R5F52106BGFP | R5F52106BGFP#30    | PLQP0100KB-A |              |              |              |                            |                       |
|       | R5F52106BGFN | R5F52106BGFN#30    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52106BGFM | R5F52106BGFM#30    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52106BGFL | R5F52106BGFL#30    | PLQP0048KB-A |              |              |              |                            |                       |
|       | R5F52106BGFF | R5F52106BGFF#V0    | PTLG0100JA-A |              |              |              |                            |                       |
|       | R5F52106BGFK | R5F52106BGFK#30    | PLQP0064GA-A |              |              |              |                            |                       |
|       | R5F52105BGFB | R5F52105BGFB#30    | PLQP0144KA-A | 128 Kbytes   | 20 Kbytes    |              |                            |                       |
|       | R5F52105BGFP | R5F52105BGFP#30    | PLQP0100KB-A |              |              |              |                            |                       |
|       | R5F52105BGFN | R5F52105BGFN#30    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52105BGFM | R5F52105BGFM#30    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52105BGFL | R5F52105BGFL#30    | PLQP0048KB-A |              |              |              |                            |                       |
|       | R5F52105BGFF | R5F52105BGFF#V0    | PLQP0080JA-A |              |              |              |                            |                       |
|       | R5F52105BGFK | R5F52105BGFK#30    | PLQP0064GA-A |              |              |              |                            |                       |
|       | R5F52104BGFM | R5F52104BGFM#30    | PLQP0064KB-A | 96 Kbytes    | 16 Kbytes    |              |                            |                       |
|       | R5F52104BGFL | R5F52104BGFL#30    | PLQP0048KB-A |              |              |              |                            |                       |
|       | R5F52104BGFF | R5F52104BGFF#V0    | PLQP0080JA-A |              |              |              |                            |                       |
|       | R5F52103BGFM | R5F52103BGFM#30    | PLQP0064KB-A | 64 Kbytes    | 12 Kbytes    |              |                            |                       |
|       | R5F52103BGFL | R5F52103BGFL#30    | PLQP0048KB-A |              |              |              |                            |                       |
|       | R5F52103BGFF | R5F52103BGFF#V0    | PLQP0080JA-A |              |              |              |                            |                       |

Note: • Please contact Renesas Electronics sales office for derating of operation under Ta = +85°C to +105°C. Derating is the systematic reduction of load for the sake of improved reliability.

Note: • Orderable part numbers are current as of when this manual was published. Please make sure to refer to the relevant product page on the Renesas website for the latest part numbers.

**Table 1.6 List of Products Chip Version C: D Version (Ta = –40 to +85°C)**

| Group | Part No.     | Orderable Part No. | Package      | ROM Capacity | RAM Capacity | E2 DataFlash | Operating Frequency (Max.) | Operating Temperature |
|-------|--------------|--------------------|--------------|--------------|--------------|--------------|----------------------------|-----------------------|
| RX210 | R5F52108CDFP | R5F52108CDFP#30    | PLQP0100KB-A | 512 Kbytes   | 64 Kbytes    | 8 Kbytes     | 50 MHz                     | –40 to +85°C          |
|       | R5F52108CDFN | R5F52108CDFN#30    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52108CDFM | R5F52108CDFM#30    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52108CDLJ | R5F52108CDLJ#U0    | PTLG0100JA-A |              |              |              |                            |                       |
|       | R5F52108CDFF | R5F52108CDFF#V0    | PLQP0080JA-A |              |              |              |                            |                       |
|       | R5F52108CDFK | R5F52108CDFK#30    | PLQP0064GA-A |              |              |              |                            |                       |
|       | R5F52107CDFP | R5F52107CDFP#30    | PLQP0100KB-A | 384 Kbytes   | 64 Kbytes    | 8 Kbytes     | 50 MHz                     | –40 to +85°C          |
|       | R5F52107CDFN | R5F52107CDFN#30    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52107CDFM | R5F52107CDFM#30    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52107CDLJ | R5F52107CDLJ#U0    | PTLG0100JA-A |              |              |              |                            |                       |
|       | R5F52107CDFF | R5F52107CDFF#V0    | PLQP0080JA-A |              |              |              |                            |                       |
|       | R5F52107CDFK | R5F52107CDFK#30    | PLQP0064GA-A |              |              |              |                            |                       |


Note: • Orderable part numbers are current as of when this manual was published. Please make sure to refer to the relevant product page on the Renesas website for the latest part numbers.

**Table 1.7 List of Products Chip Version C: G Version (Ta = –40 to +105°C)**

| Group | Part No.     | Orderable Part No. | Package      | ROM Capacity | RAM Capacity | E2 DataFlash | Operating Frequency (Max.) | Operating Temperature |
|-------|--------------|--------------------|--------------|--------------|--------------|--------------|----------------------------|-----------------------|
| RX210 | R5F52108CGFP | R5F52108CGFP#30    | PLQP0100KB-A | 512 Kbytes   | 64 Kbytes    | 8 Kbytes     | 50 MHz                     | –40 to +105°C         |
|       | R5F52108CGFN | R5F52108CGFN#30    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52108CGFM | R5F52108CGFM#30    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52108CGFF | R5F52108CGFF#V0    | PLQP0080JA-A |              |              |              |                            |                       |
|       | R5F52108CGFK | R5F52108CGFK#30    | PLQP0064GA-A |              |              |              |                            |                       |
|       | R5F52107CGFP | R5F52107CGFP#30    | PLQP0100KB-A | 384 Kbytes   | 64 Kbytes    | 8 Kbytes     | 50 MHz                     | –40 to +105°C         |
|       | R5F52107CGFN | R5F52107CGFN#30    | PLQP0080KB-A |              |              |              |                            |                       |
|       | R5F52107CGFM | R5F52107CGFM#30    | PLQP0064KB-A |              |              |              |                            |                       |
|       | R5F52107CGFF | R5F52107CGFF#V0    | PLQP0080JA-A |              |              |              |                            |                       |
|       | R5F52107CGFK | R5F52107CGFK#30    | PLQP0064GA-A |              |              |              |                            |                       |

Note: • Please contact Renesas Electronics sales office for derating of operation under Ta = +85°C to +105°C. Derating is the systematic reduction of load for the sake of improved reliability.


Note: • Orderable part numbers are current as of when this manual was published. Please make sure to refer to the relevant product page on the Renesas website for the latest part numbers.

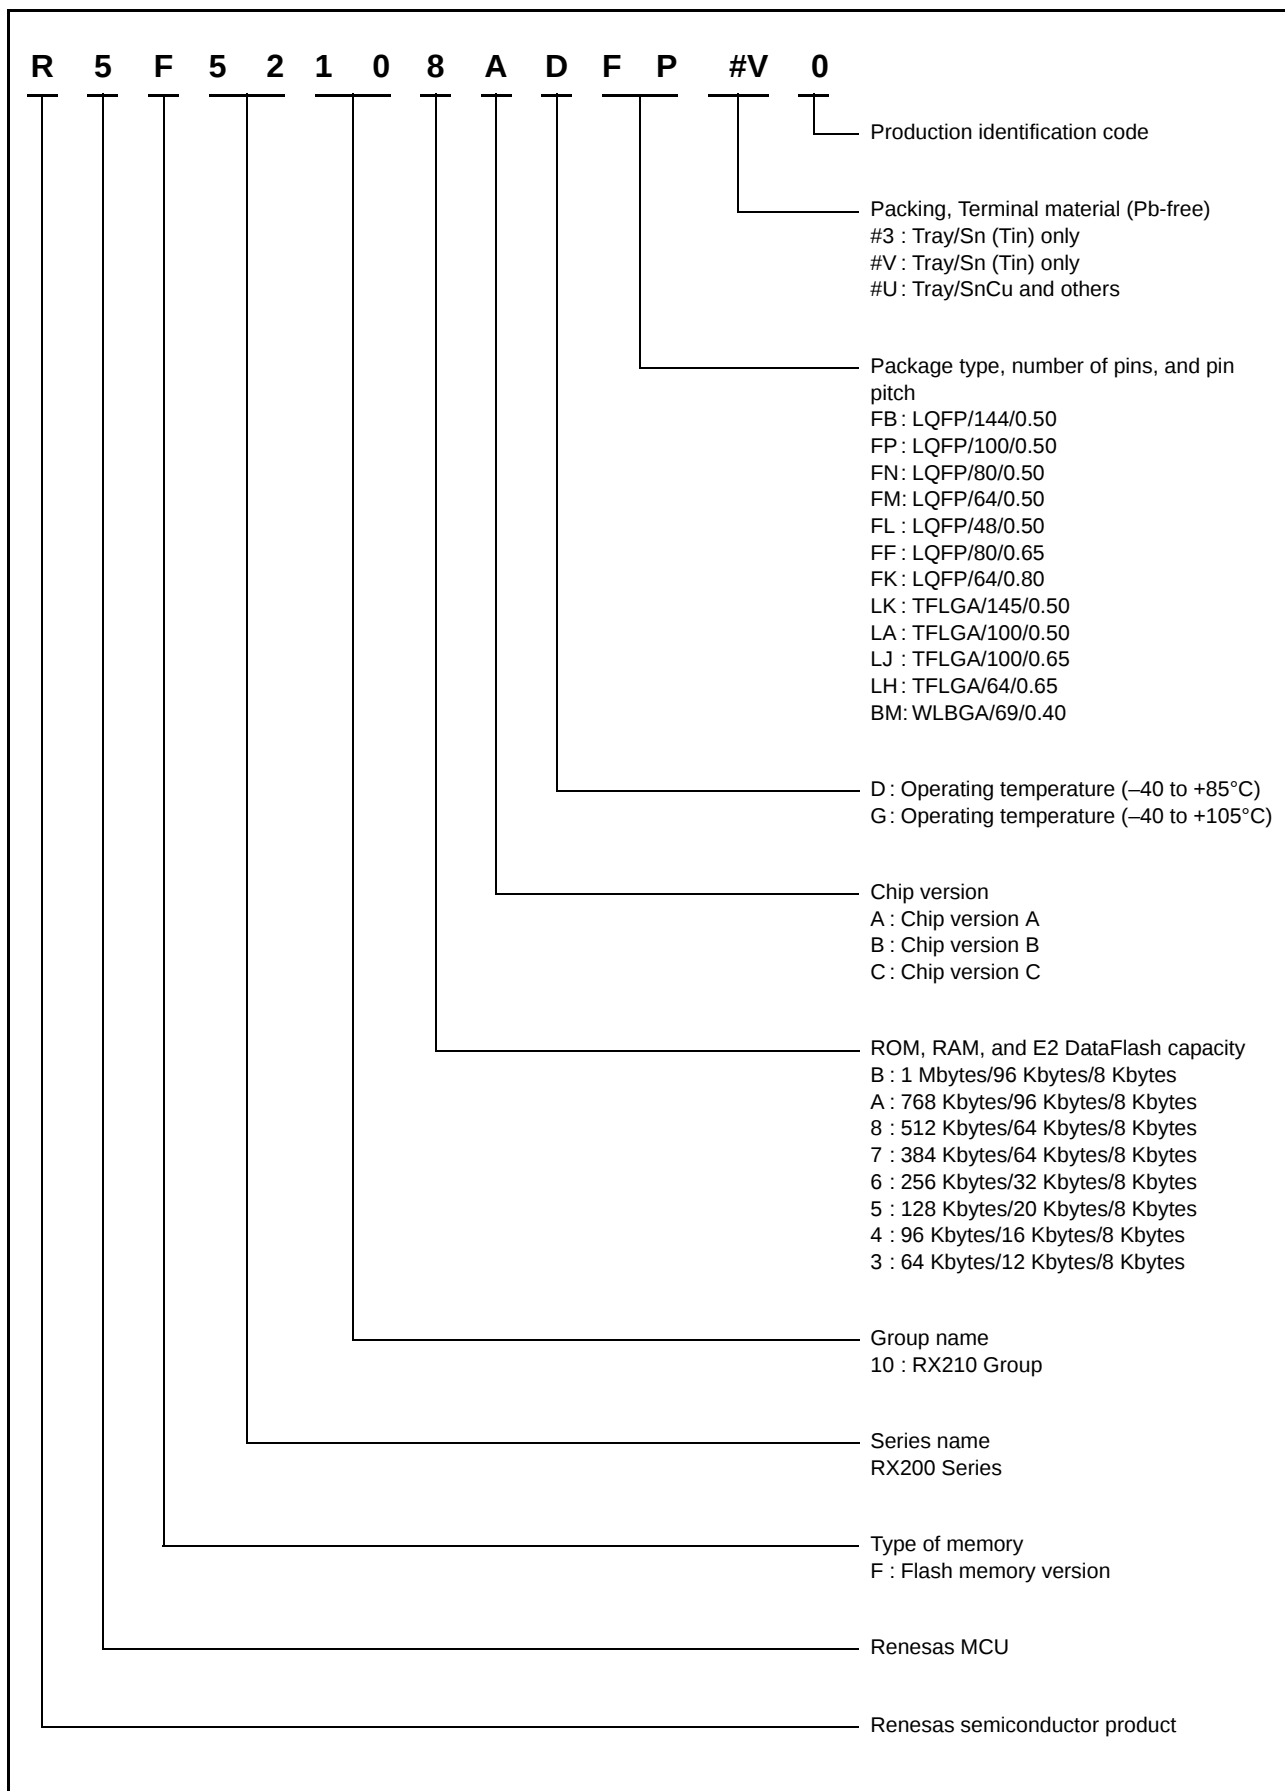

**Figure 1.1 How to Read the Product Part No., Memory Capacity, and Package Type**

### 1.3 Block Diagram

Figure 1.2 shows a block diagram.

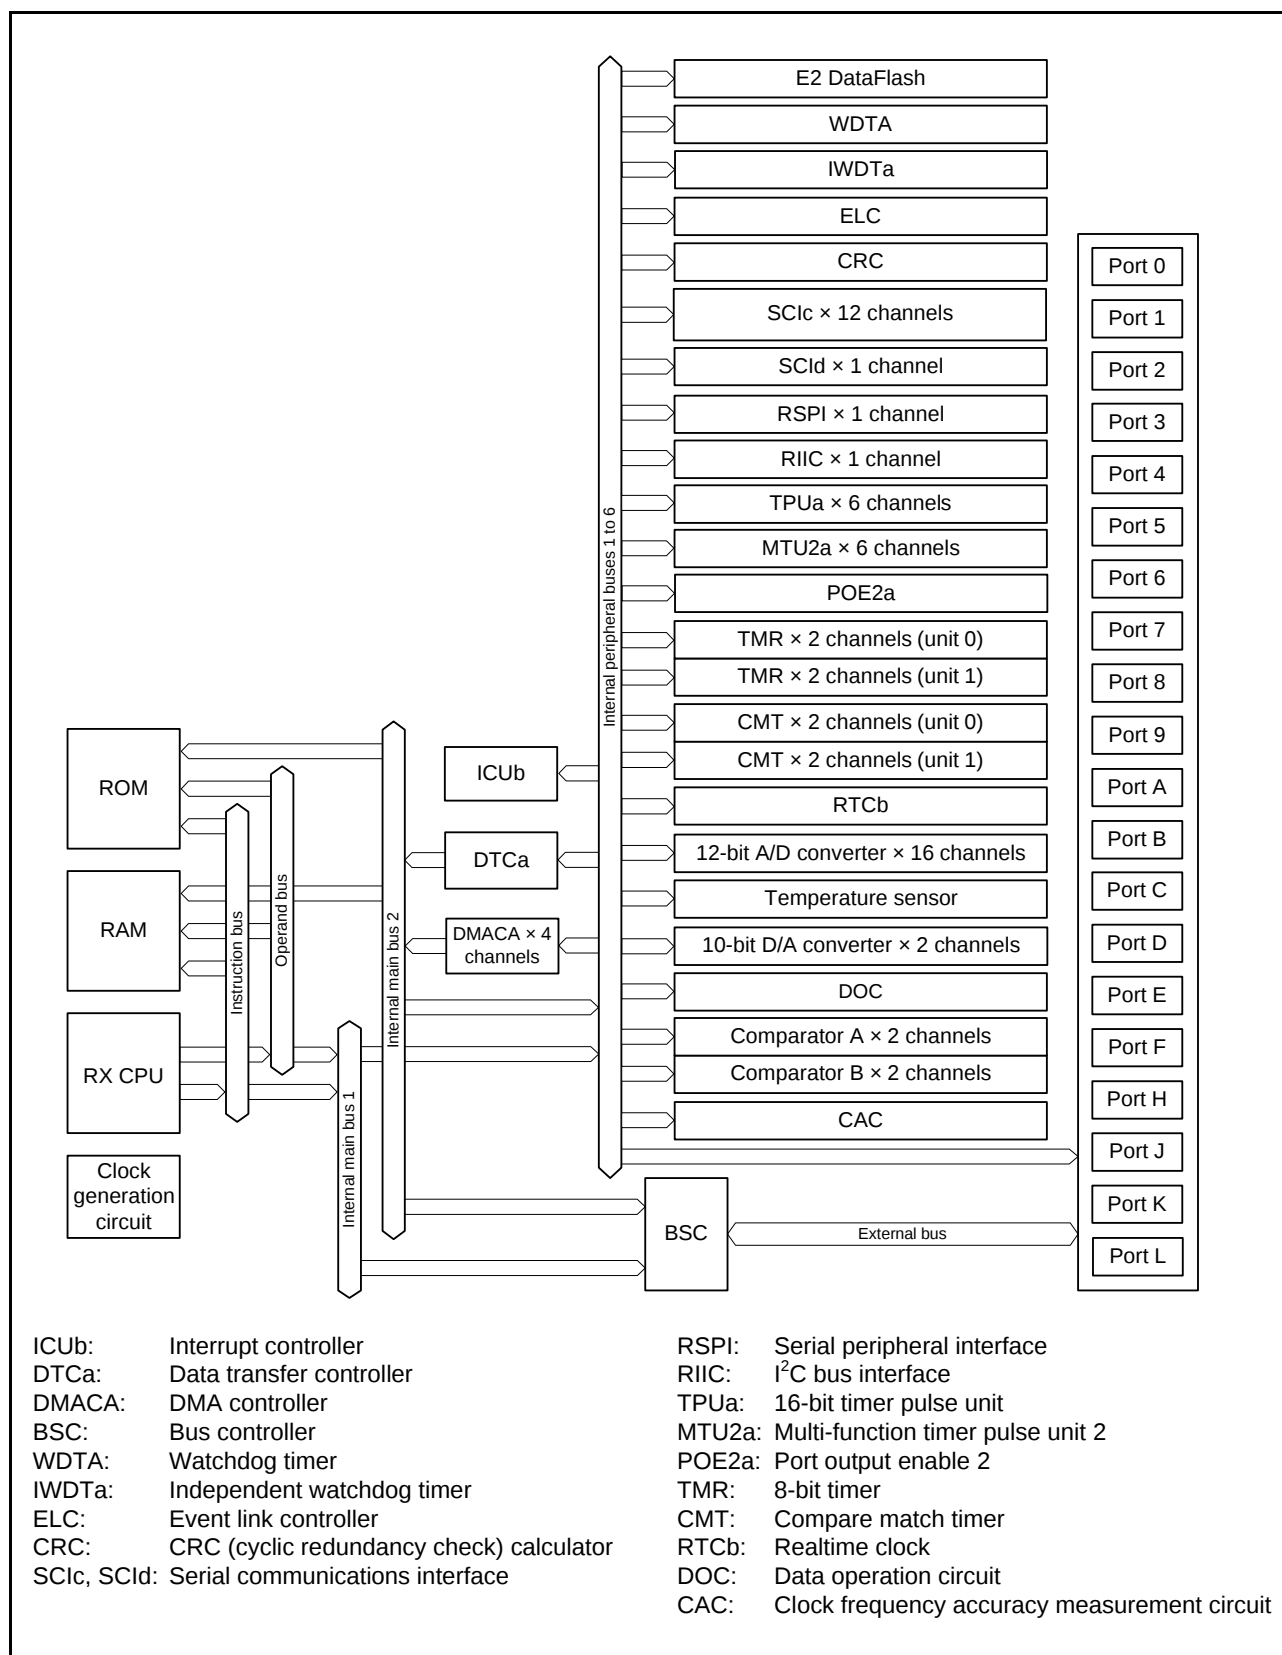

**Figure 1.2 Block Diagram**

## 1.4 Pin Functions

Table 1.8 lists the pin functions.

**Table 1.8 Pin Functions (1 / 4)**

| Classifications        | Pin Name         | I/O    | Description                                                                                                                                                                    |
|------------------------|------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply           | VCC              | Input  | Power supply pin. Connect it to the system power supply.                                                                                                                       |
|                        | VCL              | —      | Connect this pin to the VSS pin via the 0.1 $\mu$ F smoothing capacitor used to stabilize the internal power supply. Place the capacitor close to the pin.                     |
|                        | VSS              | Input  | Ground pin. Connect it to the system power supply (0 V).                                                                                                                       |
| Clock                  | XTAL             | Output | Pins for connecting a crystal resonator. An external clock signal can be input through the EXTAL pin.                                                                          |
|                        | EXTAL            | Input  |                                                                                                                                                                                |
|                        | BCLK             | Output | Outputs the external bus clock for external devices.                                                                                                                           |
|                        | XCIN             | Input  | Input/output pins for the sub-clock oscillator. Connect a crystal resonator between XCIN and XCOUT.                                                                            |
|                        | XCOUT            | Output |                                                                                                                                                                                |
| Operating mode control | MD               | Input  | Pin for setting the operating mode. The signal levels on this pin must not be changed during operation.                                                                        |
| System control         | RES#             | Input  | Reset pin. This LSI enters the reset state when this signal goes low.                                                                                                          |
| CAC                    | CACREF           | Input  | Input pin for the clock frequency accuracy measurement circuit.                                                                                                                |
| On-chip emulator       | FINED            | I/O    | FINE interface pin.                                                                                                                                                            |
| Address bus            | A0 to A23        | Output | Output pins for the address.                                                                                                                                                   |
| Data bus               | D0 to D15        | I/O    | Input and output pins for the bidirectional data bus.                                                                                                                          |
| Multiplexed bus        | A0/D0 to A15/D15 | I/O    | Address/data multiplexed bus                                                                                                                                                   |
| Bus control            | RD#              | Output | Strobe signal which indicates that reading from the external bus interface space is in progress.                                                                               |
|                        | WR#              | Output | Strobe signal which indicates that writing to the external bus interface space is in progress, in single-write strobe mode.                                                    |
|                        | WR0#, WR1#       | Output | Strobe signals which indicate that either group of data bus pins (D7 to D0, and D15 to D8) is valid in writing to the external bus interface space, in byte strobe mode.       |
|                        | BC0#, BC1#       | Output | Strobe signals which indicate that either group of data bus pins (D7 to D0 and D15 to D8) is valid in access to the external bus interface space, in single-write strobe mode. |
|                        | CS0# to CS3#     | Output | Select signals for areas 0 to 3.                                                                                                                                               |
|                        | WAIT#            | Input  | Input pin for wait request signals in access to the external space.                                                                                                            |
|                        | ALE              | Output | Address latch signal when address/data multiplexed bus is selected.                                                                                                            |
|                        |                  |        |                                                                                                                                                                                |
| Interrupt              | NMI              | Input  | Non-maskable interrupt request pin.                                                                                                                                            |
|                        | IRQ0 to IRQ7     | Input  | Interrupt request pins.                                                                                                                                                        |

**Table 1.8 Pin Functions (2 / 4)**

| Classifications                        | Pin Name                                   | I/O    | Description                                                                       |
|----------------------------------------|--------------------------------------------|--------|-----------------------------------------------------------------------------------|
| 16-bit timer pulse unit                | TIOCA0, TIOCB0<br>TIOCC0, TIOCD0           | I/O    | The TGRA0 to TGRD0 input capture input/output compare output/PWM output pins.     |
|                                        | TIOCA1, TIOCB1                             | I/O    | The TGRA1 and TGRB1 input capture input/output compare output/PWM output pins.    |
|                                        | TIOCA2, TIOCB2                             | I/O    | The TGRA2 and TGRB2 input capture input/output compare output/PWM output pins.    |
|                                        | TIOCA3, TIOCB3<br>TIOCC3, TIOCD3           | I/O    | The TGRA3 to TGRD3 input capture input/output compare output/PWM output pins.     |
|                                        | TIOCA4, TIOCB4                             | I/O    | The TGRA4 and TGRB4 input capture input/output compare output/PWM output pins.    |
|                                        | TIOCA5, TIOCB5                             | I/O    | The TGRA5 and TGRB5 input capture input/output compare output/PWM output pins.    |
|                                        | TCLKA, TCLKB<br>TCLKC, TCLKD               | Input  | Input pins for external clock signals.                                            |
| Multi-function timer pulse unit 2      | MTIOC0A, MTIOC0B<br>MTIOC0C, MTIOC0D       | I/O    | The TGRA0 to TGRD0 input capture input/output compare output/PWM output pins.     |
|                                        | MTIOC1A, MTIOC1B                           | I/O    | The TGRA1 and TGRB1 input capture input/output compare output/PWM output pins.    |
|                                        | MTIOC2A, MTIOC2B                           | I/O    | The TGRA2 and TGRB2 input capture input/output compare output/PWM output pins.    |
|                                        | MTIOC3A, MTIOC3B<br>MTIOC3C, MTIOC3D       | I/O    | The TGRA3 to TGRD3 input capture input/output compare output/PWM output pins.     |
|                                        | MTIOC4A, MTIOC4B<br>MTIOC4C, MTIOC4D       | I/O    | The TGRA4 to TGRD4 input capture input/output compare output/PWM output pins.     |
|                                        | MTIC5U, MTIC5V, MTIC5W                     | Input  | The TGRU5, TGRV5, and TGRW5 input capture input/external pulse input pins.        |
|                                        | MTCLKA, MTCLKB,<br>MTCLKC, MTCLKD          | Input  | Input pins for the external clock.                                                |
| Port output enable 2                   | POE0# to POE3#, POE8#                      | Input  | Input pins for request signals to place the MTU pins in the high impedance state. |
| 8-bit timer                            | TMO0 to TMO3                               | Output | Compare match output pins.                                                        |
|                                        | TMCIO to TMCIO3                            | Input  | Input pins for external clocks to be input to the counter.                        |
|                                        | TMRI0 to TMRI3                             | Input  | Input pins for the counter reset.                                                 |
| Realtime clock                         | RTCOUT                                     | Output | Output pin for 1-Hz clock.                                                        |
|                                        | RTCIC0 to RTCIC2                           | Input  | Time capture event input pins.                                                    |
| Serial communications interface (SCIC) | • Asynchronous mode/clock synchronous mode |        |                                                                                   |
|                                        | SCK0 to SCK11                              | I/O    | Input/output pins for the clock                                                   |
|                                        | RXD0 to RXD11                              | Input  | Input pins for received data                                                      |
|                                        | TXD0 to TXD11                              | Output | Output pins for transmitted data                                                  |
|                                        | CTS0# to CTS11#                            | Input  | Input pins for controlling the start of transmission and reception                |
|                                        | RTS0# to RTS11#                            | Output | Output pins for controlling the start of transmission and reception               |
|                                        | • Simple I <sup>2</sup> C mode             |        |                                                                                   |
|                                        | SSCL0 to SSCL11                            | I/O    | Input/output pins for the I <sup>2</sup> C clock                                  |
|                                        | SSDA0 to SSDA11                            | I/O    | Input/output pins for the I <sup>2</sup> C data                                   |
|                                        | • Simple SPI mode                          |        |                                                                                   |
|                                        | SCK0 to SCK11                              | I/O    | Input/output pins for the clock                                                   |
|                                        | SMISO0 to SMISO11                          | I/O    | Input/output pins for slave transmission of data                                  |
|                                        | SMOSI0 to SMOSI11                          | I/O    | Input/output pins for master transmission of data                                 |
|                                        | SS0# to SS11#                              | Input  | Chip-select input pins                                                            |

**Table 1.8 Pin Functions (3 / 4)**

| Classifications                        | Pin Name                                   | I/O    | Description                                                                                                                |
|----------------------------------------|--------------------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------|
| Serial communications interface (SCId) | • Asynchronous mode/clock synchronous mode |        |                                                                                                                            |
|                                        | SCK12                                      | I/O    | Input/output pin for the clock                                                                                             |
|                                        | RXD12                                      | Input  | Input pin for received data                                                                                                |
|                                        | TXD12                                      | Output | Output pin for transmitted data                                                                                            |
|                                        | CTS12#                                     | Input  | Input pin for controlling the start of transmission and reception                                                          |
|                                        | RTS12#                                     | Output | Output pin for controlling the start of transmission and reception                                                         |
|                                        | • Simple I <sup>2</sup> C mode             |        |                                                                                                                            |
|                                        | SSCL12                                     | I/O    | Input/output pin for the I <sup>2</sup> C clock                                                                            |
|                                        | SSDA12                                     | I/O    | Input/output pin for the I <sup>2</sup> C data                                                                             |
|                                        | • Simple SPI mode                          |        |                                                                                                                            |
|                                        | SCK12                                      | I/O    | Input/output pin for the clock                                                                                             |
|                                        | SMISO12                                    | I/O    | Input/output pin for slave transmit data                                                                                   |
|                                        | SMOSI12                                    | I/O    | Input/output pin for master transmit data                                                                                  |
|                                        | SS12#                                      | Input  | Chip-select input pin                                                                                                      |
|                                        | • Extended serial mode                     |        |                                                                                                                            |
|                                        | RDX12                                      | Input  | Input pin for data reception by SCId                                                                                       |
|                                        | TXDX12                                     | Output | Output pin for data transmission by SCId                                                                                   |
|                                        | SIOX12                                     | I/O    | Input/output pin for data reception or transmission by SCId                                                                |
| I <sup>2</sup> C bus interface         | SCL                                        | I/O    | Input/output pin for I <sup>2</sup> C bus interface clocks. Bus can be directly driven by the N-channel open-drain output. |
|                                        | SDA                                        | I/O    | Input/output pin for I <sup>2</sup> C bus interface data. Bus can be directly driven by the N-channel open-drain output.   |
| Serial peripheral interface            | RSPCKA                                     | I/O    | Clock input/output pin for the RSPI.                                                                                       |
|                                        | MOSIA                                      | I/O    | Input or output data output from the master for the RSPI.                                                                  |
|                                        | MISOA                                      | I/O    | Input or output data output from the slave for the RSPI.                                                                   |
|                                        | SSLA0                                      | I/O    | Input/output pin to select the slave for the RSPI.                                                                         |
|                                        | SSLA1 to SSLA3                             | Output | Output pins to select the slave for the RSPI.                                                                              |
| 12-bit A/D converter                   | AN000 to AN015                             | Input  | Input pins for the analog signals to be processed by the A/D converter.                                                    |
|                                        | ADTRG0#                                    | Input  | Input pin for the external trigger signals that start the A/D conversion.                                                  |
| D/A converter                          | DA0, DA1                                   | Output | Output pins for the analog signals to be processed by the D/A converter.                                                   |
| Comparator A                           | CMPA1                                      | Input  | Input pin for the comparator A1 analog signal.                                                                             |
|                                        | CMPA2                                      | Input  | Input pin for the comparator A2 analog signal.                                                                             |
|                                        | CVREFA                                     | Input  | Input pin for the comparator reference voltage.                                                                            |
| Comparator B                           | CMPB0                                      | Input  | Input pin for the comparator B0 analog signal.                                                                             |
|                                        | CVREFB0                                    | Input  | Input pin for the comparator B0 reference voltage.                                                                         |
|                                        | CMPB1                                      | Input  | Input pin for the comparator B1 analog signal.                                                                             |
|                                        | CVREFB1                                    | Input  | Input pin for the comparator B1 reference voltage.                                                                         |

**Table 1.8 Pin Functions (4 / 4)**

| Classifications     | Pin Name             | I/O   | Description                                                                                                                              |
|---------------------|----------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------|
| Analog power supply | AVCC0                | Input | Analog voltage supply pin for the 12-bit A/D converter. Connect this pin to VCC if the 12-bit A/D converter is not to be used.           |
|                     | AVSS0                | Input | Analog ground pin for the 12-bit A/D converter. Connect this pin to VSS if the 12-bit A/D converter is not to be used.                   |
|                     | VREFH0               | Input | Analog reference voltage supply pin for the 12-bit A/D converter. Connect this pin to VCC if the 12-bit A/D converter is not to be used. |
|                     | VREFL0               | Input | Analog reference ground pin for the 12-bit A/D converter. Connect this pin to VSS if the 12-bit A/D converter is not to be used.         |
|                     | VREFH                | Input | Analog voltage supply pin for the D/A converter. Connect this pin to VCC if the D/A converter is not to be used.                         |
|                     | VREFL                | Input | Analog ground pin for the D/A converter. Connect this pin to VSS if the D/A converter is not to be used.                                 |
| I/O ports           | P00 to P03, P05, P07 | I/O   | 6-bit input/output pins.                                                                                                                 |
|                     | P12 to P17           | I/O   | 6-bit input/output pins.                                                                                                                 |
|                     | P20 to P27           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | P30 to P37           | I/O   | 8-bit input/output pins. (P35 input pin)                                                                                                 |
|                     | P40 to P47           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | P50 to P56           | I/O   | 7-bit input/output pins.                                                                                                                 |
|                     | P60 to P67           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | P70 to P77           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | P80 to P83, P86, P87 | I/O   | 6-bit input/output pins.                                                                                                                 |
|                     | P90 to P93           | I/O   | 4-bit input/output pins.                                                                                                                 |
|                     | PA0 to PA7           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | PB0 to PB7           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | PC0 to PC7           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | PD0 to PD7           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | PE0 to PE7           | I/O   | 8-bit input/output pins.                                                                                                                 |
|                     | PF5                  | I/O   | 1-bit input/output pin.                                                                                                                  |
|                     | PH0 to PH3           | I/O   | 4-bit input/output pins.                                                                                                                 |
|                     | PJ1, PJ3, PJ5        | I/O   | 3-bit input/output pins.                                                                                                                 |
|                     | PK2 to PK5           | I/O   | 4-bit input/output pins.                                                                                                                 |
|                     | PL0, PL1             | I/O   | 2-bit input/output pins.                                                                                                                 |

## 1.5 Pin Assignments


Figure 1.3 to Figure 1.11 show the pin assignments. Table 1.9 to Table 1.17 show the lists of pins and pin functions.

|    | A     | B      | C      | D   | E                                                                                    | F     | G    | H     | J   | K   | L   | M   | N   |    |
|----|-------|--------|--------|-----|--------------------------------------------------------------------------------------|-------|------|-------|-----|-----|-----|-----|-----|----|
| 13 | PE3   | PE4    | PK4    | PE6 | P67                                                                                  | PA2   | PA4  | PA7   | PB1 | PB5 | PL0 | PL1 | P74 | 13 |
| 12 | PE1   | PE2    | P70    | PE5 | P65                                                                                  | PA1   | VCC  | PB0   | PB2 | PB6 | P73 | PC1 | P75 | 12 |
| 11 | P62   | P61    | PE0    | PK5 | P66                                                                                  | VSS   | PA6  | P71   | PB4 | PB7 | PC2 | PC0 | PC3 | 11 |
| 10 | PK3   | PK2    | P63    | PE7 | PA0                                                                                  | PA3   | PA5  | P72   | PB3 | P76 | PC4 | P77 | P82 | 10 |
| 9  | PD6   | PD4    | PD7    | P64 | <b>RX210 Group<br/>PTLG0145KA-A<br/>(145-pin TFLGA)<br/>(Upper perspective view)</b> |       |      |       |     | P80 | PC5 | P81 | PC7 | 9  |
| 8  | PD2   | PD0    | PD3    | P60 |                                                                                      |       |      |       |     | VCC | P83 | PC6 | VSS | 8  |
| 7  | P92   | P91    | PD1    | PD5 |                                                                                      |       |      |       |     | P51 | P52 | P50 | P55 | 7  |
| 6  | P90   | P47    | VSS    | P93 |                                                                                      |       |      |       |     | P53 | P56 | PH0 | PH1 | 6  |
| 5  | P45   | P43    | P46    | VCC | P44                                                                                  |       |      |       |     | P54 | P13 | PH3 | PH2 | 5  |
| 4  | P42   | VREFL0 | P41    | P01 | NC                                                                                   | PJ1   | NC   | P35   | P30 | P15 | P24 | P12 | P14 | 4  |
| 3  | P40   | P05    | VREFH0 | P03 | PJ5                                                                                  | PJ3   | MD   | VSS   | P32 | P31 | P16 | P86 | P87 | 3  |
| 2  | P07   | AVCC0  | P02    | PF5 | VCL                                                                                  | XCOUT | RES# | VCC   | P33 | P26 | P23 | P17 | P20 | 2  |
| 1  | AVSS0 | VREFH  | VREFL  | P00 | VSS                                                                                  | XCIN  | XTAL | EXTAL | P34 | P27 | P25 | P22 | P21 | 1  |
|    | A     | B      | C      | D   | E                                                                                    | F     | G    | H     | J   | K   | L   | M   | N   |    |


Note: • This figure indicates the power supply pins and I/O port pins. For the pin configuration, see the table "List of Pins and Pin Functions (145-Pin TFLGA)".

Note: • For the position of A1 pin in the package, see "Package Dimensions".


**Figure 1.3 Pin Assignments of the 145-Pin TFLGA (Upper Perspective View)**

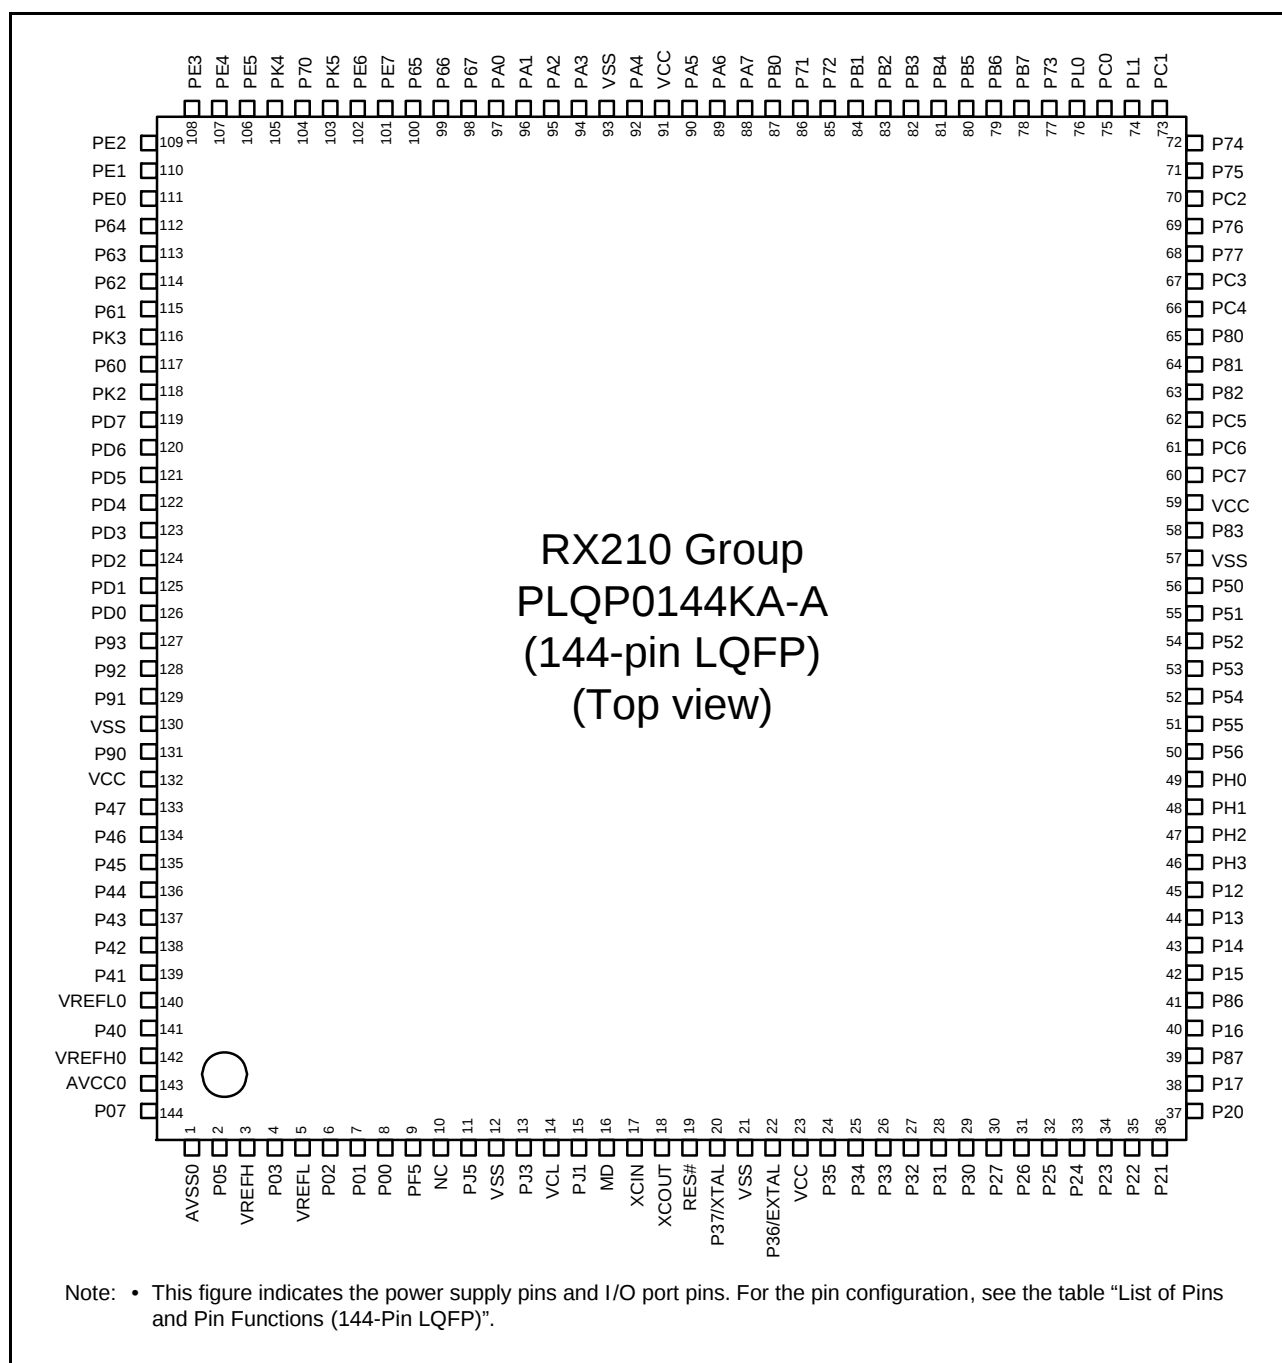

**Figure 1.4 Pin Assignments of the 144-Pin LQFP**

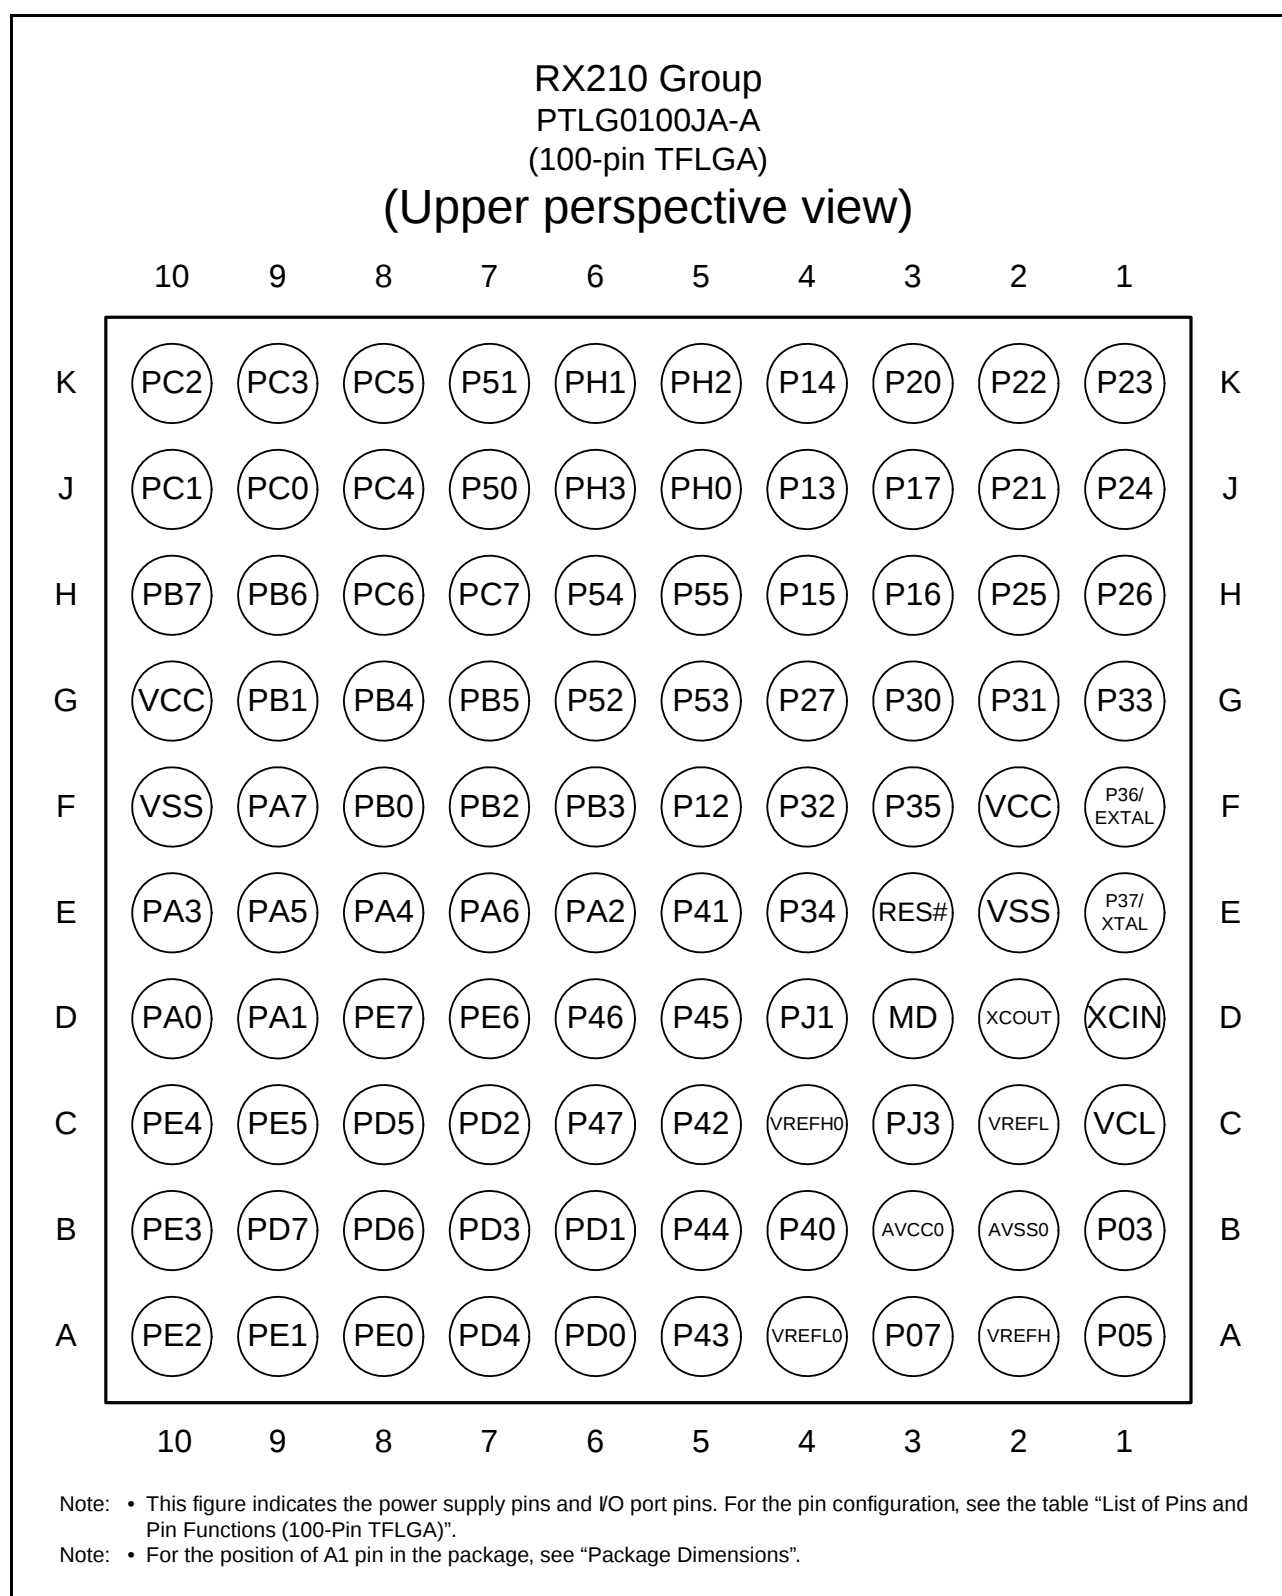

**Figure 1.5 Pin Assignments of the 100-Pin TFLGA (Upper Perspective View)**

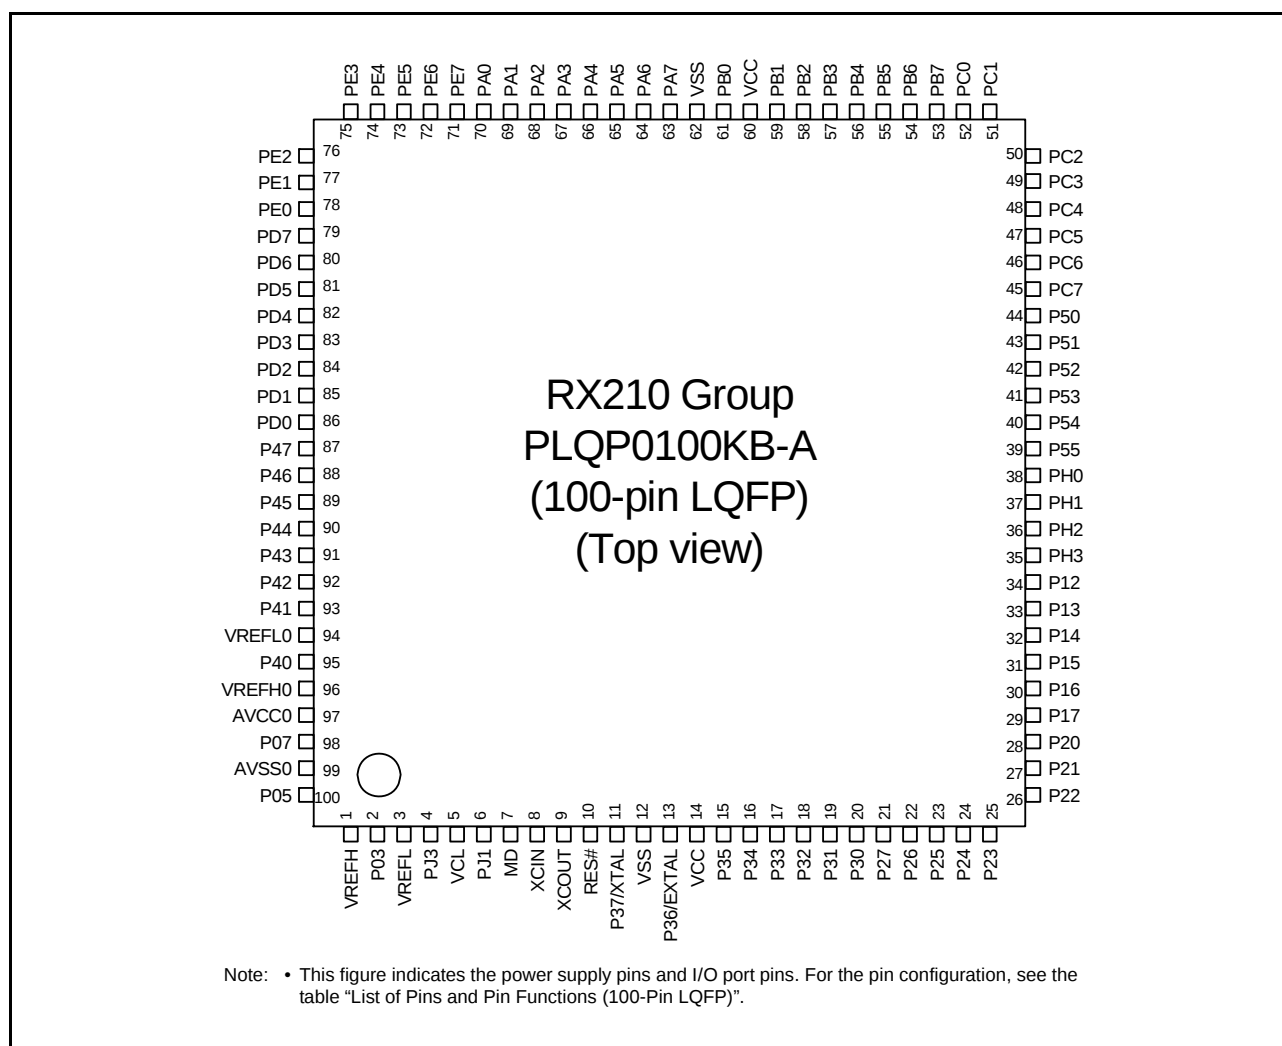

**Figure 1.6 Pin Assignments of the 100-Pin LQFP**



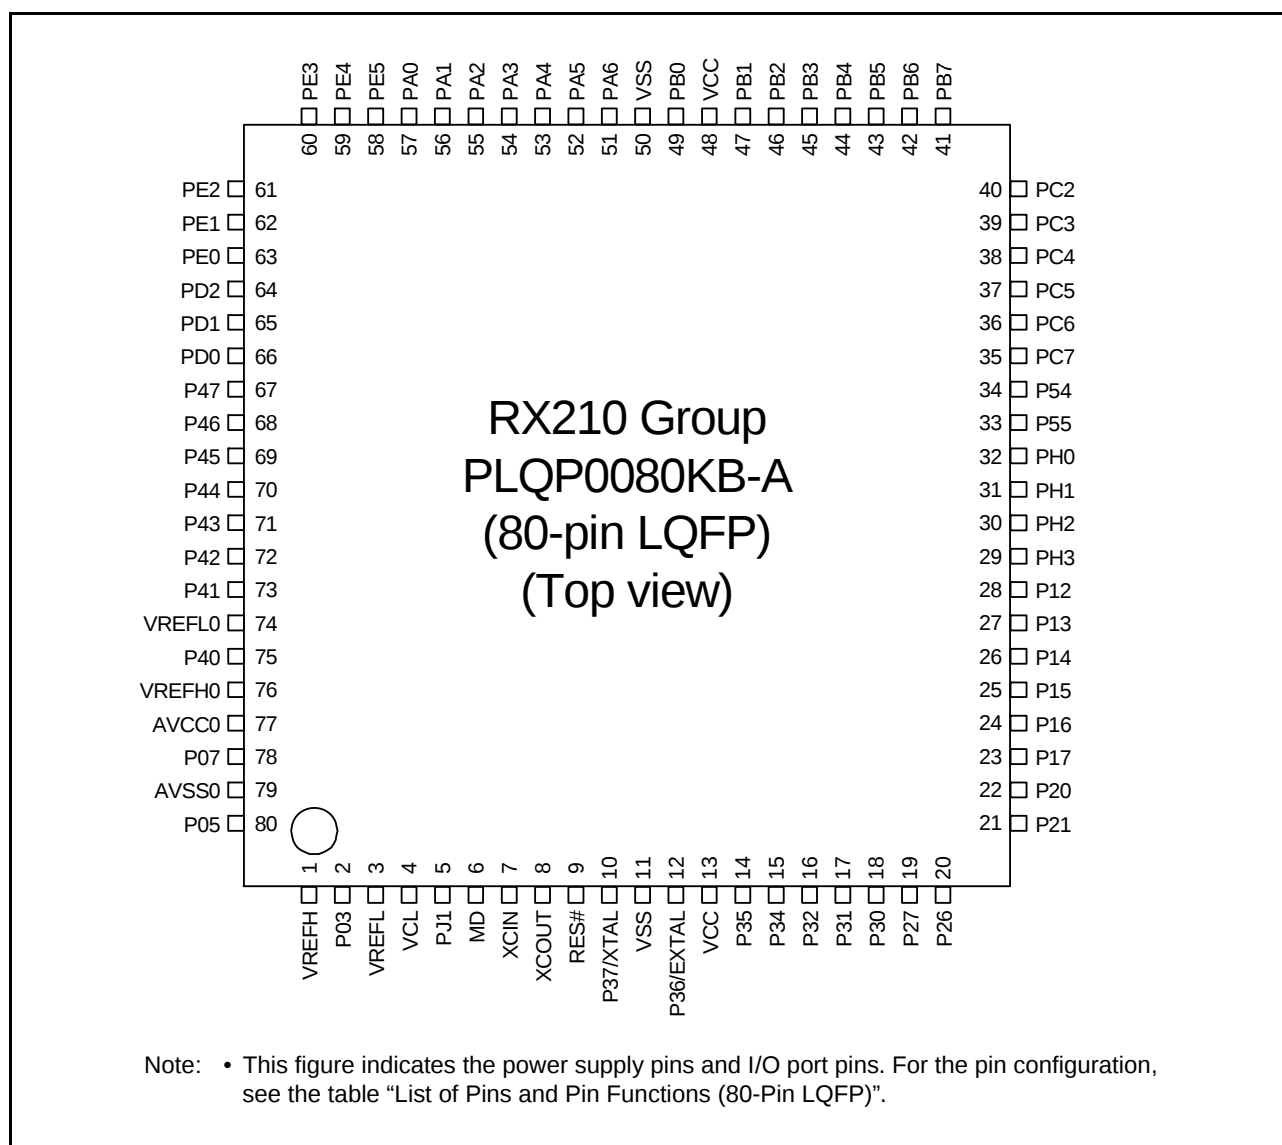



Figure 1.7 Pin Assignments of the 80-Pin LQFP

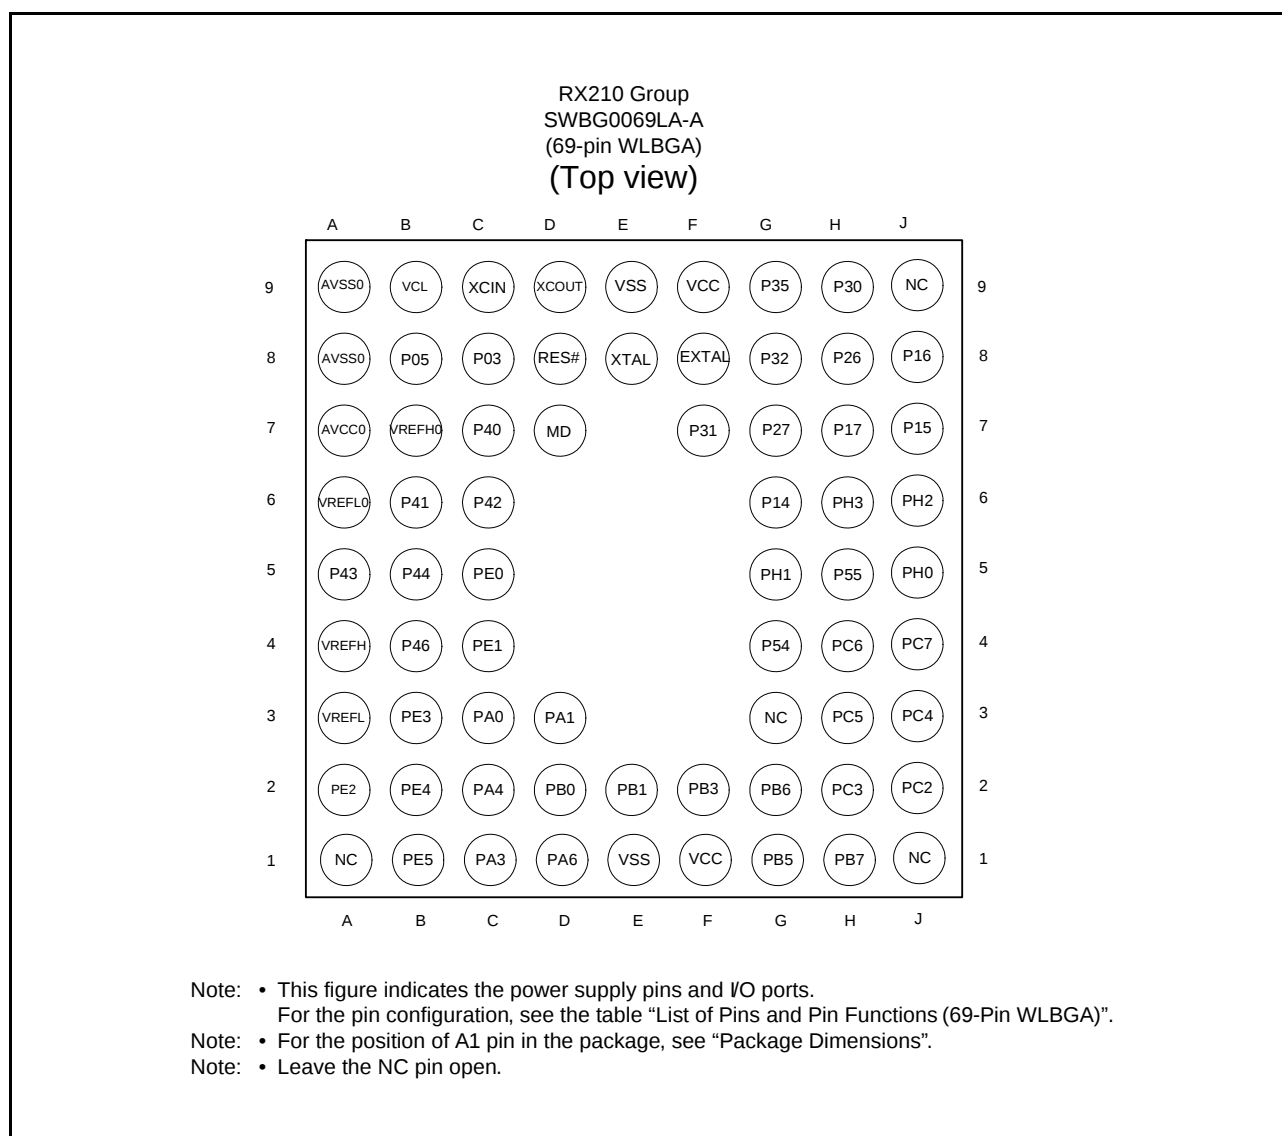


**Figure 1.8 Pin Assignments of the 69-Pin WLBGA**

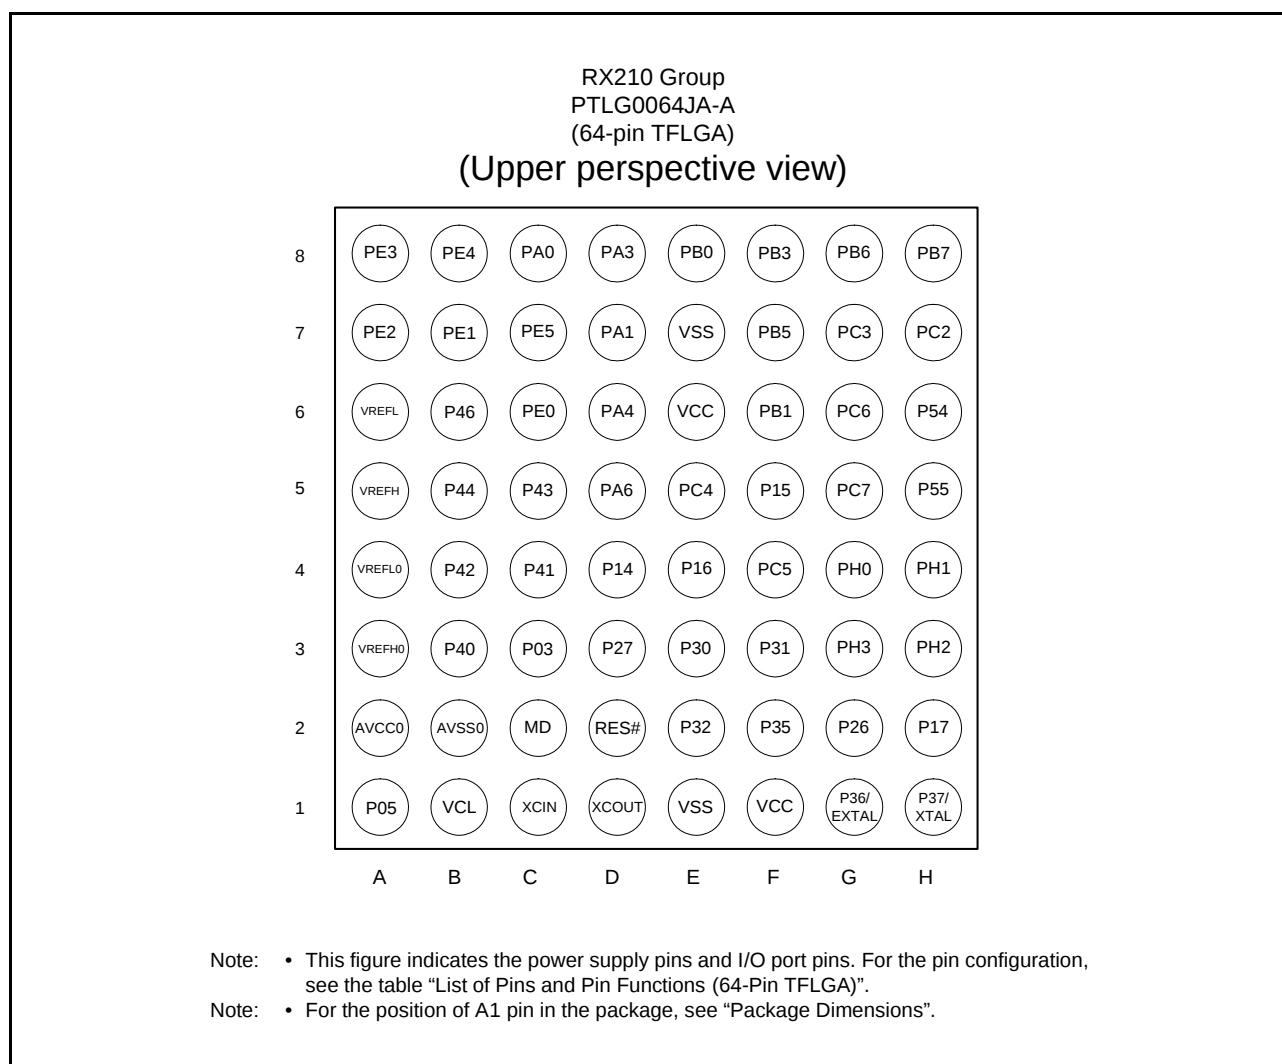

**Figure 1.9 Pin Assignments of the 64-Pin TFLGA**

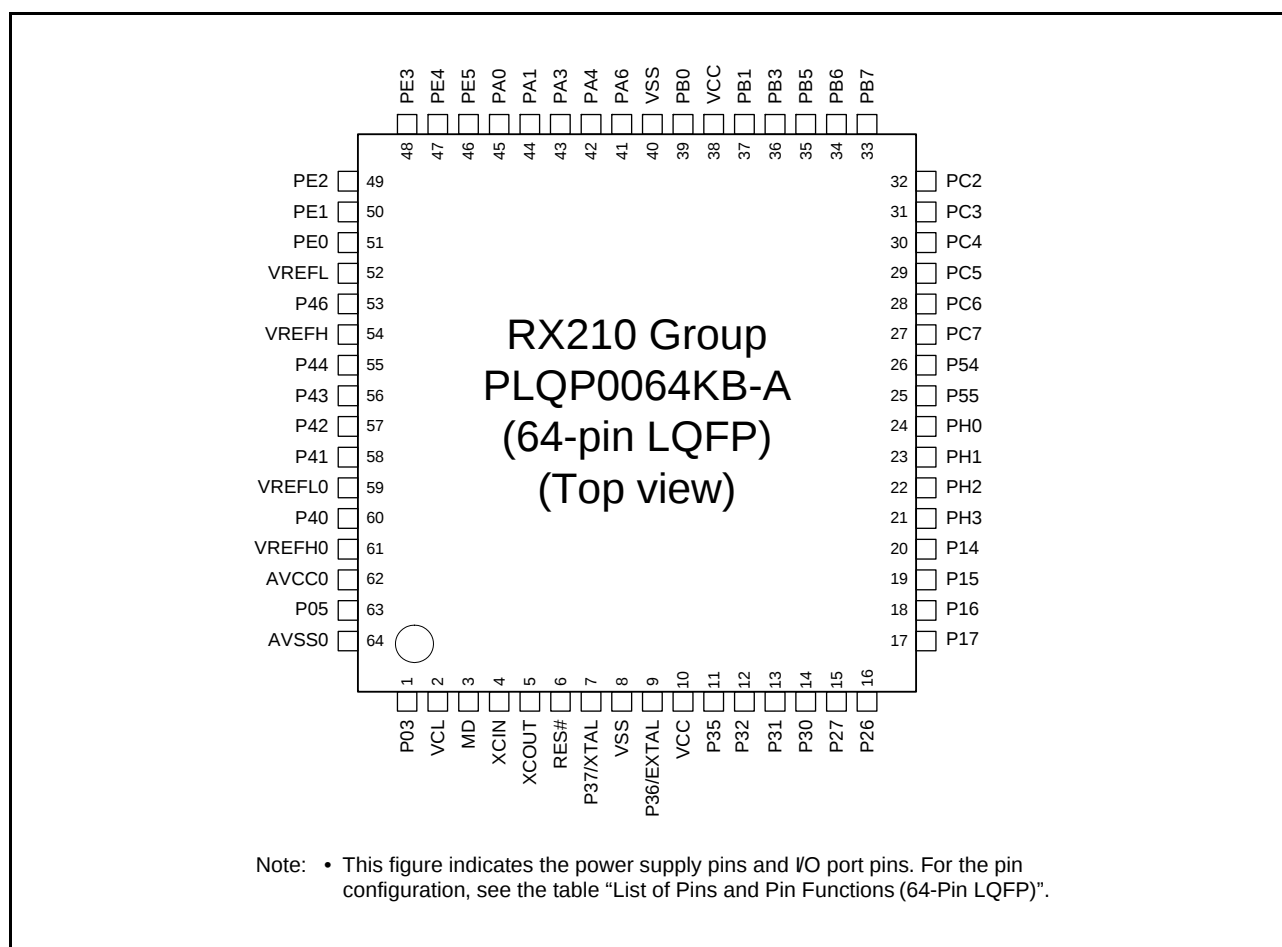

**Figure 1.10 Pin Assignments of the 64-Pin LQFP**

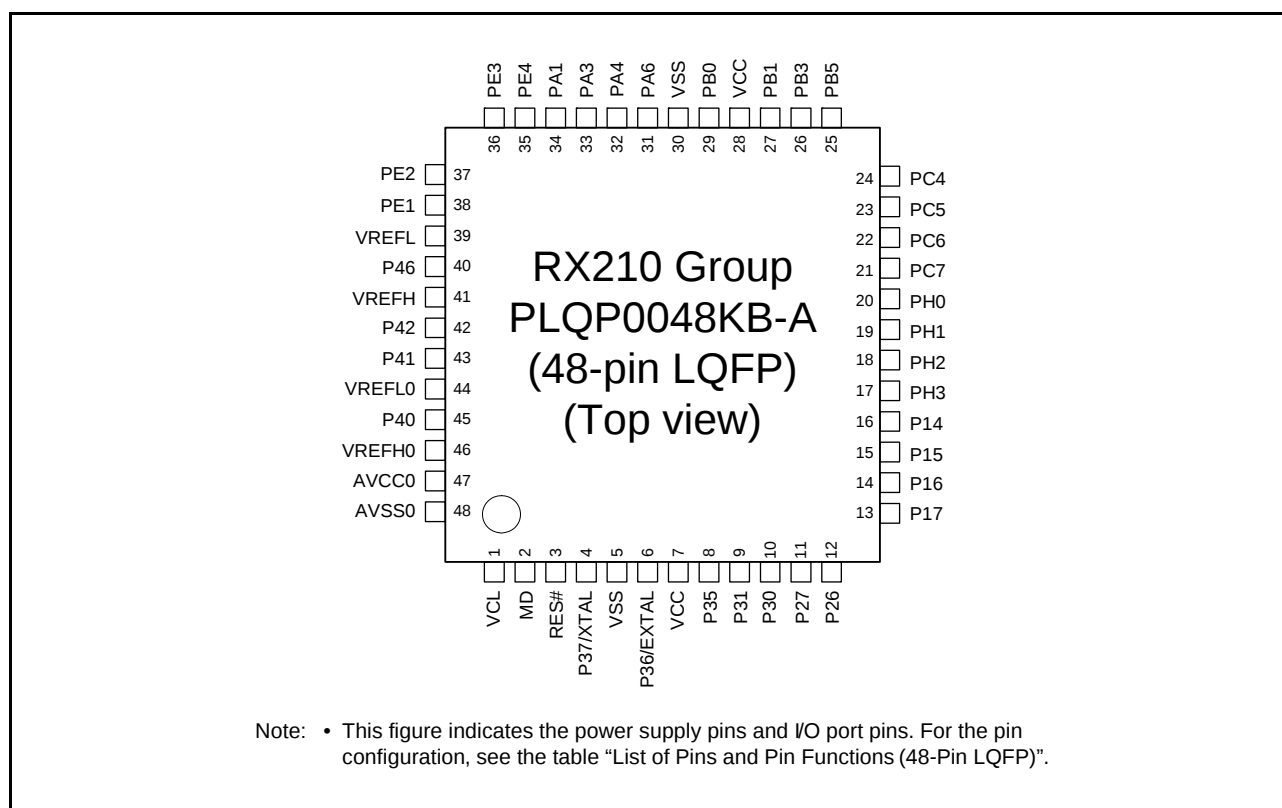

**Figure 1.11 Pin Assignments of the 48-Pin LQFP**

**Table 1.9 List of Pins and Pin Functions (145-Pin TFLGA) (1 / 4)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE) | Communications (SCIc, SCId, RSPI, RIIC) | Others                |
|---------|-------------------------------------|----------|--------------|------------------------|-----------------------------------------|-----------------------|
| A1      | AVSS0                               |          |              |                        |                                         |                       |
| A2      |                                     | P07      |              |                        |                                         | ADTRG0#               |
| A3      |                                     | P40      |              |                        |                                         | AN000                 |
| A4      |                                     | P42      |              |                        |                                         | AN002                 |
| A5      |                                     | P45      |              |                        |                                         | AN005                 |
| A6      |                                     | P90      |              |                        | TXD7/SMOSI7/SSDA7                       |                       |
| A7      |                                     | P92      |              |                        | RXD7/SMISO7/SSCL7                       |                       |
| A8      |                                     | PD2      | D2[A2/D2]    | MTIOC4D                |                                         | IRQ2                  |
| A9      |                                     | PD6      | D6[A6/D6]    | MTIC5V/POE1#           |                                         | IRQ6                  |
| A10     |                                     | PK3      |              |                        | RXD9/SMISO9/SSCL9                       |                       |
| A11     |                                     | P62      |              |                        |                                         |                       |
| A12     |                                     | PE1      | D9[A9/D9]    | MTIOC4C                | TXD12/TXDX12/SIOX12/SMOSI12/SSDA12      | AN009/CMPB0           |
| A13     |                                     | PE3      | D11[A11/D11] | MTIOC4B/POE8#          | CTS12#/RTS12#/SS12#                     | AN011/CMPA1           |
| B1      | VREFH                               |          |              |                        |                                         |                       |
| B2      | AVCC0                               |          |              |                        |                                         |                       |
| B3      |                                     | P05      |              |                        |                                         | DA1                   |
| B4      | VREFL0                              |          |              |                        |                                         |                       |
| B5      |                                     | P43      |              |                        |                                         | AN003                 |
| B6      |                                     | P47      |              |                        |                                         | AN007                 |
| B7      |                                     | P91      |              |                        | SCK7                                    |                       |
| B8      |                                     | PD0      | D0[A0/D0]    |                        |                                         | IRQ0                  |
| B9      |                                     | PD4      | D4[A4/D4]    | POE3#                  |                                         | IRQ4                  |
| B10     |                                     | PK2      |              |                        | TXD9/SMOSI9/SSDA9                       |                       |
| B11     |                                     | P61      |              |                        | CTS9#/RTS9#/SS9#                        |                       |
| B12     |                                     | PE2      | D10[A10/D10] | MTIOC4A                | RXD12/RXDX12/SMISO12/SSCL12             | IRQ7-DS/AN010/CVREFB0 |
| B13     |                                     | PE4      | D12[A12/D12] | MTIOC4D/MTIOC1A        |                                         | AN012/CMPA2           |
| C1      | VREFL                               |          |              |                        |                                         |                       |
| C2      |                                     | P02      |              | TMC11                  | SCK6                                    |                       |
| C3      | VREFH0                              |          |              |                        |                                         |                       |
| C4      |                                     | P41      |              |                        |                                         | AN001                 |
| C5      |                                     | P46      |              |                        |                                         | AN006                 |
| C6      | VSS                                 |          |              |                        |                                         |                       |
| C7      |                                     | PD1      | D1[A1/D1]    | MTIOC4B                |                                         | IRQ1                  |
| C8      |                                     | PD3      | D3[A3/D3]    | POE8#                  |                                         | IRQ3                  |
| C9      |                                     | PD7      | D7[A7/D7]    | MTIC5U/POE0#           |                                         | IRQ7                  |
| C10     |                                     | P63      |              |                        |                                         |                       |
| C11     |                                     | PE0      | D8[A8/D8]    |                        | SCK12                                   | AN008                 |
| C12     |                                     | P70      |              |                        | SCK4                                    |                       |
| C13     |                                     | PK4      |              |                        | RXD4/SMISO4/SSCL4                       |                       |
| D1      |                                     | P00      |              | TMRI0                  | TXD6/SMOSI6/SSDA6                       |                       |
| D2      |                                     | PF5      |              |                        |                                         | IRQ4                  |
| D3      |                                     | P03      |              |                        |                                         | DA0                   |
| D4      |                                     | P01      |              | TMC10                  | RXD6/SMISO6/SSCL6                       |                       |
| D5      | VCC                                 |          |              |                        |                                         |                       |
| D6      |                                     | P93      |              |                        | CTST7#/RTST7#/SS7#                      |                       |
| D7      |                                     | PD5      | D5[A5/D5]    | MTIC5W/POE2#           |                                         | IRQ5                  |
| D8      |                                     | P60      |              |                        | SCK9                                    |                       |
| D9      |                                     | P64      |              |                        |                                         |                       |
| D10     |                                     | PE7      | D15[A15/D15] |                        |                                         | IRQ7/AN015            |

**Table 1.9 List of Pins and Pin Functions (145-Pin TFLGA) (2 / 4)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE)                          | Communications (SCId, SCId, RSPI, RIIC)            | Others                      |
|---------|-------------------------------------|----------|--------------|-------------------------------------------------|----------------------------------------------------|-----------------------------|
| D11     |                                     | PK5      |              |                                                 | TXD4/SMOSI4/SSDA4                                  |                             |
| D12     |                                     | PE5      | D13[A13/D13] | MTIOC4C/MTIOC2B                                 |                                                    | IRQ5/AN013                  |
| D13     |                                     | PE6      | D14[A14/D14] |                                                 | CTS4#/RTS4#/SS4#                                   | IRQ6/AN014                  |
| E1      | VSS                                 |          |              |                                                 |                                                    |                             |
| E2      | VCL                                 |          |              |                                                 |                                                    |                             |
| E3      |                                     | PJ5      |              |                                                 |                                                    |                             |
| E4      | NC                                  |          |              |                                                 |                                                    |                             |
| E5      |                                     | P44      |              |                                                 |                                                    | AN004                       |
| E10     |                                     | PA0      | A0/BC0#      | MTIOC4A/TIOCA0                                  | SSLA1                                              | CACREF                      |
| E11     |                                     | P66      |              |                                                 |                                                    |                             |
| E12     |                                     | P65      |              |                                                 |                                                    |                             |
| E13     |                                     | P67      |              |                                                 |                                                    |                             |
| F1      | XCIN                                |          |              |                                                 |                                                    |                             |
| F2      | XCOUT                               |          |              |                                                 |                                                    |                             |
| F3      |                                     | PJ3      |              | MTIOC3C                                         | CTS6#/RTS6#/SS6#/<br>CTS0#/RTS0#/SS0#              |                             |
| F4      |                                     | PJ1      |              | MTIOC3A                                         |                                                    |                             |
| F10     |                                     | PA3      | A3           | MTIOC0D/MTCLKD/<br>TIOC0D/TCLKB                 | RXD5/SMISO5/SSCL5                                  | IRQ6-DS/CMPB1               |
| F11     | VSS                                 |          |              |                                                 |                                                    |                             |
| F12     |                                     | PA1      | A1           | MTIOC0B/MTCLKC/<br>TIOCB0                       | SCK5/SSLA2                                         | CVREFA                      |
| F13     |                                     | PA2      | A2           |                                                 | RXD5/SMISO5/SSCL5/<br>SSLA3                        |                             |
| G1      | XTAL                                | P37      |              |                                                 |                                                    |                             |
| G2      | RES#                                |          |              |                                                 |                                                    |                             |
| G3      | MD                                  |          |              |                                                 |                                                    | FINED                       |
| G4      | NC                                  |          |              |                                                 |                                                    |                             |
| G10     |                                     | PA5      | A5           | TIOCB1                                          | RSPCKA                                             |                             |
| G11     |                                     | PA6      | A6           | MTIC5V/MTCLKB/<br>TMCI3/POE2#/TIOCA2            | CTS5#/RTS5#/SS5#/<br>MOSIA/                        |                             |
| G12     | VCC                                 |          |              |                                                 |                                                    |                             |
| G13     |                                     | PA4      | A4           | MTIC5U/MTCLKA/<br>TMRI0/TIOCA1                  | TXD5/SMOSI5/SSDA5/<br>SSLA0                        | IRQ5-DS/CVREFB1             |
| H1      | EXTAL                               | P36      |              |                                                 |                                                    |                             |
| H2      | VCC                                 |          |              |                                                 |                                                    |                             |
| H3      | VSS                                 |          |              |                                                 |                                                    |                             |
| H4      |                                     | P35      |              |                                                 |                                                    | NMI                         |
| H10     |                                     | P72      |              |                                                 |                                                    |                             |
| H11     |                                     | P71      |              |                                                 |                                                    |                             |
| H12     |                                     | PB0      | A8           | MTIC5W/TIOCA3                                   | RXD4/SMISO4/SSCL4/<br>RXD6/SMISO6/SSCL6/<br>RSPCKA |                             |
| H13     |                                     | PA7      | A7           | TIOCB2                                          | MISOA                                              |                             |
| J1      |                                     | P34      |              | MTIOC0A/TMCI3/<br>POE2#                         | SCK6/SCK0                                          | IRQ4                        |
| J2      |                                     | P33      |              | MTIOC0D/TMRI3/<br>POE3#/TIOC0D                  | RXD6/SMISO6/SSCL6/<br>RXD0/SMISO0/SSCL0            | IRQ3-DS                     |
| J3      |                                     | P32      |              | MTIOC0C/TMO3/<br>TIOCC0                         | TXD6/SMOSI6/SSDA6/<br>TXD0/SMOSI0/SSDA0            | IRQ2-DS/RTICOUT/<br>RTICIC2 |
| J4      |                                     | P30      |              | MTIOC4B/TMRI3/<br>POE8#                         | RXD1/SMISO1/SSCL1                                  | IRQ0-DS/RTICIC0             |
| J10     |                                     | PB3      | A11          | MTIOC0A/MTIOC4A/<br>TMO0/POE3#/<br>TIOC0D/TCLKD | SCK4/SCK6                                          |                             |
| J11     |                                     | PB4      | A12          | TIOCA4                                          | CTS9#/RTS9#/SS9#                                   |                             |

**Table 1.9 List of Pins and Pin Functions (145-Pin TFLGA) (3 / 4)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus    | Timers (MTU, TMR, POE)                          | Communications (SCIc, SCId, RSPI, RIIC)                  | Others                  |
|---------|-------------------------------------|----------|-----------------|-------------------------------------------------|----------------------------------------------------------|-------------------------|
| J12     |                                     | PB2      | A10             | TIOCC3/TCLKC                                    | CTS4#/RTS4#/SS4#/<br>CTS6#/RTS6#/SS6#                    |                         |
| J13     |                                     | PB1      | A9              | MTIOC0C/MTIOC4C/<br>TMCI0/TIOCB3                | TXD4/SMOSI4/SSDA4/<br>TXD6/SMOSI6/SSDA6                  | IRQ4-DS                 |
| K1      |                                     | P27      | CS3#            | MTIOC2B/TMCI3                                   | SCK1                                                     |                         |
| K2      |                                     | P26      | CS2#            | MTIOC2A/TMO1                                    | TXD1/SMOSI1/SSDA1/<br>CTS3#/RTS3#/SS3#                   |                         |
| K3      |                                     | P31      |                 | MTIOC4D/TMCI2                                   | CTS1#/RTS1#/SS1#                                         | IRQ1-DS/RTCIC1          |
| K4      |                                     | P15      |                 | MTIOC0B/MTCLKB/<br>TMCI2/TIOCB2/TCLKB           | RXD1/SMISO1/SSCL1/<br>SCK3                               | IRQ5                    |
| K5      |                                     | P54      | ALE             | MTIOC4B/TMCI1                                   | CTS2#/RTS2#/SS2#                                         |                         |
| K6      | BCLK                                | P53      |                 |                                                 |                                                          |                         |
| K7      |                                     | P51      | WR1#/BC1#/WAIT# |                                                 | SCK2                                                     |                         |
| K8      | VCC                                 |          |                 |                                                 |                                                          |                         |
| K9      |                                     | P80      |                 | MTIOC3B                                         | SCK10                                                    |                         |
| K10     |                                     | P76      |                 |                                                 | RXD11/SMISO11/SSCL11                                     |                         |
| K11     |                                     | PB7      | A15             | MTIOC3B/TIOCB5                                  | TXD9/SMOSI9/SSDA9                                        |                         |
| K12     |                                     | PB6      | A14             | MTIOC3D/TIOCA5                                  | RXD9/SMISO9/SSCL9                                        |                         |
| K13     |                                     | PB5      | A13             | MTIOC2A/MTIOC1B/<br>TMRI1/POE1#/TIOCB4          | SCK9                                                     |                         |
| L1      |                                     | P25      | CS1#            | MTIOC4C/MTCLKB/<br>TIOCA4                       | RXD3/SMISO3/SSCL3                                        | ADTRG0#                 |
| L2      |                                     | P23      |                 | MTIOC3D/MTCLKD/<br>TIOCD3                       | CTS0#/RTS0#/SS0#/<br>TXD3/SMOSI3/SSDA3                   |                         |
| L3      |                                     | P16      |                 | MTIOC3C/MTIOC3D/<br>TMO2/TIOCB1/TCLKC           | TXD1/SMOSI1/SSDA1/<br>MOSIA/SCL-DS/RXD3/<br>SMISO3/SSCL3 | IRQ6/RTCOUT/<br>ADTRG0# |
| L4      |                                     | P24      | CS0#            | MTIOC4A/MTCLKA/<br>TMRI1/TIOCB4                 | SCK3                                                     |                         |
| L5      |                                     | P13      |                 | MTIOC0B/TMO3/<br>TIOCA5                         | SDA/TXD2/SMOSI2/<br>SSDA2                                | IRQ3                    |
| L6      |                                     | P56      |                 | MTIOC3C/TIOCA1                                  |                                                          |                         |
| L7      |                                     | P52      | RD#             |                                                 | RXD2/SMISO2/SSCL2                                        |                         |
| L8      |                                     | P83      |                 | MTIOC4C                                         | CTS10#/RTS10#                                            |                         |
| L9      |                                     | PC5      | A21/CS2#/WAIT#  | MTIOC3B/MTCLKD/<br>TMRI2                        | SCK8/RSPCKA                                              |                         |
| L10     |                                     | PC4      | A20/CS3#        | MTIOC3D/MTCLKC/<br>TMCI1/POE0#                  | SCK5/CTS8#/RTS8#/<br>SS8#/SSLA0                          |                         |
| L11     |                                     | PC2      | A18             | MTIOC4B/TCLKA                                   | RXD5/SMISO5/SSCL5/<br>SSLA3                              |                         |
| L12     |                                     | P73      |                 |                                                 |                                                          |                         |
| L13     |                                     | PL0      |                 |                                                 |                                                          |                         |
| M1      |                                     | P22      |                 | MTIOC3B/MTCLKC/<br>TMO0/TIOCC3                  | SCK0                                                     |                         |
| M2      |                                     | P17      |                 | MTIOC3A/MTIOC3B/<br>TMO1/POE8#/TIOCB0/<br>TCLKD | SCK1/MISOA/SDA-DS/<br>TXD3/SMOSI3/SSDA3                  | IRQ7                    |
| M3      |                                     | P86      |                 | TIOCA0                                          |                                                          |                         |
| M4      |                                     | P12      |                 | TMCI1                                           | SCL/RXD2/SMISO2/<br>SSCL2                                | IRQ2                    |
| M5      |                                     | PH3      |                 | TMCI0                                           |                                                          |                         |
| M6      |                                     | PH0      |                 |                                                 |                                                          | CACREF                  |
| M7      |                                     | P50      | WR0#/WR#        |                                                 | TXD2/SMOSI2/SSDA2                                        |                         |
| M8      |                                     | PC6      | A22/CS1#        | MTIOC3C/MTCLKA/<br>TMCI2                        | RXD8/SMISO8/SSCL8/<br>MOSIA                              |                         |
| M9      |                                     | P81      |                 | MTIOC3D                                         | RXD10/SMISO10/SSCL10                                     |                         |
| M10     |                                     | P77      |                 |                                                 | TXD11/SMOSI11/SSDA11                                     |                         |

**Table 1.9 List of Pins and Pin Functions (145-Pin TFLGA) (4 / 4)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE)            | Communications (SC1c, SC1d, RSPI, RIIC) | Others |
|---------|-------------------------------------|----------|--------------|-----------------------------------|-----------------------------------------|--------|
| M11     |                                     | PC0      | A16          | MTIOC3C/TCLKC                     | CTS5#/RTS5#/SS5#/SSLA1                  |        |
| M12     |                                     | PC1      | A17          | MTIOC3A/TCLKD                     | SCK5/SSLA2                              |        |
| M13     |                                     | PL1      |              |                                   |                                         |        |
| N1      |                                     | P21      |              | MTIOC1B/TMCIO/TIOCA3              | RXD0/SMISO0/SSCL0                       |        |
| N2      |                                     | P20      |              | MTIOC1A/TMRI0/TIOCB3              | TXD0/SMOSI0/SSDA0                       |        |
| N3      |                                     | P87      |              | TIOCA2                            |                                         |        |
| N4      |                                     | P14      |              | MTIOC3A/MTCLKA/TMRI2/TIOCB5/TCLKA | CTS1#/RTS1#/SS1#                        | IRQ4   |
| N5      |                                     | PH2      |              | TMRI0                             |                                         | IRQ1   |
| N6      |                                     | PH1      |              | TMO0                              |                                         | IRQ0   |
| N7      |                                     | P55      | WAIT#        | MTIOC4D/TMO3                      |                                         |        |
| N8      | VSS                                 |          |              |                                   |                                         |        |
| N9      |                                     | PC7      | A23/CS0#     | MTIOC3A/TMO2/MTCLKB               | TXD8/SMOSI8/SSDA8/MISOA                 | CACREF |
| N10     |                                     | P82      |              | MTIOC4A                           | TXD10/SMOSI10/SSDA10                    |        |
| N11     |                                     | PC3      | A19          | MTIOC4D/TCLKB                     | TXD5/SMOSI5/SSDA5                       |        |
| N12     |                                     | P75      |              |                                   | SCK11                                   |        |
| N13     |                                     | P74      |              |                                   | CTS11#/RTS11#/SS11#                     |        |

Note: • Pin names to which –DS is appended are for pins that can be used to trigger release from deep software standby mode.

Note: • Leave the NC pin open.

**Table 1.10 List of Pins and Pin Functions (144-Pin LQFP) (1 / 4)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE)                          | Communications (SCIc, SCId, RSPI, RIIC) | Others                    |
|---------|-------------------------------------|----------|--------------|-------------------------------------------------|-----------------------------------------|---------------------------|
| 1       | AVSS0                               |          |              |                                                 |                                         |                           |
| 2       |                                     | P05      |              |                                                 |                                         | DA1                       |
| 3       | VREFH                               |          |              |                                                 |                                         |                           |
| 4       |                                     | P03      |              |                                                 |                                         | DA0                       |
| 5       | VREFL                               |          |              |                                                 |                                         |                           |
| 6       |                                     | P02      |              | TMCI1                                           | SCK6                                    |                           |
| 7       |                                     | P01      |              | TMCI0                                           | RXD6/SMISO6/SSCL6                       |                           |
| 8       |                                     | P00      |              | TMRI0                                           | TXD6/SMOSI6/SSDA6                       |                           |
| 9       |                                     | PF5      |              |                                                 |                                         | IRQ4                      |
| 10      | NC                                  |          |              |                                                 |                                         |                           |
| 11      |                                     | PJ5      |              |                                                 |                                         |                           |
| 12      | VSS                                 |          |              |                                                 |                                         |                           |
| 13      |                                     | PJ3      |              | MTIOC3C                                         | CTS6#/RTS6#/SS6#/<br>CTS0#/RTS0#/SS0#   |                           |
| 14      | VCL                                 |          |              |                                                 |                                         |                           |
| 15      |                                     | PJ1      |              | MTIOC3A                                         |                                         |                           |
| 16      | MD                                  |          |              |                                                 |                                         | FINED                     |
| 17      | XCIN                                |          |              |                                                 |                                         |                           |
| 18      | XCOUT                               |          |              |                                                 |                                         |                           |
| 19      | RES#                                |          |              |                                                 |                                         |                           |
| 20      | XTAL                                | P37      |              |                                                 |                                         |                           |
| 21      | VSS                                 |          |              |                                                 |                                         |                           |
| 22      | EXTAL                               | P36      |              |                                                 |                                         |                           |
| 23      | VCC                                 |          |              |                                                 |                                         |                           |
| 24      |                                     | P35      |              |                                                 |                                         | NMI                       |
| 25      |                                     | P34      |              | MTIOC0A/TMCI3/<br>POE2#                         | SCK6/SCK0                               | IRQ4                      |
| 26      |                                     | P33      |              | MTIOC0D/TMRI3/<br>POE3#/TIOCD0                  | RXD6/SMISO6/SSCL6/<br>RXD0/SMISO0/SSCL0 | IRQ3-DS                   |
| 27      |                                     | P32      |              | MTIOC0C/TMO3/<br>TIOCC0                         | TXD6/SMOSI6/SSDA6/<br>TXD0/SMOSI0/SSDA0 | IRQ2-DS/RTCOUT/<br>RTCIC2 |
| 28      |                                     | P31      |              | MTIOC4D/TMCI2                                   | CTS1#/RTS1#/SS1#                        | IRQ1-DS/RTCIC1            |
| 29      |                                     | P30      |              | MTIOC4B/TMRI3/<br>POE8#                         | RXD1/SMISO1/SSCL1                       | IRQ0-DS/RTCIC0            |
| 30      |                                     | P27      | CS3#         | MTIOC2B/TMCI3                                   | SCK1                                    |                           |
| 31      |                                     | P26      | CS2#         | MTIOC2A/TMO1                                    | TXD1/SMOSI1/SSDA1/<br>CTS3#/RTS3#/SS3#  |                           |
| 32      |                                     | P25      | CS1#         | MTIOC4C/MTCLKB/<br>TIOCA4                       | RXD3/SMISO3/SSCL3                       | ADTRG0#                   |
| 33      |                                     | P24      | CS0#         | MTIOC4A/MTCLKA/<br>TMRI1/TIOCB4                 | SCK3                                    |                           |
| 34      |                                     | P23      |              | MTIOC3D/MTCLKD/<br>TIOCD3                       | CTS0#/RTS0#/SS0#/<br>TXD3/SMOSI3/SSDA3  |                           |
| 35      |                                     | P22      |              | MTIOC3B/MTCLKC/<br>TMO0/TIOCC3                  | SCK0                                    |                           |
| 36      |                                     | P21      |              | MTIOC1B/TMCI0/<br>TIOCA3                        | RXD0/SMISO0/SSCL0                       |                           |
| 37      |                                     | P20      |              | MTIOC1A/TMRI0/<br>TIOCB3                        | TXD0/SMOSI0/SSDA0                       |                           |
| 38      |                                     | P17      |              | MTIOC3A/MTIOC3B/<br>TMO1/POE8#/TIOCB0/<br>TCLKD | SCK1/MISOA/SDA-DS/<br>TXD3/SMOSI3/SSDA3 | IRQ7                      |
| 39      |                                     | P87      |              | TIOCA2                                          |                                         |                           |

**Table 1.10 List of Pins and Pin Functions (144-Pin LQFP) (2 / 4)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus    | Timers (MTU, TMR, POE)                 | Communications (SCIc, SCId, RSPI, RIIC)                  | Others                   |
|---------|-------------------------------------|----------|-----------------|----------------------------------------|----------------------------------------------------------|--------------------------|
| 40      |                                     | P16      |                 | MTIOC3C/MTIOC3D/<br>TMO2/TIOCB1/TCLKC  | TXD1/SMOSI1/SSDA1/<br>MOSIA/SCL-DS/RXD3/<br>SMISO3/SSCL3 | IRQ6/RTCCOUT/<br>ADTRG0# |
| 41      |                                     | P86      |                 | TIOCA0                                 |                                                          |                          |
| 42      |                                     | P15      |                 | MTIOC0B/MTCLKB/<br>TMCI2/TIOCB2/TCLKB  | RXD1/SMISO1/SSCL1/<br>SCK3                               | IRQ5                     |
| 43      |                                     | P14      |                 | MTIOC3A/MTCLKA/<br>TMRI2/TIOCB5/TCLKA  | CTS1#/RTS1#/SS1#                                         | IRQ4                     |
| 44      |                                     | P13      |                 | MTIOC0B/TMO3/<br>TIOCA5                | SDA/TXD2/SMOSI2/<br>SSDA2                                | IRQ3                     |
| 45      |                                     | P12      |                 | TMCI1                                  | SCL/RXD2/SMISO2/<br>SSCL2                                | IRQ2                     |
| 46      |                                     | PH3      |                 | TMCI0                                  |                                                          |                          |
| 47      |                                     | PH2      |                 | TMRI0                                  |                                                          | IRQ1                     |
| 48      |                                     | PH1      |                 | TMO0                                   |                                                          | IRQ0                     |
| 49      |                                     | PH0      |                 |                                        |                                                          | CACREF                   |
| 50      |                                     | P56      |                 | MTIOC3C/TIOCA1                         |                                                          |                          |
| 51      |                                     | P55      | WAIT#           | MTIOC4D/TMO3                           |                                                          |                          |
| 52      |                                     | P54      | ALE             | MTIOC4B/TMCI1                          | CTS2#/RTS2#/SS2#                                         |                          |
| 53      | BCLK                                | P53      |                 |                                        |                                                          |                          |
| 54      |                                     | P52      | RD#             |                                        | RXD2/SMISO2/SSCL2                                        |                          |
| 55      |                                     | P51      | WR1#/BC1#/WAIT# |                                        | SCK2                                                     |                          |
| 56      |                                     | P50      | WR0#/WR#        |                                        | TXD2/SMOSI2/SSDA2                                        |                          |
| 57      | VSS                                 |          |                 |                                        |                                                          |                          |
| 58      |                                     | P83      |                 | MTIOC4C                                | CTS10#/RTS10#                                            |                          |
| 59      | VCC                                 |          |                 |                                        |                                                          |                          |
| 60      |                                     | PC7      | A23/CS0#        | MTIOC3A/TMO2/<br>MTCLKB                | TXD8/SMOSI8/SSDA8/<br>MISOA                              | CACREF                   |
| 61      |                                     | PC6      | A22/CS1#        | MTIOC3C/MTCLKA/<br>TMCI2               | RXD8/SMISO8/SSCL8/<br>MOSIA                              |                          |
| 62      |                                     | PC5      | A21/CS2#/WAIT#  | MTIOC3B/MTCLKD/<br>TMRI2               | SCK8/RSPCKA                                              |                          |
| 63      |                                     | P82      |                 | MTIOC4A                                | TXD10/SMOSI10/SSDA10                                     |                          |
| 64      |                                     | P81      |                 | MTIOC3D                                | RXD10/SMISO10/SSCL10                                     |                          |
| 65      |                                     | P80      |                 | MTIOC3B                                | SCK10                                                    |                          |
| 66      |                                     | PC4      | A20/CS3#        | MTIOC3D/MTCLKC/<br>TMCI1/POE0#         | SCK5/CTS8#/RTS8#/<br>SS8#/SSLA0                          |                          |
| 67      |                                     | PC3      | A19             | MTIOC4D/TCLKB                          | TXD5/SMOSI5/SSDA5                                        |                          |
| 68      |                                     | P77      |                 |                                        | TXD11/SMOSI11/SSDA11                                     |                          |
| 69      |                                     | P76      |                 |                                        | RXD11/SMISO11/SSCL11                                     |                          |
| 70      |                                     | PC2      | A18             | MTIOC4B/TCLKA                          | RXD5/SMISO5/SSCL5/<br>ISSLA3                             |                          |
| 71      |                                     | P75      |                 |                                        | SCK11                                                    |                          |
| 72      |                                     | P74      |                 |                                        | CTS11#/RTS11#/SS11#                                      |                          |
| 73      |                                     | PC1      | A17             | MTIOC3A/TCLKD                          | SCK5/SSLA2                                               |                          |
| 74      |                                     | PL1      |                 |                                        |                                                          |                          |
| 75      |                                     | PC0      | A16             | MTIOC3C/TCLKC                          | CTS5#/RTS5#/SS5#/<br>SSLA1                               |                          |
| 76      |                                     | PL0      |                 |                                        |                                                          |                          |
| 77      |                                     | P73      |                 |                                        |                                                          |                          |
| 78      |                                     | PB7      | A15             | MTIOC3B/TIOCB5                         | TXD9/SMOSI9/SSDA9                                        |                          |
| 79      |                                     | PB6      | A14             | MTIOC3D/TIOCA5                         | RXD9/SMISO9/SSCL9                                        |                          |
| 80      |                                     | PB5      | A13             | MTIOC2A/MTIOC1B/<br>TMRI1/POE1#/TIOCB4 | SCK9                                                     |                          |

**Table 1.10 List of Pins and Pin Functions (144-Pin LQFP) (3 / 4)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE)                          | Communications (SClC, SClD, RSPI, RIIC)            | Others                    |
|---------|-------------------------------------|----------|--------------|-------------------------------------------------|----------------------------------------------------|---------------------------|
| 81      |                                     | PB4      | A12          | TIOCA4                                          | CTS9#/RTS9#/SS9#                                   |                           |
| 82      |                                     | PB3      | A11          | MTIOC0A/MTIOC4A/<br>TMO0/POE3#/<br>TIOCD3/TCLKD | SCK4/SCK6                                          |                           |
| 83      |                                     | PB2      | A10          | TIOCC3/TCLKC                                    | CTS4#/RTS4#/SS4#/<br>CTS6#/RTS6#/SS6#              |                           |
| 84      |                                     | PB1      | A9           | MTIOC0C/MTIOC4C/<br>TMC10/TIOCB3                | TXD4/SMOSI4/SSDA4/<br>TXD6/SMOSI6/SSDA6            | IRQ4-DS                   |
| 85      |                                     | P72      |              |                                                 |                                                    |                           |
| 86      |                                     | P71      |              |                                                 |                                                    |                           |
| 87      |                                     | PB0      | A8           | MTIC5W/TIOCA3                                   | RXD4/SMISO4/SSCL4/<br>RXD6/SMISO6/SSCL6/<br>RSPCKA |                           |
| 88      |                                     | PA7      | A7           | TIOCB2                                          | MISOA                                              |                           |
| 89      |                                     | PA6      | A6           | MTIC5V/MTCLKB/<br>TMC13/POE2#/TIOCA2            | CTS5#/RTS5#/SS5#/<br>MOSIA/                        |                           |
| 90      |                                     | PA5      | A5           | TIOCB1                                          | RSPCKA                                             |                           |
| 91      | VCC                                 |          |              |                                                 |                                                    |                           |
| 92      |                                     | PA4      | A4           | MTIC5U/MTCLKA/<br>TMRI0/TIOCA1                  | TXD5/SMOSI5/SSDA5/<br>SSLA0                        | IRQ5-DS/CVREFB1           |
| 93      | VSS                                 |          |              |                                                 |                                                    |                           |
| 94      |                                     | PA3      | A3           | MTIOC0D/MTCLKD/<br>TIOC0D/TCLKB                 | RXD5/SMISO5/SSCL5                                  | IRQ6-DS/CMPB1             |
| 95      |                                     | PA2      | A2           |                                                 | RXD5/SMISO5/SSCL5/<br>SSLA3                        |                           |
| 96      |                                     | PA1      | A1           | MTIOC0B/MTCLKC/<br>TIOCB0                       | SCK5/SSLA2                                         | CVREFA                    |
| 97      |                                     | PA0      | A0/BC0#      | MTIOC4A/TIOCA0                                  | SSLA1                                              | CACREF                    |
| 98      |                                     | P67      |              |                                                 |                                                    |                           |
| 99      |                                     | P66      |              |                                                 |                                                    |                           |
| 100     |                                     | P65      |              |                                                 |                                                    |                           |
| 101     |                                     | PE7      | D15[A15/D15] |                                                 |                                                    | IRQ7/AN015                |
| 102     |                                     | PE6      | D14[A14/D14] |                                                 | CTS4#/RTS4#/SS4#                                   | IRQ6/AN014                |
| 103     |                                     | PK5      |              |                                                 | TXD4/SMOSI4/SSDA4                                  |                           |
| 104     |                                     | P70      |              |                                                 | SCK4                                               |                           |
| 105     |                                     | PK4      |              |                                                 | RXD4/SMISO4/SSCL4                                  |                           |
| 106     |                                     | PE5      | D13[A13/D13] | MTIOC4C/MTIOC2B                                 |                                                    | IRQ5/AN013                |
| 107     |                                     | PE4      | D12[A12/D12] | MTIOC4D/MTIOC1A                                 |                                                    | AN012/CMPA2               |
| 108     |                                     | PE3      | D11[A11/D11] | MTIOC4B/POE8#                                   | CTS12#/RTS12#/SS12#                                | AN011/CMPA1               |
| 109     |                                     | PE2      | D10[A10/D10] | MTIOC4A                                         | RXD12/RXDX12/<br>SMISO12/SSCL12                    | IRQ7-DS/AN010/<br>CVREFB0 |
| 110     |                                     | PE1      | D9[A9/D9]    | MTIOC4C                                         | TXD12/TXDX12/SIOX12/<br>SMOSI12/SSDA12             | AN009/CMPB0               |
| 111     |                                     | PE0      | D8[A8/D8]    |                                                 | SCK12                                              | AN008                     |
| 112     |                                     | P64      |              |                                                 |                                                    |                           |
| 113     |                                     | P63      |              |                                                 |                                                    |                           |
| 114     |                                     | P62      |              |                                                 |                                                    |                           |
| 115     |                                     | P61      |              |                                                 | CTS9#/RTS9#/SS9#                                   |                           |
| 116     |                                     | PK3      |              |                                                 | RXD9/SMISO9/SSCL9                                  |                           |
| 117     |                                     | P60      |              |                                                 | SCK9                                               |                           |
| 118     |                                     | PK2      |              |                                                 | TXD9/SMOSI9/SSDA9                                  |                           |
| 119     |                                     | PD7      | D7[A7/D7]    | MTIC5U/POE0#                                    |                                                    | IRQ7                      |
| 120     |                                     | PD6      | D6[A6/D6]    | MTIC5V/POE1#                                    |                                                    | IRQ6                      |
| 121     |                                     | PD5      | D5[A5/D5]    | MTIC5W/POE2#                                    |                                                    | IRQ5                      |

**Table 1.10 List of Pins and Pin Functions (144-Pin LQFP) (4 / 4)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE) | Communications (SC1c, SC1d, RSPI, RIIC) | Others  |
|---------|-------------------------------------|----------|--------------|------------------------|-----------------------------------------|---------|
| 122     |                                     | PD4      | D4[A4/D4]    | POE3#                  |                                         | IRQ4    |
| 123     |                                     | PD3      | D3[A3/D3]    | POE8#                  |                                         | IRQ3    |
| 124     |                                     | PD2      | D2[A2/D2]    | MTIOC4D                |                                         | IRQ2    |
| 125     |                                     | PD1      | D1[A1/D1]    | MTIOC4B                |                                         | IRQ1    |
| 126     |                                     | PD0      | D0[A0/D0]    |                        |                                         | IRQ0    |
| 127     |                                     | P93      |              |                        | CTS7#/RTS7#/SS7#                        |         |
| 128     |                                     | P92      |              |                        | RXD7/SMISO7/SSCL7                       |         |
| 129     |                                     | P91      |              |                        | SCK7                                    |         |
| 130     | VSS                                 |          |              |                        |                                         |         |
| 131     |                                     | P90      |              |                        | TXD7/SMOSI7/SSDA7                       |         |
| 132     | VCC                                 |          |              |                        |                                         |         |
| 133     |                                     | P47      |              |                        |                                         | AN007   |
| 134     |                                     | P46      |              |                        |                                         | AN006   |
| 135     |                                     | P45      |              |                        |                                         | AN005   |
| 136     |                                     | P44      |              |                        |                                         | AN004   |
| 137     |                                     | P43      |              |                        |                                         | AN003   |
| 138     |                                     | P42      |              |                        |                                         | AN002   |
| 139     |                                     | P41      |              |                        |                                         | AN001   |
| 140     | VREFL0                              |          |              |                        |                                         |         |
| 141     |                                     | P40      |              |                        |                                         | AN000   |
| 142     | VREFH0                              |          |              |                        |                                         |         |
| 143     | AVCC0                               |          |              |                        |                                         |         |
| 144     |                                     | P07      |              |                        |                                         | ADTRG0# |

Note: • Pin names to which –DS is appended are for pins that can be used to trigger release from deep software standby mode.

Note: • Leave the NC pin open.

**Table 1.11 List of Pins and Pin Functions (100-Pin TFLGA) (1 / 3)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE) | Communications (SCIc, SCId, RSPI, RIIC) | Others                |
|---------|-------------------------------------|----------|--------------|------------------------|-----------------------------------------|-----------------------|
| A1      |                                     | P05      |              |                        |                                         | DA1                   |
| A2      | VREFH                               |          |              |                        |                                         |                       |
| A3      |                                     | P07      |              |                        |                                         | ADTRG0#               |
| A4      | VREFL0                              |          |              |                        |                                         |                       |
| A5      |                                     | P43      |              |                        |                                         | AN003                 |
| A6      |                                     | PD0      | D0[A0/D0]    |                        |                                         | IRQ0                  |
| A7      |                                     | PD4      | D4[A4/D4]    | POE3#                  |                                         | IRQ4                  |
| A8      |                                     | PE0      | D8[A8/D8]    |                        | SCK12                                   | AN008                 |
| A9      |                                     | PE1      | D9[A9/D9]    | MTIOC4C                | TXD12/TXDX12/SIOX12/SMOSI12/SSDA12      | AN009/CMPB0           |
| A10     |                                     | PE2      | D10[A10/D10] | MTIOC4A                | RXD12/RXDX12/SMISO12/SSCL12             | IRQ7-DS/AN010/CVREFB0 |
| B1      |                                     | P03      |              |                        |                                         | DA0                   |
| B2      | AVSS0                               |          |              |                        |                                         |                       |
| B3      | AVCC0                               |          |              |                        |                                         |                       |
| B4      |                                     | P40      |              |                        |                                         | AN000                 |
| B5      |                                     | P44      |              |                        |                                         | AN004                 |
| B6      |                                     | PD1      | D1[A1/D1]    | MTIOC4B                |                                         | IRQ1                  |
| B7      |                                     | PD3      | D3[A3/D3]    | POE8#                  |                                         | IRQ3                  |
| B8      |                                     | PD6      | D6[A6/D6]    | MTIC5V/POE1#           |                                         | IRQ6                  |
| B9      |                                     | PD7      | D7[A7/D7]    | MTIC5U/POE0#           |                                         | IRQ7                  |
| B10     |                                     | PE3      | D11[A11/D11] | MTIOC4B/POE8#          | CTS12#/RTS12#/SS12#                     | AN011/CMPA1           |
| C1      | VCL                                 |          |              |                        |                                         |                       |
| C2      | VREFL                               |          |              |                        |                                         |                       |
| C3      |                                     | PJ3      |              | MTIOC3C                | CTS6#/RTS6#/SS6#                        |                       |
| C4      | VREFH0                              |          |              |                        |                                         |                       |
| C5      |                                     | P42      |              |                        |                                         | AN002                 |
| C6      |                                     | P47      |              |                        |                                         | AN007                 |
| C7      |                                     | PD2      | D2[A2/D2]    | MTIOC4D                |                                         | IRQ2                  |
| C8      |                                     | PD5      | D5[A5/D5]    | MTIC5W/POE2#           |                                         | IRQ5                  |
| C9      |                                     | PE5      | D13[A13/D13] | MTIOC4C/MTIOC2B        |                                         | IRQ5/AN013            |
| C10     |                                     | PE4      | D12[A12/D12] | MTIOC4D/MTIOC1A        |                                         | AN012/CMPA2           |
| D1      | XCIN                                |          |              |                        |                                         |                       |
| D2      | XCOUT                               |          |              |                        |                                         |                       |
| D3      | MD                                  |          |              |                        |                                         | FINED                 |
| D4      |                                     | PJ1      |              | MTIOC3A                |                                         |                       |
| D5      |                                     | P45      |              |                        |                                         | AN005                 |
| D6      |                                     | P46      |              |                        |                                         | AN006                 |
| D7      |                                     | PE6      | D14[A14/D14] |                        |                                         | IRQ6/AN014            |
| D8      |                                     | PE7      | D15[A15/D15] |                        |                                         | IRQ7/AN015            |
| D9      |                                     | PA1      | A1           | MTIOC0B/MTCLKC         | SCK5/SSLA2                              | CVREFA                |
| D10     |                                     | PA0      | A0/BC0#      | MTIOC4A                | SSLA1                                   | CACREF                |
| E1      | XTAL                                | P37      |              |                        |                                         |                       |
| E2      | VSS                                 |          |              |                        |                                         |                       |
| E3      | RES#                                |          |              |                        |                                         |                       |
| E4      |                                     | P34      |              | MTIOC0A/TMC13/POE2#    | SCK6                                    | IRQ4                  |
| E5      |                                     | P41      |              |                        |                                         | AN001                 |

**Table 1.11 List of Pins and Pin Functions (100-Pin TFLGA) (2 / 3)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE)      | Communications (SCIc, SCId, RSPI, RIIC) | Others                |
|---------|-------------------------------------|----------|--------------|-----------------------------|-----------------------------------------|-----------------------|
| E6      |                                     | PA2      | A2           |                             | RXD5/SMISO5/SSCL5/SSLA3                 |                       |
| E7      |                                     | PA6      | A6           | MTIC5V/MTCLKB/TMCI3/POE2#   | CTS5#/RTS5#/SS5#/MOSIA                  |                       |
| E8      |                                     | PA4      | A4           | MTIC5U/MTCLKA/TMRI0         | TXD5/SMOSI5/SSDA5/SSLA0                 | IRQ5-DS/CVREFB1       |
| E9      |                                     | PA5      | A5           |                             | RSPCKA                                  |                       |
| E10     |                                     | PA3      | A3           | MTIOC0D/MTCLKD              | RXD5/SMISO5/SSCL5                       | IRQ6-DS/CMPB1         |
| F1      | EXTAL                               | P36      |              |                             |                                         |                       |
| F2      | VCC                                 |          |              |                             |                                         |                       |
| F3      |                                     | P35      |              |                             |                                         | NMI                   |
| F4      |                                     | P32      |              | MTIOC0C/TMO3                | TXD6/SMOSI6/SSDA6                       | IRQ2-DS/RTCOUT/RTCIC2 |
| F5      |                                     | P12      |              | TMCI1                       | SCL                                     | IRQ2                  |
| F6      |                                     | PB3      | A11          | MTIOC0A/MTIOC4A/TMO0/POE3#  | SCK6                                    |                       |
| F7      |                                     | PB2      | A10          |                             | CTS6#/RTS6#/SS6#                        |                       |
| F8      |                                     | PB0      | A8           | MTIC5W                      | RXD6/SMISO6/SSCL6/RSPCKA                |                       |
| F9      |                                     | PA7      | A7           |                             | MISOA                                   |                       |
| F10     | VSS                                 |          |              |                             |                                         |                       |
| G1      |                                     | P33      |              | MTIOC0D/TMRI3/POE3#         | RXD6/SMISO6/SSCL6                       | IRQ3-DS               |
| G2      |                                     | P31      |              | MTIOC4D/TMCI2               | CTS1#/RTS1#/SS1#                        | IRQ1-DS/RTCIC1        |
| G3      |                                     | P30      |              | MTIOC4B/TMRI3/POE8#         | RXD1/SMISO1/SSCL1                       | IRQ0-DS/RTCIC0        |
| G4      |                                     | P27      | CS3#         | MTIOC2B/TMCI3               | SCK1                                    |                       |
| G5      | BCLK                                | P53      |              |                             |                                         |                       |
| G6      |                                     | P52      | RD#          |                             |                                         |                       |
| G7      |                                     | PB5      | A13          | MTIOC2A/MTIOC1B/TMRI1/POE1# | SCK9                                    |                       |
| G8      |                                     | PB4      | A12          |                             | CTS9#/RTS9#/SS9#                        |                       |
| G9      |                                     | PB1      | A9           | MTIOC0C/MTIOC4C/TMCI0       | TXD6/SMOSI6/SSDA6                       | IRQ4-DS               |
| G10     | VCC                                 |          |              |                             |                                         |                       |
| H1      |                                     | P26      | CS2#         | MTIOC2A/TMO1                | TXD1/SMOSI1/SSDA1                       |                       |
| H2      |                                     | P25      | CS1#         | MTIOC4C/MTCLKB              |                                         | ADTRG0#               |
| H3      |                                     | P16      |              | MTIOC3C/MTIOC3D/TMO2        | TXD1/SMOSI1/SSDA1/MOSIA/SCL-DS          | IRQ6/RTCOUT/ADTRG0#   |
| H4      |                                     | P15      |              | MTIOC0B/MTCLKB/TMCI2        | RXD1/SMISO1/SSCL1                       | IRQ5                  |
| H5      |                                     | P55      | WAIT#        | MTIOC4D/TMO3                |                                         |                       |
| H6      |                                     | P54      | ALE          | MTIOC4B/TMCI1               |                                         |                       |
| H7      |                                     | PC7      | A23/CS0#     | MTIOC3A/TMO2/MTCLKB         | TXD8/SMOSI8/SSDA8/MISOA                 | CACREF                |
| H8      |                                     | PC6      | A22/CS1#     | MTIOC3C/MTCLKA/TMCI2        | RXD8/SMISO8/SSCL8/MOSIA                 |                       |
| H9      |                                     | PB6      | A14          | MTIOC3D                     | RXD9/SMISO9/SSCL9                       |                       |
| H10     |                                     | PB7      | A15          | MTIOC3B                     | TXD9/SMOSI9/SSDA9                       |                       |
| J1      |                                     | P24      | CS0#         | MTIOC4A/MTCLKA/TMRI1        |                                         |                       |
| J2      |                                     | P21      |              | MTIOC1B/TMCI0               | RXD0/SMISO0/SSCL0                       |                       |
| J3      |                                     | P17      |              | MTIOC3A/MTIOC3B/TMO1/POE8#  | SCK1/MISOA/SDA-DS                       | IRQ7                  |

**Table 1.11 List of Pins and Pin Functions (100-Pin TFLGA) (3 / 3)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus    | Timers (MTU, TMR, POE)         | Communications (SCIc, SCId, RSPI, RIIC) | Others |
|---------|-------------------------------------|----------|-----------------|--------------------------------|-----------------------------------------|--------|
| J4      |                                     | P13      |                 | MTIOC0B/TMO3                   | SDA                                     | IRQ3   |
| J5      |                                     | PH0      |                 |                                |                                         | CACREF |
| J6      |                                     | PH3      |                 | TMCi0                          |                                         |        |
| J7      |                                     | P50      | WR0#/WR#        |                                |                                         |        |
| J8      |                                     | PC4      | A20/CS3#        | MTIOC3D/MTCLKC/<br>TMCi1/POE0# | SCK5/CTS8#/RTS8#/<br>SS8#/SSLA0         |        |
| J9      |                                     | PC0      | A16             | MTIOC3C                        | CTS5#/RTS5#/SS5#/<br>SSLA1              |        |
| J10     |                                     | PC1      | A17             | MTIOC3A                        | SCK5/SSLA2                              |        |
| K1      |                                     | P23      |                 | MTIOC3D/MTCLKD                 | CTS0#/RTS0#/SS0#                        |        |
| K2      |                                     | P22      |                 | MTIOC3B/MTCLKC/<br>TMO0        | SCK0                                    |        |
| K3      |                                     | P20      |                 | MTIOC1A/TMRI0                  | TXD0/SMOSI0/SSDA0                       |        |
| K4      |                                     | P14      |                 | MTIOC3A/MTCLKA/<br>TMRI2       | CTS1#/RTS1#/SS1#                        | IRQ4   |
| K5      |                                     | PH2      |                 | TMRI0                          |                                         | IRQ1   |
| K6      |                                     | PH1      |                 | TMO0                           |                                         | IRQ0   |
| K7      |                                     | P51      | WR1#/BC1#/WAIT# |                                |                                         |        |
| K8      |                                     | PC5      | A21/CS2#/WAIT#  | MTIOC3B/MTCLKD/<br>TMRI2       | SCK8/RSPCKA                             |        |
| K9      |                                     | PC3      | A19             | MTIOC4D                        | TXD5/SMOSI5/SSDA5                       |        |
| K10     |                                     | PC2      | A18             | MTIOC4B                        | RXD5/SMISO5/SSCL5/<br>SSLA3             |        |

Note: • Pin names to which –DS is appended are for pins that can be used to trigger release from deep software standby mode.

**Table 1.12 List of Pins and Pin Functions (100-Pin LQFP) (1 / 3)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE)     | Communications (SCIc, SCId, RSPI, RIIC) | Others                |
|---------|-------------------------------------|----------|--------------|----------------------------|-----------------------------------------|-----------------------|
| 1       | VREFH                               |          |              |                            |                                         |                       |
| 2       |                                     | P03      |              |                            |                                         | DA0                   |
| 3       | VREFL                               |          |              |                            |                                         |                       |
| 4       |                                     | PJ3      |              | MTIOC3C                    | CTS6#/RTS6#/SS6#                        |                       |
| 5       | VCL                                 |          |              |                            |                                         |                       |
| 6       |                                     | PJ1      |              | MTIOC3A                    |                                         |                       |
| 7       | MD                                  |          |              |                            |                                         | FINED                 |
| 8       | XCIN                                |          |              |                            |                                         |                       |
| 9       | XCOUT                               |          |              |                            |                                         |                       |
| 10      | RES#                                |          |              |                            |                                         |                       |
| 11      | XTAL                                | P37      |              |                            |                                         |                       |
| 12      | VSS                                 |          |              |                            |                                         |                       |
| 13      | EXTAL                               | P36      |              |                            |                                         |                       |
| 14      | VCC                                 |          |              |                            |                                         |                       |
| 15      |                                     | P35      |              |                            |                                         | NMI                   |
| 16      |                                     | P34      |              | MTIOC0A/TMC13/POE2#        | SCK6                                    | IRQ4                  |
| 17      |                                     | P33      |              | MTIOC0D/TMRI3/POE3#        | RXD6/SMISO6/SSCL6                       | IRQ3-DS               |
| 18      |                                     | P32      |              | MTIOC0C/TMO3               | TXD6/SMOSI6/SSDA6                       | IRQ2-DS/RTCOUT/RTCIC2 |
| 19      |                                     | P31      |              | MTIOC4D/TMC12              | CTS1#/RTS1#/SS1#                        | IRQ1-DS/RTCIC1        |
| 20      |                                     | P30      |              | MTIOC4B/TMRI3/POE8#        | RXD1/SMISO1/SSCL1                       | IRQ0-DS/RTCIC0        |
| 21      |                                     | P27      | CS3#         | MTIOC2B/TMC13              | SCK1                                    |                       |
| 22      |                                     | P26      | CS2#         | MTIOC2A/TMO1               | TXD1/SMOSI1/SSDA1                       |                       |
| 23      |                                     | P25      | CS1#         | MTIOC4C/MTCLKB             |                                         | ADTRG0#               |
| 24      |                                     | P24      | CS0#         | MTIOC4A/MTCLKA/TMRI1       |                                         |                       |
| 25      |                                     | P23      |              | MTIOC3D/MTCLKD             | CTS0#/RTS0#/SS0#                        |                       |
| 26      |                                     | P22      |              | MTIOC3B/MTCLKC/TMO0        | SCK0                                    |                       |
| 27      |                                     | P21      |              | MTIOC1B/TMC10              | RXD0/SMISO0/SSCL0                       |                       |
| 28      |                                     | P20      |              | MTIOC1A/TMRI0              | TXD0/SMOSI0/SSDA0                       |                       |
| 29      |                                     | P17      |              | MTIOC3A/MTIOC3B/TMO1/POE8# | SCK1/MISOA/SDA-DS                       | IRQ7                  |
| 30      |                                     | P16      |              | MTIOC3C/MTIOC3D/TMO2       | TXD1/SMOSI1/SSDA1/MOSIA/SCL-DS          | IRQ6/RTCOUT/ADTRG0#   |
| 31      |                                     | P15      |              | MTIOC0B/MTCLKB/TMC12       | RXD1/SMISO1/SSCL1                       | IRQ5                  |
| 32      |                                     | P14      |              | MTIOC3A/MTCLKA/TMRI2       | CTS1#/RTS1#/SS1#                        | IRQ4                  |
| 33      |                                     | P13      |              | MTIOC0B/TMO3               | SDA                                     | IRQ3                  |
| 34      |                                     | P12      |              | TMC11                      | SCL                                     | IRQ2                  |
| 35      |                                     | PH3      |              | TMC10                      |                                         |                       |
| 36      |                                     | PH2      |              | TMRI0                      |                                         | IRQ1                  |
| 37      |                                     | PH1      |              | TMO0                       |                                         | IRQ0                  |
| 38      |                                     | PH0      |              |                            |                                         | CACREF                |
| 39      |                                     | P55      | WAIT#        | MTIOC4D/TMO3               |                                         |                       |
| 40      |                                     | P54      | ALE          | MTIOC4B/TMC11              |                                         |                       |
| 41      | BCLK                                | P53      |              |                            |                                         |                       |

**Table 1.12 List of Pins and Pin Functions (100-Pin LQFP) (2 / 3)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus    | Timers (MTU, TMR, POE)      | Communications (SCIc, SCId, RSPI, RIIC) | Others                |
|---------|-------------------------------------|----------|-----------------|-----------------------------|-----------------------------------------|-----------------------|
| 42      |                                     | P52      | RD#             |                             |                                         |                       |
| 43      |                                     | P51      | WR1#/BC1#/WAIT# |                             |                                         |                       |
| 44      |                                     | P50      | WR0#/WR#        |                             |                                         |                       |
| 45      |                                     | PC7      | A23/CS0#        | MTIOC3A/TMO2/MTCLKB         | TXD8/SMOSI8/SSDA8/MISOA                 | CACREF                |
| 46      |                                     | PC6      | A22/CS1#        | MTIOC3C/MTCLKA/TMC12        | RXD8/SMISO8/SSCL8/MOSIA                 |                       |
| 47      |                                     | PC5      | A21/CS2#/WAIT#  | MTIOC3B/MTCLKD/TMR12        | SCK8/RSPCKA                             |                       |
| 48      |                                     | PC4      | A20/CS3#        | MTIOC3D/MTCLKC/TMC11/POE0#  | SCK5/CTS8#/RTS8#/SS8#/SSLA0             |                       |
| 49      |                                     | PC3      | A19             | MTIOC4D                     | TXD5/SMOSI5/SSDA5                       |                       |
| 50      |                                     | PC2      | A18             | MTIOC4B                     | RXD5/SMISO5/SSCL5/SSLA3                 |                       |
| 51      |                                     | PC1      | A17             | MTIOC3A                     | SCK5/SSLA2                              |                       |
| 52      |                                     | PC0      | A16             | MTIOC3C                     | CTS5#/RTS5#/SS5#/SSLA1                  |                       |
| 53      |                                     | PB7      | A15             | MTIOC3B                     | TXD9/SMOSI9/SSDA9                       |                       |
| 54      |                                     | PB6      | A14             | MTIOC3D                     | RXD9/SMISO9/SSCL9                       |                       |
| 55      |                                     | PB5      | A13             | MTIOC2A/MTIOC1B/TMR11/POE1# | SCK9                                    |                       |
| 56      |                                     | PB4      | A12             |                             | CTS9#/RTS9#/SS9#                        |                       |
| 57      |                                     | PB3      | A11             | MTIOC0A/MTIOC4A/TMO0/POE3#  | SCK6                                    |                       |
| 58      |                                     | PB2      | A10             |                             | CTS6#/RTS6#/SS6#                        |                       |
| 59      |                                     | PB1      | A9              | MTIOC0C/MTIOC4C/TMC10       | TXD6/SMOSI6/SSDA6                       | IRQ4-DS               |
| 60      | VCC                                 |          |                 |                             |                                         |                       |
| 61      |                                     | PB0      | A8              | MTIC5W                      | RXD6/SMISO6/SSCL6/RSPCKA                |                       |
| 62      | VSS                                 |          |                 |                             |                                         |                       |
| 63      |                                     | PA7      | A7              |                             | MISOA                                   |                       |
| 64      |                                     | PA6      | A6              | MTIC5V/MTCLKB/TMC13/POE2#   | CTS5#/RTS5#/SS5#/MOSIA                  |                       |
| 65      |                                     | PA5      | A5              |                             | RSPCKA                                  |                       |
| 66      |                                     | PA4      | A4              | MTIC5U/MTCLKA/TMR10         | TXD5/SMOSI5/SSDA5/SSLA0                 | IRQ5-DS/CVREFB1       |
| 67      |                                     | PA3      | A3              | MTIOC0D/MTCLKD              | RXD5/SMISO5/SSCL5                       | IRQ6-DS/CMPB1         |
| 68      |                                     | PA2      | A2              |                             | RXD5/SMISO5/SSCL5/SSLA3                 |                       |
| 69      |                                     | PA1      | A1              | MTIOC0B/MTCLKC              | SCK5/SSLA2                              | CVREFA                |
| 70      |                                     | PA0      | A0/BC0#         | MTIOC4A                     | SSLA1                                   | CACREF                |
| 71      |                                     | PE7      | D15[A15/D15]    |                             |                                         | IRQ7/AN015            |
| 72      |                                     | PE6      | D14[A14/D14]    |                             |                                         | IRQ6/AN014            |
| 73      |                                     | PE5      | D13[A13/D13]    | MTIOC4C/MTIOC2B             |                                         | IRQ5/AN013            |
| 74      |                                     | PE4      | D12[A12/D12]    | MTIOC4D/MTIOC1A             |                                         | AN012/CMPA2           |
| 75      |                                     | PE3      | D11[A11/D11]    | MTIOC4B/POE8#               | CTS12#/RTS12#/SS12#                     | AN011/CMPA1           |
| 76      |                                     | PE2      | D10[A10/D10]    | MTIOC4A                     | RXD12/RXD12/SMISO12/SSCL12              | IRQ7-DS/AN010/CVREFB0 |
| 77      |                                     | PE1      | D9[A9/D9]       | MTIOC4C                     | TXD12/TXD12/SIOX12/SMOSI12/SSDA12       | AN009/CMPB0           |
| 78      |                                     | PE0      | D8[A8/D8]       |                             | SCK12                                   | AN008                 |
| 79      |                                     | PD7      | D7[A7/D7]       | MTIC5U/POE0#                |                                         | IRQ7                  |

**Table 1.12 List of Pins and Pin Functions (100-Pin LQFP) (3 / 3)**

| Pin No. | Power Supply, Clock, System Control | I/O Port | External Bus | Timers (MTU, TMR, POE) | Communications (SCIc, SCId, RSPI, RIIC) | Others  |
|---------|-------------------------------------|----------|--------------|------------------------|-----------------------------------------|---------|
| 80      |                                     | PD6      | D6[A6/D6]    | MTIC5V/POE1#           |                                         | IRQ6    |
| 81      |                                     | PD5      | D5[A5/D5]    | MTIC5W/POE2#           |                                         | IRQ5    |
| 82      |                                     | PD4      | D4[A4/D4]    | POE3#                  |                                         | IRQ4    |
| 83      |                                     | PD3      | D3[A3/D3]    | POE8#                  |                                         | IRQ3    |
| 84      |                                     | PD2      | D2[A2/D2]    | MTIOC4D                |                                         | IRQ2    |
| 85      |                                     | PD1      | D1[A1/D1]    | MTIOC4B                |                                         | IRQ1    |
| 86      |                                     | PD0      | D0[A0/D0]    |                        |                                         | IRQ0    |
| 87      |                                     | P47      |              |                        |                                         | AN007   |
| 88      |                                     | P46      |              |                        |                                         | AN006   |
| 89      |                                     | P45      |              |                        |                                         | AN005   |
| 90      |                                     | P44      |              |                        |                                         | AN004   |
| 91      |                                     | P43      |              |                        |                                         | AN003   |
| 92      |                                     | P42      |              |                        |                                         | AN002   |
| 93      |                                     | P41      |              |                        |                                         | AN001   |
| 94      | VREFL0                              |          |              |                        |                                         |         |
| 95      |                                     | P40      |              |                        |                                         | AN000   |
| 96      | VREFH0                              |          |              |                        |                                         |         |
| 97      | AVCC0                               |          |              |                        |                                         |         |
| 98      |                                     | P07      |              |                        |                                         | ADTRG0# |
| 99      | AVSS0                               |          |              |                        |                                         |         |
| 100     |                                     | P05      |              |                        |                                         | DA1     |

Note: • Pin names to which –DS is appended are for pins that can be used to trigger release from deep software standby mode.

**Table 1.13 List of Pins and Pin Functions (80-Pin LQFP) (1 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE)       | Communications<br>(SCiC, SCiD, RSPI, RIIC) | Others                    |
|---------|-------------------------------------------|----------|---------------------------------|--------------------------------------------|---------------------------|
| 1       | VREFH                                     |          |                                 |                                            |                           |
| 2       |                                           | P03      |                                 |                                            | DA0                       |
| 3       | VREFL                                     |          |                                 |                                            |                           |
| 4       | VCL                                       |          |                                 |                                            |                           |
| 5       |                                           | PJ1      | MTIOC3A                         |                                            |                           |
| 6       | MD                                        |          |                                 |                                            | FINED                     |
| 7       | XCIN                                      |          |                                 |                                            |                           |
| 8       | XCOUT                                     |          |                                 |                                            |                           |
| 9       | RES#                                      |          |                                 |                                            |                           |
| 10      | XTAL                                      | P37      |                                 |                                            |                           |
| 11      | VSS                                       |          |                                 |                                            |                           |
| 12      | EXTAL                                     | P36      |                                 |                                            |                           |
| 13      | VCC                                       |          |                                 |                                            |                           |
| 14      |                                           | P35      |                                 |                                            | NMI                       |
| 15      |                                           | P34      | MTIOC0A/TMCi3/POE2#             | SCK6                                       | IRQ4                      |
| 16      |                                           | P32      | MTIOC0C/TMO3                    | TXD6/SMOSI6/SSDA6                          | IRQ2-DS/RTCOUT/<br>RTCIC2 |
| 17      |                                           | P31      | MTIOC4D/TMCi2                   | CTS1#/RTS1#/SS1#                           | IRQ1-DS/RTCIC1            |
| 18      |                                           | P30      | MTIOC4B/TMRi3/POE8#             | RXD1/SMISO1/SSCL1                          | IRQ0-DS/RTCIC0            |
| 19      |                                           | P27      | MTIOC2B/TMCi3                   | SCK1                                       |                           |
| 20      |                                           | P26      | MTIOC2A/TMO1                    | TXD1/SMOSI1/SSDA1                          |                           |
| 21      |                                           | P21      | MTIOC1B/TMCi0                   | RXD0/SSCL0                                 |                           |
| 22      |                                           | P20      | MTIOC1A/TMRi0                   | TXD0/SSDA0                                 |                           |
| 23      |                                           | P17      | MTIOC3A/MTIOC3B/TMO1/<br>POE8#  | SCK1/MISOA/<br>SDA-DS                      | IRQ7                      |
| 24      |                                           | P16      | MTIOC3C/MTIOC3D/TMO2            | TXD1/SMOSI1/SSDA1/MOSIA/<br>SCL-DS         | IRQ6/RTCOUT/<br>ADTRG0#   |
| 25      |                                           | P15      | MTIOC0B/MTCLKB/TMCi2            | RXD1/SMISO1/SSCL1                          | IRQ5                      |
| 26      |                                           | P14      | MTIOC3A/MTCLKA/TMRi2            | CTS1#/RTS1#/SS1#                           | IRQ4                      |
| 27      |                                           | P13      | MTIOC0B/TMO3                    | SDA                                        | IRQ3                      |
| 28      |                                           | P12      | TMCi1                           | SCL                                        | IRQ2                      |
| 29      |                                           | PH3      | TMCi0                           |                                            |                           |
| 30      |                                           | PH2      | TMRi0                           |                                            | IRQ1                      |
| 31      |                                           | PH1      | TMO0                            |                                            | IRQ0                      |
| 32      |                                           | PH0      |                                 |                                            | CACREF                    |
| 33      |                                           | P55      | MTIOC4D/TMO3                    |                                            |                           |
| 34      |                                           | P54      | MTIOC4B/TMCi1                   |                                            |                           |
| 35      |                                           | PC7      | MTIOC3A/TMO2/MTCLKB             | TXD8/SMOSI8/SSDA8/MISOA                    | CACREF                    |
| 36      |                                           | PC6      | MTIOC3C/MTCLKA/TMCi2            | RXD8/SMISO8/SSCL8/MOSIA                    |                           |
| 37      |                                           | PC5      | MTIOC3B/MTCLKD/TMRi2            | SCK8/RSPCKA                                |                           |
| 38      |                                           | PC4      | MTIOC3D/MTCLKC/TMCi1/<br>POE0#  | SCK5/CTS8#/RTS8#/SS8#/<br>SSLA0            |                           |
| 39      |                                           | PC3      | MTIOC4D                         | TXD5/SMOSI5/SSDA5                          |                           |
| 40      |                                           | PC2      | MTIOC4B                         | RXD5/SMISO5/SSCL5/SSLA3                    |                           |
| 41      |                                           | PB7      | MTIOC3B                         | TXD9/SMOSI9/SSDA9                          |                           |
| 42      |                                           | PB6      | MTIOC3D                         | RXD9/SMISO9/SSCL9                          |                           |
| 43      |                                           | PB5      | MTIOC2A/MTIOC1B/TMRi1/<br>POE1# | SCK9                                       |                           |
| 44      |                                           | PB4      |                                 | CTS9#/RTS9#/SS9#                           |                           |

**Table 1.13 List of Pins and Pin Functions (80-Pin LQFP) (2 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE)      | Communications<br>(SCIc, SCId, RSPI, RIIC) | Others                    |
|---------|-------------------------------------------|----------|--------------------------------|--------------------------------------------|---------------------------|
| 45      |                                           | PB3      | MTIOC0A/MTIOC4A/TMO0/<br>POE3# | SCK6                                       |                           |
| 46      |                                           | PB2      |                                | CTS6#/RTS6#/SS6#                           |                           |
| 47      |                                           | PB1      | MTIOC0C/MTIOC4C/TMC10          | TXD6/SMOSI6/SSDA6                          | IRQ4-DS                   |
| 48      | VCC                                       |          |                                |                                            |                           |
| 49      |                                           | PB0      | MTIC5W                         | RXD6/SMISO6/SSCL6/RSPCKA                   |                           |
| 50      | VSS                                       |          |                                |                                            |                           |
| 51      |                                           | PA6      | MTIC5V/MTCLKB/TMC13/<br>POE2#  | CTS5#/RTS5#/SS5#/MOSIA                     |                           |
| 52      |                                           | PA5      |                                | RSPCKA                                     |                           |
| 53      |                                           | PA4      | MTIC5U/MTCLKA/TMR10            | TXD5/SMOSI5/SSDA5/SSLA0                    | IRQ5-DS/CVREFB1           |
| 54      |                                           | PA3      | MTIOC0D/MTCLKD                 | RXD5/SMISO5/SSCL5                          | IRQ6-DS/CMPB1             |
| 55      |                                           | PA2      |                                | RXD5/SMISO5/SSCL5/SSLA3                    |                           |
| 56      |                                           | PA1      | MTIOC0B/MTCLKC                 | SCK5/SSLA2                                 | CVREFA                    |
| 57      |                                           | PA0      | MTIOC4A                        | SSLA1                                      | CACREF                    |
| 58      |                                           | PE5      | MTIOC4C/MTIOC2B                |                                            | IRQ5/AN013                |
| 59      |                                           | PE4      | MTIOC4D/MTIOC1A                |                                            | AN012/CMPA2               |
| 60      |                                           | PE3      | MTIOC4B/POE8#                  | CTS12#/RTS12#/SS12#                        | AN011/CMPA1               |
| 61      |                                           | PE2      | MTIOC4A                        | RXD12/RXD12/SMISO12/<br>SSCL12             | IRQ7-DS/AN010/<br>CVREFB0 |
| 62      |                                           | PE1      | MTIOC4C                        | TXD12/TXD12/SIOX12/<br>SMOSI12/SSDA12      | AN009/CMPB0               |
| 63      |                                           | PE0      |                                | SCK12                                      | AN008                     |
| 64      |                                           | PD2      | MTIOC4D                        |                                            | IRQ2                      |
| 65      |                                           | PD1      | MTIOC4B                        |                                            | IRQ1                      |
| 66      |                                           | PD0      |                                |                                            | IRQ0                      |
| 67      |                                           | P47      |                                |                                            | AN007                     |
| 68      |                                           | P46      |                                |                                            | AN006                     |
| 69      |                                           | P45      |                                |                                            | AN005                     |
| 70      |                                           | P44      |                                |                                            | AN004                     |
| 71      |                                           | P43      |                                |                                            | AN003                     |
| 72      |                                           | P42      |                                |                                            | AN002                     |
| 73      |                                           | P41      |                                |                                            | AN001                     |
| 74      | VREFL0                                    |          |                                |                                            |                           |
| 75      |                                           | P40      |                                |                                            | AN000                     |
| 76      | VREFH0                                    |          |                                |                                            |                           |
| 77      | AVCC0                                     |          |                                |                                            |                           |
| 78      |                                           | P07      |                                |                                            | ADTRG0#                   |
| 79      | AVSS0                                     |          |                                |                                            |                           |
| 80      |                                           | P05      |                                |                                            | DA1                       |

Note: • Pin names to which –DS is appended are for pins that can be used to trigger release from deep software standby mode.

**Table 1.14 List of Pins and Pin Functions (69-Pin WLBGA) (1 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE)       | Communications<br>(SC1c, SC1d, RSPI, RIIC) | Others                    |
|---------|-------------------------------------------|----------|---------------------------------|--------------------------------------------|---------------------------|
| A1      | NC                                        |          |                                 |                                            |                           |
| A2      |                                           | PE2      | MTIOC4A                         | RXD12/RDX12/SMISO12/<br>SSCL12             | IRQ7-DS/AN010/<br>CVREFB0 |
| A3      | VREFL                                     |          |                                 |                                            |                           |
| A4      | VREFH                                     |          |                                 |                                            |                           |
| A5      |                                           | P43      |                                 |                                            | AN003                     |
| A6      | VREFL0                                    |          |                                 |                                            |                           |
| A7      | AVCC0                                     |          |                                 |                                            |                           |
| A8      | AVSS0                                     |          |                                 |                                            |                           |
| A9      | AVSS0                                     |          |                                 |                                            |                           |
| B1      |                                           | PE5      | MTIOC4C/MTIOC2B                 |                                            | IRQ5/AN013                |
| B2      |                                           | PE4      | MTIOC4D/MTIOC1A                 |                                            | AN012/CMPA2               |
| B3      |                                           | PE3      | MTIOC4B/POE8#                   | CTS12#/RTS12#/SS12#                        | AN011/CMPA1               |
| B4      |                                           | P46      |                                 |                                            | AN006                     |
| B5      |                                           | P44      |                                 |                                            | AN004                     |
| B6      |                                           | P41      |                                 |                                            | AN001                     |
| B7      | VREFH0                                    |          |                                 |                                            |                           |
| B8      |                                           | P05      |                                 |                                            | DA1                       |
| B9      | VCL                                       |          |                                 |                                            |                           |
| C1      |                                           | PA3      | MTIOC0D/MTCLKD                  | RXD5/SMISO5/SSCL5                          | IRQ6-DS/CMPB1             |
| C2      |                                           | PA4      | MTIC5U/MTCLKA/TMRI0             | TXD5/SMOSI5/SSDA5/SSLA0                    | IRQ5-DS/CVREFB1           |
| C3      |                                           | PA0      | MTIOC4A                         | SSLA1                                      | CACREF                    |
| C4      |                                           | PE1      | MTIOC4C                         | TXD12/TXD12/SIOX12/<br>SMOSI12/SSDA12      | AN009/CMPB0               |
| C5      |                                           | PE0      |                                 | SCK12                                      | AN008                     |
| C6      |                                           | P42      |                                 |                                            | AN002                     |
| C7      |                                           | P40      |                                 |                                            | AN000                     |
| C8      |                                           | P03      |                                 |                                            | DA0                       |
| C9      | XCIN                                      |          |                                 |                                            |                           |
| D1      |                                           | PA6      | MTIC5V/MTCLKB/TMC13/<br>POE2#   | CTS5#/RTS5#/SS5#/MOSIA                     |                           |
| D2      |                                           | PB0      | MTIC5W                          | RXD6/SMISO6/SSCL6/<br>RSPCKA               |                           |
| D3      |                                           | PA1      | MTIOC0B/MTCLKC                  | SCK5/SSLA2                                 | CVREFA                    |
| D7      | MD                                        |          |                                 |                                            | FINED                     |
| D8      | RES#                                      |          |                                 |                                            |                           |
| D9      | XCOUT                                     |          |                                 |                                            |                           |
| E1      | VSS                                       |          |                                 |                                            |                           |
| E2      |                                           | PB1      | MTIOC0C/MTIOC4C/TMC10           | TXD6/SMOSI6/SSDA6                          | IRQ4-DS                   |
| E8      | XTAL                                      | P37      |                                 |                                            |                           |
| E9      | VSS                                       |          |                                 |                                            |                           |
| F1      | VCC                                       |          |                                 |                                            |                           |
| F2      |                                           | PB3      | MTIOC0A/MTIOC4A/TMO0/<br>POE3#  | SCK6                                       |                           |
| F7      |                                           | P31      | MTIOC4D/TMC12                   | CTS1#/RTS1#/SS1#                           | IRQ1-DS/RTCIC1            |
| F8      | EXTAL                                     | P36      |                                 |                                            |                           |
| F9      | VCC                                       |          |                                 |                                            |                           |
| G1      |                                           | PB5      | MTIOC2A/MTIOC1B/TMRI1/<br>POE1# | SCK9                                       |                           |
| G2      |                                           | PB6      | MTIOC3D                         | RXD9/SMISO9/SSCL9                          |                           |

**Table 1.14 List of Pins and Pin Functions (69-Pin WLBGA) (2 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE)      | Communications<br>(SCId, SCId, RSPI, RIIC) | Others                    |
|---------|-------------------------------------------|----------|--------------------------------|--------------------------------------------|---------------------------|
| G3      | NC                                        |          |                                |                                            |                           |
| G4      |                                           | P54      | MTIOC4B/TMC11                  |                                            |                           |
| G5      |                                           | PH1      | TMO0                           |                                            | IRQ0                      |
| G6      |                                           | P14      | MTIOC3A/MTCLKA/TMRI2           | CTS1#/RTS1#/SS1#                           | IRQ4                      |
| G7      |                                           | P27      | MTIOC2B/TMC13                  | SCK1                                       |                           |
| G8      |                                           | P32      | MTIOC0C/TMO3                   | TXD6/SMOSI6/SSDA6                          | IRQ2-DS/RTCOUT/<br>RTCIC2 |
| G9      |                                           | P35      |                                |                                            | NMI                       |
| H1      |                                           | PB7      | MTIOC3B                        | TXD9/SMOSI9/SSDA9                          |                           |
| H2      |                                           | PC3      | MTIOC4D                        | TXD5/SMOSI5/SSDA5                          |                           |
| H3      |                                           | PC5      | MTIOC3B/MTCLKD/TMRI2           | SCK8/RSPCKA                                |                           |
| H4      |                                           | PC6      | MTIOC3C/MTCLKA/TMC12           | RXD8/SMISO8/SSCL8/MOSIA                    |                           |
| H5      |                                           | P55      | MTIOC4D/TMO3                   |                                            |                           |
| H6      |                                           | PH3      | TMC10                          |                                            |                           |
| H7      |                                           | P17      | MTIOC3A/MTIOC3B/TMO1/<br>POE8# | SCK1/MISOA/SDA-DS                          | IRQ7                      |
| H8      |                                           | P26      | MTIOC2A/TMO1                   | TXD1/SMOSI1/SSDA1                          |                           |
| H9      |                                           | P30      | MTIOC4B/TMRI3/POE8#            | RXD1/SMISO1/SSCL1                          | IRQ0-DS/RTCIC0            |
| J1      | NC                                        |          |                                |                                            |                           |
| J2      |                                           | PC2      | MTIOC4B                        | RXD5/SMISO5/SSCL5/SSLA3                    |                           |
| J3      |                                           | PC4      | MTIOC3D/MTCLKC/TMC11/<br>POE0# | SCK5/CTS8#/RTS8#/SS8#/<br>SSLA0            |                           |
| J4      |                                           | PC7      | MTIOC3A/TMO2/MTCLKB            | TXD8/SMOSI8/SSDA8/MISOA                    | CACREF                    |
| J5      |                                           | PH0      |                                |                                            | CACREF                    |
| J6      |                                           | PH2      | TMRI0                          |                                            | IRQ1                      |
| J7      |                                           | P15      | MTIOC0B/MTCLKB/TMC12           | RXD1/SMISO1/SSCL1                          | IRQ5                      |
| J8      |                                           | P16      | MTIOC3C/MTIOC3D/TMO2           | TXD1/SMOSI1/SSDA1/<br>MOSIA/SCL-DS         | IRQ6/RTCOUT/<br>ADTRG0#   |
| J9      | NC                                        |          |                                |                                            |                           |

Note: • Pin names to which –DS is appended are for pins that can be used to trigger release from deep software standby mode.

Note: • Leave the NC pin open.

**Table 1.15 List of Pins and Pin Functions (64-Pin TFLGA) (1 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE)      | Communication<br>(SCId, SCId, RSPI, RIIC) | Others                    |
|---------|-------------------------------------------|----------|--------------------------------|-------------------------------------------|---------------------------|
| A1      |                                           | P05      |                                |                                           | DA1                       |
| A2      | AVCC0                                     |          |                                |                                           |                           |
| A3      | VREFH0                                    |          |                                |                                           |                           |
| A4      | VREFL0                                    |          |                                |                                           |                           |
| A5      | VREFH                                     |          |                                |                                           |                           |
| A6      | VREFL                                     |          |                                |                                           |                           |
| A7      |                                           | PE2      | MTIOC4A                        | RXD12/RXD12/SMISO12/<br>SSCL12            | IRQ7-DS/AN010/<br>CVREFB0 |
| A8      |                                           | PE3      | MTIOC4B/POE8#                  | CTS12#/RTS12#/SS12#                       | AN011/CMPA1               |
| B1      | VCL                                       |          |                                |                                           |                           |
| B2      | AVSS0                                     |          |                                |                                           |                           |
| B3      |                                           | P40      |                                |                                           | AN000                     |
| B4      |                                           | P42      |                                |                                           | AN002                     |
| B5      |                                           | P44      |                                |                                           | AN004                     |
| B6      |                                           | P46      |                                |                                           | AN006                     |
| B7      |                                           | PE1      | MTIOC4C                        | TXD12/TXD12/SIOX12/<br>SMOSI12/SSDA12     | AN009/CMPB0               |
| B8      |                                           | PE4      | MTIOC4D/MTIOC1A                |                                           | AN012/CMPA2               |
| C1      | XCIN                                      |          |                                |                                           |                           |
| C2      | MD                                        |          |                                |                                           | FINED                     |
| C3      |                                           | P03      |                                |                                           | DA0                       |
| C4      |                                           | P41      |                                |                                           | AN001                     |
| C5      |                                           | P43      |                                |                                           | AN003                     |
| C6      |                                           | PE0      |                                | SCK12                                     | AN008                     |
| C7      |                                           | PE5      | MTIOC4C/MTIOC2B                |                                           | IRQ5/AN013                |
| C8      |                                           | PA0      | MTIOC4A                        | SSLA1                                     | CACREF                    |
| D1      | XCOUT                                     |          |                                |                                           |                           |
| D2      | RES#                                      |          |                                |                                           |                           |
| D3      |                                           | P27      | MTIOC2B/TMCI3                  | SCK1                                      |                           |
| D4      |                                           | P14      | MTIOC3A/MTCLKA/TMRI2           | CTS1#/RTS1#/SS1#                          | IRQ4                      |
| D5      |                                           | PA6      | MTIC5V/MTCLKB/TMCI3/<br>POE2#  | CTS5#/RTS5#/SS5#/MOSIA                    |                           |
| D6      |                                           | PA4      | MTIC5U/MTCLKA/TMRI0            | TXD5/SMOSI5/SSDA5/SSLA0                   | IRQ5-DS/CVREFB1           |
| D7      |                                           | PA1      | MTIOC0B/MTCLKC                 | SCK5/SSLA2                                | CVREFA                    |
| D8      |                                           | PA3      | MTIOC0D/MTCLKD                 | RXD5/SMISO5/SSCL5                         | IRQ6-DS/CMPB1             |
| E1      | VSS                                       |          |                                |                                           |                           |
| E2      |                                           | P32      | MTIOC0C/TMO3                   | TXD6/SMOSI6/SSDA6                         | IRQ2-DS/RTCOUT/<br>RTCIC2 |
| E3      |                                           | P30      | MTIOC4B/TMRI3/POE8#            | RXD1/SMISO1/SSCL1                         | IRQ0-DS/RTCIC0            |
| E4      |                                           | P16      | MTIOC3C/MTIOC3D/TMO2           | TXD1/SMOSI1/SSDA1/MOSIA/<br>SCL-DS        | IRQ6/RTCOUT/<br>ADTRG0#   |
| E5      |                                           | PC4      | MTIOC3D/MTCLKC/TMCI1/<br>POE0# | SCK5/CTS8#/RTS8#/SS8#/<br>SSLA0           |                           |
| E6      | VCC                                       |          |                                |                                           |                           |
| E7      | VSS                                       |          |                                |                                           |                           |
| E8      |                                           | PB0      | MTIC5W                         | RXD6/SMISO6/SSCL6/RSPCKA                  |                           |
| F1      | VCC                                       |          |                                |                                           |                           |
| F2      |                                           | P35      |                                |                                           | NMI                       |
| F3      |                                           | P31      | MTIOC4D/TMCI2                  | CTS1#/RTS1#/SS1#                          | IRQ1-DS/RTCIC1            |
| F4      |                                           | PC5      | MTIOC3B/MTCLKD/TMRI2           | SCK8/RSPCKA                               |                           |

**Table 1.15 List of Pins and Pin Functions (64-Pin TFLGA) (2 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE)       | Communication<br>(SCIc, SCId, RSPI, RIIC) | Others  |
|---------|-------------------------------------------|----------|---------------------------------|-------------------------------------------|---------|
| F5      |                                           | P15      | MTIOC0B/MTCLKB/TMCi2            | RXD1/SMISO1/SSCL1                         | IRQ5    |
| F6      |                                           | PB1      | MTIOC0C/MTIOC4C/TMCi0           | TXD6/SMOSI6/SSDA6                         | IRQ4-DS |
| F7      |                                           | PB5      | MTIOC2A/MTIOC1B/TMRI1/<br>POE1# | SCK9                                      |         |
| F8      |                                           | PB3      | MTIOC0A/MTIOC4A/TMO0/<br>POE3#  | SCK6                                      |         |
| G1      | EXTAL                                     | P36      |                                 |                                           |         |
| G2      |                                           | P26      | MTIOC2A/TMO1                    | TXD1/SMOSI1/SSDA1                         |         |
| G3      |                                           | PH3      | TMCi0                           |                                           |         |
| G4      |                                           | PH0      |                                 |                                           | CACREF  |
| G5      |                                           | PC7      | MTIOC3A/TMO2/MTCLKB             | TXD8/SMOSI8/SSDA8/MISOA                   | CACREF  |
| G6      |                                           | PC6      | MTIOC3C/MTCLKA/TMCi2            | RXD8/SMISO8/SSCL8/MOSIA                   |         |
| G7      |                                           | PC3      | MTIOC4D                         | TXD5/SMOSI5/SSDA5                         |         |
| G8      |                                           | PB6      | MTIOC3D                         | RXD9/SMISO9/SSCL9                         |         |
| H1      | XTAL                                      | P37      |                                 |                                           |         |
| H2      |                                           | P17      | MTIOC3A/MTIOC3B/TMO1/<br>POE8#  | SCK1/MISOA/SDA-DS                         | IRQ7    |
| H3      |                                           | PH2      | TMRI0                           |                                           | IRQ1    |
| H4      |                                           | PH1      | TMO0                            |                                           | IRQ0    |
| H5      |                                           | P55      | MTIOC4D/TMO3                    |                                           |         |
| H6      |                                           | P54      | MTIOC4B/TMCi1                   |                                           |         |
| H7      |                                           | PC2      | MTIOC4B                         | RXD5/SMISO5/SSCL5/SSLA3                   |         |
| H8      |                                           | PB7      | MTIOC3B                         | TXD9/SMOSI9/SSDA9                         |         |

Note: • Pin names to which -DS is appended are for pins that can be used to trigger release from deep software standby mode.

**Table 1.16 List of Pins and Pin Functions (64-Pin LQFP) (1 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE)       | Communication<br>(SCIC, SCID, RSPI, RIIC) | Others                    |
|---------|-------------------------------------------|----------|---------------------------------|-------------------------------------------|---------------------------|
| 1       |                                           | P03      |                                 |                                           | DA0                       |
| 2       | VCL                                       |          |                                 |                                           |                           |
| 3       | MD                                        |          |                                 |                                           | FINED                     |
| 4       | XCIN                                      |          |                                 |                                           |                           |
| 5       | XCOUT                                     |          |                                 |                                           |                           |
| 6       | RES#                                      |          |                                 |                                           |                           |
| 7       | XTAL                                      | P37      |                                 |                                           |                           |
| 8       | VSS                                       |          |                                 |                                           |                           |
| 9       | EXTAL                                     | P36      |                                 |                                           |                           |
| 10      | VCC                                       |          |                                 |                                           |                           |
| 11      |                                           | P35      |                                 |                                           | NMI                       |
| 12      |                                           | P32      | MTIOC0C/TMO3                    | TXD6/SMOSI6/SSDA6                         | IRQ2-DS/RTCOUT/<br>RTCIC2 |
| 13      |                                           | P31      | MTIOC4D/TMCI2                   | CTS1#/RTS1#/SS1#                          | IRQ1-DS/RTCIC1            |
| 14      |                                           | P30      | MTIOC4B/TMRI3/POE8#             | RXD1/SMISO1/SSCL1                         | IRQ0-DS/RTCIC0            |
| 15      |                                           | P27      | MTIOC2B/TMCI3                   | SCK1                                      |                           |
| 16      |                                           | P26      | MTIOC2A/TMO1                    | TXD1/SMOSI1/SSDA1                         |                           |
| 17      |                                           | P17      | MTIOC3A/MTIOC3B/TMO1/<br>POE8#  | SCK1/MISOA/SDA-DS                         | IRQ7                      |
| 18      |                                           | P16      | MTIOC3C/MTIOC3D/TMO2            | TXD1/SMOSI1/SSDA1/MOSIA/<br>SCL-DS        | IRQ6/RTCOUT/<br>ADTRG0#   |
| 19      |                                           | P15      | MTIOC0B/MTCLKB/TMCI2            | RXD1/SMISO1/SSCL1                         | IRQ5                      |
| 20      |                                           | P14      | MTIOC3A/MTCLKA/TMRI2            | CTS1#/RTS1#/SS1#                          | IRQ4                      |
| 21      |                                           | PH3      | TMCI0                           |                                           |                           |
| 22      |                                           | PH2      | TMRI0                           |                                           | IRQ1                      |
| 23      |                                           | PH1      | TMO0                            |                                           | IRQ0                      |
| 24      |                                           | PH0      |                                 |                                           | CACREF                    |
| 25      |                                           | P55      | MTIOC4D/TMO3                    |                                           |                           |
| 26      |                                           | P54      | MTIOC4B/TMCI1                   |                                           |                           |
| 27      |                                           | PC7      | MTIOC3A/TMO2/MTCLKB             | TXD8/SMOSI8/SSDA8/MISOA                   | CACREF                    |
| 28      |                                           | PC6      | MTIOC3C/MTCLKA/TMCI2            | RXD8/SMISO8/SSCL8/MOSIA                   |                           |
| 29      |                                           | PC5      | MTIOC3B/MTCLKD/TMRI2            | SCK8/RSPCKA                               |                           |
| 30      |                                           | PC4      | MTIOC3D/MTCLKC/TMCI1/<br>POE0#  | SCK5/CTS8#/RTS8#/SS8#/<br>SSLA0           |                           |
| 31      |                                           | PC3      | MTIOC4D                         | TXD5/SMOSI5/SSDA5                         |                           |
| 32      |                                           | PC2      | MTIOC4B                         | RXD5/SMISO5/SSCL5/SSLA3                   |                           |
| 33      |                                           | PB7      | MTIOC3B                         | TXD9/SMOSI9/SSDA9                         |                           |
| 34      |                                           | PB6      | MTIOC3D                         | RXD9/SMISO9/SSCL9                         |                           |
| 35      |                                           | PB5      | MTIOC2A/MTIOC1B/TMRI1/<br>POE1# | SCK9                                      |                           |
| 36      |                                           | PB3      | MTIOC0A/MTIOC4A/TMO0/<br>POE3#  | SCK6                                      |                           |
| 37      |                                           | PB1      | MTIOC0C/MTIOC4C/TMCI0           | TXD6/SMOSI6/SSDA6                         | IRQ4-DS                   |
| 38      | VCC                                       |          |                                 |                                           |                           |
| 39      |                                           | PB0      | MTIC5W                          | RXD6/SMISO6/SSCL6/RSPCKA                  |                           |
| 40      | VSS                                       |          |                                 |                                           |                           |
| 41      |                                           | PA6      | MTIC5V/MTCLKB/TMCI3/<br>POE2#   | CTS5#/RTS5#/SS5#/MOSIA                    |                           |
| 42      |                                           | PA4      | MTIC5U/MTCLKA/TMRI0             | TXD5/SMOSI5/SSDA5/SSLA0                   | IRQ5-DS/CVREFB1           |
| 43      |                                           | PA3      | MTIOC0D/MTCLKD                  | RXD5/SMISO5/SSCL5                         | IRQ6-DS/CMPB1             |

**Table 1.16 List of Pins and Pin Functions (64-Pin LQFP) (2 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE) | Communication<br>(SCIc, SCId, RSPI, RIIC) | Others                    |
|---------|-------------------------------------------|----------|---------------------------|-------------------------------------------|---------------------------|
| 44      |                                           | PA1      | MTIOC0B/MTCLKC            | SCK5/SSLA2                                | CVREFA                    |
| 45      |                                           | PA0      | MTIOC4A                   | SSLA1                                     | CACREF                    |
| 46      |                                           | PE5      | MTIOC4C/MTIOC2B           |                                           | IRQ5/AN013                |
| 47      |                                           | PE4      | MTIOC4D/MTIOC1A           |                                           | AN012/CMPA2               |
| 48      |                                           | PE3      | MTIOC4B/POE8#             | CTS12#/RTS12#/SS12#                       | AN011/CMPA1               |
| 49      |                                           | PE2      | MTIOC4A                   | RXD12/RXDX12/SMISO12/<br>SSCL12           | IRQ7-DS/AN010/<br>CVREFB0 |
| 50      |                                           | PE1      | MTIOC4C                   | TXD12/TXDX12/SIOX12/<br>SMOSI12/SSDA12    | AN009/CMPB0               |
| 51      |                                           | PE0      |                           | SCK12                                     | AN008                     |
| 52      | VREFL                                     |          |                           |                                           |                           |
| 53      |                                           | P46      |                           |                                           | AN006                     |
| 54      | VREFH                                     |          |                           |                                           |                           |
| 55      |                                           | P44      |                           |                                           | AN004                     |
| 56      |                                           | P43      |                           |                                           | AN003                     |
| 57      |                                           | P42      |                           |                                           | AN002                     |
| 58      |                                           | P41      |                           |                                           | AN001                     |
| 59      | VREFL0                                    |          |                           |                                           |                           |
| 60      |                                           | P40      |                           |                                           | AN000                     |
| 61      | VREFH0                                    |          |                           |                                           |                           |
| 62      | AVCC0                                     |          |                           |                                           |                           |
| 63      |                                           | P05      |                           |                                           | DA1                       |
| 64      | AVSS0                                     |          |                           |                                           |                           |

Note: • Pin names to which –DS is appended are for pins that can be used to trigger release from deep software standby mode.

**Table 1.17 List of Pins and Pin Functions (48-Pin LQFP) (1 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE)       | Communication<br>(SCIC, SCID, RSPI, RIIC) | Others                    |
|---------|-------------------------------------------|----------|---------------------------------|-------------------------------------------|---------------------------|
| 1       | VCL                                       |          |                                 |                                           |                           |
| 2       | MD                                        |          |                                 |                                           | FINED                     |
| 3       | RES#                                      |          |                                 |                                           |                           |
| 4       | XTAL                                      | P37      |                                 |                                           |                           |
| 5       | VSS                                       |          |                                 |                                           |                           |
| 6       | EXTAL                                     | P36      |                                 |                                           |                           |
| 7       | VCC                                       |          |                                 |                                           |                           |
| 8       |                                           | P35      |                                 |                                           | NMI                       |
| 9       |                                           | P31      | MTIOC4D/TMCI2                   | CTS1#/RTS1#/SS1#                          | IRQ1-DS                   |
| 10      |                                           | P30      | MTIOC4B/TMRI3/POE8#             | RXD1/SMISO1/SSCL1                         | IRQ0-DS                   |
| 11      |                                           | P27      | MTIOC2B/TMCI3                   | SCK1                                      |                           |
| 12      |                                           | P26      | MTIOC2A/TMO1                    | TXD1/SMOSI1/SSDA1                         |                           |
| 13      |                                           | P17      | MTIOC3A/MTIOC3B/TMO1/<br>POE8#  | SCK1/MISOA/SDA-DS                         | IRQ7                      |
| 14      |                                           | P16      | MTIOC3C/MTIOC3D/TMO2            | TXD1/SMOSI1/SSDA1/MOSIA/<br>SCL-DS        | IRQ6/ADTRG0#              |
| 15      |                                           | P15      | MTIOC0B/MTCLKB/TMCI2            | RXD1/SMISO1/SSCL1                         | IRQ5                      |
| 16      |                                           | P14      | MTIOC3A/MTCLKA/TMRI2            | CTS1#/RTS1#/SS1#                          | IRQ4                      |
| 17      |                                           | PH3      | TMCI0                           |                                           |                           |
| 18      |                                           | PH2      | TMRI0                           |                                           | IRQ1                      |
| 19      |                                           | PH1      | TMO0                            |                                           | IRQ0                      |
| 20      |                                           | PH0      |                                 |                                           | CACREF                    |
| 21      |                                           | PC7      | MTIOC3A/TMO2/MTCLKB             | TXD8/SMOSI8/SSDA8/MISOA                   | CACREF                    |
| 22      |                                           | PC6      | MTIOC3C/MTCLKA/TMCI2            | RXD8/SMISO8/SSCL8/MOSIA                   |                           |
| 23      |                                           | PC5      | MTIOC3B/MTCLKD/TMRI2            | SCK8/RSPCKA                               |                           |
| 24      |                                           | PC4      | MTIOC3D/MTCLKC/TMCI1/<br>POE0#  | SCK5/CTS8#/RTS8#/SS8#/<br>SSLA0           |                           |
| 25      |                                           | PB5      | MTIOC2A/MTIOC1B/TMRI1/<br>POE1# |                                           |                           |
| 26      |                                           | PB3      | MTIOC0A/MTIOC4A/TMO0/<br>POE3#  | SCK6                                      |                           |
| 27      |                                           | PB1      | MTIOC0C/MTIOC4C/TMCI0           | TXD6/SMOSI6/SSDA6                         | IRQ4-DS                   |
| 28      | VCC                                       |          |                                 |                                           |                           |
| 29      |                                           | PB0      | MTIC5W                          | RXD6/SMISO6/SSCL6/RSPCKA                  |                           |
| 30      | VSS                                       |          |                                 |                                           |                           |
| 31      |                                           | PA6      | MTIC5V/MTCLKB/TMCI3/<br>POE2#   | CTS5#/RTS5#/SS5#/MOSIA                    |                           |
| 32      |                                           | PA4      | MTIC5U/MTCLKA/TMRI0             | TXD5/SMOSI5/SSDA5/SSLA0                   | IRQ5-DS/CVREFB1           |
| 33      |                                           | PA3      | MTIOC0D/MTCLKD                  | RXD5/SMISO5/SSCL5                         | IRQ6-DS/CMPB1             |
| 34      |                                           | PA1      | MTIOC0B/MTCLKC                  | SCK5/SSLA2                                | CVREFA                    |
| 35      |                                           | PE4      | MTIOC4D/MTIOC1A                 |                                           | AN012/CMPA2               |
| 36      |                                           | PE3      | MTIOC4B/POE8#                   | CTS12#/RTS12#                             | AN011/CMPA1               |
| 37      |                                           | PE2      | MTIOC4A                         | RXD12/RXD12/SSCL12                        | IRQ7-DS/AN010/<br>CVREFB0 |
| 38      |                                           | PE1      | MTIOC4C                         | TXD12/TXD12/SIOX12/<br>SSDA12             | AN009/CMPB0               |
| 39      | VREFL                                     |          |                                 |                                           |                           |
| 40      |                                           | P46      |                                 |                                           | AN006                     |
| 41      | VREFH                                     |          |                                 |                                           |                           |
| 42      |                                           | P42      |                                 |                                           | AN002                     |
| 43      |                                           | P41      |                                 |                                           | AN001                     |


**Table 1.17 List of Pins and Pin Functions (48-Pin LQFP) (2 / 2)**

| Pin No. | Power Supply,<br>Clock, System<br>Control | I/O Port | Timers<br>(MTU, TMR, POE) | Communication<br>(SCIc, SCId, RSPI, RIIC) | Others |
|---------|-------------------------------------------|----------|---------------------------|-------------------------------------------|--------|
| 44      | VREFL0                                    |          |                           |                                           |        |
| 45      |                                           | P40      |                           |                                           | AN000  |
| 46      | VREFH0                                    |          |                           |                                           |        |
| 47      | AVCC0                                     |          |                           |                                           |        |
| 48      | AVSS0                                     |          |                           |                                           |        |

Note: • Pin names to which –DS is appended are for pins that can be used to trigger release from deep software standby mode.

## 2. CPU

Figure 2.1 shows the register set of the CPU.

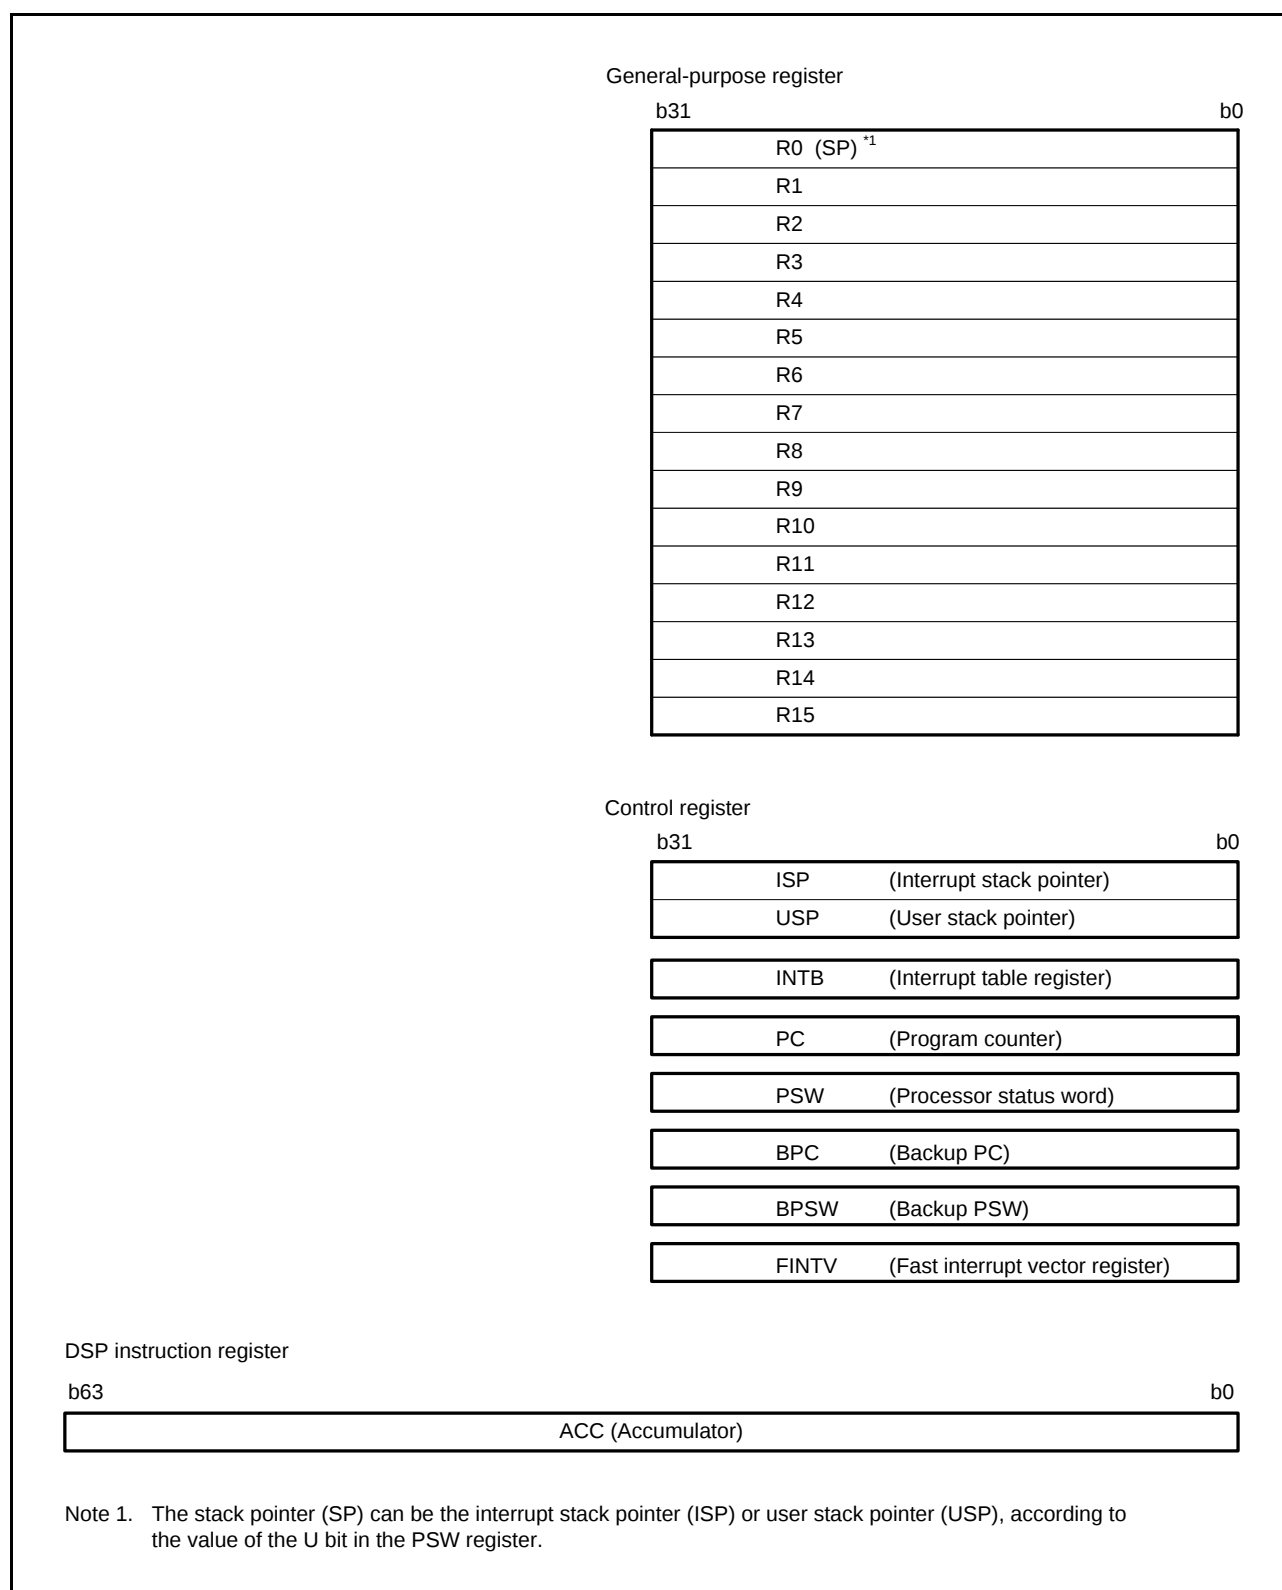

**Figure 2.1 Register Set of the CPU**

## 2.1 General-Purpose Registers (R0 to R15)

This CPU has sixteen general-purpose registers (R0 to R15). R1 to R15 can be used as data registers or address registers. R0, a general-purpose register, also functions as the stack pointer (SP). The stack pointer is switched to operate as the interrupt stack pointer (ISP) or user stack pointer (USP) by the value of the stack pointer select bit (U) in the processor status word (PSW).

## 2.2 Control Registers

### (1) Interrupt Stack Pointer (ISP)/User Stack Pointer (USP)

The stack pointer (SP) can be either of two types, the interrupt stack pointer (ISP) or the user stack pointer (USP). Whether the stack pointer operates as the ISP or USP depends on the value of the stack pointer select bit (U) in the processor status word (PSW).

Set the ISP or USP to a multiple of four, as this reduces the numbers of cycles required to execute interrupt sequences and instructions entailing stack manipulation.

### (2) Interrupt Table Register (INTB)

The interrupt table register (INTB) specifies the address where the relocatable vector table starts.

### (3) Program Counter (PC)

The program counter (PC) indicates the address of the instruction being executed.

### (4) Processor Status Word (PSW)

The processor status word (PSW) indicates the results of instruction execution or the state of the CPU.

### (5) Backup PC (BPC)

The backup PC (BPC) is provided to speed up response to interrupts.

After a fast interrupt has been generated, the contents of the program counter (PC) are saved in the BPC register.

### (6) Backup PSW (BPSW)

The backup PSW (BPSW) is provided to speed up response to interrupts.

After a fast interrupt has been generated, the contents of the processor status word (PSW) are saved in the BPSW. The allocation of bits in the BPSW corresponds to that in the PSW.

### (7) Fast Interrupt Vector Register (FINTV)

The fast interrupt vector register (FINTV) is provided to speed up response to interrupts.

The FINTV register specifies a branch destination address when a fast interrupt has been generated.

## 2.3 Register Associated with DSP Instructions

### (1) Accumulator (ACC)

The accumulator (ACC) is a 64-bit register used for DSP instructions. The accumulator is also used for the multiply and multiply-and-accumulate instructions; EMUL, EMULU, MUL, and RMPA, in which case the prior value in the accumulator is modified by execution of the instruction.

Use the MVTACHI and MVTACLO instructions for writing to the accumulator. The MVTACHI and MVTACLO instructions write data to the higher-order 32 bits (bits 63 to 32) and the lower-order 32 bits (bits 31 to 0), respectively.

Use the MVFACHI and MVFACMI instructions for reading data from the accumulator. The MVFACHI and MVFACMI instructions read data from the higher-order 32 bits (bits 63 to 32) and the middle 32 bits (bits 47 to 16), respectively.

## 3. Address Space

### 3.1 Address Space

This LSI has a 4-Gbyte address space, consisting of the range of addresses from 0000 0000h to FFFF FFFFh. That is, linear access to an address space of up to 4 Gbytes is possible, and this contains both program and data areas.

Figure 3.1 shows the memory maps in the respective operating modes. Accessible areas will differ according to the operating mode and states of control bits.


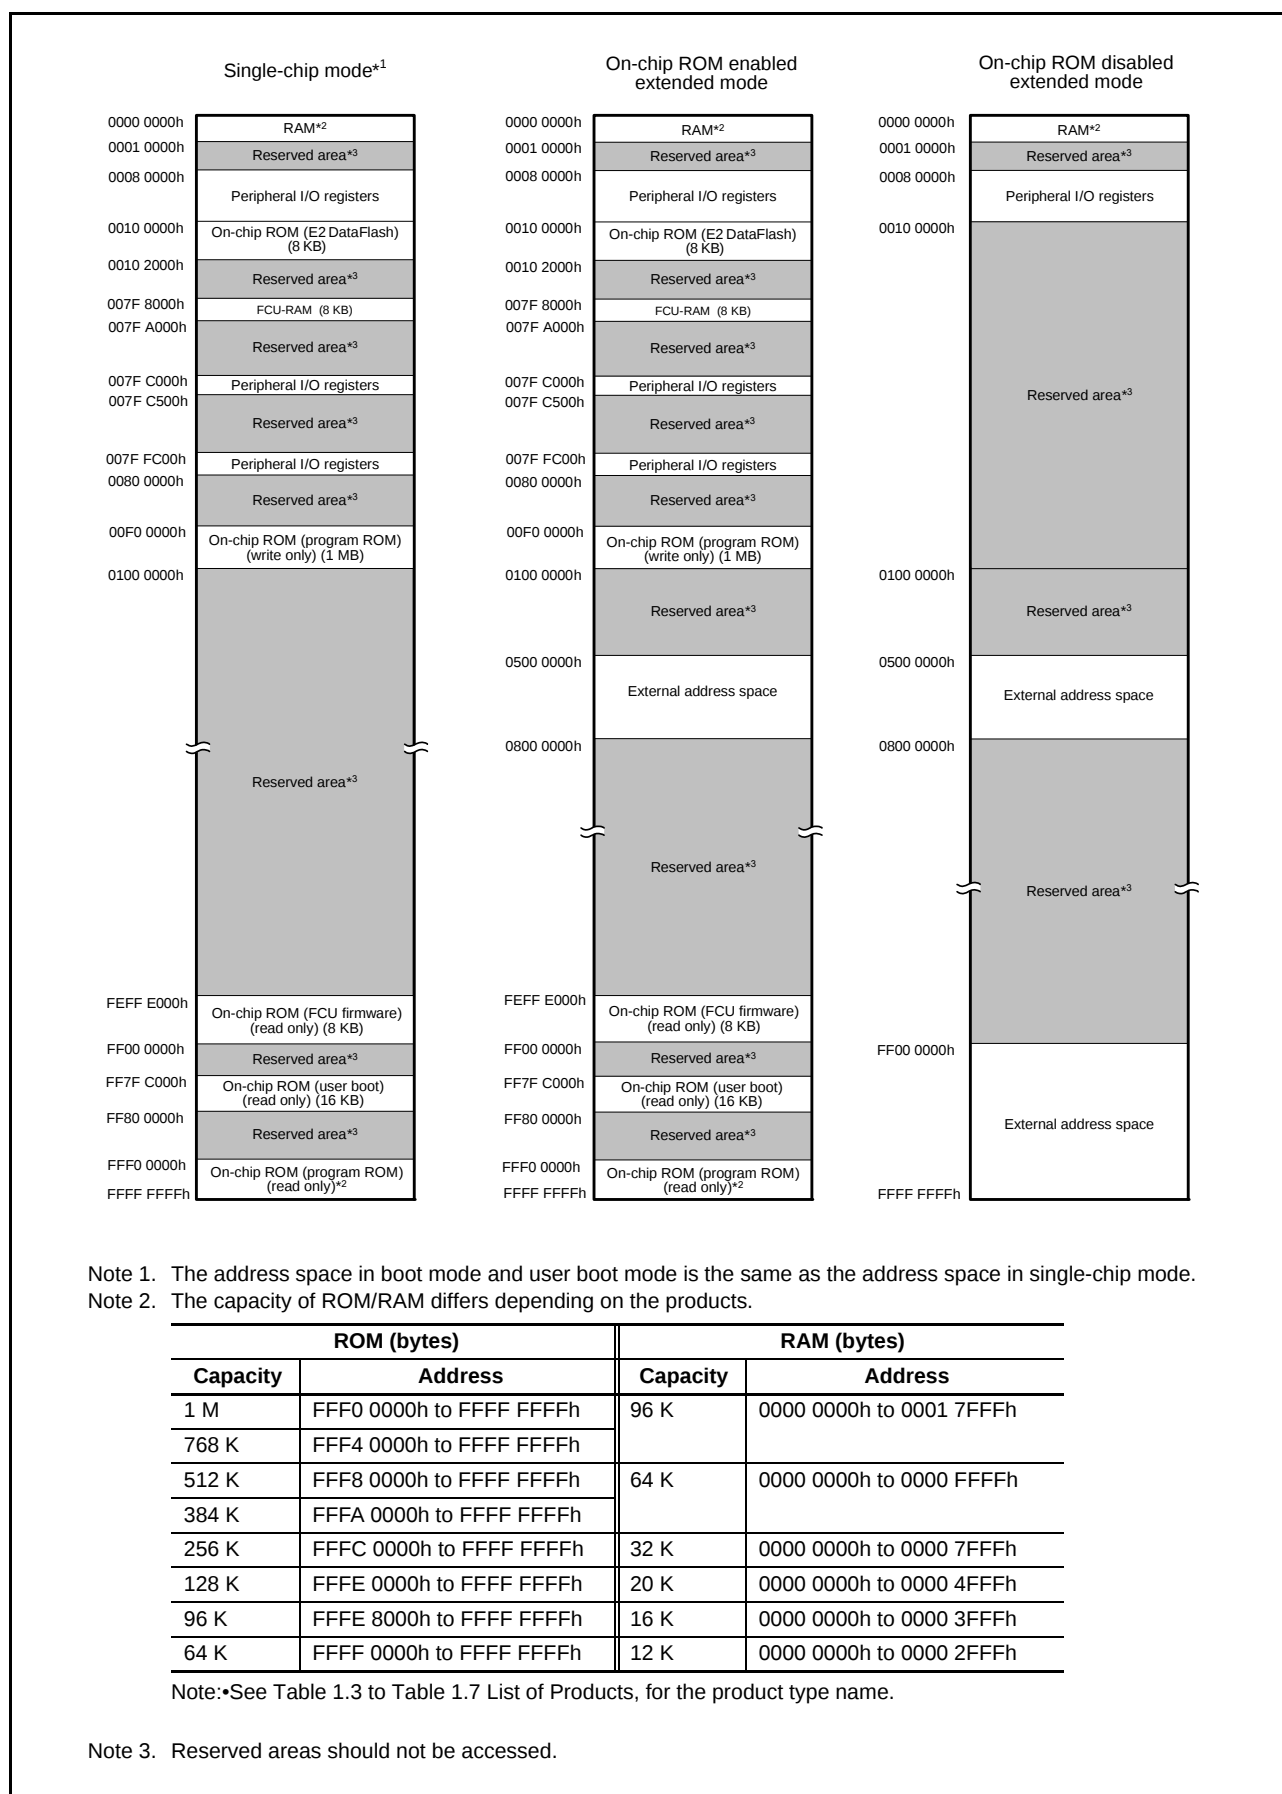


Figure 3.1 Memory Map in Each Operating Mode

## 3.2 External Address Space

The external address space is divided into up to four CS areas (CS0 to CS3), each corresponding to the CSn# signal output from a CSn# (n = 0 to 3) pin.

Figure 3.2 shows the address ranges corresponding to the individual CS areas (CS0 to CS3) in on-chip ROM disabled extended mode.

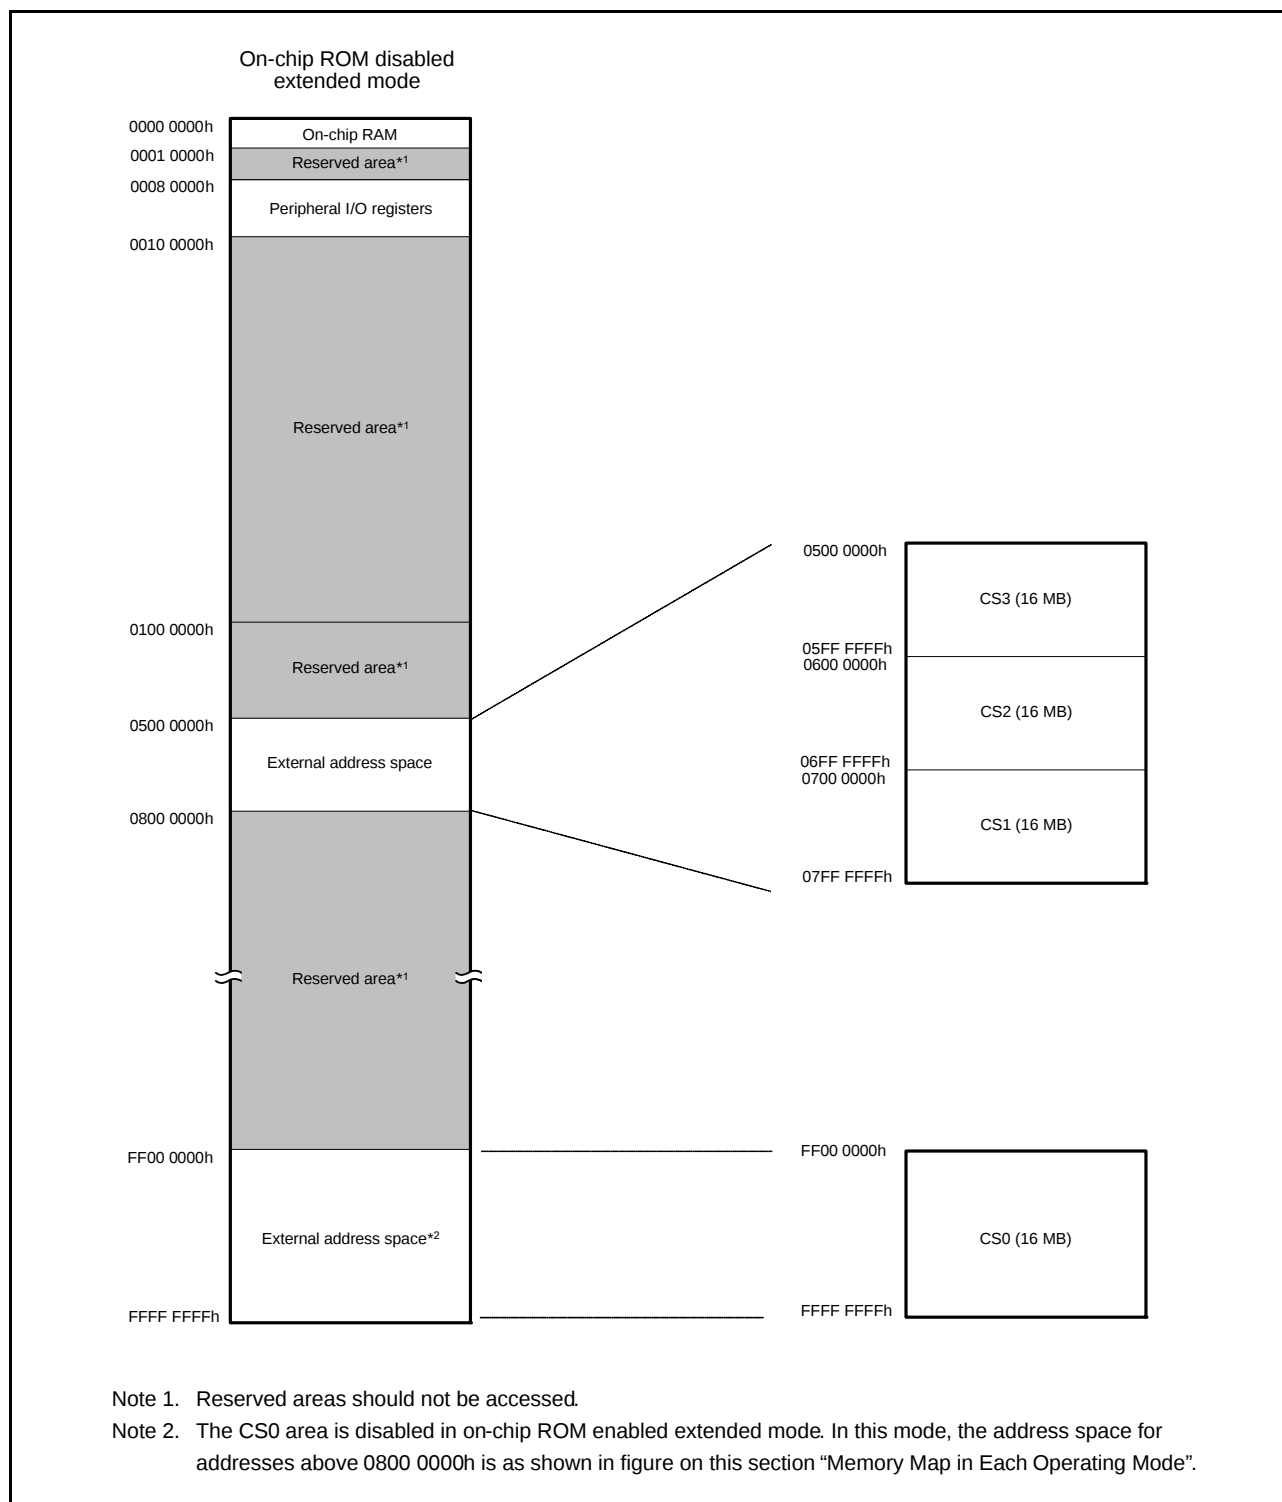

**Figure 3.2 Correspondence between External Address Spaces and CS Areas (In On-Chip ROM Disabled Extended Mode)**

## 4. I/O Registers

This section gives information on the on-chip I/O register addresses and bit configuration. The information is given as shown below. Notes on writing to registers are also given at the end.

### (1) I/O register addresses (address order)

- Registers are listed from the lower allocation addresses.
- Registers are classified according to module symbols.
- Numbers of cycles for access indicate numbers of cycles of the given base clock.
- Among the internal I/O register area, addresses not listed in the list of registers are reserved. Reserved addresses must not be accessed. Do not access these addresses; otherwise, the operation when accessing these bits and subsequent operations cannot be guaranteed.

### (2) Notes on writing to I/O registers

When writing to an I/O register, the CPU starts executing the subsequent instruction before completing I/O register write. This may cause the subsequent instruction to be executed before the post-update I/O register value is reflected on the operation.

As described in the following examples, special care is required for the cases in which the subsequent instruction must be executed after the post-update I/O register value is actually reflected.

#### [Examples of cases requiring special care]

- The subsequent instruction must be executed while an interrupt request is disabled with the IENj bit in IERN of the ICU (interrupt request enable bit) cleared to 0.
- A WAIT instruction is executed immediately after the preprocessing for causing a transition to the low power consumption state.

In the above cases, after writing to an I/O register, wait until the write operation is completed using the following procedure and then execute the subsequent instruction.

- Write to an I/O register.
- Read the value from the I/O register to a general register.
- Execute the operation using the value read.
- Execute the subsequent instruction.

#### [Instruction examples]

- Byte-size I/O registers

```
MOV.L #SFR_ADDR, R1
MOV.B #SFR_DATA, [R1]
CMP [R1].UB, R1
;; Next process
```

- Word-size I/O registers

```
MOV.L #SFR_ADDR, R1
MOV.W #SFR_DATA, [R1]
CMP [R1].W, R1
;; Next process
```

- Longword-size I/O registers

```
MOV.L #SFR_ADDR, R1
MOV.L #SFR_DATA, [R1]
CMP [R1].L, R1
;; Next process
```

If multiple registers are written to and a subsequent instruction should be executed after the write operations are entirely completed, only read the I/O register that was last written to and execute the operation using the value; it is not necessary to read or execute operation for all the registers that were written to.

### (3) Number of Access Cycles to I/O Registers

For numbers of clock cycles for access to I/O registers, see Table 4.1, List of I/O Registers (Address Order).

The number of access cycles to I/O registers is obtained by following equation.\*<sup>1</sup>

$$\begin{aligned} \text{Number of access cycles to I/O registers} = & \text{Number of bus cycles for internal main bus 1} + \\ & \text{Number of divided clock synchronization cycles} + \\ & \text{Number of bus cycles for internal peripheral bus 1 to 6} \end{aligned}$$

The number of bus cycles of internal peripheral bus 1 to 6 differs according to the register to be accessed.

When peripheral functions connected to internal peripheral bus 2 to 6 or registers for the external bus control unit (except for bus error related registers) are accessed, the number of divided clock synchronization cycles is added.

The number of divided clock synchronization cycles differs depending on the frequency ratio between ICLK and PCLK (or FCLK, BCLK) or bus access timing.

In the peripheral function unit, when the frequency ratio of ICLK is equal to or greater than that of PCLK (or FCLK), the sum of the number of bus cycles for internal main bus 1 and the number of the divided clock synchronization cycles will be one cycle of PCLK (or FCLK) at a maximum. Therefore, one PCLK (or FCLK) has been added to the number of access cycles shown in Table 4.1.

When the frequency ratio of ICLK is lower than that of PCLK (or FCLK), the subsequent bus access is started from the ICLK cycle following the completion of the access to the peripheral functions. Therefore, the access cycles are described on an ICLK basis.

In the external bus control unit, the sum of the number of bus cycles for internal main bus 1 and the number of divided clock synchronization cycles will be one cycle of BCLK at a maximum. Therefore, one BCLK is added to the number of access cycles shown in Table 4.1.

Note 1. This applies to the number of cycles when the access from the CPU does not conflict with the instruction fetching to the external memory or bus access from the different bus master (DMAC or DTC).

## 4.1 I/O Register Addresses (Address Order)

**Table 4.1 List of I/O Registers (Address Order) (1 / 29)**

| Address    | Module Symbol | Register Name                                                 | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|---------------------------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                                               |                 |                |             | ICLK ≥ PCLK             | ICLK < PCLK |
| 0008 0000h | SYSTEM        | Mode monitor register                                         | MDMONR          | 16             | 16          | 3 ICLK                  |             |
| 0008 0002h | SYSTEM        | Mode status register                                          | MDSR            | 16             | 16          | 3 ICLK                  |             |
| 0008 0006h | SYSTEM        | System control register 0                                     | SYSCR0          | 16             | 16          | 3 ICLK                  |             |
| 0008 0008h | SYSTEM        | System control register 1                                     | SYSCR1          | 16             | 16          | 3 ICLK                  |             |
| 0008 000Ch | SYSTEM        | Standby control register                                      | SBYCR           | 16             | 16          | 3 ICLK                  |             |
| 0008 0010h | SYSTEM        | Module stop control register A                                | MSTPCRA         | 32             | 32          | 3 ICLK                  |             |
| 0008 0014h | SYSTEM        | Module stop control register B                                | MSTPCRB         | 32             | 32          | 3 ICLK                  |             |
| 0008 0018h | SYSTEM        | Module stop control register C                                | MSTPCRC         | 32             | 32          | 3 ICLK                  |             |
| 0008 0020h | SYSTEM        | System clock control register                                 | SCKCR           | 32             | 32          | 3 ICLK                  |             |
| 0008 0026h | SYSTEM        | System clock control register 3                               | SCKCR3          | 16             | 16          | 3 ICLK                  |             |
| 0008 0028h | SYSTEM        | PLL control register                                          | PLLCR           | 16             | 16          | 3 ICLK                  |             |
| 0008 002Ah | SYSTEM        | PLL control register 2                                        | PLLCR2          | 8              | 8           | 3 ICLK                  |             |
| 0008 0030h | SYSTEM        | External bus clock control register                           | BCKCR           | 8              | 8           | 3 ICLK                  |             |
| 0008 0032h | SYSTEM        | Main clock oscillator control register                        | MOSCCR          | 8              | 8           | 3 ICLK                  |             |
| 0008 0033h | SYSTEM        | Sub-clock oscillator control register                         | SOSCCR          | 8              | 8           | 3 ICLK                  |             |
| 0008 0034h | SYSTEM        | Low-speed on-chip oscillator control register                 | LOCOCR          | 8              | 8           | 3 ICLK                  |             |
| 0008 0035h | SYSTEM        | IWDT-dedicated on-chip oscillator control register            | ILOCOCR         | 8              | 8           | 3 ICLK                  |             |
| 0008 0036h | SYSTEM        | High-speed on-chip oscillator control register                | HOCOCR          | 8              | 8           | 3 ICLK                  |             |
| 0008 0037h | SYSTEM        | High-speed on-chip oscillator control register 2              | HOCOCR2         | 8              | 8           | 3 ICLK                  |             |
| 0008 0040h | SYSTEM        | Oscillation stop detection control register                   | OSTDCR          | 8              | 8           | 3 ICLK                  |             |
| 0008 0041h | SYSTEM        | Oscillation stop detection status register                    | OSTDSR          | 8              | 8           | 3 ICLK                  |             |
| 0008 00A0h | SYSTEM        | Operating power control register                              | OPCCR           | 8              | 8           | 3 ICLK                  |             |
| 0008 00A1h | SYSTEM        | Sleep mode return clock source switching register             | RSTCKCR         | 8              | 8           | 3 ICLK                  |             |
| 0008 00A2h | SYSTEM        | Main clock oscillator wait control register                   | MOSCWTCR        | 8              | 8           | 3 ICLK                  |             |
| 0008 00A3h | SYSTEM        | Sub-clock oscillator wait control register                    | SOSCWTCR        | 8              | 8           | 3 ICLK                  |             |
| 0008 00A6h | SYSTEM        | PLL wait control register                                     | PLLWTCR         | 8              | 8           | 3 ICLK                  |             |
| 0008 00A9h | SYSTEM        | HOCO wait control register 2                                  | HOCOWTCR2       | 8              | 8           | 3 ICLK                  |             |
| 0008 00C0h | SYSTEM        | Reset status register 2                                       | RSTS2           | 8              | 8           | 3 ICLK                  |             |
| 0008 00C2h | SYSTEM        | Software reset register                                       | SWRR            | 16             | 16          | 3 ICLK                  |             |
| 0008 00E0h | SYSTEM        | Voltage monitoring 1 circuit/comparator A1 control register 1 | LVD1CR1         | 8              | 8           | 3 ICLK                  |             |
| 0008 00E1h | SYSTEM        | Voltage monitoring 1 circuit/comparator A1 status register    | LVD1SR          | 8              | 8           | 3 ICLK                  |             |
| 0008 00E2h | SYSTEM        | Voltage monitoring 2 circuit/comparator A2 control register 1 | LVD2CR1         | 8              | 8           | 3 ICLK                  |             |
| 0008 00E3h | SYSTEM        | Voltage monitoring 2 circuit/comparator A2 status register    | LVD2SR          | 8              | 8           | 3 ICLK                  |             |
| 0008 0200h | SYSTEM        | Voltage regulator control register                            | VRCCR           | 8              | 8           | 3 ICLK                  |             |
| 0008 03FEh | SYSTEM        | Protect register                                              | PRCR            | 16             | 16          | 3 ICLK                  |             |
| 0008 1300h | BSC           | Bus error status clear register                               | BERCLR          | 8              | 8           | 2 ICLK                  |             |
| 0008 1304h | BSC           | Bus error monitoring enable register                          | BEREN           | 8              | 8           | 2 ICLK                  |             |
| 0008 1308h | BSC           | Bus error status register 1                                   | BERSR1          | 8              | 8           | 2 ICLK                  |             |
| 0008 130Ah | BSC           | Bus error status register 2                                   | BERSR2          | 16             | 16          | 2 ICLK                  |             |
| 0008 1310h | BSC           | Bus priority control register                                 | BUSPRI          | 16             | 16          | 2 ICLK                  |             |
| 0008 2000h | DMAC0         | DMA source address register                                   | DMSAR           | 32             | 32          | 2 ICLK                  |             |
| 0008 2004h | DMAC0         | DMA destination address register                              | DMDAR           | 32             | 32          | 2 ICLK                  |             |
| 0008 2008h | DMAC0         | DMA transfer count register                                   | DMCRA           | 32             | 32          | 2 ICLK                  |             |
| 0008 200Ch | DMAC0         | DMA block transfer count register                             | DMCRB           | 16             | 16          | 2 ICLK                  |             |
| 0008 2010h | DMAC0         | DMA transfer mode register                                    | DMTMD           | 16             | 16          | 2 ICLK                  |             |
| 0008 2013h | DMAC0         | DMA interrupt setting register                                | DMINT           | 8              | 8           | 2 ICLK                  |             |
| 0008 2014h | DMAC0         | DMA address mode register                                     | DMAMD           | 16             | 16          | 2 ICLK                  |             |
| 0008 2018h | DMAC0         | DMA offset register                                           | DMOFR           | 32             | 32          | 2 ICLK                  |             |
| 0008 201Ch | DMAC0         | DMA transfer enable register                                  | DMCNT           | 8              | 8           | 2 ICLK                  |             |

**Table 4.1 List of I/O Registers (Address Order) (2 / 29)**

| Address    | Module Symbol | Register Name                               | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|---------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                             |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 201Dh | DMAC0         | DMA software start register                 | DMREQ           | 8              | 8           | 2 ICLK                  |             |
| 0008 201Eh | DMAC0         | DMA status register                         | DMSTS           | 8              | 8           | 2 ICLK                  |             |
| 0008 201Fh | DMAC0         | DMA activation source flag control register | DMCSL           | 8              | 8           | 2 ICLK                  |             |
| 0008 2040h | DMAC1         | DMA source address register                 | DMSAR           | 32             | 32          | 2 ICLK                  |             |
| 0008 2044h | DMAC1         | DMA destination address register            | DMDAR           | 32             | 32          | 2 ICLK                  |             |
| 0008 2048h | DMAC1         | DMA transfer count register                 | DMCRA           | 32             | 32          | 2 ICLK                  |             |
| 0008 204Ch | DMAC1         | DMA block transfer count register           | DMCRB           | 16             | 16          | 2 ICLK                  |             |
| 0008 2050h | DMAC1         | DMA transfer mode register                  | DMTMD           | 16             | 16          | 2 ICLK                  |             |
| 0008 2053h | DMAC1         | DMA interrupt setting register              | DMINT           | 8              | 8           | 2 ICLK                  |             |
| 0008 2054h | DMAC1         | DMA address mode register                   | DMAMD           | 16             | 16          | 2 ICLK                  |             |
| 0008 205Ch | DMAC1         | DMA transfer enable register                | DMCNT           | 8              | 8           | 2 ICLK                  |             |
| 0008 205Dh | DMAC1         | DMA software start register                 | DMREQ           | 8              | 8           | 2 ICLK                  |             |
| 0008 205Eh | DMAC1         | DMA status register                         | DMSTS           | 8              | 8           | 2 ICLK                  |             |
| 0008 205Fh | DMAC1         | DMA activation source flag control register | DMCSL           | 8              | 8           | 2 ICLK                  |             |
| 0008 2080h | DMAC2         | DMA source address register                 | DMSAR           | 32             | 32          | 2 ICLK                  |             |
| 0008 2084h | DMAC2         | DMA destination address register            | DMDAR           | 32             | 32          | 2 ICLK                  |             |
| 0008 2088h | DMAC2         | DMA transfer count register                 | DMCRA           | 32             | 32          | 2 ICLK                  |             |
| 0008 208Ch | DMAC2         | DMA block transfer count register           | DMCRB           | 16             | 16          | 2 ICLK                  |             |
| 0008 2090h | DMAC2         | DMA transfer mode register                  | DMTMD           | 16             | 16          | 2 ICLK                  |             |
| 0008 2093h | DMAC2         | DMA interrupt setting register              | DMINT           | 8              | 8           | 2 ICLK                  |             |
| 0008 2094h | DMAC2         | DMA address mode register                   | DMAMD           | 16             | 16          | 2 ICLK                  |             |
| 0008 209Ch | DMAC2         | DMA transfer enable register                | DMCNT           | 8              | 8           | 2 ICLK                  |             |
| 0008 209Dh | DMAC2         | DMA software start register                 | DMREQ           | 8              | 8           | 2 ICLK                  |             |
| 0008 209Eh | DMAC2         | DMA status register                         | DMSTS           | 8              | 8           | 2 ICLK                  |             |
| 0008 209Fh | DMAC2         | DMA activation source flag control register | DMCSL           | 8              | 8           | 2 ICLK                  |             |
| 0008 20C0h | DMAC3         | DMA source address register                 | DMSAR           | 32             | 32          | 2 ICLK                  |             |
| 0008 20C4h | DMAC3         | DMA destination address register            | DMDAR           | 32             | 32          | 2 ICLK                  |             |
| 0008 20C8h | DMAC3         | DMA transfer count register                 | DMCRA           | 32             | 32          | 2 ICLK                  |             |
| 0008 20CCh | DMAC3         | DMA block transfer count register           | DMCRB           | 16             | 16          | 2 ICLK                  |             |
| 0008 20D0h | DMAC3         | DMA transfer mode register                  | DMTMD           | 16             | 16          | 2 ICLK                  |             |
| 0008 20D3h | DMAC3         | DMA interrupt setting register              | DMINT           | 8              | 8           | 2 ICLK                  |             |
| 0008 20D4h | DMAC3         | DMA address mode register                   | DMAMD           | 16             | 16          | 2 ICLK                  |             |
| 0008 20DCh | DMAC3         | DMA transfer enable register                | DMCNT           | 8              | 8           | 2 ICLK                  |             |
| 0008 20DDh | DMAC3         | DMA software start register                 | DMREQ           | 8              | 8           | 2 ICLK                  |             |
| 0008 20DEh | DMAC3         | DMA status register                         | DMSTS           | 8              | 8           | 2 ICLK                  |             |
| 0008 20DFh | DMAC3         | DMA activation source flag control register | DMCSL           | 8              | 8           | 2 ICLK                  |             |
| 0008 2200h | DMAC          | DMA module activation register              | DMAST           | 8              | 8           | 2 ICLK                  |             |
| 0008 2400h | DTC           | DTC control register                        | DTCCR           | 8              | 8           | 2 ICLK                  |             |
| 0008 2404h | DTC           | DTC vector base register                    | DTCVBR          | 32             | 32          | 2 ICLK                  |             |
| 0008 2408h | DTC           | DTC address mode register                   | DTCADMOD        | 8              | 8           | 2 ICLK                  |             |
| 0008 240Ch | DTC           | DTC module start register                   | DTCST           | 8              | 8           | 2 ICLK                  |             |
| 0008 240Eh | DTC           | DTC status register                         | DTCSTS          | 16             | 16          | 2 ICLK                  |             |
| 0008 3002h | BSC           | CS0 mode register                           | CS0MOD          | 16             | 16          | 1, 2 BCLK               |             |
| 0008 3004h | BSC           | CS0 wait control register 1                 | CS0WCR1         | 32             | 32          | 1, 2 BCLK               |             |
| 0008 3008h | BSC           | CS0 wait control register 2                 | CS0WCR2         | 32             | 32          | 1, 2 BCLK               |             |
| 0008 3012h | BSC           | CS1 mode register                           | CS1MOD          | 16             | 16          | 1, 2 BCLK               |             |
| 0008 3014h | BSC           | CS1 wait control register 1                 | CS1WCR1         | 32             | 32          | 1, 2 BCLK               |             |
| 0008 3018h | BSC           | CS1 wait control register 2                 | CS1WCR2         | 32             | 32          | 1, 2 BCLK               |             |
| 0008 3022h | BSC           | CS2 mode register                           | CS2MOD          | 16             | 16          | 1, 2 BCLK               |             |
| 0008 3024h | BSC           | CS2 wait control register 1                 | CS2WCR1         | 32             | 32          | 1, 2 BCLK               |             |
| 0008 3028h | BSC           | CS2 wait control register 2                 | CS2WCR2         | 32             | 32          | 1, 2 BCLK               |             |

**Table 4.1 List of I/O Registers (Address Order) (3 / 29)**

| Address    | Module Symbol | Register Name                               | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|---------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                             |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 3032h | BSC           | CS3 mode register                           | CS3MOD          | 16             | 16          | 1, 2 BCLK               |             |
| 0008 3034h | BSC           | CS3 wait control register 1                 | CS3WCR1         | 32             | 32          | 1, 2 BCLK               |             |
| 0008 3038h | BSC           | CS3 wait control register 2                 | CS3WCR2         | 32             | 32          | 1, 2 BCLK               |             |
| 0008 3802h | BSC           | CS0 control register                        | CS0CR           | 16             | 16          | 1, 2 BCLK               |             |
| 0008 380Ah | BSC           | CS0 recovery cycle register                 | CS0REC          | 16             | 16          | 1, 2 BCLK               |             |
| 0008 3812h | BSC           | CS1 control register                        | CS1CR           | 16             | 16          | 1, 2 BCLK               |             |
| 0008 381Ah | BSC           | CS1 recovery cycle register                 | CS1REC          | 16             | 16          | 1, 2 BCLK               |             |
| 0008 3822h | BSC           | CS2 control register                        | CS2CR           | 16             | 16          | 1, 2 BCLK               |             |
| 0008 382Ah | BSC           | CS2 recovery cycle register                 | CS2REC          | 16             | 16          | 1, 2 BCLK               |             |
| 0008 3832h | BSC           | CS3 control register                        | CS3CR           | 16             | 16          | 1, 2 BCLK               |             |
| 0008 383Ah | BSC           | CS3 recovery cycle register                 | CS3REC          | 16             | 16          | 1, 2 BCLK               |             |
| 0008 3880h | BSC           | CS recovery cycle insertion enable register | CSRECEN         | 16             | 16          | 1, 2 BCLK               |             |
| 0008 7010h | ICU           | Interrupt request register 016              | IR016           | 8              | 8           | 2 ICLK                  |             |
| 0008 7015h | ICU           | Interrupt request register 021              | IR021           | 8              | 8           | 2 ICLK                  |             |
| 0008 7017h | ICU           | Interrupt request register 023              | IR023           | 8              | 8           | 2 ICLK                  |             |
| 0008 701Bh | ICU           | Interrupt request register 027              | IR027           | 8              | 8           | 2 ICLK                  |             |
| 0008 701Ch | ICU           | Interrupt request register 028              | IR028           | 8              | 8           | 2 ICLK                  |             |
| 0008 701Dh | ICU           | Interrupt request register 029              | IR029           | 8              | 8           | 2 ICLK                  |             |
| 0008 701Eh | ICU           | Interrupt request register 030              | IR030           | 8              | 8           | 2 ICLK                  |             |
| 0008 701Fh | ICU           | Interrupt request register 031              | IR031           | 8              | 8           | 2 ICLK                  |             |
| 0008 7020h | ICU           | Interrupt request register 032              | IR032           | 8              | 8           | 2 ICLK                  |             |
| 0008 7021h | ICU           | Interrupt request register 033              | IR033           | 8              | 8           | 2 ICLK                  |             |
| 0008 7022h | ICU           | Interrupt request register 034              | IR034           | 8              | 8           | 2 ICLK                  |             |
| 0008 702Ch | ICU           | Interrupt request register 044              | IR044           | 8              | 8           | 2 ICLK                  |             |
| 0008 702Dh | ICU           | Interrupt request register 045              | IR045           | 8              | 8           | 2 ICLK                  |             |
| 0008 702Eh | ICU           | Interrupt request register 046              | IR046           | 8              | 8           | 2 ICLK                  |             |
| 0008 702Fh | ICU           | Interrupt request register 047              | IR047           | 8              | 8           | 2 ICLK                  |             |
| 0008 7039h | ICU           | Interrupt request register 057              | IR057           | 8              | 8           | 2 ICLK                  |             |
| 0008 703Ah | ICU           | Interrupt request register 058              | IR058           | 8              | 8           | 2 ICLK                  |             |
| 0008 703Bh | ICU           | Interrupt request register 059              | IR059           | 8              | 8           | 2 ICLK                  |             |
| 0008 703Fh | ICU           | Interrupt request register 063              | IR063           | 8              | 8           | 2 ICLK                  |             |
| 0008 7040h | ICU           | Interrupt request register 064              | IR064           | 8              | 8           | 2 ICLK                  |             |
| 0008 7041h | ICU           | Interrupt request register 065              | IR065           | 8              | 8           | 2 ICLK                  |             |
| 0008 7042h | ICU           | Interrupt request register 066              | IR066           | 8              | 8           | 2 ICLK                  |             |
| 0008 7043h | ICU           | Interrupt request register 067              | IR067           | 8              | 8           | 2 ICLK                  |             |
| 0008 7044h | ICU           | Interrupt request register 068              | IR068           | 8              | 8           | 2 ICLK                  |             |
| 0008 7045h | ICU           | Interrupt request register 069              | IR069           | 8              | 8           | 2 ICLK                  |             |
| 0008 7046h | ICU           | Interrupt request register 070              | IR070           | 8              | 8           | 2 ICLK                  |             |
| 0008 7047h | ICU           | Interrupt request register 071              | IR071           | 8              | 8           | 2 ICLK                  |             |
| 0008 7058h | ICU           | Interrupt request register 088              | IR088           | 8              | 8           | 2 ICLK                  |             |
| 0008 7059h | ICU           | Interrupt request register 089              | IR089           | 8              | 8           | 2 ICLK                  |             |
| 0008 705Ch | ICU           | Interrupt request register 092              | IR092           | 8              | 8           | 2 ICLK                  |             |
| 0008 705Dh | ICU           | Interrupt request register 093              | IR093           | 8              | 8           | 2 ICLK                  |             |
| 0008 7066h | ICU           | Interrupt request register 102              | IR102           | 8              | 8           | 2 ICLK                  |             |
| 0008 7067h | ICU           | Interrupt request register 103              | IR103           | 8              | 8           | 2 ICLK                  |             |
| 0008 706Ah | ICU           | Interrupt request register 106              | IR106           | 8              | 8           | 2 ICLK                  |             |
| 0008 706Bh | ICU           | Interrupt request register 107              | IR107           | 8              | 8           | 2 ICLK                  |             |
| 0008 7072h | ICU           | Interrupt request register 114              | IR114           | 8              | 8           | 2 ICLK                  |             |
| 0008 7073h | ICU           | Interrupt request register 115              | IR115           | 8              | 8           | 2 ICLK                  |             |
| 0008 7074h | ICU           | Interrupt request register 116              | IR116           | 8              | 8           | 2 ICLK                  |             |
| 0008 7075h | ICU           | Interrupt request register 117              | IR117           | 8              | 8           | 2 ICLK                  |             |

**Table 4.1 List of I/O Registers (Address Order) (4 / 29)**

| Address    | Module Symbol | Register Name                  | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |               |
|------------|---------------|--------------------------------|-----------------|----------------|-------------|-------------------------|---------------|
|            |               |                                |                 |                |             | ICLK $\geq$ PCLK        | ICLK $<$ PCLK |
| 0008 7076h | ICU           | Interrupt request register 118 | IR118           | 8              | 8           | 2 ICLK                  |               |
| 0008 7077h | ICU           | Interrupt request register 119 | IR119           | 8              | 8           | 2 ICLK                  |               |
| 0008 7078h | ICU           | Interrupt request register 120 | IR120           | 8              | 8           | 2 ICLK                  |               |
| 0008 7079h | ICU           | Interrupt request register 121 | IR121           | 8              | 8           | 2 ICLK                  |               |
| 0008 707Ah | ICU           | Interrupt request register 122 | IR122           | 8              | 8           | 2 ICLK                  |               |
| 0008 707Bh | ICU           | Interrupt request register 123 | IR123           | 8              | 8           | 2 ICLK                  |               |
| 0008 707Ch | ICU           | Interrupt request register 124 | IR124           | 8              | 8           | 2 ICLK                  |               |
| 0008 707Dh | ICU           | Interrupt request register 125 | IR125           | 8              | 8           | 2 ICLK                  |               |
| 0008 707Eh | ICU           | Interrupt request register 126 | IR126           | 8              | 8           | 2 ICLK                  |               |
| 0008 707Fh | ICU           | Interrupt request register 127 | IR127           | 8              | 8           | 2 ICLK                  |               |
| 0008 7080h | ICU           | Interrupt request register 128 | IR128           | 8              | 8           | 2 ICLK                  |               |
| 0008 7081h | ICU           | Interrupt request register 129 | IR129           | 8              | 8           | 2 ICLK                  |               |
| 0008 7082h | ICU           | Interrupt request register 130 | IR130           | 8              | 8           | 2 ICLK                  |               |
| 0008 7083h | ICU           | Interrupt request register 131 | IR131           | 8              | 8           | 2 ICLK                  |               |
| 0008 7084h | ICU           | Interrupt request register 132 | IR132           | 8              | 8           | 2 ICLK                  |               |
| 0008 7085h | ICU           | Interrupt request register 133 | IR133           | 8              | 8           | 2 ICLK                  |               |
| 0008 7086h | ICU           | Interrupt request register 134 | IR134           | 8              | 8           | 2 ICLK                  |               |
| 0008 7087h | ICU           | Interrupt request register 135 | IR135           | 8              | 8           | 2 ICLK                  |               |
| 0008 7088h | ICU           | Interrupt request register 136 | IR136           | 8              | 8           | 2 ICLK                  |               |
| 0008 7089h | ICU           | Interrupt request register 137 | IR137           | 8              | 8           | 2 ICLK                  |               |
| 0008 708Ah | ICU           | Interrupt request register 138 | IR138           | 8              | 8           | 2 ICLK                  |               |
| 0008 708Bh | ICU           | Interrupt request register 139 | IR139           | 8              | 8           | 2 ICLK                  |               |
| 0008 708Ch | ICU           | Interrupt request register 140 | IR140           | 8              | 8           | 2 ICLK                  |               |
| 0008 708Dh | ICU           | Interrupt request register 141 | IR141           | 8              | 8           | 2 ICLK                  |               |
| 0008 708Eh | ICU           | Interrupt request register 142 | IR142           | 8              | 8           | 2 ICLK                  |               |
| 0008 708Fh | ICU           | Interrupt request register 143 | IR143           | 8              | 8           | 2 ICLK                  |               |
| 0008 7090h | ICU           | Interrupt request register 144 | IR144           | 8              | 8           | 2 ICLK                  |               |
| 0008 7091h | ICU           | Interrupt request register 145 | IR145           | 8              | 8           | 2 ICLK                  |               |
| 0008 7092h | ICU           | Interrupt request register 146 | IR146           | 8              | 8           | 2 ICLK                  |               |
| 0008 7093h | ICU           | Interrupt request register 147 | IR147           | 8              | 8           | 2 ICLK                  |               |
| 0008 7094h | ICU           | Interrupt request register 148 | IR148           | 8              | 8           | 2 ICLK                  |               |
| 0008 7095h | ICU           | Interrupt request register 149 | IR149           | 8              | 8           | 2 ICLK                  |               |
| 0008 7096h | ICU           | Interrupt request register 150 | IR150           | 8              | 8           | 2 ICLK                  |               |
| 0008 7097h | ICU           | Interrupt request register 151 | IR151           | 8              | 8           | 2 ICLK                  |               |
| 0008 7098h | ICU           | Interrupt request register 152 | IR152           | 8              | 8           | 2 ICLK                  |               |
| 0008 7099h | ICU           | Interrupt request register 153 | IR153           | 8              | 8           | 2 ICLK                  |               |
| 0008 709Ah | ICU           | Interrupt request register 154 | IR154           | 8              | 8           | 2 ICLK                  |               |
| 0008 709Bh | ICU           | Interrupt request register 155 | IR155           | 8              | 8           | 2 ICLK                  |               |
| 0008 709Ch | ICU           | Interrupt request register 156 | IR156           | 8              | 8           | 2 ICLK                  |               |
| 0008 709Dh | ICU           | Interrupt request register 157 | IR157           | 8              | 8           | 2 ICLK                  |               |
| 0008 709Eh | ICU           | Interrupt request register 158 | IR158           | 8              | 8           | 2 ICLK                  |               |
| 0008 709Fh | ICU           | Interrupt request register 159 | IR159           | 8              | 8           | 2 ICLK                  |               |
| 0008 70A0h | ICU           | Interrupt request register 160 | IR160           | 8              | 8           | 2 ICLK                  |               |
| 0008 70A1h | ICU           | Interrupt request register 161 | IR161           | 8              | 8           | 2 ICLK                  |               |
| 0008 70A2h | ICU           | Interrupt request register 162 | IR162           | 8              | 8           | 2 ICLK                  |               |
| 0008 70A3h | ICU           | Interrupt request register 163 | IR163           | 8              | 8           | 2 ICLK                  |               |
| 0008 70A4h | ICU           | Interrupt request register 164 | IR164           | 8              | 8           | 2 ICLK                  |               |
| 0008 70A5h | ICU           | Interrupt request register 165 | IR165           | 8              | 8           | 2 ICLK                  |               |
| 0008 70A6h | ICU           | Interrupt request register 166 | IR166           | 8              | 8           | 2 ICLK                  |               |
| 0008 70A7h | ICU           | Interrupt request register 167 | IR167           | 8              | 8           | 2 ICLK                  |               |
| 0008 70AAh | ICU           | Interrupt request register 170 | IR170           | 8              | 8           | 2 ICLK                  |               |

**Table 4.1 List of I/O Registers (Address Order) (5 / 29)**

| Address    | Module Symbol | Register Name                  | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|--------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 70ABh | ICU           | Interrupt request register 171 | IR171           | 8              | 8           | 2 ICLK                  |             |
| 0008 70AEh | ICU           | Interrupt request register 174 | IR174           | 8              | 8           | 2 ICLK                  |             |
| 0008 70AFh | ICU           | Interrupt request register 175 | IR175           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B0h | ICU           | Interrupt request register 176 | IR176           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B1h | ICU           | Interrupt request register 177 | IR177           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B2h | ICU           | Interrupt request register 178 | IR178           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B3h | ICU           | Interrupt request register 179 | IR179           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B4h | ICU           | Interrupt request register 180 | IR180           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B5h | ICU           | Interrupt request register 181 | IR181           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B6h | ICU           | Interrupt request register 182 | IR182           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B7h | ICU           | Interrupt request register 183 | IR183           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B8h | ICU           | Interrupt request register 184 | IR184           | 8              | 8           | 2 ICLK                  |             |
| 0008 70B9h | ICU           | Interrupt request register 185 | IR185           | 8              | 8           | 2 ICLK                  |             |
| 0008 70BAh | ICU           | Interrupt request register 186 | IR186           | 8              | 8           | 2 ICLK                  |             |
| 0008 70BBh | ICU           | Interrupt request register 187 | IR187           | 8              | 8           | 2 ICLK                  |             |
| 0008 70BCh | ICU           | Interrupt request register 188 | IR188           | 8              | 8           | 2 ICLK                  |             |
| 0008 70BDh | ICU           | Interrupt request register 189 | IR189           | 8              | 8           | 2 ICLK                  |             |
| 0008 70BEh | ICU           | Interrupt request register 190 | IR190           | 8              | 8           | 2 ICLK                  |             |
| 0008 70BFh | ICU           | Interrupt request register 191 | IR191           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C0h | ICU           | Interrupt request register 192 | IR192           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C1h | ICU           | Interrupt request register 193 | IR193           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C2h | ICU           | Interrupt request register 194 | IR194           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C3h | ICU           | Interrupt request register 195 | IR195           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C4h | ICU           | Interrupt request register 196 | IR196           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C5h | ICU           | Interrupt request register 197 | IR197           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C6h | ICU           | Interrupt request register 198 | IR198           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C7h | ICU           | Interrupt request register 199 | IR199           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C8h | ICU           | Interrupt request register 200 | IR200           | 8              | 8           | 2 ICLK                  |             |
| 0008 70C9h | ICU           | Interrupt request register 201 | IR201           | 8              | 8           | 2 ICLK                  |             |
| 0008 70CEh | ICU           | Interrupt request register 206 | IR206           | 8              | 8           | 2 ICLK                  |             |
| 0008 70CFh | ICU           | Interrupt request register 207 | IR207           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D0h | ICU           | Interrupt request register 208 | IR208           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D1h | ICU           | Interrupt request register 209 | IR209           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D2h | ICU           | Interrupt request register 210 | IR210           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D3h | ICU           | Interrupt request register 211 | IR211           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D4h | ICU           | Interrupt request register 212 | IR212           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D5h | ICU           | Interrupt request register 213 | IR213           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D6h | ICU           | Interrupt request register 214 | IR214           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D7h | ICU           | Interrupt request register 215 | IR215           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D8h | ICU           | Interrupt request register 216 | IR216           | 8              | 8           | 2 ICLK                  |             |
| 0008 70D9h | ICU           | Interrupt request register 217 | IR217           | 8              | 8           | 2 ICLK                  |             |
| 0008 70DAh | ICU           | Interrupt request register 218 | IR218           | 8              | 8           | 2 ICLK                  |             |
| 0008 70DBh | ICU           | Interrupt request register 219 | IR219           | 8              | 8           | 2 ICLK                  |             |
| 0008 70DCh | ICU           | Interrupt request register 220 | IR220           | 8              | 8           | 2 ICLK                  |             |
| 0008 70DDh | ICU           | Interrupt request register 221 | IR221           | 8              | 8           | 2 ICLK                  |             |
| 0008 70DEh | ICU           | Interrupt request register 222 | IR222           | 8              | 8           | 2 ICLK                  |             |
| 0008 70DFh | ICU           | Interrupt request register 223 | IR223           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E0h | ICU           | Interrupt request register 224 | IR224           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E1h | ICU           | Interrupt request register 225 | IR225           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E2h | ICU           | Interrupt request register 226 | IR226           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E3h | ICU           | Interrupt request register 227 | IR227           | 8              | 8           | 2 ICLK                  |             |

**Table 4.1 List of I/O Registers (Address Order) (6 / 29)**

| Address    | Module Symbol | Register Name                      | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                    |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 70E4h | ICU           | Interrupt request register 228     | IR228           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E5h | ICU           | Interrupt request register 229     | IR229           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E6h | ICU           | Interrupt request register 230     | IR230           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E7h | ICU           | Interrupt request register 231     | IR231           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E8h | ICU           | Interrupt request register 232     | IR232           | 8              | 8           | 2 ICLK                  |             |
| 0008 70E9h | ICU           | Interrupt request register 233     | IR233           | 8              | 8           | 2 ICLK                  |             |
| 0008 70EAh | ICU           | Interrupt request register 234     | IR234           | 8              | 8           | 2 ICLK                  |             |
| 0008 70EBh | ICU           | Interrupt request register 235     | IR235           | 8              | 8           | 2 ICLK                  |             |
| 0008 70ECh | ICU           | Interrupt request register 236     | IR236           | 8              | 8           | 2 ICLK                  |             |
| 0008 70EDh | ICU           | Interrupt request register 237     | IR237           | 8              | 8           | 2 ICLK                  |             |
| 0008 70EEh | ICU           | Interrupt request register 238     | IR238           | 8              | 8           | 2 ICLK                  |             |
| 0008 70EFh | ICU           | Interrupt request register 239     | IR239           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F0h | ICU           | Interrupt request register 240     | IR240           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F1h | ICU           | Interrupt request register 241     | IR241           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F2h | ICU           | Interrupt request register 242     | IR242           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F3h | ICU           | Interrupt request register 243     | IR243           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F4h | ICU           | Interrupt request register 244     | IR244           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F5h | ICU           | Interrupt request register 245     | IR245           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F6h | ICU           | Interrupt request register 246     | IR246           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F7h | ICU           | Interrupt request register 247     | IR247           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F8h | ICU           | Interrupt request register 248     | IR248           | 8              | 8           | 2 ICLK                  |             |
| 0008 70F9h | ICU           | Interrupt request register 249     | IR249           | 8              | 8           | 2 ICLK                  |             |
| 0008 70FAh | ICU           | Interrupt request register 250     | IR250           | 8              | 8           | 2 ICLK                  |             |
| 0008 70FBh | ICU           | Interrupt request register 251     | IR251           | 8              | 8           | 2 ICLK                  |             |
| 0008 70FCh | ICU           | Interrupt request register 252     | IR252           | 8              | 8           | 2 ICLK                  |             |
| 0008 70FDh | ICU           | Interrupt request register 253     | IR253           | 8              | 8           | 2 ICLK                  |             |
| 0008 711Bh | ICU           | DTC activation enable register 027 | DTCE027         | 8              | 8           | 2 ICLK                  |             |
| 0008 711Ch | ICU           | DTC activation enable register 028 | DTCE028         | 8              | 8           | 2 ICLK                  |             |
| 0008 711Dh | ICU           | DTC activation enable register 029 | DTCE029         | 8              | 8           | 2 ICLK                  |             |
| 0008 711Eh | ICU           | DTC activation enable register 030 | DTCE030         | 8              | 8           | 2 ICLK                  |             |
| 0008 711Fh | ICU           | DTC activation enable register 031 | DTCE031         | 8              | 8           | 2 ICLK                  |             |
| 0008 712Dh | ICU           | DTC activation enable register 045 | DTCE045         | 8              | 8           | 2 ICLK                  |             |
| 0008 712Eh | ICU           | DTC activation enable register 046 | DTCE046         | 8              | 8           | 2 ICLK                  |             |
| 0008 713Ah | ICU           | DTC activation enable register 058 | DTCE058         | 8              | 8           | 2 ICLK                  |             |
| 0008 713Bh | ICU           | DTC activation enable register 059 | DTCE059         | 8              | 8           | 2 ICLK                  |             |
| 0008 7140h | ICU           | DTC activation enable register 064 | DTCE064         | 8              | 8           | 2 ICLK                  |             |
| 0008 7141h | ICU           | DTC activation enable register 065 | DTCE065         | 8              | 8           | 2 ICLK                  |             |
| 0008 7142h | ICU           | DTC activation enable register 066 | DTCE066         | 8              | 8           | 2 ICLK                  |             |
| 0008 7143h | ICU           | DTC activation enable register 067 | DTCE067         | 8              | 8           | 2 ICLK                  |             |
| 0008 7144h | ICU           | DTC activation enable register 068 | DTCE068         | 8              | 8           | 2 ICLK                  |             |
| 0008 7145h | ICU           | DTC activation enable register 069 | DTCE069         | 8              | 8           | 2 ICLK                  |             |
| 0008 7146h | ICU           | DTC activation enable register 070 | DTCE070         | 8              | 8           | 2 ICLK                  |             |
| 0008 7147h | ICU           | DTC activation enable register 071 | DTCE071         | 8              | 8           | 2 ICLK                  |             |
| 0008 7166h | ICU           | DTC activation enable register 102 | DTCE102         | 8              | 8           | 2 ICLK                  |             |
| 0008 7167h | ICU           | DTC activation enable register 103 | DTCE103         | 8              | 8           | 2 ICLK                  |             |
| 0008 716Ah | ICU           | DTC activation enable register 106 | DTCE106         | 8              | 8           | 2 ICLK                  |             |
| 0008 716Bh | ICU           | DTC activation enable register 107 | DTCE107         | 8              | 8           | 2 ICLK                  |             |
| 0008 7172h | ICU           | DTC activation enable register 114 | DTCE114         | 8              | 8           | 2 ICLK                  |             |
| 0008 7173h | ICU           | DTC activation enable register 115 | DTCE115         | 8              | 8           | 2 ICLK                  |             |
| 0008 7174h | ICU           | DTC activation enable register 116 | DTCE116         | 8              | 8           | 2 ICLK                  |             |
| 0008 7175h | ICU           | DTC activation enable register 117 | DTCE117         | 8              | 8           | 2 ICLK                  |             |

**Table 4.1 List of I/O Registers (Address Order) (7 / 29)**

| Address    | Module Symbol | Register Name                      | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |               |
|------------|---------------|------------------------------------|-----------------|----------------|-------------|-------------------------|---------------|
|            |               |                                    |                 |                |             | ICLK $\geq$ PCLK        | ICLK $<$ PCLK |
| 0008 7179h | ICU           | DTC activation enable register 121 | DTCE121         | 8              | 8           | 2 ICLK                  |               |
| 0008 717Ah | ICU           | DTC activation enable register 122 | DTCE122         | 8              | 8           | 2 ICLK                  |               |
| 0008 717Dh | ICU           | DTC activation enable register 125 | DTCE125         | 8              | 8           | 2 ICLK                  |               |
| 0008 717Eh | ICU           | DTC activation enable register 126 | DTCE126         | 8              | 8           | 2 ICLK                  |               |
| 0008 7181h | ICU           | DTC activation enable register 129 | DTCE129         | 8              | 8           | 2 ICLK                  |               |
| 0008 7182h | ICU           | DTC activation enable register 130 | DTCE130         | 8              | 8           | 2 ICLK                  |               |
| 0008 7183h | ICU           | DTC activation enable register 131 | DTCE131         | 8              | 8           | 2 ICLK                  |               |
| 0008 7184h | ICU           | DTC activation enable register 132 | DTCE132         | 8              | 8           | 2 ICLK                  |               |
| 0008 7186h | ICU           | DTC activation enable register 134 | DTCE134         | 8              | 8           | 2 ICLK                  |               |
| 0008 7187h | ICU           | DTC activation enable register 135 | DTCE135         | 8              | 8           | 2 ICLK                  |               |
| 0008 7188h | ICU           | DTC activation enable register 136 | DTCE136         | 8              | 8           | 2 ICLK                  |               |
| 0008 7189h | ICU           | DTC activation enable register 137 | DTCE137         | 8              | 8           | 2 ICLK                  |               |
| 0008 718Ah | ICU           | DTC activation enable register 138 | DTCE138         | 8              | 8           | 2 ICLK                  |               |
| 0008 718Bh | ICU           | DTC activation enable register 139 | DTCE139         | 8              | 8           | 2 ICLK                  |               |
| 0008 718Ch | ICU           | DTC activation enable register 140 | DTCE140         | 8              | 8           | 2 ICLK                  |               |
| 0008 718Dh | ICU           | DTC activation enable register 141 | DTCE141         | 8              | 8           | 2 ICLK                  |               |
| 0008 718Eh | ICU           | DTC activation enable register 142 | DTCE142         | 8              | 8           | 2 ICLK                  |               |
| 0008 718Fh | ICU           | DTC activation enable register 143 | DTCE143         | 8              | 8           | 2 ICLK                  |               |
| 0008 7190h | ICU           | DTC activation enable register 144 | DTCE144         | 8              | 8           | 2 ICLK                  |               |
| 0008 7191h | ICU           | DTC activation enable register 145 | DTCE145         | 8              | 8           | 2 ICLK                  |               |
| 0008 7193h | ICU           | DTC activation enable register 147 | DTCE147         | 8              | 8           | 2 ICLK                  |               |
| 0008 7194h | ICU           | DTC activation enable register 148 | DTCE148         | 8              | 8           | 2 ICLK                  |               |
| 0008 7197h | ICU           | DTC activation enable register 151 | DTCE151         | 8              | 8           | 2 ICLK                  |               |
| 0008 7198h | ICU           | DTC activation enable register 152 | DTCE152         | 8              | 8           | 2 ICLK                  |               |
| 0008 719Bh | ICU           | DTC activation enable register 155 | DTCE155         | 8              | 8           | 2 ICLK                  |               |
| 0008 719Ch | ICU           | DTC activation enable register 156 | DTCE156         | 8              | 8           | 2 ICLK                  |               |
| 0008 719Dh | ICU           | DTC activation enable register 157 | DTCE157         | 8              | 8           | 2 ICLK                  |               |
| 0008 719Eh | ICU           | DTC activation enable register 158 | DTCE158         | 8              | 8           | 2 ICLK                  |               |
| 0008 71A0h | ICU           | DTC activation enable register 160 | DTCE160         | 8              | 8           | 2 ICLK                  |               |
| 0008 71A1h | ICU           | DTC activation enable register 161 | DTCE161         | 8              | 8           | 2 ICLK                  |               |
| 0008 71A4h | ICU           | DTC activation enable register 164 | DTCE164         | 8              | 8           | 2 ICLK                  |               |
| 0008 71A5h | ICU           | DTC activation enable register 165 | DTCE165         | 8              | 8           | 2 ICLK                  |               |
| 0008 71AEh | ICU           | DTC activation enable register 174 | DTCE174         | 8              | 8           | 2 ICLK                  |               |
| 0008 71AFh | ICU           | DTC activation enable register 175 | DTCE175         | 8              | 8           | 2 ICLK                  |               |
| 0008 71B1h | ICU           | DTC activation enable register 177 | DTCE177         | 8              | 8           | 2 ICLK                  |               |
| 0008 71B2h | ICU           | DTC activation enable register 178 | DTCE178         | 8              | 8           | 2 ICLK                  |               |
| 0008 71B4h | ICU           | DTC activation enable register 180 | DTCE180         | 8              | 8           | 2 ICLK                  |               |
| 0008 71B5h | ICU           | DTC activation enable register 181 | DTCE181         | 8              | 8           | 2 ICLK                  |               |
| 0008 71B7h | ICU           | DTC activation enable register 183 | DTCE183         | 8              | 8           | 2 ICLK                  |               |
| 0008 71B8h | ICU           | DTC activation enable register 184 | DTCE184         | 8              | 8           | 2 ICLK                  |               |
| 0008 71BBh | ICU           | DTC activation enable register 187 | DTCE187         | 8              | 8           | 2 ICLK                  |               |
| 0008 71BCh | ICU           | DTC activation enable register 188 | DTCE188         | 8              | 8           | 2 ICLK                  |               |
| 0008 71BFh | ICU           | DTC activation enable register 191 | DTCE191         | 8              | 8           | 2 ICLK                  |               |
| 0008 71C0h | ICU           | DTC activation enable register 192 | DTCE192         | 8              | 8           | 2 ICLK                  |               |
| 0008 71C3h | ICU           | DTC activation enable register 195 | DTCE195         | 8              | 8           | 2 ICLK                  |               |
| 0008 71C4h | ICU           | DTC activation enable register 196 | DTCE196         | 8              | 8           | 2 ICLK                  |               |
| 0008 71C6h | ICU           | DTC activation enable register 198 | DTCE198         | 8              | 8           | 2 ICLK                  |               |
| 0008 71C7h | ICU           | DTC activation enable register 199 | DTCE199         | 8              | 8           | 2 ICLK                  |               |
| 0008 71C8h | ICU           | DTC activation enable register 200 | DTCE200         | 8              | 8           | 2 ICLK                  |               |
| 0008 71C9h | ICU           | DTC activation enable register 201 | DTCE201         | 8              | 8           | 2 ICLK                  |               |
| 0008 71CFh | ICU           | DTC activation enable register 207 | DTCE207         | 8              | 8           | 2 ICLK                  |               |

**Table 4.1 List of I/O Registers (Address Order) (8 / 29)**

| Address    | Module Symbol | Register Name                          | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|----------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                        |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 71D0h | ICU           | DTC activation enable register 208     | DTCER208        | 8              | 8           | 2 ICLK                  |             |
| 0008 71D3h | ICU           | DTC activation enable register 211     | DTCER211        | 8              | 8           | 2 ICLK                  |             |
| 0008 71D4h | ICU           | DTC activation enable register 212     | DTCER212        | 8              | 8           | 2 ICLK                  |             |
| 0008 71D7h | ICU           | DTC activation enable register 215     | DTCER215        | 8              | 8           | 2 ICLK                  |             |
| 0008 71D8h | ICU           | DTC activation enable register 216     | DTCER216        | 8              | 8           | 2 ICLK                  |             |
| 0008 71DBh | ICU           | DTC activation enable register 219     | DTCER219        | 8              | 8           | 2 ICLK                  |             |
| 0008 71DCh | ICU           | DTC activation enable register 220     | DTCER220        | 8              | 8           | 2 ICLK                  |             |
| 0008 71DFh | ICU           | DTC activation enable register 223     | DTCER223        | 8              | 8           | 2 ICLK                  |             |
| 0008 71E0h | ICU           | DTC activation enable register 224     | DTCER224        | 8              | 8           | 2 ICLK                  |             |
| 0008 71E3h | ICU           | DTC activation enable register 227     | DTCER227        | 8              | 8           | 2 ICLK                  |             |
| 0008 71E4h | ICU           | DTC activation enable register 228     | DTCER228        | 8              | 8           | 2 ICLK                  |             |
| 0008 71E7h | ICU           | DTC activation enable register 231     | DTCER231        | 8              | 8           | 2 ICLK                  |             |
| 0008 71E8h | ICU           | DTC activation enable register 232     | DTCER232        | 8              | 8           | 2 ICLK                  |             |
| 0008 71EBh | ICU           | DTC activation enable register 235     | DTCER235        | 8              | 8           | 2 ICLK                  |             |
| 0008 71ECh | ICU           | DTC activation enable register 236     | DTCER236        | 8              | 8           | 2 ICLK                  |             |
| 0008 71EFh | ICU           | DTC activation enable register 239     | DTCER239        | 8              | 8           | 2 ICLK                  |             |
| 0008 71F0h | ICU           | DTC activation enable register 240     | DTCER240        | 8              | 8           | 2 ICLK                  |             |
| 0008 71F7h | ICU           | DTC activation enable register 247     | DTCER247        | 8              | 8           | 2 ICLK                  |             |
| 0008 71F8h | ICU           | DTC activation enable register 248     | DTCER248        | 8              | 8           | 2 ICLK                  |             |
| 0008 71FBh | ICU           | DTC activation enable register 251     | DTCER251        | 8              | 8           | 2 ICLK                  |             |
| 0008 71FCh | ICU           | DTC activation enable register 252     | DTCER252        | 8              | 8           | 2 ICLK                  |             |
| 0008 7202h | ICU           | Interrupt request enable register 02   | IER02           | 8              | 8           | 2 ICLK                  |             |
| 0008 7203h | ICU           | Interrupt request enable register 03   | IER03           | 8              | 8           | 2 ICLK                  |             |
| 0008 7204h | ICU           | Interrupt request enable register 04   | IER04           | 8              | 8           | 2 ICLK                  |             |
| 0008 7205h | ICU           | Interrupt request enable register 05   | IER05           | 8              | 8           | 2 ICLK                  |             |
| 0008 7207h | ICU           | Interrupt request enable register 07   | IER07           | 8              | 8           | 2 ICLK                  |             |
| 0008 7208h | ICU           | Interrupt request enable register 08   | IER08           | 8              | 8           | 2 ICLK                  |             |
| 0008 720Bh | ICU           | Interrupt request enable register 0B   | IER0B           | 8              | 8           | 2 ICLK                  |             |
| 0008 720Ch | ICU           | Interrupt request enable register 0C   | IER0C           | 8              | 8           | 2 ICLK                  |             |
| 0008 720Dh | ICU           | Interrupt request enable register 0D   | IER0D           | 8              | 8           | 2 ICLK                  |             |
| 0008 720Eh | ICU           | Interrupt request enable register 0E   | IER0E           | 8              | 8           | 2 ICLK                  |             |
| 0008 720Fh | ICU           | Interrupt request enable register 0F   | IER0F           | 8              | 8           | 2 ICLK                  |             |
| 0008 7210h | ICU           | Interrupt request enable register 10   | IER10           | 8              | 8           | 2 ICLK                  |             |
| 0008 7211h | ICU           | Interrupt request enable register 11   | IER11           | 8              | 8           | 2 ICLK                  |             |
| 0008 7212h | ICU           | Interrupt request enable register 12   | IER12           | 8              | 8           | 2 ICLK                  |             |
| 0008 7213h | ICU           | Interrupt request enable register 13   | IER13           | 8              | 8           | 2 ICLK                  |             |
| 0008 7214h | ICU           | Interrupt request enable register 14   | IER14           | 8              | 8           | 2 ICLK                  |             |
| 0008 7215h | ICU           | Interrupt request enable register 15   | IER15           | 8              | 8           | 2 ICLK                  |             |
| 0008 7216h | ICU           | Interrupt request enable register 16   | IER16           | 8              | 8           | 2 ICLK                  |             |
| 0008 7217h | ICU           | Interrupt request enable register 17   | IER17           | 8              | 8           | 2 ICLK                  |             |
| 0008 7218h | ICU           | Interrupt request enable register 18   | IER18           | 8              | 8           | 2 ICLK                  |             |
| 0008 7219h | ICU           | Interrupt request enable register 19   | IER19           | 8              | 8           | 2 ICLK                  |             |
| 0008 721Ah | ICU           | Interrupt request enable register 1A   | IER1A           | 8              | 8           | 2 ICLK                  |             |
| 0008 721Bh | ICU           | Interrupt request enable register 1B   | IER1B           | 8              | 8           | 2 ICLK                  |             |
| 0008 721Ch | ICU           | Interrupt request enable register 1C   | IER1C           | 8              | 8           | 2 ICLK                  |             |
| 0008 721Dh | ICU           | Interrupt request enable register 1D   | IER1D           | 8              | 8           | 2 ICLK                  |             |
| 0008 721Eh | ICU           | Interrupt request enable register 1E   | IER1E           | 8              | 8           | 2 ICLK                  |             |
| 0008 721Fh | ICU           | Interrupt request enable register 1F   | IER1F           | 8              | 8           | 2 ICLK                  |             |
| 0008 72E0h | ICU           | Software interrupt activation register | SWINTR          | 8              | 8           | 2 ICLK                  |             |
| 0008 72F0h | ICU           | Fast interrupt set register            | FIR             | 16             | 16          | 2 ICLK                  |             |
| 0008 7300h | ICU           | Interrupt source priority register 000 | IPR000          | 8              | 8           | 2 ICLK                  |             |

**Table 4.1 List of I/O Registers (Address Order) (9 / 29)**

| Address    | Module Symbol | Register Name                          | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|----------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                        |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 7301h | ICU           | Interrupt source priority register 001 | IPR001          | 8              | 8           | 2 ICLK                  |             |
| 0008 7302h | ICU           | Interrupt source priority register 002 | IPR002          | 8              | 8           | 2 ICLK                  |             |
| 0008 7303h | ICU           | Interrupt source priority register 003 | IPR003          | 8              | 8           | 2 ICLK                  |             |
| 0008 7304h | ICU           | Interrupt source priority register 004 | IPR004          | 8              | 8           | 2 ICLK                  |             |
| 0008 7305h | ICU           | Interrupt source priority register 005 | IPR005          | 8              | 8           | 2 ICLK                  |             |
| 0008 7306h | ICU           | Interrupt source priority register 006 | IPR006          | 8              | 8           | 2 ICLK                  |             |
| 0008 7307h | ICU           | Interrupt source priority register 007 | IPR007          | 8              | 8           | 2 ICLK                  |             |
| 0008 7320h | ICU           | Interrupt source priority register 032 | IPR032          | 8              | 8           | 2 ICLK                  |             |
| 0008 7321h | ICU           | Interrupt source priority register 033 | IPR033          | 8              | 8           | 2 ICLK                  |             |
| 0008 7322h | ICU           | Interrupt source priority register 034 | IPR034          | 8              | 8           | 2 ICLK                  |             |
| 0008 732Ch | ICU           | Interrupt source priority register 044 | IPR044          | 8              | 8           | 2 ICLK                  |             |
| 0008 7339h | ICU           | Interrupt source priority register 057 | IPR057          | 8              | 8           | 2 ICLK                  |             |
| 0008 733Ah | ICU           | Interrupt source priority register 058 | IPR058          | 8              | 8           | 2 ICLK                  |             |
| 0008 733Bh | ICU           | Interrupt source priority register 059 | IPR059          | 8              | 8           | 2 ICLK                  |             |
| 0008 733Fh | ICU           | Interrupt source priority register 063 | IPR063          | 8              | 8           | 2 ICLK                  |             |
| 0008 7340h | ICU           | Interrupt source priority register 064 | IPR064          | 8              | 8           | 2 ICLK                  |             |
| 0008 7341h | ICU           | Interrupt source priority register 065 | IPR065          | 8              | 8           | 2 ICLK                  |             |
| 0008 7342h | ICU           | Interrupt source priority register 066 | IPR066          | 8              | 8           | 2 ICLK                  |             |
| 0008 7343h | ICU           | Interrupt source priority register 067 | IPR067          | 8              | 8           | 2 ICLK                  |             |
| 0008 7344h | ICU           | Interrupt source priority register 068 | IPR068          | 8              | 8           | 2 ICLK                  |             |
| 0008 7345h | ICU           | Interrupt source priority register 069 | IPR069          | 8              | 8           | 2 ICLK                  |             |
| 0008 7346h | ICU           | Interrupt source priority register 070 | IPR070          | 8              | 8           | 2 ICLK                  |             |
| 0008 7347h | ICU           | Interrupt source priority register 071 | IPR071          | 8              | 8           | 2 ICLK                  |             |
| 0008 7358h | ICU           | Interrupt source priority register 088 | IPR088          | 8              | 8           | 2 ICLK                  |             |
| 0008 7359h | ICU           | Interrupt source priority register 089 | IPR089          | 8              | 8           | 2 ICLK                  |             |
| 0008 735Ch | ICU           | Interrupt source priority register 092 | IPR092          | 8              | 8           | 2 ICLK                  |             |
| 0008 735Dh | ICU           | Interrupt source priority register 093 | IPR093          | 8              | 8           | 2 ICLK                  |             |
| 0008 7366h | ICU           | Interrupt source priority register 102 | IPR102          | 8              | 8           | 2 ICLK                  |             |
| 0008 7367h | ICU           | Interrupt source priority register 103 | IPR103          | 8              | 8           | 2 ICLK                  |             |
| 0008 736Ah | ICU           | Interrupt source priority register 106 | IPR106          | 8              | 8           | 2 ICLK                  |             |
| 0008 736Bh | ICU           | Interrupt source priority register 107 | IPR107          | 8              | 8           | 2 ICLK                  |             |
| 0008 7372h | ICU           | Interrupt source priority register 114 | IPR114          | 8              | 8           | 2 ICLK                  |             |
| 0008 7376h | ICU           | Interrupt source priority register 118 | IPR118          | 8              | 8           | 2 ICLK                  |             |
| 0008 7379h | ICU           | Interrupt source priority register 121 | IPR121          | 8              | 8           | 2 ICLK                  |             |
| 0008 737Bh | ICU           | Interrupt source priority register 123 | IPR123          | 8              | 8           | 2 ICLK                  |             |
| 0008 737Dh | ICU           | Interrupt source priority register 125 | IPR125          | 8              | 8           | 2 ICLK                  |             |
| 0008 737Fh | ICU           | Interrupt source priority register 127 | IPR127          | 8              | 8           | 2 ICLK                  |             |
| 0008 7381h | ICU           | Interrupt source priority register 129 | IPR129          | 8              | 8           | 2 ICLK                  |             |
| 0008 7385h | ICU           | Interrupt source priority register 133 | IPR133          | 8              | 8           | 2 ICLK                  |             |
| 0008 7386h | ICU           | Interrupt source priority register 134 | IPR134          | 8              | 8           | 2 ICLK                  |             |
| 0008 738Ah | ICU           | Interrupt source priority register 138 | IPR138          | 8              | 8           | 2 ICLK                  |             |
| 0008 738Bh | ICU           | Interrupt source priority register 139 | IPR139          | 8              | 8           | 2 ICLK                  |             |
| 0008 738Eh | ICU           | Interrupt source priority register 142 | IPR142          | 8              | 8           | 2 ICLK                  |             |
| 0008 7392h | ICU           | Interrupt source priority register 146 | IPR146          | 8              | 8           | 2 ICLK                  |             |
| 0008 7393h | ICU           | Interrupt source priority register 147 | IPR147          | 8              | 8           | 2 ICLK                  |             |
| 0008 7395h | ICU           | Interrupt source priority register 149 | IPR149          | 8              | 8           | 2 ICLK                  |             |
| 0008 7397h | ICU           | Interrupt source priority register 151 | IPR151          | 8              | 8           | 2 ICLK                  |             |
| 0008 7399h | ICU           | Interrupt source priority register 153 | IPR153          | 8              | 8           | 2 ICLK                  |             |
| 0008 739Bh | ICU           | Interrupt source priority register 155 | IPR155          | 8              | 8           | 2 ICLK                  |             |
| 0008 739Fh | ICU           | Interrupt source priority register 159 | IPR159          | 8              | 8           | 2 ICLK                  |             |
| 0008 73A0h | ICU           | Interrupt source priority register 160 | IPR160          | 8              | 8           | 2 ICLK                  |             |

**Table 4.1 List of I/O Registers (Address Order) (10 / 29)**

| Address    | Module Symbol | Register Name                             | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|-------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                           |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 738A2 | ICU           | Interrupt source priority register 162    | IPR162          | 8              | 8           | 2 ICLK                  |             |
| 0008 73A4h | ICU           | Interrupt source priority register 164    | IPR164          | 8              | 8           | 2 ICLK                  |             |
| 0008 73A6h | ICU           | Interrupt source priority register 166    | IPR166          | 8              | 8           | 2 ICLK                  |             |
| 0008 73AAh | ICU           | Interrupt source priority register 170    | IPR170          | 8              | 8           | 2 ICLK                  |             |
| 0008 73ABh | ICU           | Interrupt source priority register 171    | IPR171          | 8              | 8           | 2 ICLK                  |             |
| 0008 73AEh | ICU           | Interrupt source priority register 174    | IPR174          | 8              | 8           | 2 ICLK                  |             |
| 0008 73B1h | ICU           | Interrupt source priority register 177    | IPR177          | 8              | 8           | 2 ICLK                  |             |
| 0008 73B4h | ICU           | Interrupt source priority register 180    | IPR180          | 8              | 8           | 2 ICLK                  |             |
| 0008 73B7h | ICU           | Interrupt source priority register 183    | IPR183          | 8              | 8           | 2 ICLK                  |             |
| 0008 73BAh | ICU           | Interrupt source priority register 186    | IPR186          | 8              | 8           | 2 ICLK                  |             |
| 0008 73BEh | ICU           | Interrupt source priority register 190    | IPR190          | 8              | 8           | 2 ICLK                  |             |
| 0008 73C2h | ICU           | Interrupt source priority register 194    | IPR194          | 8              | 8           | 2 ICLK                  |             |
| 0008 73C6h | ICU           | Interrupt source priority register 198    | IPR198          | 8              | 8           | 2 ICLK                  |             |
| 0008 73C7h | ICU           | Interrupt source priority register 199    | IPR199          | 8              | 8           | 2 ICLK                  |             |
| 0008 73C8h | ICU           | Interrupt source priority register 200    | IPR200          | 8              | 8           | 2 ICLK                  |             |
| 0008 73C9h | ICU           | Interrupt source priority register 201    | IPR201          | 8              | 8           | 2 ICLK                  |             |
| 0008 73CEh | ICU           | Interrupt source priority register 206    | IPR206          | 8              | 8           | 2 ICLK                  |             |
| 0008 73D2h | ICU           | Interrupt source priority register 210    | IPR210          | 8              | 8           | 2 ICLK                  |             |
| 0008 73D6h | ICU           | Interrupt source priority register 214    | IPR214          | 8              | 8           | 2 ICLK                  |             |
| 0008 73DAh | ICU           | Interrupt source priority register 218    | IPR218          | 8              | 8           | 2 ICLK                  |             |
| 0008 73DEh | ICU           | Interrupt source priority register 222    | IPR222          | 8              | 8           | 2 ICLK                  |             |
| 0008 73E2h | ICU           | Interrupt source priority register 226    | IPR226          | 8              | 8           | 2 ICLK                  |             |
| 0008 73E6h | ICU           | Interrupt source priority register 230    | IPR230          | 8              | 8           | 2 ICLK                  |             |
| 0008 73EAh | ICU           | Interrupt source priority register 234    | IPR234          | 8              | 8           | 2 ICLK                  |             |
| 0008 73EEh | ICU           | Interrupt source priority register 238    | IPR238          | 8              | 8           | 2 ICLK                  |             |
| 0008 73F2h | ICU           | Interrupt source priority register 242    | IPR242          | 8              | 8           | 2 ICLK                  |             |
| 0008 73F3h | ICU           | Interrupt source priority register 243    | IPR243          | 8              | 8           | 2 ICLK                  |             |
| 0008 73F4h | ICU           | Interrupt source priority register 244    | IPR244          | 8              | 8           | 2 ICLK                  |             |
| 0008 73F5h | ICU           | Interrupt source priority register 245    | IPR245          | 8              | 8           | 2 ICLK                  |             |
| 0008 73F6h | ICU           | Interrupt source priority register 246    | IPR246          | 8              | 8           | 2 ICLK                  |             |
| 0008 73F7h | ICU           | Interrupt source priority register 247    | IPR247          | 8              | 8           | 2 ICLK                  |             |
| 0008 73F8h | ICU           | Interrupt source priority register 248    | IPR248          | 8              | 8           | 2 ICLK                  |             |
| 0008 73F9h | ICU           | Interrupt source priority register 249    | IPR249          | 8              | 8           | 2 ICLK                  |             |
| 0008 73FAh | ICU           | Interrupt source priority register 250    | IPR250          | 8              | 8           | 2 ICLK                  |             |
| 0008 7400h | ICU           | DMAC activation request select register 0 | DMRSR0          | 8              | 8           | 2 ICLK                  |             |
| 0008 7404h | ICU           | DMAC activation request select register 1 | DMRSR1          | 8              | 8           | 2 ICLK                  |             |
| 0008 7408h | ICU           | DMAC activation request select register 2 | DMRSR2          | 8              | 8           | 2 ICLK                  |             |
| 0008 740Ch | ICU           | DMAC activation request select register 3 | DMRSR3          | 8              | 8           | 2 ICLK                  |             |
| 0008 7500h | ICU           | IRQ control register 0                    | IRQCR0          | 8              | 8           | 2 ICLK                  |             |
| 0008 7501h | ICU           | IRQ control register 1                    | IRQCR1          | 8              | 8           | 2 ICLK                  |             |
| 0008 7502h | ICU           | IRQ control register 2                    | IRQCR2          | 8              | 8           | 2 ICLK                  |             |
| 0008 7503h | ICU           | IRQ control register 3                    | IRQCR3          | 8              | 8           | 2 ICLK                  |             |
| 0008 7504h | ICU           | IRQ control register 4                    | IRQCR4          | 8              | 8           | 2 ICLK                  |             |
| 0008 7505h | ICU           | IRQ control register 5                    | IRQCR5          | 8              | 8           | 2 ICLK                  |             |
| 0008 7506h | ICU           | IRQ control register 6                    | IRQCR6          | 8              | 8           | 2 ICLK                  |             |
| 0008 7507h | ICU           | IRQ control register 7                    | IRQCR7          | 8              | 8           | 2 ICLK                  |             |
| 0008 7510h | ICU           | IRQ pin digital filter enable register 0  | IRQFLTE0        | 8              | 8           | 2 ICLK                  |             |
| 0008 7514h | ICU           | IRQ pin digital filter setting register 0 | IRQFLTC0        | 16             | 16          | 2 ICLK                  |             |
| 0008 7580h | ICU           | Non-maskable interrupt status register    | NMISR           | 8              | 8           | 2 ICLK                  |             |
| 0008 7581h | ICU           | Non-maskable interrupt enable register    | NMIER           | 8              | 8           | 2 ICLK                  |             |
| 0008 7582h | ICU           | Non-maskable interrupt clear register     | NMICLR          | 8              | 8           | 2 ICLK                  |             |

**Table 4.1 List of I/O Registers (Address Order) (11 / 29)**

| Address    | Module Symbol | Register Name                           | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|-----------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                         |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 7583h | ICU           | NMI pin interrupt control register      | NMICR           | 8              | 8           | 2 ICLK                  |             |
| 0008 7590h | ICU           | NMI pin digital filter enable register  | NMIFLTE         | 8              | 8           | 2 ICLK                  |             |
| 0008 7594h | ICU           | NMI pin digital filter setting register | NMIFLTC         | 8              | 8           | 2 ICLK                  |             |
| 0008 8000h | CMT           | Compare match timer start register 0    | CMSTR0          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8002h | CMT0          | Compare match timer control register    | CMCR            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8004h | CMT0          | Compare match timer counter             | CMCNT           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8006h | CMT0          | Compare match timer constant register   | CMCOR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8008h | CMT1          | Compare match timer control register    | CMCR            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 800Ah | CMT1          | Compare match timer counter             | CMCNT           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 800Ch | CMT1          | Compare match timer constant register   | CMCOR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8010h | CMT           | Compare match timer start register 1    | CMSTR1          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8012h | CMT2          | Compare match timer control register    | CMCR            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8014h | CMT2          | Compare match timer counter             | CMCNT           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8016h | CMT2          | Compare match timer constant register   | CMCOR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8018h | CMT3          | Compare match timer control register    | CMCR            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 801Ah | CMT3          | Compare match timer counter             | CMCNT           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 801Ch | CMT3          | Compare match timer constant register   | CMCOR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8020h | WDT           | WDT refresh register                    | WDTRR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8022h | WDT           | WDT control register                    | WDTCR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8024h | WDT           | WDT status register                     | WDTSR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8026h | WDT           | WDT reset control register              | WDTRCR          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8030h | IWDT          | IWDT refresh register                   | IWDTRR          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8032h | IWDT          | IWDT control register                   | IWDTCR          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8034h | IWDT          | IWDT status register                    | IWDTSR          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8036h | IWDT          | IWDT reset control register             | IWDTRCR         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8038h | IWDT          | IWDT count stop control register        | IWDTCSNPR       | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 80C0h | DA            | D/A data register 0                     | DADR0           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 80C2h | DA            | D/A data register 1                     | DADR1           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 80C4h | DA            | D/A control register                    | DACR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 80C5h | DA            | DADRm format select register            | DADPR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8100h | TPU           | Timer start register                    | TSTR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8101h | TPU           | Timer synchronous register              | TSYR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8108h | TPU0          | Noise filter control register           | NFCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8109h | TPU1          | Noise filter control register           | NFCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 810Ah | TPU2          | Noise filter control register           | NFCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 810Bh | TPU3          | Noise filter control register           | NFCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 810Ch | TPU4          | Noise filter control register           | NFCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 810Dh | TPU5          | Noise filter control register           | NFCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8110h | TPU0          | Timer control register                  | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8111h | TPU0          | Timer mode register                     | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8112h | TPU0          | Timer I/O control register H            | TIORH           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8113h | TPU0          | Timer I/O control register L            | TIORL           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8114h | TPU0          | Timer interrupt enable register         | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8115h | TPU0          | Timer status register                   | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8116h | TPU0          | Timer counter                           | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8118h | TPU0          | Timer general register A                | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 811Ah | TPU0          | Timer general register B                | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 811Ch | TPU0          | Timer general register C                | TGRC            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 811Eh | TPU0          | Timer general register D                | TGRD            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8120h | TPU1          | Timer control register                  | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8121h | TPU1          | Timer mode register                     | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (12 / 29)**

| Address    | Module Symbol | Register Name                   | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|---------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                 |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 8122h | TPU1          | Timer I/O control register      | TIOR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8124h | TPU1          | Timer interrupt enable register | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8125h | TPU1          | Timer status register           | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8126h | TPU1          | Timer counter                   | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8128h | TPU1          | Timer general register A        | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 812Ah | TPU1          | Timer general register B        | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8130h | TPU2          | Timer control register          | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8131h | TPU2          | Timer mode register             | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8132h | TPU2          | Timer I/O control register      | TIOR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8134h | TPU2          | Timer interrupt enable register | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8135h | TPU2          | Timer status register           | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8136h | TPU2          | Timer counter                   | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8138h | TPU2          | Timer general register A        | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 813Ah | TPU2          | Timer general register B        | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8140h | TPU3          | Timer control register          | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8141h | TPU3          | Timer mode register             | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8142h | TPU3          | Timer I/O control register H    | TIORH           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8143h | TPU3          | Timer I/O control register L    | TIORL           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8144h | TPU3          | Timer interrupt enable register | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8145h | TPU3          | Timer status register           | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8146h | TPU3          | Timer counter                   | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8148h | TPU3          | Timer general register A        | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 814Ah | TPU3          | Timer general register B        | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 814Ch | TPU3          | Timer general register C        | TGRC            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 814Eh | TPU3          | Timer general register D        | TGRD            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8150h | TPU4          | Timer control register          | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8151h | TPU4          | Timer mode register             | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8152h | TPU4          | Timer I/O control register      | TIOR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8154h | TPU4          | Timer interrupt enable register | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8155h | TPU4          | Timer status register           | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8156h | TPU4          | Timer counter                   | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8158h | TPU4          | Timer general register A        | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 815Ah | TPU4          | Timer general register B        | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8160h | TPU5          | Timer control register          | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8161h | TPU5          | Timer mode register             | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8162h | TPU5          | Timer I/O control register      | TIOR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8164h | TPU5          | Timer interrupt enable register | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8165h | TPU5          | Timer status register           | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8166h | TPU5          | Timer counter                   | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8168h | TPU5          | Timer general register A        | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 816Ah | TPU5          | Timer general register B        | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8200h | TMR0          | Timer control register          | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8201h | TMR1          | Timer counter control register  | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8202h | TMR0          | Timer control/status register   | TCSR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8203h | TMR1          | Timer control/status register   | TCSR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8204h | TMR0          | Time constant register A        | TCORA           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8205h | TMR1          | Time constant register A        | TCORA           | 8              | 8*1         | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8206h | TMR0          | Time constant register B        | TCORB           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8207h | TMR1          | Time constant register B        | TCORB           | 8              | 8*1         | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8208h | TMR0          | Timer counter                   | TCNT            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8209h | TMR1          | Timer counter                   | TCNT            | 8              | 8*1         | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (13 / 29)**

| Address    | Module Symbol | Register Name                                     | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|---------------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                                   |                 |                |             | ICLK ≥ PCLK             | ICLK < PCLK |
| 0008 820Ah | TMR0          | Timer counter control register                    | TCCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 820Bh | TMR1          | Timer counter control register                    | TCCR            | 8              | 8*1         | 2, 3 PCLKB              | 2 ICLK      |
| 0008 820Ch | TMR0          | Time count start register                         | TCSTR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8210h | TMR2          | Timer control register                            | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8211h | TMR3          | Timer control register                            | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8212h | TMR2          | Timer control/status register                     | TCSR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8213h | TMR3          | Timer control/status register                     | TCSR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8214h | TMR2          | Time constant register A                          | TCORA           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8215h | TMR3          | Time constant register A                          | TCORA           | 8              | 8*1         | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8216h | TMR2          | Time constant register B                          | TCORB           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8217h | TMR3          | Time constant register B                          | TCORB           | 8              | 8*1         | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8218h | TMR2          | Timer counter                                     | TCNT            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8219h | TMR3          | Timer counter                                     | TCNT            | 8              | 8*1         | 2, 3 PCLKB              | 2 ICLK      |
| 0008 821Ah | TMR2          | Timer counter control register                    | TCCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 821Bh | TMR3          | Timer counter control register                    | TCCR            | 8              | 8*1         | 2, 3 PCLKB              | 2 ICLK      |
| 0008 821Ch | TMR2          | Time count start register                         | TCSTR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8280h | CRC           | CRC control register                              | CRCCR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8281h | CRC           | CRC data input register                           | CRCDIR          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8282h | CRC           | CRC data output register                          | CRCDOR          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8300h | RIIC0         | I <sup>2</sup> C bus control register 1           | ICCR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8301h | RIIC0         | I <sup>2</sup> C bus control register 2           | ICCR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8302h | RIIC0         | I <sup>2</sup> C bus mode register 1              | ICMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8303h | RIIC0         | I <sup>2</sup> C bus mode register 2              | ICMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8304h | RIIC0         | I <sup>2</sup> C bus mode register 3              | ICMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8305h | RIIC0         | I <sup>2</sup> C bus function enable register     | ICFER           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8306h | RIIC0         | I <sup>2</sup> C bus status enable register       | ICSER           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8307h | RIIC0         | I <sup>2</sup> C bus interrupt enable register    | ICIER           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8308h | RIIC0         | I <sup>2</sup> C bus status register 1            | ICSR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8309h | RIIC0         | I <sup>2</sup> C bus status register 2            | ICSR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 830Ah | RIIC0         | Slave address register L0                         | SARL0           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 830Ah | RIIC0         | Timeout internal counter L                        | TMOCNTL         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 830Bh | RIIC0         | Slave address register U0                         | SARU0           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 830Bh | RIIC0         | Timeout internal counter U                        | TMOCNTU         | 8              | 8*2         | 2, 3 PCLKB              | 2 ICLK      |
| 0008 830Ch | RIIC0         | Slave address register L1                         | SARL1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 830Dh | RIIC0         | Slave address register U1                         | SARU1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 830Eh | RIIC0         | Slave address register L2                         | SARL2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 830Fh | RIIC0         | Slave address register U2                         | SARU2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8310h | RIIC0         | I <sup>2</sup> C bus bit rate low-level register  | ICBRL           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8311h | RIIC0         | I <sup>2</sup> C bus bit rate high-level register | ICBRH           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8312h | RIIC0         | I <sup>2</sup> C bus transmit data register       | ICDRT           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8313h | RIIC0         | I <sup>2</sup> C bus receive data register        | ICDRR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8380h | RSPI0         | RSPI control register                             | SPCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8381h | RSPI0         | RSPI slave select polarity register               | SSLP            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8382h | RSPI0         | RSPI pin control register                         | SPPCR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8383h | RSPI0         | RSPI status register                              | SPSR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8384h | RSPI0         | RSPI data register                                | SPDR            | 32             | 16, 32      | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8388h | RSPI0         | RSPI sequence control register                    | SPSCR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8389h | RSPI0         | RSPI sequence status register                     | SPSSR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 838Ah | RSPI0         | RSPI bit rate register                            | SPBR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 838Bh | RSPI0         | RSPI data control register                        | SPDCR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 838Ch | RSPI0         | RSPI clock delay register                         | SPCKD           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (14 / 29)**

| Address    | Module Symbol | Register Name                                          | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|--------------------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                                        |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 838Dh | RSPI0         | RSPI slave select negation delay register              | SSLND           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 838Eh | RSPI0         | RSPI next-access delay register                        | SPND            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 838Fh | RSPI0         | RSPI control register 2                                | SPCR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8390h | RSPI0         | RSPI command register 0                                | SPCMD0          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8392h | RSPI0         | RSPI command register 1                                | SPCMD1          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8394h | RSPI0         | RSPI command register 2                                | SPCMD2          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8396h | RSPI0         | RSPI command register 3                                | SPCMD3          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8398h | RSPI0         | RSPI command register 4                                | SPCMD4          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 839Ah | RSPI0         | RSPI command register 5                                | SPCMD5          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 839Ch | RSPI0         | RSPI command register 6                                | SPCMD6          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 839Eh | RSPI0         | RSPI command register 7                                | SPCMD7          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8600h | MTU3          | Timer control register                                 | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8601h | MTU4          | Timer control register                                 | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8602h | MTU3          | Timer mode register                                    | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8603h | MTU4          | Timer mode register                                    | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8604h | MTU3          | Timer I/O control register H                           | TIORH           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8605h | MTU3          | Timer I/O control register L                           | TIORL           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8606h | MTU4          | Timer I/O control register H                           | TIORH           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8607h | MTU4          | Timer I/O control register L                           | TIORL           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8608h | MTU3          | Timer interrupt enable register                        | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8609h | MTU4          | Timer interrupt enable register                        | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 860Ah | MTU           | Timer output master enable register                    | TOER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 860Dh | MTU           | Timer gate control register                            | TGCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 860Eh | MTU           | Timer output control register 1                        | TOCR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 860Fh | MTU           | Timer output control register 2                        | TOCR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8610h | MTU3          | Timer counter                                          | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8612h | MTU4          | Timer counter                                          | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8614h | MTU           | Timer cycle data register                              | TCDR            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8616h | MTU           | Timer dead time data register                          | TDDR            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8618h | MTU3          | Timer general register A                               | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 861Ah | MTU3          | Timer general register B                               | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 861Ch | MTU4          | Timer general register A                               | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 861Eh | MTU4          | Timer general register B                               | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8620h | MTU           | Timer subcounter                                       | TCNTS           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8622h | MTU           | Timer cycle buffer register                            | TCBR            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8624h | MTU3          | Timer general register C                               | TGRC            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8626h | MTU3          | Timer general register D                               | TGRD            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8628h | MTU4          | Timer general register C                               | TGRC            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 862Ah | MTU4          | Timer general register D                               | TGRD            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 862Ch | MTU3          | Timer status register                                  | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 862Dh | MTU4          | Timer status register                                  | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8630h | MTU           | Timer interrupt skipping set register                  | TITCR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8631h | MTU           | Timer interrupt skipping counter                       | TITCNT          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8632h | MTU           | Timer buffer transfer set register                     | TBTER           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8634h | MTU           | Timer dead time enable register                        | TDER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8636h | MTU           | Timer output level buffer register                     | TOLBR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8638h | MTU3          | Timer buffer operation transfer mode register          | TBTM            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8639h | MTU4          | Timer buffer operation transfer mode register          | TBTM            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8640h | MTU4          | Timer A/D converter start request control register     | TADCR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8644h | MTU4          | Timer A/D converter start request cycle set register A | TADCORA         | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8646h | MTU4          | Timer A/D converter start request cycle set register B | TADCORB         | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (15 / 29)**

| Address    | Module Symbol | Register Name                                                 | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |               |
|------------|---------------|---------------------------------------------------------------|-----------------|----------------|-------------|-------------------------|---------------|
|            |               |                                                               |                 |                |             | ICLK $\geq$ PCLK        | ICLK $<$ PCLK |
| 0008 8648h | MTU4          | Timer A/D converter start request cycle set buffer register A | TADCOBRA        | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 864Ah | MTU4          | Timer A/D converter start request cycle set buffer register B | TADCOBRB        | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8660h | MTU           | Timer waveform control register                               | TWCR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8680h | MTU           | Timer start register                                          | TSTR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8681h | MTU           | Timer synchronous register                                    | TSYR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8684h | MTU           | Timer read/write enable register                              | TRWER           | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8690h | MTU0          | Noise filter control register                                 | NFCR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8691h | MTU1          | Noise filter control register                                 | NFCR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8692h | MTU2          | Noise filter control register                                 | NFCR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8693h | MTU3          | Noise filter control register                                 | NFCR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8694h | MTU4          | Noise filter control register                                 | NFCR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8695h | MTU5          | Noise filter control register                                 | NFCR            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8700h | MTU0          | Timer control register                                        | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8701h | MTU0          | Timer mode register                                           | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8702h | MTU0          | Timer I/O control register H                                  | TIORH           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8703h | MTU0          | Timer I/O control register L                                  | TIORL           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8704h | MTU0          | Timer interrupt enable register                               | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8705h | MTU0          | Timer status register                                         | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8706h | MTU0          | Timer counter                                                 | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8708h | MTU0          | Timer general register A                                      | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 870Ah | MTU0          | Timer general register B                                      | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 870Ch | MTU0          | Timer general register C                                      | TGRC            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 870Eh | MTU0          | Timer general register D                                      | TGRD            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8720h | MTU0          | Timer general register E                                      | TGRE            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8722h | MTU0          | Timer general register F                                      | TGRF            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8724h | MTU0          | Timer interrupt enable register 2                             | TIER2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8726h | MTU0          | Timer buffer operation transfer mode register                 | TBTM            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8780h | MTU1          | Timer control register                                        | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8781h | MTU1          | Timer mode register                                           | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8782h | MTU1          | Timer I/O control register                                    | TIOR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8784h | MTU1          | Timer interrupt enable register                               | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8785h | MTU1          | Timer status register                                         | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8786h | MTU1          | Timer counter                                                 | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8788h | MTU1          | Timer general register A                                      | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 878Ah | MTU1          | Timer general register B                                      | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8790h | MTU1          | Timer input capture control register                          | TICCR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8800h | MTU2          | Timer control register                                        | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8801h | MTU2          | Timer mode register                                           | TMDR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8802h | MTU2          | Timer I/O control register                                    | TIOR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8804h | MTU2          | Timer interrupt enable register                               | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8805h | MTU2          | Timer status register                                         | TSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8806h | MTU2          | Timer counter                                                 | TCNT            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8808h | MTU2          | Timer general register A                                      | TGRA            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 880Ah | MTU2          | Timer general register B                                      | TGRB            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8880h | MTU5          | Timer counter U                                               | TCNTU           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8882h | MTU5          | Timer general register U                                      | TGRU            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8884h | MTU5          | Timer control register U                                      | TCRU            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8886h | MTU5          | Timer I/O control register U                                  | TIORU           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8890h | MTU5          | Timer counter V                                               | TCNTV           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8892h | MTU5          | Timer general register V                                      | TGRV            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK        |
| 0008 8894h | MTU5          | Timer control register V                                      | TCRV            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK        |

**Table 4.1 List of I/O Registers (Address Order) (16 / 29)**

| Address    | Module Symbol | Register Name                                      | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|----------------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                                    |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 8896h | MTU5          | Timer I/O control register V                       | TIORV           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 88A0h | MTU5          | Timer counter W                                    | TCNTW           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 88A2h | MTU5          | Timer general register W                           | TGRW            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 88A4h | MTU5          | Timer control register W                           | TCRW            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 88A6h | MTU5          | Timer I/O control register W                       | TIORW           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 88B2h | MTU5          | Timer interrupt enable register                    | TIER            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 88B4h | MTU5          | Timer start register                               | TSTR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 88B6h | MTU5          | Timer compare match clear register                 | TCNTCMPCLR      | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8900h | POE           | Input level control/status register 1              | ICSR1           | 16             | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8902h | POE           | Output level control/status register 1             | OCSR1           | 16             | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 8908h | POE           | Input level control/status register 2              | ICSR2           | 16             | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 890Ah | POE           | Software port output enable register               | SPOER           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 890Bh | POE           | Port output enable control register 1              | POECR1          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 890Ch | POE           | Port output enable control register 2              | POECR2          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 890Eh | POE           | Input level control/status register 3              | ICSR3           | 16             | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9000h | S12AD         | A/D control register                               | ADCSR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9004h | S12AD         | A/D channel select register A                      | ADANSA          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9008h | S12AD         | A/D-converted value addition mode select register  | ADADS           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 900Ch | S12AD         | A/D-converted value addition count select register | ADADC           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 900Eh | S12AD         | A/D control extended register                      | ADCER           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9010h | S12AD         | A/D start trigger select register                  | ADSTRGR         | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9012h | S12AD         | A/D converted extended input control register      | ADEXICR         | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9014h | S12AD         | A/D channel select register B                      | ADANSB          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9018h | S12AD         | A/D double register                                | ADDBLDR         | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 901Ah | S12AD         | A/D temperature sensor data register               | ADTSR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 901Ch | S12AD         | A/D internal reference voltage data register       | ADOCDR          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 901Eh | S12AD         | A/D self-diagnosis data register                   | ADRD            | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9020h | S12AD         | A/D data register 0                                | ADDR0           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9022h | S12AD         | A/D data register 1                                | ADDR1           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9024h | S12AD         | A/D data register 2                                | ADDR2           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9026h | S12AD         | A/D data register 3                                | ADDR3           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9028h | S12AD         | A/D data register 4                                | ADDR4           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 902Ah | S12AD         | A/D data register 5                                | ADDR5           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 902Ch | S12AD         | A/D data register 6                                | ADDR6           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 902Eh | S12AD         | A/D data register 7                                | ADDR7           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9030h | S12AD         | A/D data register 8                                | ADDR8           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9032h | S12AD         | A/D data register 9                                | ADDR9           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9034h | S12AD         | A/D data register 10                               | ADDR10          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9036h | S12AD         | A/D data register 11                               | ADDR11          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9038h | S12AD         | A/D data register 12                               | ADDR12          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 903Ah | S12AD         | A/D data register 13                               | ADDR13          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 903Ch | S12AD         | A/D data register 14                               | ADDR14          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 903Eh | S12AD         | A/D data register 15                               | ADDR15          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9060h | S12AD         | A/D sampling state register 0                      | ADSSTR0         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9061h | S12AD         | A/D sampling state register L                      | ADSSTRL         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9066h | S12AD         | A/D sample and hold circuit register               | ADSHCR          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9070h | S12AD         | A/D sampling state register T                      | ADSSTRT         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9071h | S12AD         | A/D sampling state register O                      | ADSSTRO         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9073h | S12AD         | A/D sampling state register 1                      | ADSSTR1         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9074h | S12AD         | A/D sampling state register 2                      | ADSSTR2         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9075h | S12AD         | A/D sampling state register 3                      | ADSSTR3         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (17 / 29)**

| Address    | Module Symbol | Register Name                                | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|----------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                              |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 9076h | S12AD         | A/D sampling state register 4                | ADSSTR4         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9077h | S12AD         | A/D sampling state register 5                | ADSSTR5         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9078h | S12AD         | A/D sampling state register 6                | ADSSTR6         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 9079h | S12AD         | A/D sampling state register 7                | ADSSTR7         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 907Ah | S12AD         | A/D disconnecting detection control register | ADDISCR         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A000h | SCI0          | Serial mode register                         | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A001h | SCI0          | Bit rate register                            | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A002h | SCI0          | Serial control register                      | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A003h | SCI0          | Transmit data register                       | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A004h | SCI0          | Serial status register                       | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A005h | SCI0          | Receive data register                        | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A006h | SCI0          | Smart card mode register                     | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A007h | SCI0          | Serial extended mode register                | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A008h | SCI0          | Noise filter setting register                | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A009h | SCI0          | I <sup>2</sup> C mode register 1             | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A00Ah | SCI0          | I <sup>2</sup> C mode register 2             | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A00Bh | SCI0          | I <sup>2</sup> C mode register 3             | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A00Ch | SCI0          | I <sup>2</sup> C status register             | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A00Dh | SCI0          | SPI mode register                            | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A020h | SCI1          | Serial mode register                         | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A021h | SCI1          | Bit rate register                            | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A022h | SCI1          | Serial control register                      | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A023h | SCI1          | Transmit data register                       | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A024h | SCI1          | Serial status register                       | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A025h | SCI1          | Receive data register                        | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A026h | SCI1          | Smart card mode register                     | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A027h | SCI1          | Serial extended mode register                | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A028h | SCI1          | Noise filter setting register                | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A029h | SCI1          | I <sup>2</sup> C mode register 1             | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A02Ah | SCI1          | I <sup>2</sup> C mode register 2             | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A02Bh | SCI1          | I <sup>2</sup> C mode register 3             | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A02Ch | SCI1          | I <sup>2</sup> C status register             | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A02Dh | SCI1          | SPI mode register                            | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A040h | SCI2          | Serial mode register                         | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A041h | SCI2          | Bit rate register                            | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A042h | SCI2          | Serial control register                      | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A043h | SCI2          | Transmit data register                       | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A044h | SCI2          | Serial status register                       | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A045h | SCI2          | Receive data register                        | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A046h | SCI2          | Smart card mode register                     | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A047h | SCI2          | Serial extended mode register                | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A048h | SCI2          | Noise filter setting register                | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A049h | SCI2          | I <sup>2</sup> C mode register 1             | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A04Ah | SCI2          | I <sup>2</sup> C mode register 2             | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A04Bh | SCI2          | I <sup>2</sup> C mode register 3             | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A04Ch | SCI2          | I <sup>2</sup> C status register             | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A04Dh | SCI2          | SPI mode register                            | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A060h | SCI3          | Serial mode register                         | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A061h | SCI3          | Bit rate register                            | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A062h | SCI3          | Serial control register                      | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A063h | SCI3          | Transmit data register                       | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (18 / 29)**

| Address    | Module Symbol | Register Name                    | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|----------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                  |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 A064h | SCI3          | Serial status register           | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A065h | SCI3          | Receive data register            | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A066h | SCI3          | Smart card mode register         | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A067h | SCI3          | Serial extended mode register    | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A068h | SCI3          | Noise filter setting register    | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A069h | SCI3          | I <sup>2</sup> C mode register 1 | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A06Ah | SCI3          | I <sup>2</sup> C mode register 2 | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A06Bh | SCI3          | I <sup>2</sup> C mode register 3 | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A06Ch | SCI3          | I <sup>2</sup> C status register | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A06Dh | SCI3          | SPI mode register                | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A080h | SCI4          | Serial mode register             | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A081h | SCI4          | Bit rate register                | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A082h | SCI4          | Serial control register          | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A083h | SCI4          | Transmit data register           | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A084h | SCI4          | Serial status register           | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A085h | SCI4          | Receive data register            | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A086h | SCI4          | Smart card mode register         | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A087h | SCI4          | Serial extended mode register    | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A088h | SCI4          | Noise filter setting register    | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A089h | SCI4          | I <sup>2</sup> C mode register 1 | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A08Ah | SCI4          | I <sup>2</sup> C mode register 2 | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A08Bh | SCI4          | I <sup>2</sup> C mode register 3 | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A08Ch | SCI4          | I <sup>2</sup> C status register | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A08Dh | SCI4          | SPI mode register                | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A0h | SCI5          | Serial mode register             | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A1h | SCI5          | Bit rate register                | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A2h | SCI5          | Serial control register          | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A3h | SCI5          | Transmit data register           | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A4h | SCI5          | Serial status register           | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A5h | SCI5          | Receive data register            | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A6h | SCI5          | Smart card mode register         | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A7h | SCI5          | Serial extended mode register    | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A8h | SCI5          | Noise filter setting register    | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0A9h | SCI5          | I <sup>2</sup> C mode register 1 | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0AAh | SCI5          | I <sup>2</sup> C mode register 2 | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0ABh | SCI5          | I <sup>2</sup> C mode register 3 | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0ACh | SCI5          | I <sup>2</sup> C status register | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0ADh | SCI5          | SPI mode register                | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C0h | SCI6          | Serial mode register             | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C1h | SCI6          | Bit rate register                | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C2h | SCI6          | Serial control register          | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C3h | SCI6          | Transmit data register           | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C4h | SCI6          | Serial status register           | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C5h | SCI6          | Receive data register            | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C6h | SCI6          | Smart card mode register         | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C7h | SCI6          | Serial extended mode register    | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C8h | SCI6          | Noise filter setting register    | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0C9h | SCI6          | I <sup>2</sup> C mode register 1 | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0CAh | SCI6          | I <sup>2</sup> C mode register 2 | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0CBh | SCI6          | I <sup>2</sup> C mode register 3 | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0CCh | SCI6          | I <sup>2</sup> C status register | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (19 / 29)**

| Address    | Module Symbol | Register Name                    | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|----------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                  |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 A0CDh | SCI6          | SPI mode register                | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E0h | SCI7          | Serial mode register             | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E1h | SCI7          | Bit rate register                | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E2h | SCI7          | Serial control register          | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E3h | SCI7          | Transmit data register           | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E4h | SCI7          | Serial status register           | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E5h | SCI7          | Receive data register            | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E6h | SCI7          | Smart card mode register         | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E7h | SCI7          | Serial extended mode register    | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E8h | SCI7          | Noise filter setting register    | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0E9h | SCI7          | I <sup>2</sup> C mode register 1 | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0EAh | SCI7          | I <sup>2</sup> C mode register 2 | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0EBh | SCI7          | I <sup>2</sup> C mode register 3 | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0ECh | SCI7          | I <sup>2</sup> C status register | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A0EDh | SCI7          | SPI mode register                | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A100h | SCI8          | Serial mode register             | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A101h | SCI8          | Bit rate register                | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A102h | SCI8          | Serial control register          | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A103h | SCI8          | Transmit data register           | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A104h | SCI8          | Serial status register           | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A105h | SCI8          | Receive data register            | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A106h | SCI8          | Smart card mode register         | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A107h | SCI8          | Serial extended mode register    | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A108h | SCI8          | Noise filter setting register    | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A109h | SCI8          | I <sup>2</sup> C mode register 1 | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A10Ah | SCI8          | I <sup>2</sup> C mode register 2 | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A10Bh | SCI8          | I <sup>2</sup> C mode register 3 | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A10Ch | SCI8          | I <sup>2</sup> C status register | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A10Dh | SCI8          | SPI mode register                | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A120h | SCI9          | Serial mode register             | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A121h | SCI9          | Bit rate register                | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A122h | SCI9          | Serial control register          | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A123h | SCI9          | Transmit data register           | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A124h | SCI9          | Serial status register           | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A125h | SCI9          | Receive data register            | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A126h | SCI9          | Smart card mode register         | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A127h | SCI9          | Serial extended mode register    | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A128h | SCI9          | Noise filter setting register    | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A129h | SCI9          | I <sup>2</sup> C mode register 1 | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A12Ah | SCI9          | I <sup>2</sup> C mode register 2 | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A12Bh | SCI9          | I <sup>2</sup> C mode register 3 | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A12Ch | SCI9          | I <sup>2</sup> C status register | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A12Dh | SCI9          | SPI mode register                | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A140h | SCI10         | Serial mode register             | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A141h | SCI10         | Bit rate register                | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A142h | SCI10         | Serial control register          | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A143h | SCI10         | Transmit data register           | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A144h | SCI10         | Serial status register           | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A145h | SCI10         | Receive data register            | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A146h | SCI10         | Smart card mode register         | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A147h | SCI10         | Serial extended mode register    | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (20 / 29)**

| Address    | Module Symbol | Register Name                          | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|----------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                        |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 A148h | SCI10         | Noise filter setting register          | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A149h | SCI10         | I <sup>2</sup> C mode register 1       | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A14Ah | SCI10         | I <sup>2</sup> C mode register 2       | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A14Bh | SCI10         | I <sup>2</sup> C mode register 3       | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A14Ch | SCI10         | I <sup>2</sup> C status register       | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A14Dh | SCI10         | SPI mode register                      | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A160h | SCI11         | Serial mode register                   | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A161h | SCI11         | Bit rate register                      | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A162h | SCI11         | Serial control register                | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A163h | SCI11         | Transmit data register                 | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A164h | SCI11         | Serial status register                 | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A165h | SCI11         | Receive data register                  | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A166h | SCI11         | Smart card mode register               | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A167h | SCI11         | Serial extended mode register          | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A168h | SCI11         | Noise filter setting register          | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A169h | SCI11         | I <sup>2</sup> C mode register 1       | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A16Ah | SCI11         | I <sup>2</sup> C mode register 2       | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A16Bh | SCI11         | I <sup>2</sup> C mode register 3       | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A16Ch | SCI11         | I <sup>2</sup> C status register       | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 A16Dh | SCI11         | SPI mode register                      | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B000h | CAC           | CAC control register 0                 | CACR0           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B001h | CAC           | CAC control register 1                 | CACR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B002h | CAC           | CAC control register 2                 | CACR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B003h | CAC           | CAC interrupt control register         | CAICR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B004h | CAC           | CAC status register                    | CASTR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B006h | CAC           | CAC upper-limit value setting register | CAULVR          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B008h | CAC           | CAC lower-limit value setting register | CALLVR          | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B00Ah | CAC           | CAC counter buffer register            | CACNTBR         | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B080h | DOC           | DOC control register                   | DOCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B082h | DOC           | DOC data input register                | DODIR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B084h | DOC           | DOC data setting register              | DODSR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B100h | ELC           | Event link control register            | ELCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B102h | ELC           | Event link setting register 1          | ELSR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B103h | ELC           | Event link setting register 2          | ELSR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B104h | ELC           | Event link setting register 3          | ELSR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B105h | ELC           | Event link setting register 4          | ELSR4           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B108h | ELC           | Event link setting register 7          | ELSR7           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B10Bh | ELC           | Event link setting register 10         | ELSR10          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B10Dh | ELC           | Event link setting register 12         | ELSR12          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B110h | ELC           | Event link setting register 15         | ELSR15          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B111h | ELC           | Event link setting register 16         | ELSR16          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B113h | ELC           | Event link setting register 18         | ELSR18          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B114h | ELC           | Event link setting register 19         | ELSR19          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B115h | ELC           | Event link setting register 20         | ELSR20          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B116h | ELC           | Event link setting register 21         | ELSR21          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B117h | ELC           | Event link setting register 22         | ELSR22          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B118h | ELC           | Event link setting register 23         | ELSR23          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B119h | ELC           | Event link setting register 24         | ELSR24          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B11Ah | ELC           | Event link setting register 25         | ELSR25          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B11Bh | ELC           | Event link setting register 26         | ELSR26          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B11Ch | ELC           | Event link setting register 27         | ELSR27          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (21 / 29)**

| Address    | Module Symbol | Register Name                                 | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|-----------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                               |                 |                |             | ICLK ≥ PCLK             | ICLK < PCLK |
| 0008 B11Dh | ELC           | Event link setting register 28                | ELSR28          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B11Eh | ELC           | Event link setting register 29                | ELSR29          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B11Fh | ELC           | Event link option setting register A          | ELOPA           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B120h | ELC           | Event link option setting register B          | ELOPB           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B121h | ELC           | Event link option setting register C          | ELOPC           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B122h | ELC           | Event link option setting register D          | ELOPD           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B123h | ELC           | Port group setting register 1                 | PGR1            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B124h | ELC           | Port group setting register 2                 | PGR2            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B125h | ELC           | Port group control register 1                 | PGC1            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B126h | ELC           | Port group control register 2                 | PGC2            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B127h | ELC           | Port buffer register 1                        | PDBF1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B128h | ELC           | Port buffer register 2                        | PDBF2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B129h | ELC           | Event link port setting register 0            | PEL0            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B12Ah | ELC           | Event link port setting register 1            | PEL1            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B12Bh | ELC           | Event link port setting register 2            | PEL2            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B12Ch | ELC           | Event link port setting register 3            | PEL3            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B12Dh | ELC           | Event link software event generation register | ELSEGR          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B300h | SCI12         | Serial mode register                          | SMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B301h | SCI12         | Bit rate register                             | BRR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B302h | SCI12         | Serial control register                       | SCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B303h | SCI12         | Transmit data register                        | TDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B304h | SCI12         | Serial status register                        | SSR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B305h | SCI12         | Receive data register                         | RDR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B306h | SCI12         | Smart card mode register                      | SCMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B307h | SCI12         | Serial extended mode register                 | SEMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B308h | SCI12         | Noise filter setting register                 | SNFR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B309h | SCI12         | I <sup>2</sup> C mode register 1              | SIMR1           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B30Ah | SCI12         | I <sup>2</sup> C mode register 2              | SIMR2           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B30Bh | SCI12         | I <sup>2</sup> C mode register 3              | SIMR3           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B30Ch | SCI12         | I <sup>2</sup> C status register              | SISR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B30Dh | SCI12         | SPI mode register                             | SPMR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B320h | SCI12         | Extended serial mode enable register          | ESMER           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B321h | SCI12         | Control register 0                            | CR0             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B322h | SCI12         | Control register 1                            | CR1             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B323h | SCI12         | Control register 2                            | CR2             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B324h | SCI12         | Control register 3                            | CR3             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B325h | SCI12         | Port control register                         | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B326h | SCI12         | Interrupt control register                    | ICR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B327h | SCI12         | Status register                               | STR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B328h | SCI12         | Status clear register                         | STCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B329h | SCI12         | Control Field 0 data register                 | CF0DR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B32Ah | SCI12         | Control Field 0 compare enable register       | CF0CR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B32Bh | SCI12         | Control Field 0 receive data register         | CF0RR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B32Ch | SCI12         | Primary control field 1 data register         | PCF1DR          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B32Dh | SCI12         | Secondary control field 1 data register       | SCF1DR          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B32Eh | SCI12         | Control field 1 compare enable register       | CF1CR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B32Fh | SCI12         | Control field 1 receive data register         | CF1RR           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B330h | SCI12         | Timer control register                        | TCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B331h | SCI12         | Timer mode register                           | TMR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B332h | SCI12         | Timer prescaler register                      | TPRE            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 B333h | SCI12         | Timer count register                          | TCNT            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (22 / 29)**

| Address    | Module Symbol | Register Name             | Register Symbol | Number of Bits | Access Size | Number of Access Cycles                                            |                                                        |
|------------|---------------|---------------------------|-----------------|----------------|-------------|--------------------------------------------------------------------|--------------------------------------------------------|
|            |               |                           |                 |                |             | ICLK ≥ PCLK                                                        | ICLK < PCLK                                            |
| 0008 C000h | PORT0         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C001h | PORT1         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C002h | PORT2         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C003h | PORT3         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C004h | PORT4         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C005h | PORT5         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C006h | PORT6         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C007h | PORT7         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C008h | PORT8         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C009h | PORT9         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C00Ah | PORTA         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C00Bh | PORTB         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C00Ch | PORTC         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C00Dh | PORTD         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C00Eh | PORTE         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C00Fh | PORTF         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C011h | PORTH         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C012h | PORTJ         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C013h | PORTK         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C014h | PORTL         | Port direction register   | PDR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C020h | PORT0         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C021h | PORT1         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C022h | PORT2         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C023h | PORT3         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C024h | PORT4         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C025h | PORT5         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C026h | PORT6         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C027h | PORT7         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C028h | PORT8         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C029h | PORT9         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C02Ah | PORTA         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C02Bh | PORTB         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C02Ch | PORTC         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C02Eh | PORTE         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C02Fh | PORTF         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C031h | PORTH         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C032h | PORTJ         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C033h | PORTK         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C034h | PORTL         | Port output data register | PODR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C040h | PORT0         | Port input data register  | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C041h | PORT1         | Port input data register  | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |

**Table 4.1 List of I/O Registers (Address Order) (23 / 29)**

| Address    | Module Symbol | Register Name            | Register Symbol | Number of Bits | Access Size | Number of Access Cycles                                            |                                                        |
|------------|---------------|--------------------------|-----------------|----------------|-------------|--------------------------------------------------------------------|--------------------------------------------------------|
|            |               |                          |                 |                |             | ICLK $\geq$ PCLK                                                   | ICLK $<$ PCLK                                          |
| 0008 C042h | PORT2         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C043h | PORT3         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C044h | PORT4         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C045h | PORT5         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C046h | PORT6         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C047h | PORT7         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C048h | PORT8         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C049h | PORT9         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C04Ah | PORTA         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C04Bh | PORTB         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |

**Table 4.1 List of I/O Registers (Address Order) (24 / 29)**

| Address    | Module Symbol | Register Name            | Register Symbol | Number of Bits | Access Size | Number of Access Cycles                                            |                                                        |
|------------|---------------|--------------------------|-----------------|----------------|-------------|--------------------------------------------------------------------|--------------------------------------------------------|
|            |               |                          |                 |                |             | ICLK $\geq$ PCLKB                                                  | ICLK < PCLKB                                           |
| 0008 C04Ch | PORTC         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C04Dh | PORTD         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C04Eh | PORTE         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C04Fh | PORTF         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C051h | PORTH         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C052h | PORTJ         | Port input data register | PIDR            | 8              | 8           | 3 or 4 PCLKB cycles when reading, 2 or 3 PCLKB cycles when writing | 3 ICLK cycles when reading, 2 ICLK cycles when writing |
| 0008 C053h | PORTK         | Port input data register | PIDR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C054h | PORTL         | Port input data register | PIDR            | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C060h | PORT0         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C061h | PORT1         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C062h | PORT2         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C063h | PORT3         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C064h | PORT4         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C065h | PORT5         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C066h | PORT6         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C067h | PORT7         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C068h | PORT8         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C069h | PORT9         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C06Ah | PORTA         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C06Bh | PORTB         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C06Ch | PORTC         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C06Dh | PORTD         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C06Eh | PORTE         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C06Fh | PORTF         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C071h | PORTH         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C072h | PORTJ         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C073h | PORTK         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |
| 0008 C074h | PORTL         | Port mode register       | PMR             | 8              | 8           | 2, 3 PCLKB                                                         | 2 ICLK                                                 |

**Table 4.1 List of I/O Registers (Address Order) (25 / 29)**

| Address    | Module Symbol | Register Name                   | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|---------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                 |                 |                |             | ICLK $\geq$ PCLK        | ICLK < PCLK |
| 0008 C080  | PORT0         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C082h | PORT1         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C083h | PORT1         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C084h | PORT2         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C085h | PORT2         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C086h | PORT3         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C087h | PORT3         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C08Ch | PORT6         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C08Eh | PORT7         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C08Fh | PORT7         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C090h | PORT8         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C092h | PORT9         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C094h | PORTA         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C095h | PORTA         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C096h | PORTB         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C097h | PORTB         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C098h | PORTC         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C099h | PORTC         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C09Ch | PORTE         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C09Dh | PORTE         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0A6h | PORTK         | Open drain control register 0   | ODR0            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0A7h | PORTK         | Open drain control register 1   | ODR1            | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C0h | PORT0         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C1h | PORT1         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C2h | PORT2         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C3h | PORT3         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C4h | PORT4         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C5h | PORT5         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C6h | PORT6         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C7h | PORT7         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C8h | PORT8         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0C9h | PORT9         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0CAh | PORTA         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0CBh | PORTB         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0CCh | PORTC         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0CDh | PORTD         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0CEh | PORTE         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0CFh | PORTF         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0D1h | PORTH         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0D2h | PORTJ         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0D3h | PORTK         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0D4h | PORTL         | Pull-up control register        | PCR             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E0h | PORT0         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E1h | PORT1         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E2h | PORT2         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E3h | PORT3         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E5h | PORT5         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E6h | PORT6         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E7h | PORT7         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E8h | PORT8         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0E9h | PORT9         | Drive capacity control register | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (26 / 29)**

| Address    | Module Symbol | Register Name                     | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|-----------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                   |                 |                |             | ICLK ≥ PCLK             | ICLK < PCLK |
| 0008 C0EAh | PORTA         | Drive capacity control register   | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0EBh | PORTB         | Drive capacity control register   | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0ECh | PORTC         | Drive capacity control register   | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0EDh | PORTD         | Drive capacity control register   | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0EEh | PORTE         | Drive capacity control register   | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0F1h | PORTH         | Drive capacity control register   | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0F2h | PORTJ         | Drive capacity control register   | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C0F3h | PORTK         | Drive capacity control register   | DSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C100h | MPC           | CS output enable register         | PFCSE           | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C104h | MPC           | Address output enable register 0  | PFAOE0          | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C105h | MPC           | Address output enable register 1  | PFAOE1          | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C106h | MPC           | External bus control register 0   | PFBCR0          | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C107h | MPC           | External bus control register 1   | PFBCR1          | 8              | 8, 16       | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C11Fh | MPC           | Write-protect register            | PWPR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C140h | MPC           | P00 pin function control register | P00PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C141h | MPC           | P01 pin function control register | P01PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C142h | MPC           | P02 pin function control register | P02PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C143h | MPC           | P03 pin function control register | P03PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C145h | MPC           | P05 pin function control register | P05PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C147h | MPC           | P07 pin function control register | P07PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C14Ah | MPC           | P12 pin function control register | P12PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C14Bh | MPC           | P13 pin function control register | P13PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C14Ch | MPC           | P14 pin function control register | P14PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C14Dh | MPC           | P15 pin function control register | P15PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C14Eh | MPC           | P16 pin function control register | P16PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C14Fh | MPC           | P17 pin function control register | P17PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C150h | MPC           | P20 pin function control register | P20PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C151h | MPC           | P21 pin function control register | P21PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C152h | MPC           | P22 pin function control register | P22PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C153h | MPC           | P23 pin function control register | P23PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C154h | MPC           | P24 pin function control register | P24PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C155h | MPC           | P25 pin function control register | P25PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C156h | MPC           | P26 pin function control register | P26PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C157h | MPC           | P27 pin function control register | P27PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C158h | MPC           | P30 pin function control register | P30PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C159h | MPC           | P31 pin function control register | P31PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C15Ah | MPC           | P32 pin function control register | P32PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C15Bh | MPC           | P33 pin function control register | P33PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C15Ch | MPC           | P34 pin function control register | P34PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C160h | MPC           | P40 pin function control register | P40PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C161h | MPC           | P41 pin function control register | P41PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C162h | MPC           | P42 pin function control register | P42PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C163h | MPC           | P43 pin function control register | P43PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C164h | MPC           | P44 pin function control register | P44PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C165h | MPC           | P45 pin function control register | P45PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C166h | MPC           | P46 pin function control register | P46PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C167h | MPC           | P47 pin function control register | P47PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C168h | MPC           | P50 pin function control register | P50PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C169h | MPC           | P51 pin function control register | P51PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C16Ah | MPC           | P52 pin function control register | P52PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C16Ch | MPC           | P54 pin function control register | P54PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (27 / 29)**

| Address    | Module Symbol | Register Name                     | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|-----------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                   |                 |                |             | ICLK ≥ PCLK             | ICLK < PCLK |
| 0008 C16Dh | MPC           | P55 pin function control register | P55PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C16Eh | MPC           | P56 pin function control register | P56PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C170h | MPC           | P60 pin function control register | P60PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C171h | MPC           | P61 pin function control register | P61PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C178h | MPC           | P70 pin function control register | P70PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C17Ch | MPC           | P74 pin function control register | P74PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C17Dh | MPC           | P75 pin function control register | P75PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C17Eh | MPC           | P76 pin function control register | P76PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C17Fh | MPC           | P77 pin function control register | P77PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C180h | MPC           | P80 pin function control register | P80PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C181h | MPC           | P81 pin function control register | P81PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C182h | MPC           | P82 pin function control register | P82PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C183h | MPC           | P83 pin function control register | P83PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C186h | MPC           | P86 pin function control register | P86PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C187h | MPC           | P87 pin function control register | P87PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C188h | MPC           | P90 pin function control register | P90PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C189h | MPC           | P91 pin function control register | P91PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C18Ah | MPC           | P92 pin function control register | P92PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C18Bh | MPC           | P93 pin function control register | P93PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C190h | MPC           | PA0 pin function control register | PA0PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C191h | MPC           | PA1 pin function control register | PA1PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C192h | MPC           | PA2 pin function control register | PA2PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C193h | MPC           | PA3 pin function control register | PA3PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C194h | MPC           | PA4 pin function control register | PA4PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C195h | MPC           | PA5 pin function control register | PA5PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C196h | MPC           | PA6 pin function control register | PA6PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C197h | MPC           | PA7 pin function control register | PA7PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C198h | MPC           | PB0 pin function control register | PB0PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C199h | MPC           | PB1 pin function control register | PB1PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C19Ah | MPC           | PB2 pin function control register | PB2PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C19Bh | MPC           | PB3 pin function control register | PB3PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C19Ch | MPC           | PB4 pin function control register | PB4PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C19Dh | MPC           | PB5 pin function control register | PB5PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C19Eh | MPC           | PB6 pin function control register | PB6PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C19Fh | MPC           | PB7 pin function control register | PB7PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A0h | MPC           | PC0 pin function control register | PC0PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A1h | MPC           | PC1 pin function control register | PC1PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A2h | MPC           | PC2 pin function control register | PC2PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A3h | MPC           | PC3 pin function control register | PC3PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A4h | MPC           | PC4 pin function control register | PC4PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A5h | MPC           | PC5 pin function control register | PC5PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A6h | MPC           | PC6 pin function control register | PC6PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A7h | MPC           | PC7 pin function control register | PC7PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A8h | MPC           | PD0 pin function control register | PD0PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1A9h | MPC           | PD1 pin function control register | PD1PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1AAh | MPC           | PD2 pin function control register | PD2PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1ABh | MPC           | PD3 pin function control register | PD3PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1ACh | MPC           | PD4 pin function control register | PD4PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1ADh | MPC           | PD5 pin function control register | PD5PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1AEh | MPC           | PD6 pin function control register | PD6PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1AFh | MPC           | PD7 pin function control register | PD7PFS          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (28 / 29)**

| Address                  | Module Symbol | Register Name                                                 | Register Symbol     | Number of Bits | Access Size | Number of Access Cycles |             |
|--------------------------|---------------|---------------------------------------------------------------|---------------------|----------------|-------------|-------------------------|-------------|
|                          |               |                                                               |                     |                |             | ICLK ≥ PCLK             | ICLK < PCLK |
| 0008 C1B0h               | MPC           | PE0 pin function control register                             | PE0PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1B1h               | MPC           | PE1 pin function control register                             | PE1PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1B2h               | MPC           | PE2 pin function control register                             | PE2PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1B3h               | MPC           | PE3 pin function control register                             | PE3PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1B4h               | MPC           | PE4 pin function control register                             | PE4PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1B5h               | MPC           | PE5 pin function control register                             | PE5PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1B6h               | MPC           | PE6 pin function control register                             | PE6PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1B7h               | MPC           | PE7 pin function control register                             | PE7PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1BDh               | MPC           | PF5 pin function control register                             | PF5PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1C8h               | MPC           | PH0 pin function control register                             | PH0PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1C9h               | MPC           | PH1 pin function control register                             | PH1PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1CAh               | MPC           | PH2 pin function control register                             | PH2PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1CBh               | MPC           | PH3 pin function control register                             | PH3PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1D1h               | MPC           | PJ1 pin function control register                             | PJ1PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1D3h               | MPC           | PJ3 pin function control register                             | PJ3PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1DAh               | MPC           | PK2 pin function control register                             | PK2PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1DBh               | MPC           | PK3 pin function control register                             | PK3PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1DCh               | MPC           | PK4 pin function control register                             | PK4PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C1DDh               | MPC           | PK5 pin function control register                             | PK5PFS              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C280h               | SYSTEM        | Deep standby control register                                 | DPSBYCR             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C282h               | SYSTEM        | Deep standby interrupt enable register 0                      | DPSIER0             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C284h               | SYSTEM        | Deep standby interrupt enable register 2                      | DPSIER2             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C286h               | SYSTEM        | Deep standby interrupt flag register 0                        | DPSIFR0             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C288h               | SYSTEM        | Deep standby interrupt flag register 2                        | DPSIFR2             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C28Ah               | SYSTEM        | Deep standby interrupt edge register 0                        | DPSIEGR0            | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C28Ch               | SYSTEM        | Deep standby interrupt edge register 2                        | DPSIEGR2            | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C28Fh               | SYSTEM        | Flash HOCO software standby control register                  | FHSSBYCR            | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C290h               | SYSTEM        | Reset status register 0                                       | RSTSR0              | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C291h               | SYSTEM        | Reset status register 1                                       | RSTSR1              | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C293h               | SYSTEM        | Main clock oscillator forced oscillation control register     | MOFCR               | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C294h               | SYSTEM        | High-speed clock oscillator power supply control register     | HOCOPCR             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C295h               | SYSTEM        | PLL power control register                                    | PLLPCR              | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C296h               | FLASH         | Flash write erase protection register                         | FWEPROR             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C297h               | SYSTEM        | Voltage monitoring circuit/comparator A control register      | LVCMPCR             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C298h               | SYSTEM        | Voltage detection level select register                       | LVDLVL              | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C29Ah               | SYSTEM        | Voltage monitoring 1 circuit/comparator A1 control register 0 | LVD1CR0             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C29Bh               | SYSTEM        | Voltage monitoring 2 circuit/comparator A2 control register 0 | LVD2CR0             | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C2A0h to 0008 C2BFh | SYSTEM        | Deep standby backup register 0 to 31                          | DPSBKR0 to DPSBKR31 | 8              | 8           | 4, 5 PCLKB              | 2, 3 ICLK   |
| 0008 C400h               | RTC           | 64-Hz counter                                                 | R64CNT              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C402h               | RTC           | Second counter                                                | RSECCNT             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C404h               | RTC           | Minute counter                                                | RMINCNT             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C406h               | RTC           | Hour counter                                                  | RHRCNT              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C408h               | RTC           | Day-of-week counter                                           | RWKCNT              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C40Ah               | RTC           | Date counter                                                  | RDAYCNT             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C40Ch               | RTC           | Month counter                                                 | RMONCNT             | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C40Eh               | RTC           | Year counter                                                  | RYRCNT              | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C410h               | RTC           | Second alarm register                                         | RSECAR              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C412h               | RTC           | Minute alarm register                                         | RMINAR              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C414h               | RTC           | Hour alarm register                                           | RHRAR               | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C416h               | RTC           | Day-of-week alarm register                                    | RWKAR               | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C418h               | RTC           | Date alarm register                                           | RDAYAR              | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |

**Table 4.1 List of I/O Registers (Address Order) (29 / 29)**

| Address    | Module Symbol | Register Name                                      | Register Symbol | Number of Bits | Access Size | Number of Access Cycles |             |
|------------|---------------|----------------------------------------------------|-----------------|----------------|-------------|-------------------------|-------------|
|            |               |                                                    |                 |                |             | ICLK ≥ PCLK             | ICLK < PCLK |
| 0008 C41Ah | RTC           | Month alarm register                               | RMONAR          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C41Ch | RTC           | Year alarm register                                | RYRAR           | 16             | 16          | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C41Eh | RTC           | Year alarm enable register                         | RYRAREN         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C422h | RTC           | RTC control register 1                             | RCR1            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C424h | RTC           | RTC control register 2                             | RCR2            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C426h | RTC           | RTC control register 3                             | RCR3            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C42Eh | RTC           | Time error adjustment register                     | RADJ            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C440h | RTC           | Time capture control register 0                    | RTCCR0          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C442h | RTC           | Time capture control register 1                    | RTCCR1          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C444h | RTC           | Time capture control register 2                    | RTCCR2          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C452h | RTC           | Second capture register 0                          | RSECCP0         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C454h | RTC           | Minute capture register 0                          | RMINCP0         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C456h | RTC           | Hour capture register 0                            | RHRCP0          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C45Ah | RTC           | Date capture register 0/                           | RDAYCP0         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C45Ch | RTC           | Month capture register 0                           | RMONCP0         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C462h | RTC           | Second capture register 1                          | RSECCP1         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C464h | RTC           | Minute capture register 1                          | RMINCP1         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C466h | RTC           | Hour capture register 1                            | RHRCP1          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C46Ah | RTC           | Date capture register 1                            | RDAYCP1         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C46Ch | RTC           | Month capture register 1                           | RMONCP1         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C472h | RTC           | Second capture register 2                          | RSECCP2         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C474h | RTC           | Minute capture register 2                          | RMINCP2         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C476h | RTC           | Hour capture register 2                            | RHRCP2          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C47Ah | RTC           | Date capture register 2                            | RDAYCP2         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C47Ch | RTC           | Month capture register 2                           | RMONCP2         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C500h | TEMPS         | Temperature sensor control register                | TSCR            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C580h | CMPB          | Comparator B control register 1                    | CPBCNT1         | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C582h | CMPB          | Comparator B flag register                         | CPBFLG          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C583h | CMPB          | Comparator B interrupt control register            | CPBINT          | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 0008 C584h | CMPB          | Comparator B filter select register                | CPBF            | 8              | 8           | 2, 3 PCLKB              | 2 ICLK      |
| 007F C402h | FLASH         | Flash mode register                                | FMODR           | 8              | 8           | 2, 3 FCLK               | 2 ICLK      |
| 007F C410h | FLASH         | Flash access status register                       | FASTAT          | 8              | 8           | 2, 3 FCLK               | 2 ICLK      |
| 007F C411h | FLASH         | Flash access error interrupt enable register       | FAEINT          | 8              | 8           | 2, 3 FCLK               | 2 ICLK      |
| 007F C412h | FLASH         | Flash ready interrupt enable register              | FRDYIE          | 8              | 8           | 2, 3 FCLK               | 2 ICLK      |
| 007F C440h | FLASH         | E2 DataFlash read enable register 0                | DFLRE0          | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F C450h | FLASH         | E2 DataFlash programming/erasure enable register 0 | DFLWE0          | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F C454h | FLASH         | FCU RAM enable register                            | FCURAME         | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFB0h | FLASH         | Flash status register 0                            | FSTATR0         | 8              | 8           | 2, 3 FCLK               | 2 ICLK      |
| 007F FFB1h | FLASH         | Flash status register 1                            | FSTATR1         | 8              | 8           | 2, 3 FCLK               | 2 ICLK      |
| 007F FFB2h | FLASH         | Flash P/E mode entry register                      | FENTRYR         | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFB4h | FLASH         | Flash protection register                          | FPROTR          | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFB6h | FLASH         | Flash reset register                               | FRESETR         | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFBAh | FLASH         | FCU command register                               | FCMDR           | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFC8h | FLASH         | FCU processing switching register                  | FCPSR           | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFCAh | FLASH         | E2 DataFlash blank check control register          | DFLBCCNT        | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFCCh | FLASH         | Flash P/E status register                          | FPESTAT         | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFCEh | FLASH         | E2 DataFlash blank check status register           | DFLBCSTAT       | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |
| 007F FFE8h | FLASH         | Peripheral clock notification register             | PCKAR           | 16             | 16          | 2, 3 FCLK               | 2 ICLK      |

Note 1. Odd addresses cannot be accessed in 16-bit units. When accessing a register in 16-bit units, access the address of the TMR0 or TMR2 register.

Note 2. Odd addresses cannot be accessed in 16-bit units. When accessing a register in 16-bit units, access the address of the TMOCNTL register.

## 5. Electrical Characteristics

### 5.1 Absolute Maximum Ratings

**Table 5.1 Absolute Maximum Ratings**

Conditions: VSS = AVSS0 = VREFL = VREFL0 = 0 V

| Item                                                | Symbol           | Value              | Unit |
|-----------------------------------------------------|------------------|--------------------|------|
| Power supply voltage                                | VCC              | −0.3 to +6.5       | V    |
| Input voltage (except for ports for 5 V tolerant*1) | V <sub>in</sub>  | −0.3 to VCC +0.3*3 | V    |
| Input voltage (ports for 5 V tolerant*1)            | V <sub>in</sub>  | −0.3 to +6.5       | V    |
| Reference power supply voltage                      | VREFH, VREFH0    | −0.3 to VCC +0.3*3 | V    |
| Analog power supply voltage                         | AVCC0*2          | −0.3 to +6.5       | V    |
| Analog input voltage                                | V <sub>AN</sub>  | −0.3 to VCC +0.3*3 | V    |
| Operating temperature                               | T <sub>opr</sub> | −40 to +105        | °C   |
| Storage temperature                                 | T <sub>stg</sub> | −55 to +125        | °C   |

Caution: Permanent damage to the LSI may result if absolute maximum ratings are exceeded.

To preclude any malfunctions due to noise interferences, insert capacitors of high frequency characteristics between the VCC and VSS pins, between the AVCC0 and AVSS0 pins, and between the VREFH0 and VREFL0 pins. Place capacitors of 0.1 μF or so as close to every power pin and use the shortest and heaviest possible traces.

Connect the VCL pin to a VSS pin via a 0.1 μF (±20% accuracy) capacitor. The capacitor must be placed as close to the pin as possible.

Note 1. Ports 12, 13, 16, and 17 are 5 V tolerant.

Note 2. Connect AVCC0 to VCC. When neither the A/D converter nor the D/A converter is in use, do not leave the AVCC0, VREFH, VREFH0, AVSS0, VREFL, and VREFL0 pins open. Connect the AVCC0, VREFH, and VREFH0 pins to VCC, and the AVSS0, VREFL, and VREFL0 pins to VSS, respectively.

Note 3. The maximum value is 6.5 V.

## 5.2 DC Characteristics

**Table 5.2 DC Characteristics (1)**Conditions:  $V_{CC} = AV_{CC0} = 2.7$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^{\circ}\text{C}$ 

| Item                                                        |                                                 | Symbol       | Min.                 | Typ. | Max.                | Unit | Test Conditions |
|-------------------------------------------------------------|-------------------------------------------------|--------------|----------------------|------|---------------------|------|-----------------|
| Schmitt trigger input voltage                               | RIIC input pin (except for SMBus, 5 V tolerant) | $V_{IH}$     | $V_{CC} \times 0.7$  | —    | 5.8                 | V    |                 |
|                                                             | Ports 12, 13, 16, and 17 (5 V tolerant)         |              | $V_{CC} \times 0.8$  | —    | 5.8                 |      |                 |
|                                                             | Ports 0, 14, 15, 2 to 9, A to L, and RES#       |              | $V_{CC} \times 0.8$  | —    | $V_{CC} + 0.3$      |      |                 |
|                                                             | RIIC input pin (except for SMBus)               | $V_{IL}$     | -0.3                 | —    | $V_{CC} \times 0.3$ |      |                 |
|                                                             | Other than RIIC input pin                       |              | -0.3                 | —    | $V_{CC} \times 0.2$ |      |                 |
|                                                             | RIIC input pin (except for SMBus)               | $\Delta V_T$ | $V_{CC} \times 0.05$ | —    | —                   |      |                 |
|                                                             | Other than RIIC input pin                       |              | $V_{CC} \times 0.1$  | —    | —                   |      |                 |
| Input level voltage (except for Schmitt trigger input pins) | MD pin                                          | $V_{IH}$     | $V_{CC} \times 0.9$  | —    | $V_{CC} + 0.3$      | V    |                 |
|                                                             | EXTAL, WAIT#                                    |              | $V_{CC} \times 0.8$  | —    | $V_{CC} + 0.3$      |      |                 |
|                                                             | D0 to D15                                       |              | $V_{CC} \times 0.7$  | —    | $V_{CC} + 0.3$      |      |                 |
|                                                             | RIIC input pin (SMBus)                          |              | 2.1                  | —    | $V_{CC} + 0.3$      |      |                 |
|                                                             | MD pin                                          | $V_{IL}$     | -0.3                 | —    | $V_{CC} \times 0.1$ |      |                 |
|                                                             | EXTAL, WAIT#                                    |              | -0.3                 | —    | $V_{CC} \times 0.2$ |      |                 |
|                                                             | D0 to D15                                       |              | -0.3                 | —    | $V_{CC} \times 0.3$ |      |                 |
|                                                             | RIIC input pin (SMBus)                          |              | -0.3                 | —    | 0.8                 |      |                 |

**Table 5.3 DC Characteristics (2)**Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $2.7$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^{\circ}\text{C}$ 

| Item                                                        |                                           |            | Symbol          | Min.       | Typ. | Max.      | Unit | Test Conditions |
|-------------------------------------------------------------|-------------------------------------------|------------|-----------------|------------|------|-----------|------|-----------------|
| Schmitt trigger input voltage                               | Ports 12, 13, 16, and 17 (5 V tolerant)   |            | V <sub>IH</sub> | VCC × 0.8  | —    | 5.8       | V    |                 |
|                                                             | Ports 0, 14, 15, 2 to 9, A to L, and RES# |            |                 | VCC × 0.8  | —    | VCC + 0.3 |      |                 |
|                                                             | All input pins                            |            | V <sub>IL</sub> | −0.3       | —    | VCC × 0.2 |      |                 |
|                                                             | Ports 0 to 9, A to L                      | VCC ≥ 2.2V | ΔV <sub>T</sub> | VCC × 0.05 | —    | —         |      |                 |
|                                                             |                                           | VCC < 2.2V |                 | VCC × 0.01 |      |           |      |                 |
|                                                             | RES#                                      |            |                 | VCC × 0.1  |      |           |      |                 |
| Input level voltage (except for Schmitt trigger input pins) | MD pin                                    |            | V <sub>IH</sub> | VCC × 0.9  | —    | VCC + 0.3 | V    |                 |
|                                                             | EXTAL, WAIT#                              |            |                 | VCC × 0.8  | —    | VCC + 0.3 |      |                 |
|                                                             | D0 to D15                                 |            |                 | VCC × 0.7  | —    | VCC + 0.3 |      |                 |
|                                                             | MD pin                                    |            | V <sub>IL</sub> | −0.3       | —    | VCC × 0.1 |      |                 |
|                                                             | EXTAL, WAIT#                              |            |                 | −0.3       | —    | VCC × 0.2 |      |                 |
|                                                             | D0 to D15                                 |            |                 | −0.3       | —    | VCC × 0.3 |      |                 |

**Table 5.4 DC Characteristics (3)**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item                                    |                                                                        | Symbol      | Min. | Typ. | Max. | Unit          | Test Conditions                                       |
|-----------------------------------------|------------------------------------------------------------------------|-------------|------|------|------|---------------|-------------------------------------------------------|
| Input leakage current                   | RES#, MD pin, P35/NMI                                                  | $ I_{in} $  | —    | —    | 1.0  | $\mu\text{A}$ | $V_{in} = 0$ V, $V_{CC}$                              |
| Three-state leakage current (off-state) | Port 4                                                                 | $ I_{TSI} $ | —    | —    | 1.0  | $\mu\text{A}$ | $V_{in} = 0$ V, $V_{CC}$                              |
|                                         | Other pins except for ports for 5 V tolerant and port 4                |             | —    | —    | 0.2  |               |                                                       |
|                                         | Ports for 5 V tolerant                                                 |             | —    | —    | 1.0  |               | $V_{in} = 0$ V, 5.8 V                                 |
| Input capacitance                       | All input pins (except for ports 12, 13, 16, 17, 4, A1, A3, A4, and E) | $C_{in}$    | —    | —    | 15   | pF            | $V_{in} = 0$ V, $f = 1$ MHz, $T_a = 25^\circ\text{C}$ |
|                                         | Ports 12, 13, 16, 17, 4, A1, A3, A4, and E                             |             | —    | —    | 30   |               |                                                       |

**Table 5.5 DC Characteristics (4)**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item                      |                                | Symbol         | VCC           |      |              |      |              |      | Unit | Test Conditions       |
|---------------------------|--------------------------------|----------------|---------------|------|--------------|------|--------------|------|------|-----------------------|
|                           |                                |                | 1.62 to 2.7 V |      | 2.7 to 4.0 V |      | 4.0 to 5.5 V |      |      |                       |
|                           |                                |                | Min.          | Max. | Min.         | Max. | Min.         | Max. |      |                       |
| Input pull-up MOS current | All ports (except for port 35) | I <sub>p</sub> | −150          | −5   | −200         | −10  | −400         | −50  | μA   | V <sub>in</sub> = 0 V |

[Chip version A]

**Table 5.6 DC Characteristics (5)**Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item             |                           |                                 |                                    |               | Symbol          | Typ. | Max. | Unit | Test Conditions |
|------------------|---------------------------|---------------------------------|------------------------------------|---------------|-----------------|------|------|------|-----------------|
| Supply current*1 | High-speed operating mode | Normal operating mode           | No peripheral operation*2          | ICLK = 50 MHz | I <sub>CC</sub> | 10   | —    | mA   |                 |
|                  |                           |                                 | All peripheral operation: Normal*3 | ICLK = 50 MHz |                 | 31.5 | —    |      |                 |
|                  |                           |                                 | All peripheral operation: Max.*3   | ICLK = 50 MHz |                 | —    | 55   |      |                 |
|                  |                           | Sleep mode                      | No peripheral operation            | ICLK = 50 MHz |                 | 7.5  | —    |      |                 |
|                  |                           |                                 | All peripheral operation: Normal   | ICLK = 50 MHz |                 | 17.5 | —    |      |                 |
|                  |                           | All-module clock stop mode      |                                    | ICLK = 50 MHz |                 | 6.7  | —    |      |                 |
|                  |                           | Increase during BGO operation*4 |                                    |               |                 | 25   | —    |      |                 |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are ICLK divided by 2.

Note 4. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.

[Chip version A]

**Table 5.7 DC Characteristics (6)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item             |                                        |                                 |                                    |                           | Symbol          | Typ.          | Max.  | Unit | Test Conditions |   |
|------------------|----------------------------------------|---------------------------------|------------------------------------|---------------------------|-----------------|---------------|-------|------|-----------------|---|
| Supply current*1 | Middle-speed operating modes 1A and 1B | Normal operating mode           | No peripheral operation            | ICLK = 32 MHz*2           | I <sub>CC</sub> | 7.0           | —     | mA   |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*3           |                 | 6.0           | —     |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz*4           |                 | 26            | —     |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*5           |                 | 18.5          | —     |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max.     | ICLK = 32 MHz*4           |                 | —             | 40    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*5           |                 | —             | 30    |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation            | ICLK = 32 MHz             |                 | 5.0           | —     |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz             |                 | 4.6           | —     |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz             |                 | 15.5          | —     |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz             |                 | 12            | —     |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                    |                           |                 | ICLK = 32 MHz | 4.5   |      |                 | — |
|                  |                                        |                                 |                                    |                           |                 | ICLK = 20 MHz | 4.3   |      |                 | — |
|                  |                                        | Increase during BGO operation*6 | Middle-speed operating mode 1A     |                           |                 | 25            | —     |      |                 |   |
|                  |                                        |                                 | Middle-speed operating mode 1B     |                           |                 | 20            | —     |      |                 |   |
|                  | Low-speed operating mode 1             | Normal operating mode           | No peripheral operation*7          | ICLK = 1 MHz              |                 | 0.68          | —     |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 1 MHz              |                 | 2.4           | —     |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal*8 | ICLK = 1 MHz              |                 | —             | 7     |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation            | ICLK = 1 MHz              |                 | 0.6           | —     |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 1 MHz              |                 | 2             | —     |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                    |                           |                 | 0.58          | —     |      |                 |   |
|                  |                                        | Low-speed operating mode 2      | Normal operating mode              | No peripheral operation*9 |                 | ICLK = 32 kHz | 0.024 |      |                 | — |
|                  | ICLK = 32 kHz                          |                                 |                                    |                           |                 | 0.05          | —     |      |                 |   |
|                  | All peripheral operation: Normal*10    |                                 |                                    | ICLK = 32 kHz             |                 | —             | 3*11  |      |                 |   |
|                  | Sleep mode                             |                                 | No peripheral operation            | ICLK = 32 kHz             |                 | 0.02          | —     |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 32 kHz             |                 | 0.04          | —     |      |                 |   |
|                  | All-module clock stop mode             |                                 |                                    | 0.018                     |                 | —             |       |      |                 |   |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 4. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 5. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 6. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.


Note 7. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 8. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 9. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are set to divided by 64.

Note 10. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 11. Value when the main clock continues oscillating at 12.5 MHz.

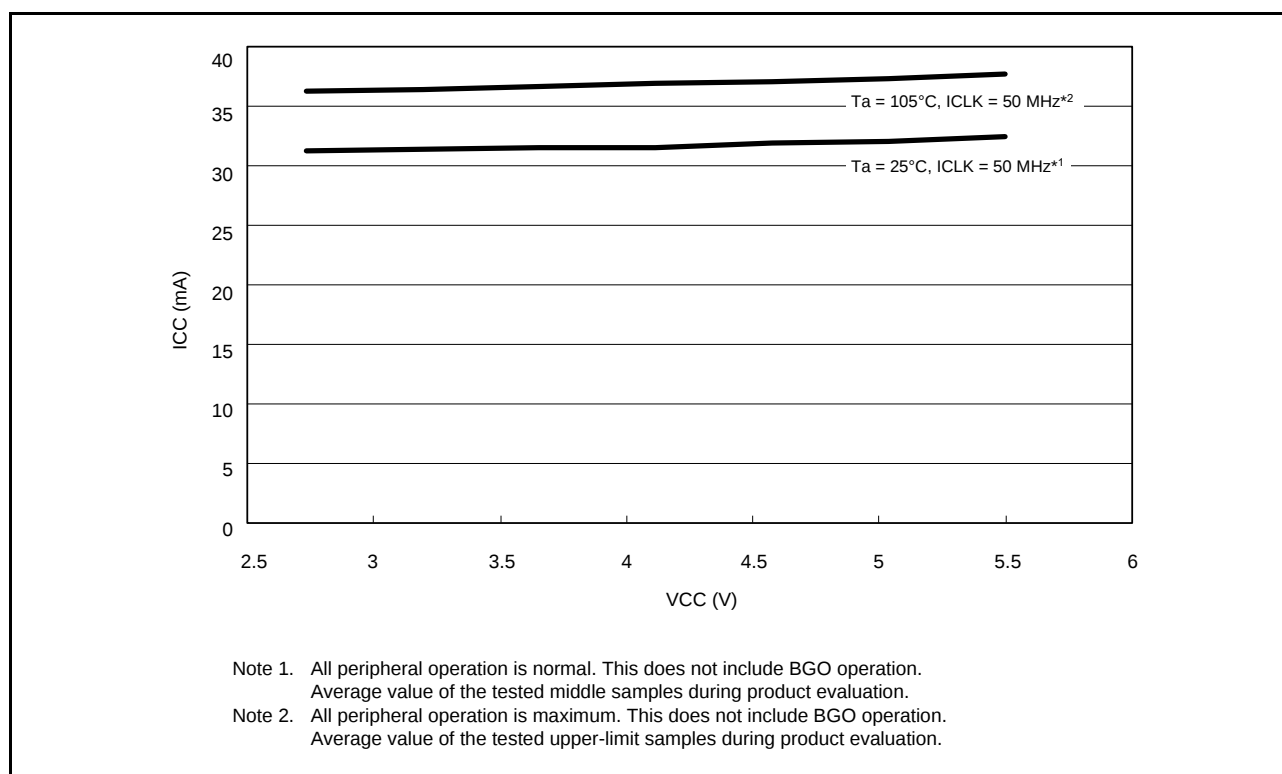


**Figure 5.1 Voltage Dependency in High-Speed Operating Mode (Reference Data) for Chip Version A**

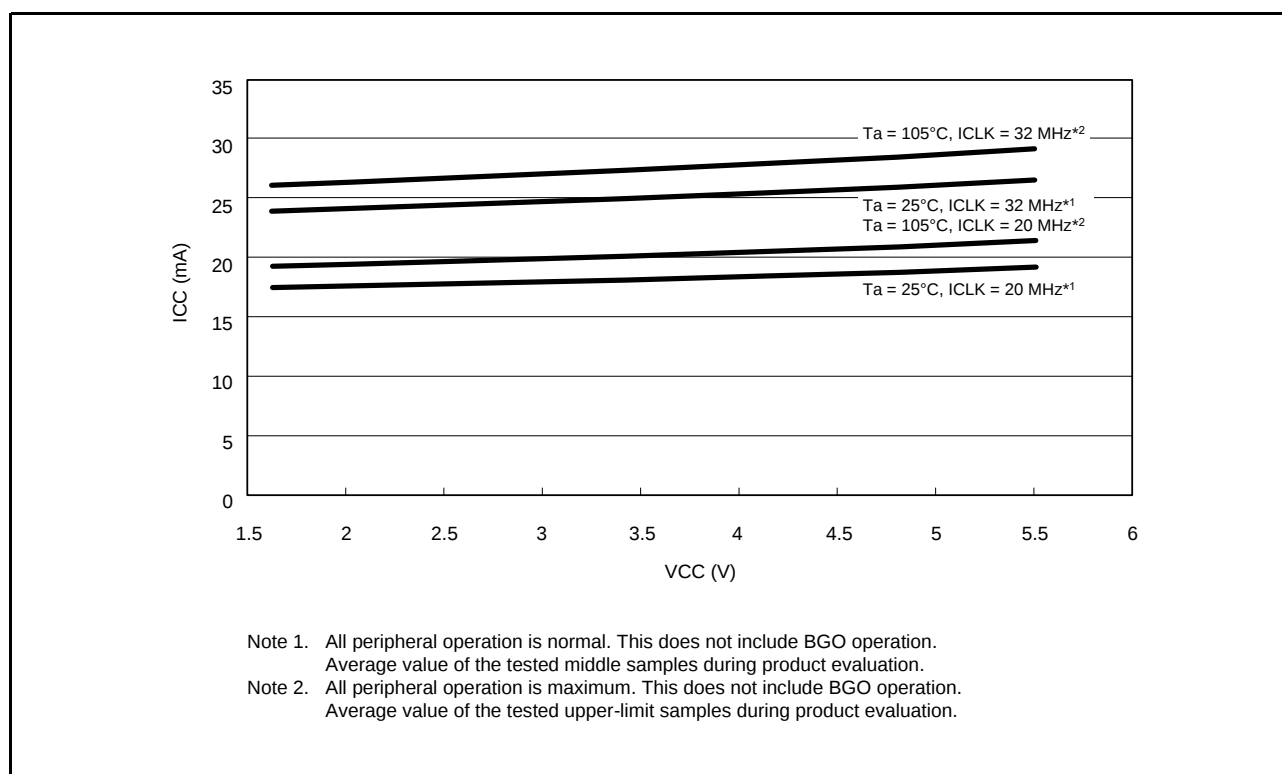

**Figure 5.2 Voltage Dependency in Middle-Speed Operating Modes 1A and 1B (Reference Data) for Chip Version A**

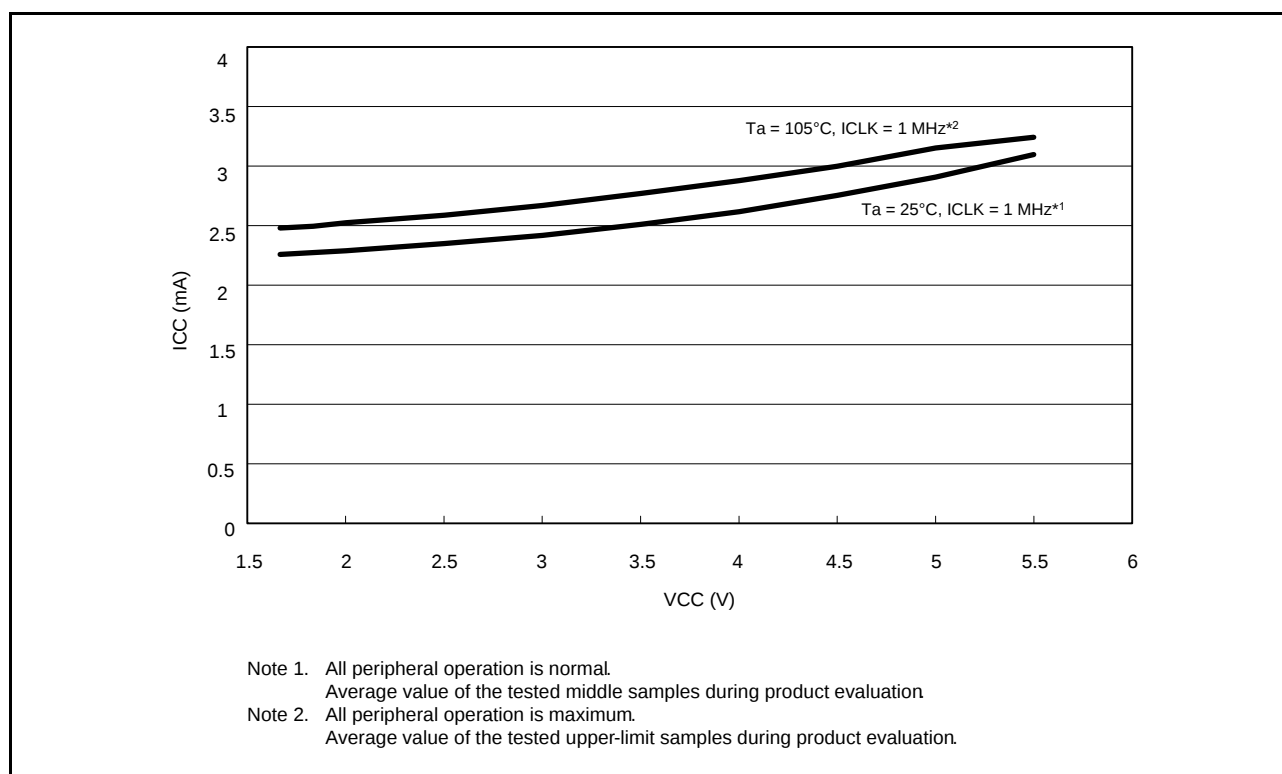

**Figure 5.3 Voltage Dependency in Low-Speed Operating Mode 1 (Reference Data) for Chip Version A**

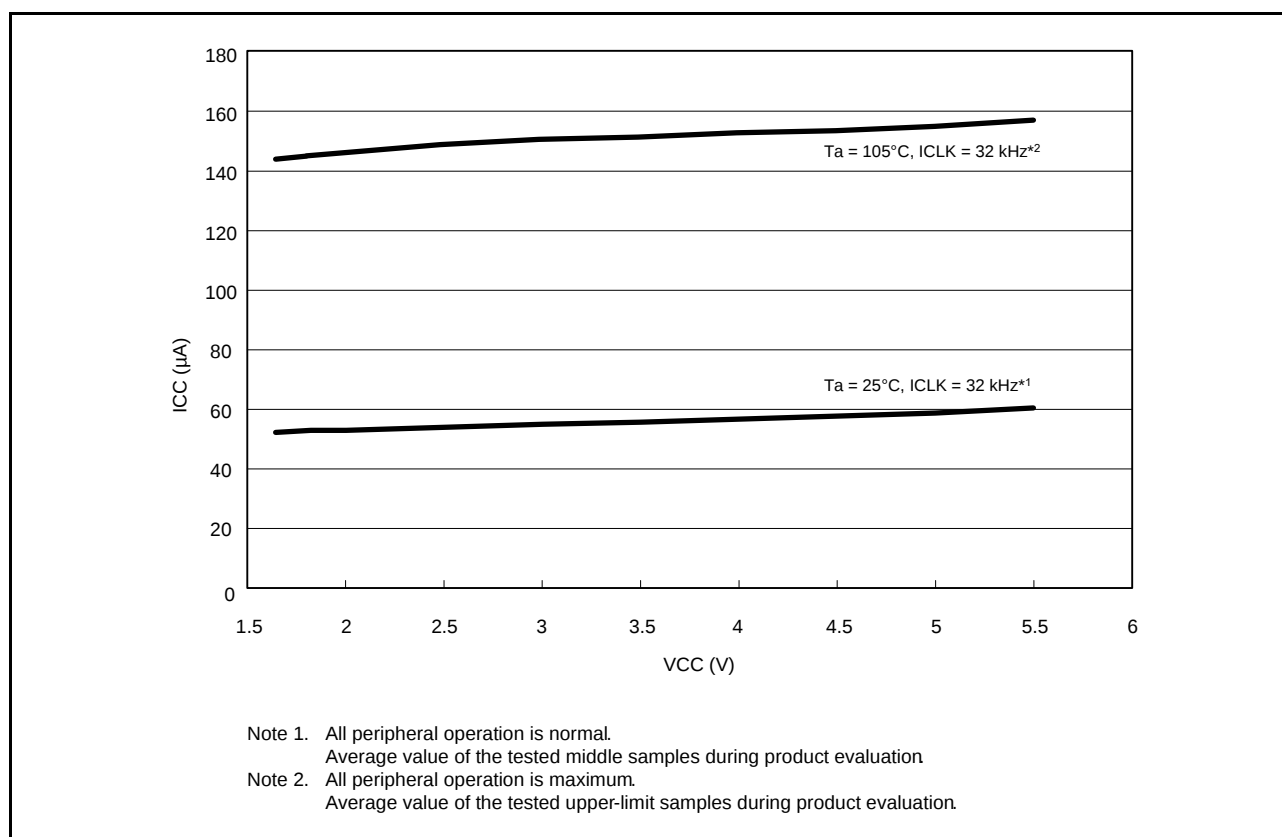

**Figure 5.4 Voltage Dependency in Low-Speed Operating Mode 2 (Reference Data) for Chip Version A**

[Chip version A]


**Table 5.8 DC Characteristics (7)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item             |                                                                                                                |                                                                                                                             |                                                                                                                                 | Symbol          | Typ.*3                | Max. | Unit | Test Conditions |     |  |
|------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------|------|------|-----------------|-----|--|
| Supply current*1 | Software standby mode*2                                                                                        | Flash memory power supplied, HOCO power supplied, POR low power consumption function disabled (SOFTCUT[2:0] bits = 000b)    | T <sub>a</sub> = 25°C                                                                                                           | I <sub>CC</sub> | 175                   | —    | μA   |                 |     |  |
|                  |                                                                                                                |                                                                                                                             | Flash memory power supplied, HOCO power not supplied, POR low power consumption function enabled (SOFTCUT[2:0] bits = 110b)     |                 | T <sub>a</sub> = 25°C | 3.0  |      |                 | —   |  |
|                  |                                                                                                                |                                                                                                                             |                                                                                                                                 |                 | T <sub>a</sub> = 85°C | —    |      |                 | 130 |  |
|                  |                                                                                                                | Flash memory power supplied, HOCO power not supplied, POR low power consumption function enabled (SOFTCUT[2:0] bits = 110b) | T <sub>a</sub> = 105°C                                                                                                          |                 | —                     | 150  |      |                 |     |  |
|                  |                                                                                                                |                                                                                                                             | Flash memory power not supplied, HOCO power not supplied, POR low power consumption function enabled (SOFTCUT[2:0] bits = 111b) |                 | T <sub>a</sub> = 25°C | 2.0  |      |                 | —   |  |
|                  |                                                                                                                | T <sub>a</sub> = 85°C                                                                                                       |                                                                                                                                 |                 | —                     | 120  |      |                 |     |  |
|                  |                                                                                                                | T <sub>a</sub> = 105°C                                                                                                      |                                                                                                                                 |                 | —                     | 140  |      |                 |     |  |
|                  | Deep software standby mode*2                                                                                   | Flash memory power not supplied, HOCO power not supplied, POR low power consumption function enabled (DEEPCUT1 bit = 1)     | T <sub>a</sub> = 25°C                                                                                                           |                 | 0.45                  |      |      |                 |     |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C                                                                                                           |                 | —                     | 20   |      |                 |     |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C                                                                                                          |                 | —                     | 25   |      |                 |     |  |
|                  | Increments produced by running voltage detection circuits and disabling the POR low power consumption function |                                                                                                                             |                                                                                                                                 |                 | 1.4                   | —    |      |                 |     |  |
|                  | Increment for RTC operation (low CL)                                                                           |                                                                                                                             |                                                                                                                                 |                 | 0.8                   | —    |      |                 |     |  |
|                  | Increment for RTC operation (standard CL)                                                                      |                                                                                                                             |                                                                                                                                 |                 | 2.0                   | —    |      |                 |     |  |


Note 1. Supply current values are with all output pins unloaded and all input pull-up MOSs in the off state.

Note 2. The IWDT and LVD are stopped.


Note 3. VCC = 3.3 V.

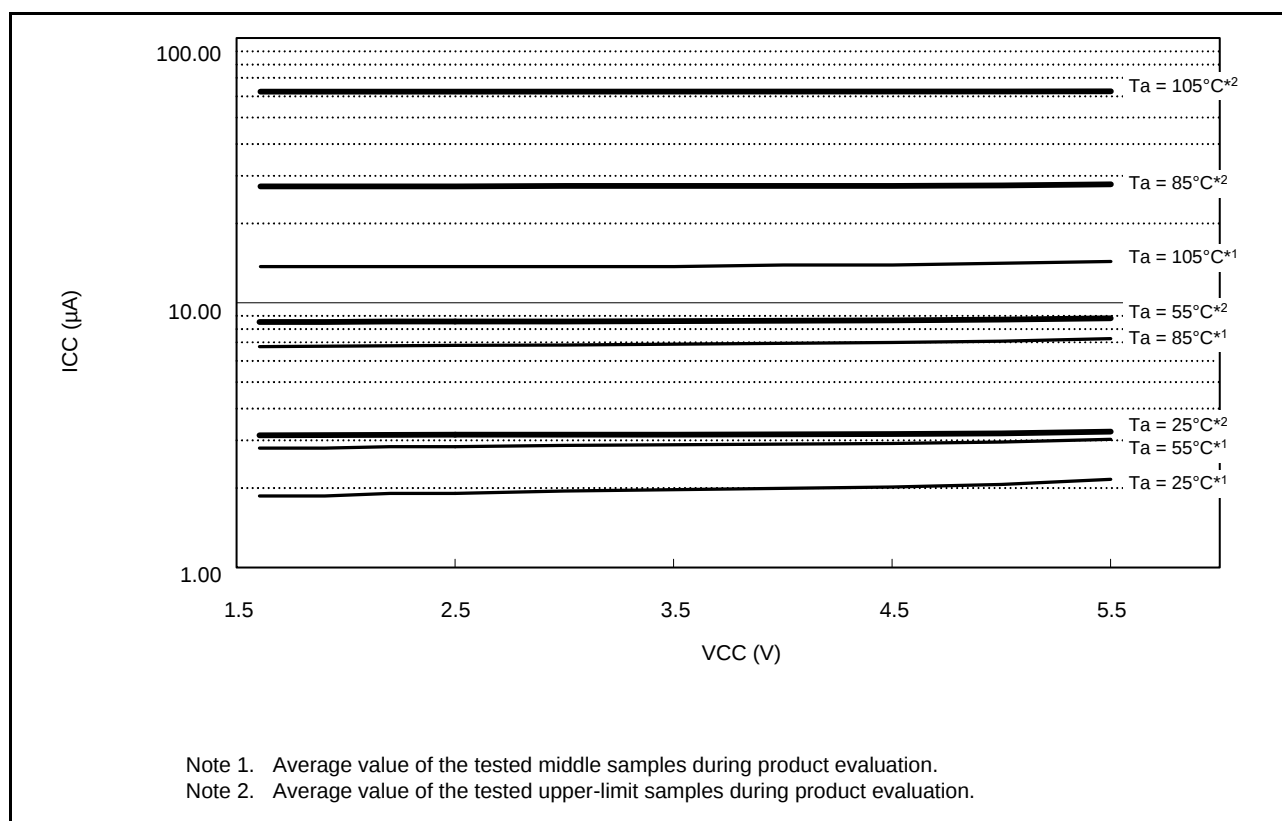


**Figure 5.5 Voltage Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 111b) (Reference Data) for Chip Version A**

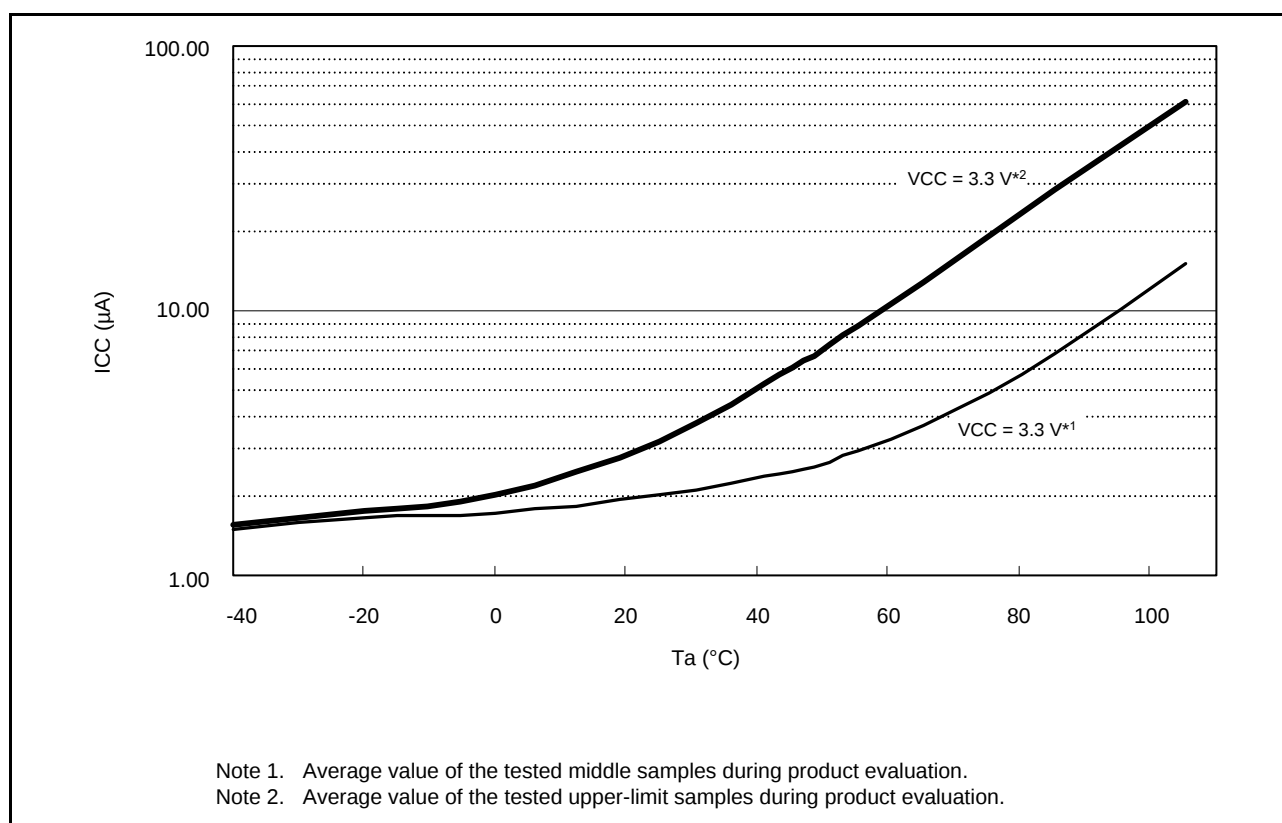

**Figure 5.6 Temperature Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 111b) (Reference Data) for Chip Version A**

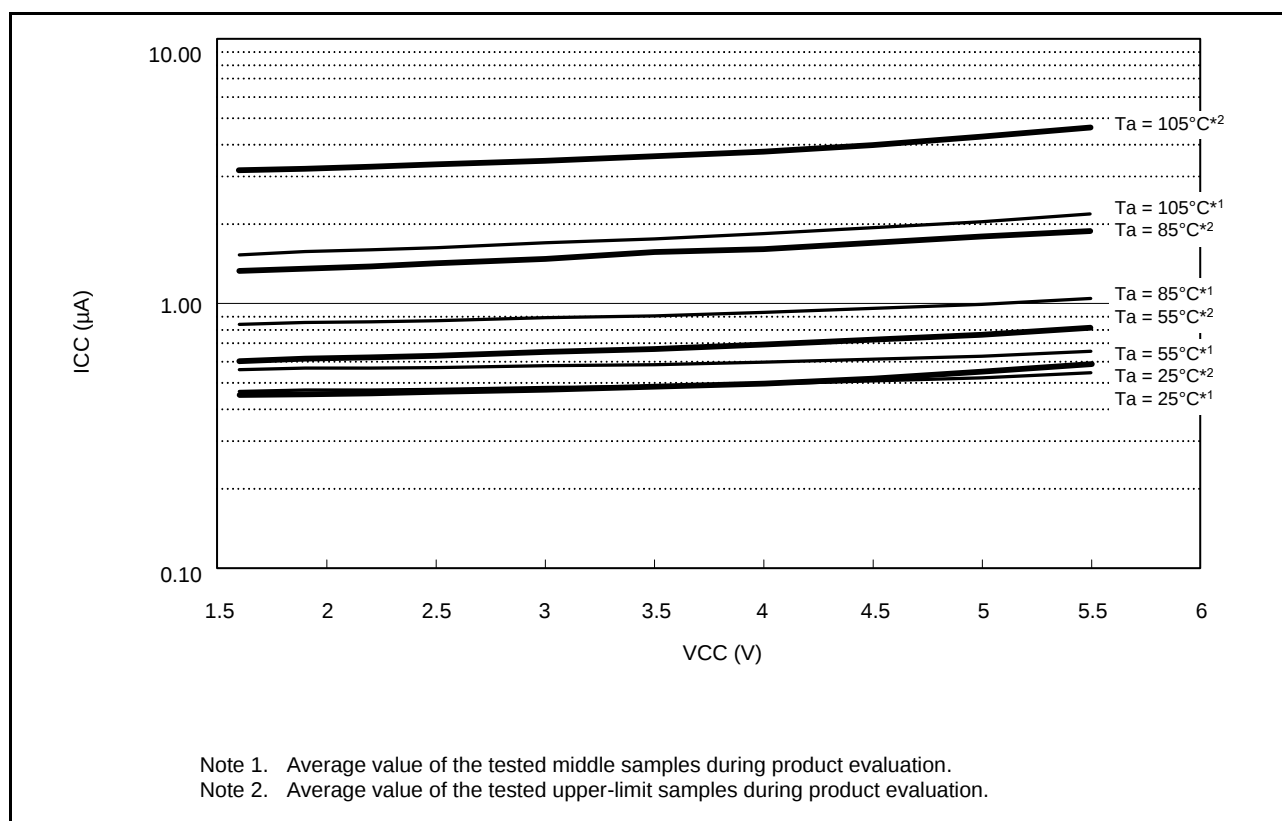

**Figure 5.7 Voltage Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version A**

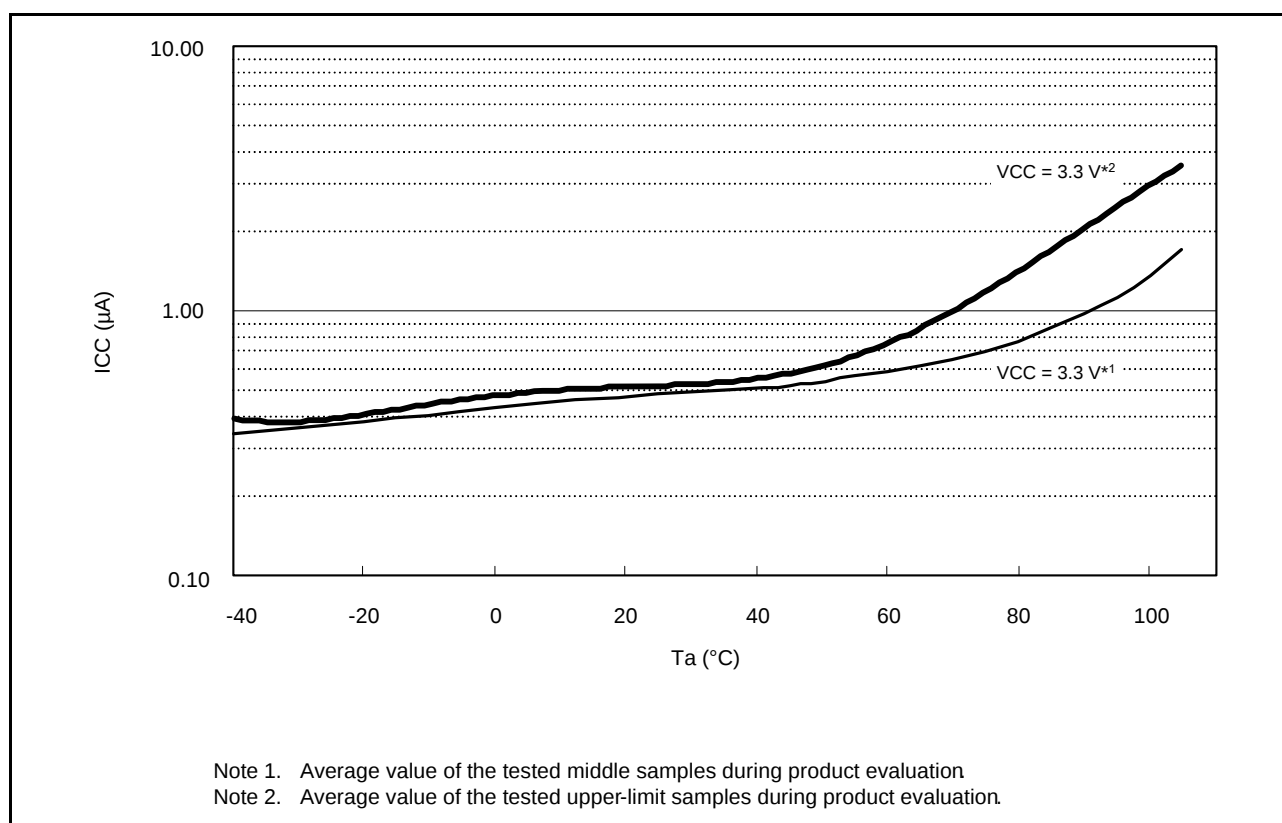

**Figure 5.8 Temperature Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version A**

[Chip version C]

**Table 5.9 DC Characteristics (8)**Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = VREFL = VREFL0 = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item             |                           |                                 |                                    |               | Symbol          | Typ. | Max. | Unit | Test Conditions |
|------------------|---------------------------|---------------------------------|------------------------------------|---------------|-----------------|------|------|------|-----------------|
| Supply current*1 | High-speed operating mode | Normal operating mode           | No peripheral operation*2          | ICLK = 50 MHz | I <sub>CC</sub> | 10   | —    | mA   |                 |
|                  |                           |                                 | All peripheral operation: Normal*3 | ICLK = 50 MHz |                 | 31.5 | —    |      |                 |
|                  |                           |                                 | All peripheral operation: Max.*3   | ICLK = 50 MHz |                 | —    | 55   |      |                 |
|                  |                           | Sleep mode                      | No peripheral operation            | ICLK = 50 MHz |                 | 7.5  | —    |      |                 |
|                  |                           |                                 | All peripheral operation: Normal   | ICLK = 50 MHz |                 | 17.5 | —    |      |                 |
|                  |                           | All-module clock stop mode      |                                    | ICLK = 50 MHz |                 | 6.7  | —    |      |                 |
|                  |                           | Increase during BGO operation*4 |                                    |               |                 | 25   | —    |      |                 |
|                  |                           |                                 |                                    |               |                 |      |      |      |                 |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are ICLK divided by 2.

Note 4. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.

[Chip version C]

**Table 5.10 DC Characteristics (9)**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item             |                                        |                                 |                                     |                 | Symbol          | Typ.          | Max. | Unit | Test Conditions |   |
|------------------|----------------------------------------|---------------------------------|-------------------------------------|-----------------|-----------------|---------------|------|------|-----------------|---|
| Supply current*1 | Middle-speed operating modes 1A and 1B | Normal operating mode           | No peripheral operation             | ICLK = 32 MHz*2 | I <sub>CC</sub> | 7.0           | —    | mA   |                 |   |
|                  |                                        |                                 |                                     | ICLK = 20 MHz*3 |                 | 6.0           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal    | ICLK = 32 MHz*4 |                 | 26            | —    |      |                 |   |
|                  |                                        |                                 |                                     | ICLK = 20 MHz*5 |                 | 18.5          | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max.      | ICLK = 32 MHz*4 |                 | —             | 40   |      |                 |   |
|                  |                                        |                                 |                                     | ICLK = 20 MHz*5 |                 | —             | 30   |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation             | ICLK = 32 MHz   |                 | 5.0           | —    |      |                 |   |
|                  |                                        |                                 |                                     | ICLK = 20 MHz   |                 | 4.6           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal    | ICLK = 32 MHz   |                 | 15.5          | —    |      |                 |   |
|                  |                                        |                                 |                                     | ICLK = 20 MHz   |                 | 12            | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                     |                 |                 | ICLK = 32 MHz | 4.5  |      |                 | — |
|                  |                                        |                                 |                                     |                 |                 | ICLK = 20 MHz | 4.5  |      |                 | — |
|                  |                                        | Increase during BGO operation*6 | Middle-speed operating mode 1A      |                 |                 | 25            | —    |      |                 |   |
|                  |                                        |                                 | Middle-speed operating mode 1B      |                 |                 | 20            | —    |      |                 |   |
|                  | Low-speed operating mode 1             | Normal operating mode           | No peripheral operation*7           | ICLK = 1 MHz    |                 | 0.68          | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal*8  | ICLK = 1 MHz    |                 | 2.4           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max. *8   | ICLK = 1 MHz    |                 | —             | 7    |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation             | ICLK = 1 MHz    |                 | 0.6           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal    | ICLK = 1 MHz    |                 | 2             | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                     |                 |                 | 0.58          | —    |      |                 |   |
|                  | Low-speed operating mode 2             | Normal operating mode           | No peripheral operation*9           | ICLK = 32 kHz   |                 | 0.024         | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal*10 | ICLK = 32 kHz   |                 | 0.05          | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max. *10  | ICLK = 32 kHz   |                 | —             | 3*11 |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation             | ICLK = 32 kHz   |                 | 0.02          | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal    | ICLK = 32 kHz   |                 | 0.04          | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                     |                 |                 | 0.018         | —    |      |                 |   |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 4. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 5. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 6. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.


Note 7. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 8. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 9. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are set to divided by 64.

Note 10. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 11. Value when the main clock continues oscillating at 12.5 MHz.

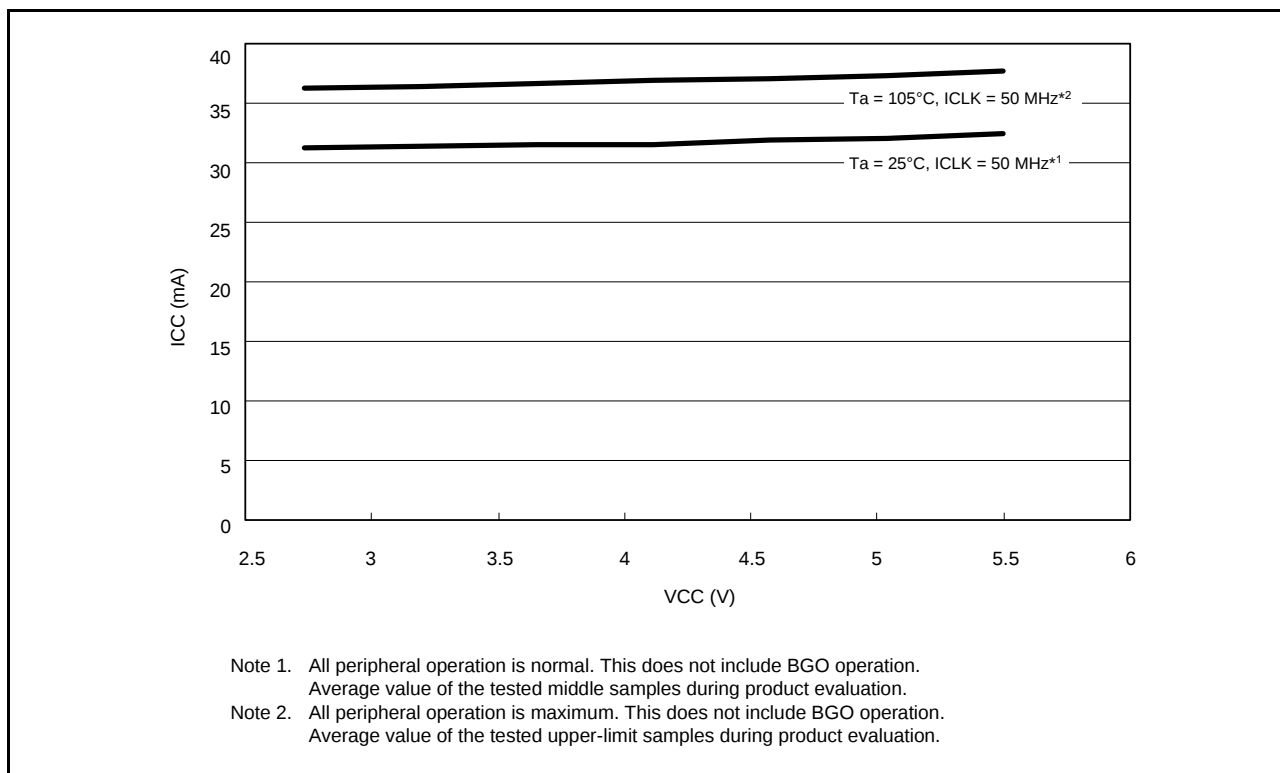


**Figure 5.9 Voltage Dependency in High-Speed Operating Mode (Reference Data) for Chip Version C**

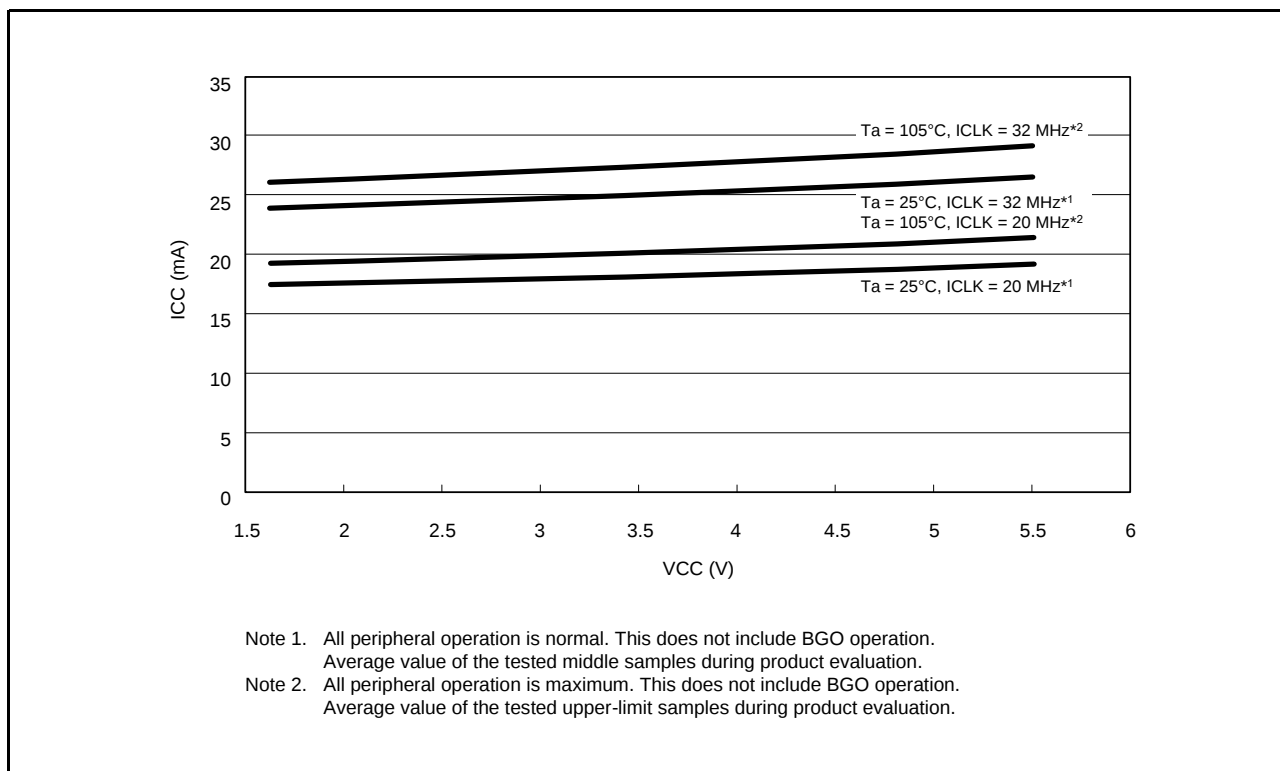

**Figure 5.10 Voltage Dependency in Middle-Speed Operating Modes 1A and 1B (Reference Data) for Chip Version C**

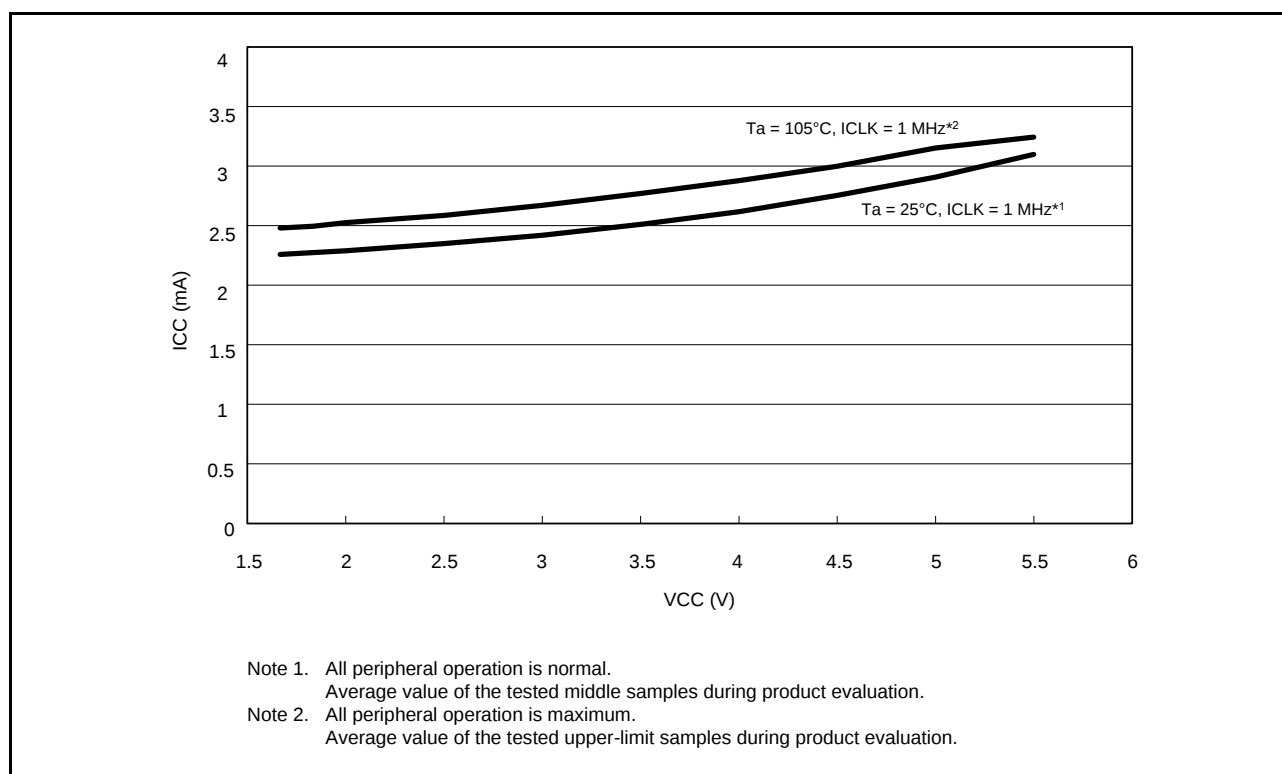

**Figure 5.11 Voltage Dependency in Low-Speed Operating Mode 1 (Reference Data) for Chip Version C**

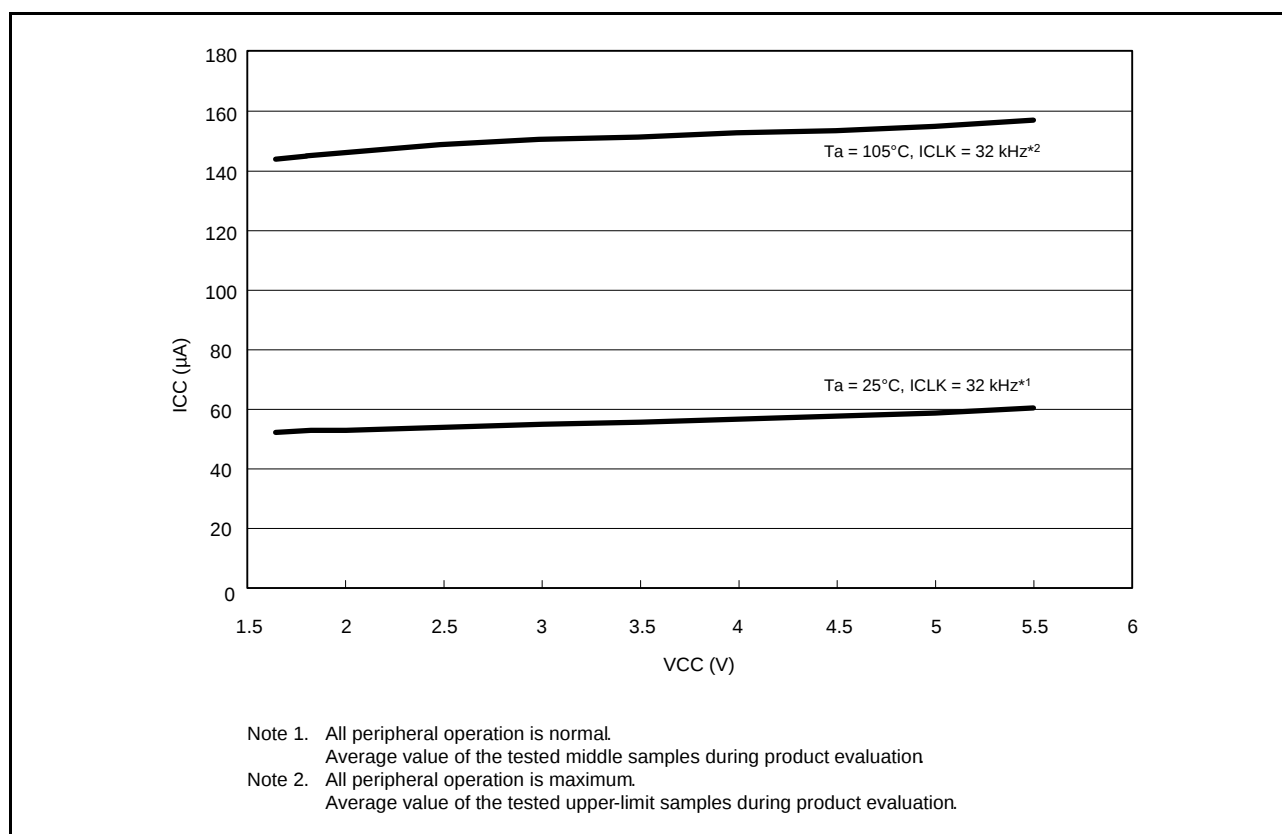

**Figure 5.12 Voltage Dependency in Low-Speed Operating Mode 2 (Reference Data) for Chip Version C**

[Chip version C]


**Table 5.11 DC Characteristics (10)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item             |                                                                                                                |                                                                                                                                 |                        | Symbol          | Typ.*3 | Max. | Unit | Test Conditions |  |  |
|------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|------------------------|-----------------|--------|------|------|-----------------|--|--|
| Supply current*1 | Software standby mode*2                                                                                        | Flash memory power supplied, HOCO power supplied, POR low power consumption function disabled (SOFTCUT[2:0] bits = 000b)        | T <sub>a</sub> = 25°C  | I <sub>CC</sub> | 160    | —    | μA   |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 55°C  |                 | 188    | —    |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 85°C  |                 | 220    | —    |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 105°C |                 | 250    | —    |      |                 |  |  |
|                  |                                                                                                                | Flash memory power supplied, HOCO power not supplied, POR low power consumption function enabled (SOFTCUT[2:0] bits = 110b)     | T <sub>a</sub> = 25°C  |                 | 2.6    | 10.5 |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 55°C  |                 | 3.8    | 22   |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 85°C  |                 | 9.0    | 80   |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 105°C |                 | 20     | 150  |      |                 |  |  |
|                  |                                                                                                                | Flash memory power not supplied, HOCO power not supplied, POR low power consumption function enabled (SOFTCUT[2:0] bits = 111b) | T <sub>a</sub> = 25°C  |                 | 2.0    | 8.2  |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 55°C  |                 | 2.9    | 17   |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 85°C  |                 | 6.8    | 53   |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 105°C |                 | 15     | 115  |      |                 |  |  |
|                  | Deep software standby mode*2                                                                                   | Flash memory power not supplied, HOCO power not supplied, POR low power consumption function enabled (DEEPCUT1 bit = 1)         | T <sub>a</sub> = 25°C  |                 | 0.5    | 0.9  |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 55°C  |                 | 0.6    | 1.2  |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 85°C  |                 | 0.9    | 20   |      |                 |  |  |
|                  |                                                                                                                |                                                                                                                                 | T <sub>a</sub> = 105°C |                 | 1.8    | 25   |      |                 |  |  |
|                  | Increments produced by running voltage detection circuits and disabling the POR low power consumption function |                                                                                                                                 |                        |                 | 1.4    | —    |      |                 |  |  |
|                  | Increment for RTC operation (low CL)                                                                           |                                                                                                                                 |                        |                 | 0.8    | —    |      |                 |  |  |
|                  | Increment for RTC operation (standard CL)                                                                      |                                                                                                                                 |                        |                 | 2.0    | —    |      |                 |  |  |


Note 1. Supply current values are with all output pins unloaded and all input pull-up MOSs in the off state.

Note 2. The IWDt and LVD are stopped.


Note 3. VCC = 3.3 V.

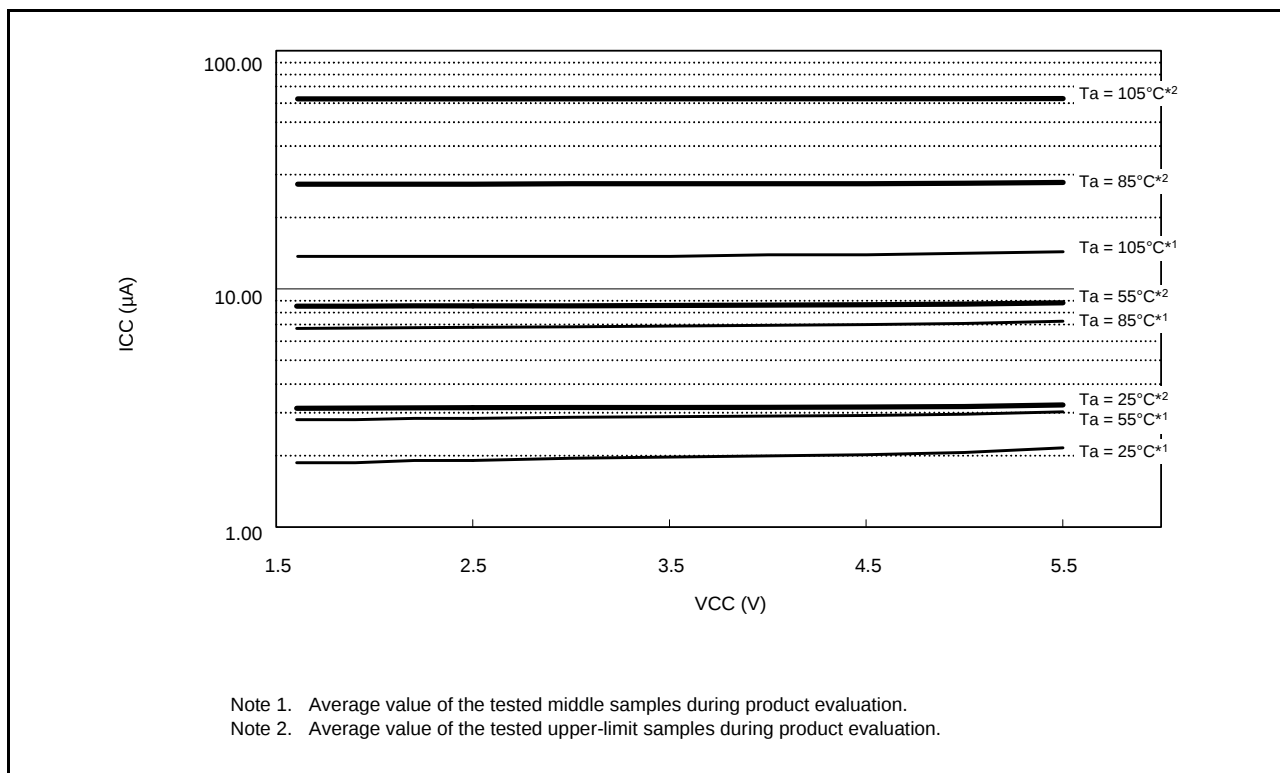


**Figure 5.13 Voltage Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 111b) (Reference Data) for Chip Version C**

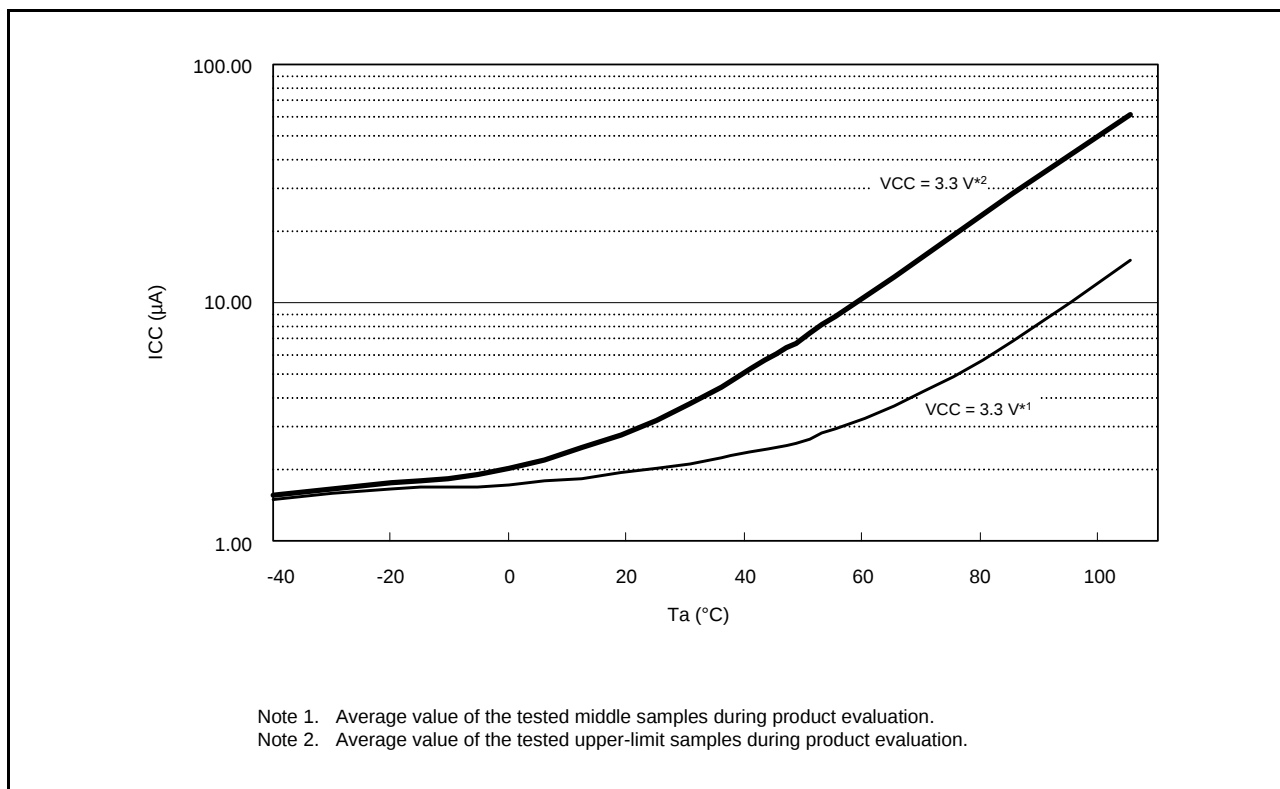

**Figure 5.14 Temperature Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 111b) (Reference Data) for Chip Version C**

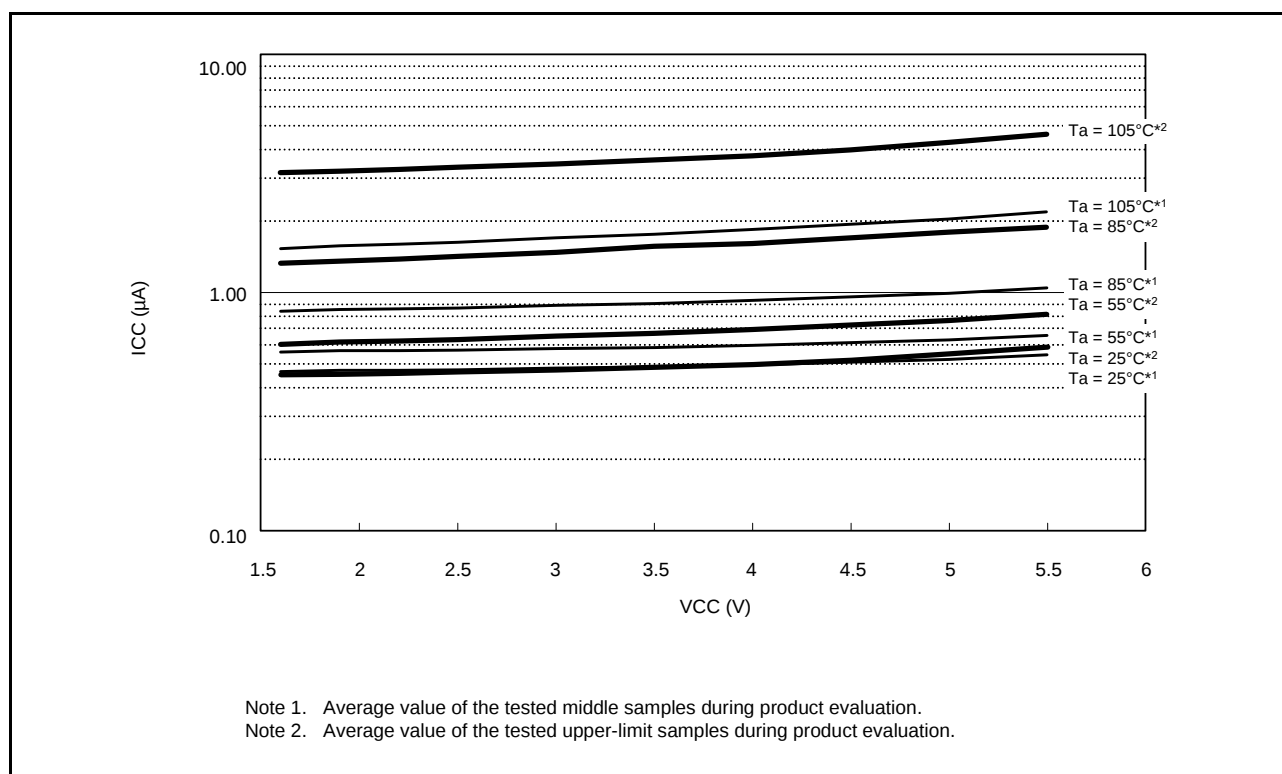

**Figure 5.15 Voltage Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version C**

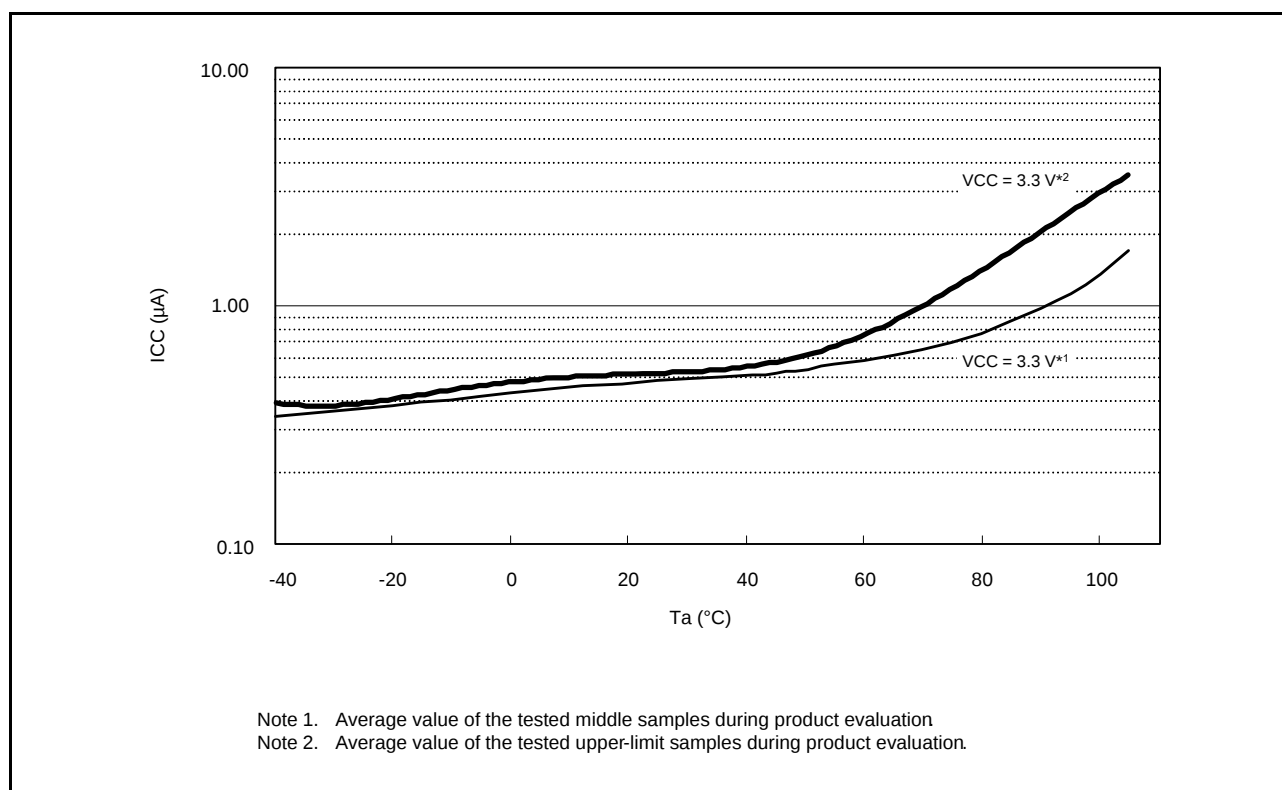

**Figure 5.16 Temperature Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version C**

[Chip version B with 256 Kbytes or less of flash memory and 48 to 100 pins]

**Table 5.12 DC Characteristics (11)**

Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = VREFL = VREFL0 = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$

| Item             |                           |                                 |                                    |               | Symbol          | Typ. | Max. | Unit | Test Conditions |
|------------------|---------------------------|---------------------------------|------------------------------------|---------------|-----------------|------|------|------|-----------------|
| Supply current*1 | High-speed operating mode | Normal operating mode           | No peripheral operation*2          | ICLK = 50 MHz | I <sub>CC</sub> | 7.2  | —    | mA   |                 |
|                  |                           |                                 | All peripheral operation: Normal*3 | ICLK = 50 MHz |                 | 23.5 | —    |      |                 |
|                  |                           |                                 | All peripheral operation: Max.*3   | ICLK = 50 MHz |                 | —    | 45   |      |                 |
|                  |                           | Sleep mode                      | No peripheral operation            | ICLK = 50 MHz |                 | 4.3  | —    |      |                 |
|                  |                           |                                 | All peripheral operation: Normal   | ICLK = 50 MHz |                 | 12   | —    |      |                 |
|                  |                           | All-module clock stop mode      |                                    | ICLK = 50 MHz |                 | 3.7  | —    |      |                 |
|                  |                           | Increase during BGO operation*4 |                                    |               |                 | 20   | —    |      |                 |
|                  |                           |                                 |                                    |               |                 |      |      |      |                 |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are ICLK divided by 2.

Note 4. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.

[Chip version B with 256 Kbytes or less of flash memory and 48 to 100 pins]

**Table 5.13 DC Characteristics (12)**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item             |                                        |                                 |                                    |                 | Symbol          | Typ.          | Max. | Unit | Test Conditions |   |
|------------------|----------------------------------------|---------------------------------|------------------------------------|-----------------|-----------------|---------------|------|------|-----------------|---|
| Supply current*1 | Middle-speed operating modes 1A and 1B | Normal operating mode           | No peripheral operation            | ICLK = 32 MHz*2 | I <sub>CC</sub> | 5.3           | —    | mA   |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*3 |                 | 4.6           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz*4 |                 | 20.1          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*5 |                 | 14.3          | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max.     | ICLK = 32 MHz*4 |                 | —             | 35   |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*5 |                 | —             | —    |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation            | ICLK = 32 MHz   |                 | 3.4           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz   |                 | 3.3           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz   |                 | 11.5          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz   |                 | 9             | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                    |                 |                 | ICLK = 32 MHz | 3    |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 20 MHz | 3    |      |                 | — |
|                  |                                        | Increase during BGO operation*6 | Middle-speed operating mode 1A     |                 |                 | 17            | —    |      |                 |   |
|                  |                                        |                                 | Middle-speed operating mode 1B     |                 |                 | 17            | —    |      |                 |   |
|                  | Middle-speed operating modes 2A and 2B | Normal operating mode           | No peripheral operation*2          | ICLK = 32 MHz   |                 | 4.7           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 3.4           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 2.7           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal*4 | ICLK = 32 MHz   |                 | 19.6          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK =16 MHz    |                 | 11.3          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 7.2           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max.*4   | ICLK = 32 MHz   |                 | —             | 34   |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | —             | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | —             | —    |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation            | ICLK = 32 MHz   |                 | 2.8           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 2.5           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 2.2           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz   |                 | 11            | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 7.2           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 5.3           | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                    |                 |                 | ICLK = 32 MHz | 2.4  |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 16 MHz | 2.2  |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 8 MHz  | 2.1  |      |                 | — |
|                  |                                        | Increase during BGO operation*6 | Middle-speed operating mode 1A     |                 |                 | 17            | —    |      |                 |   |
|                  |                                        |                                 | Middle-speed operating mode 1B     |                 |                 | 17            | —    |      |                 |   |

| Item             |                            |                            |                                     |               | Symbol          | Typ.         | Max. | Unit | Test Conditions |   |
|------------------|----------------------------|----------------------------|-------------------------------------|---------------|-----------------|--------------|------|------|-----------------|---|
| Supply current*1 | Low-speed operating mode 1 | Normal operating mode      | No peripheral operation*7           | ICLK = 8 MHz  | I <sub>CC</sub> | 2            | —    | mA   |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 1.6          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 1.5          | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal*8  | ICLK = 8 MHz  |                 | 6            | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 3.8          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 2.8          | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Max.*8    | ICLK = 8 MHz  |                 | —            | 12   |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | —            | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | —            | —    |      |                 |   |
|                  |                            | Sleep mode                 | No peripheral operation             | ICLK = 8 MHz  |                 | 1.5          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 1.4          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 1.3          | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal    | ICLK = 8 MHz  |                 | 3.6          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 2.7          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 2.2          | —    |      |                 |   |
|                  |                            | All-module clock stop mode |                                     |               |                 | ICLK = 8 MHz | 1.4  |      |                 | — |
|                  |                            |                            |                                     |               |                 | ICLK = 4 MHz | 1.3  |      |                 | — |
|                  |                            |                            |                                     |               |                 | ICLK = 2 MHz | 1.2  |      |                 | — |
|                  | Low-speed operating mode 2 | Normal operating mode      | No peripheral operation*9           | ICLK = 32 kHz |                 | 0.021        | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal*10 | ICLK = 32 kHz |                 | 0.05         | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Max.*10   | ICLK = 32 kHz |                 | —            | 3*11 |      |                 |   |
|                  |                            | Sleep mode                 | No peripheral operation             | ICLK = 32 kHz |                 | 0.017        | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal    | ICLK = 32 kHz |                 | 0.034        | —    |      |                 |   |
|                  |                            | All-module clock stop mode |                                     |               |                 | 0.016        | —    |      |                 |   |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 4. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 5. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 6. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.


Note 7. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 8. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 9. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are set to divided by 64.

Note 10. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 11. Value when the main clock continues oscillating at 12.5 MHz.

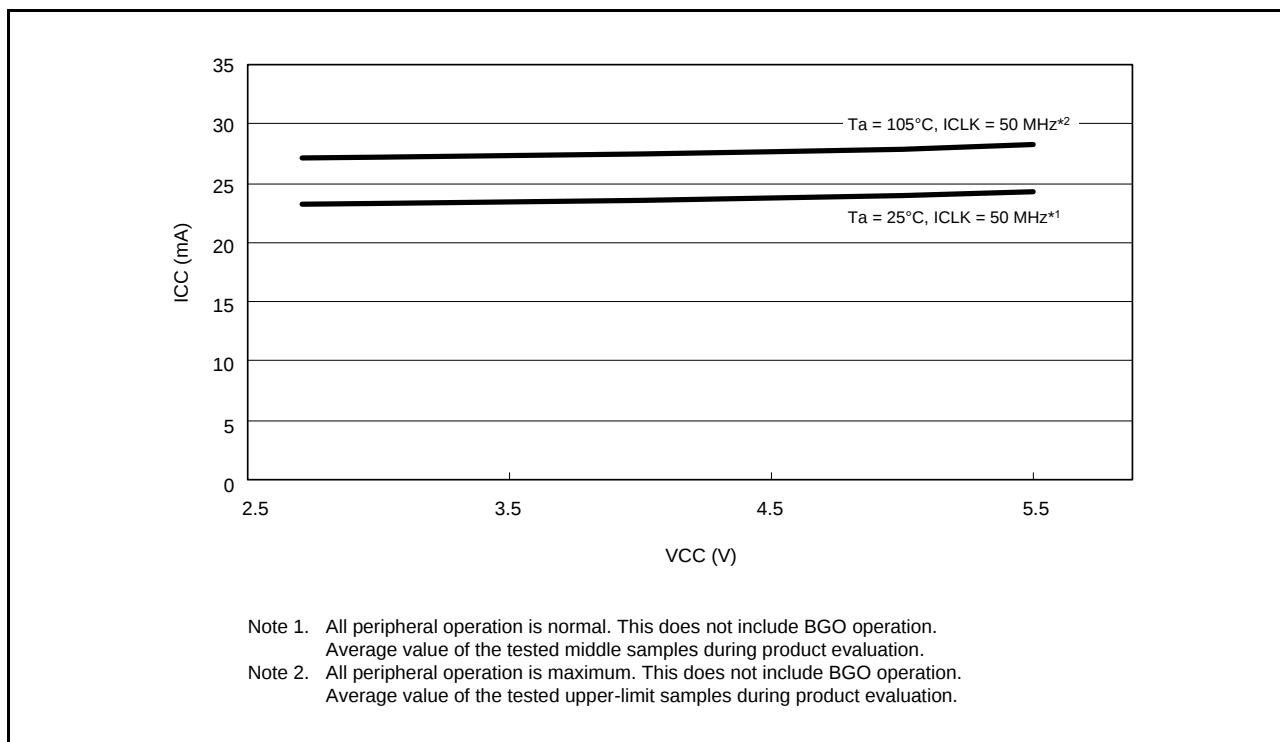


**Figure 5.17 Voltage Dependency in High-Speed Operating Mode (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

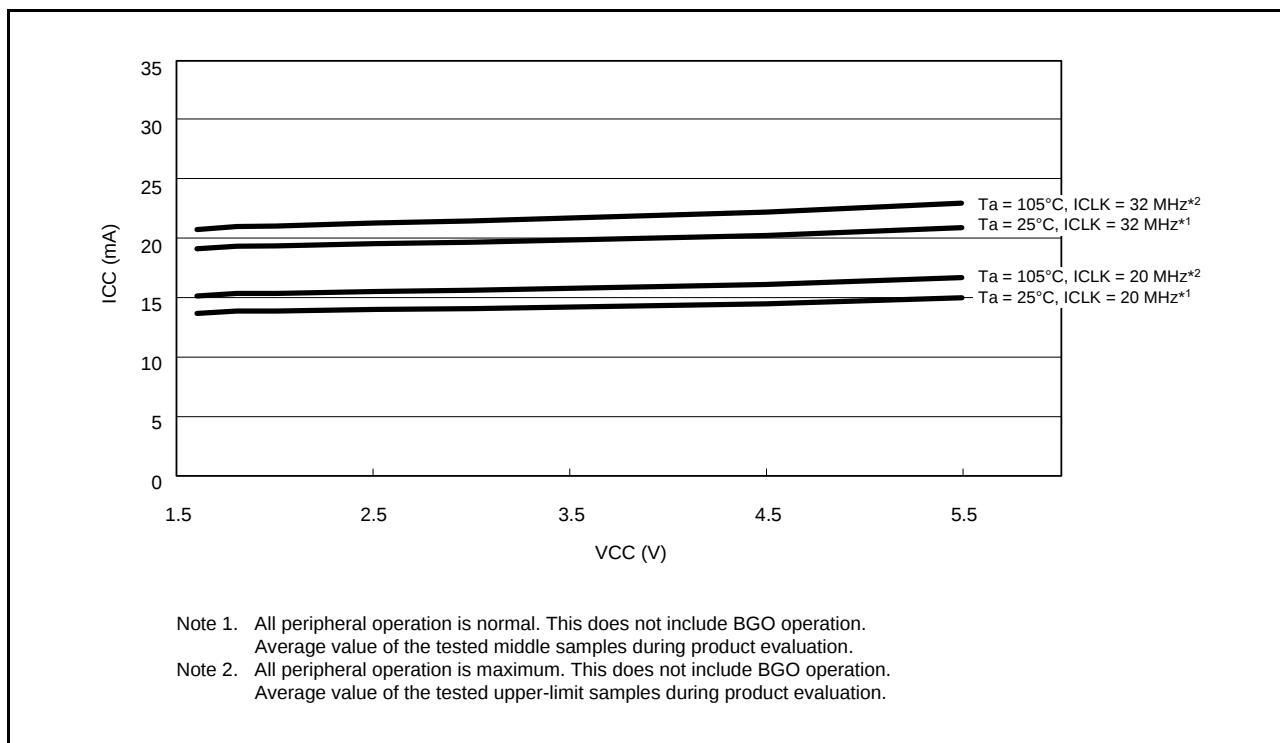


**Figure 5.18 Voltage Dependency in Middle-Speed Operating Modes 1A and 1B (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

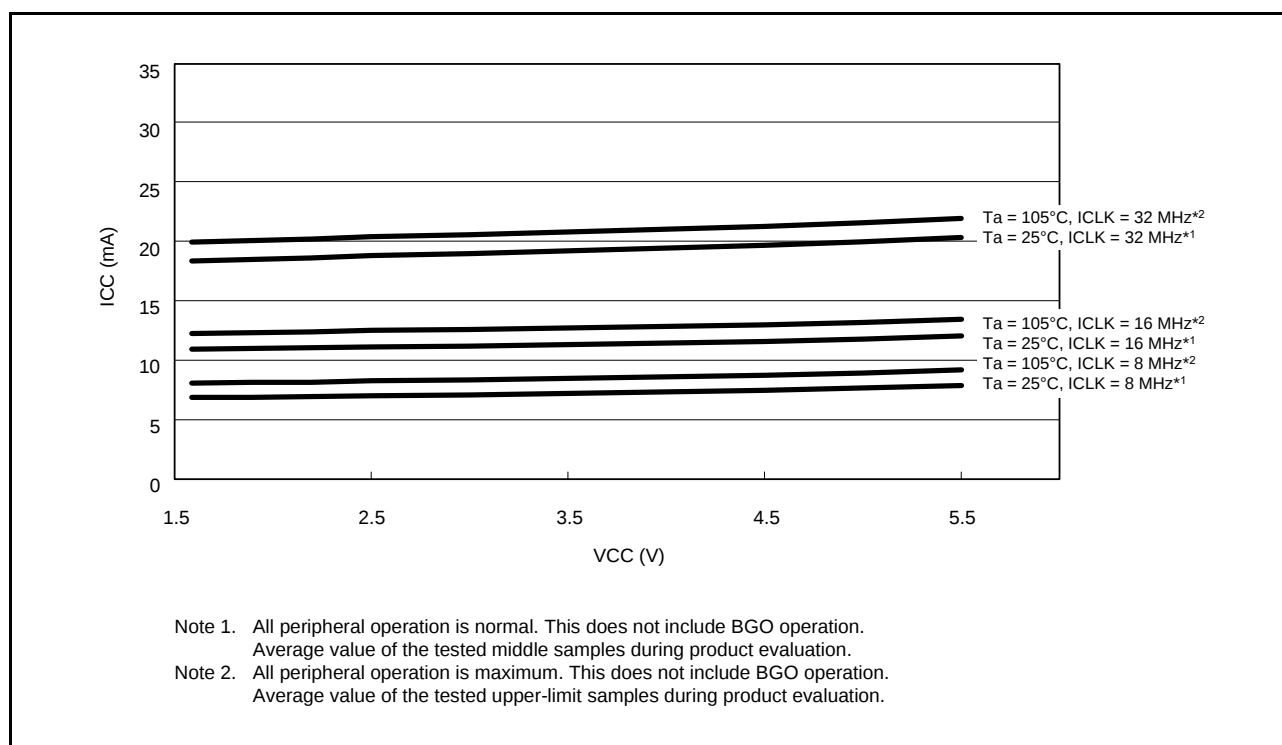

**Figure 5.19 Voltage Dependency in Middle-Speed Operating Modes 2A and 2B (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

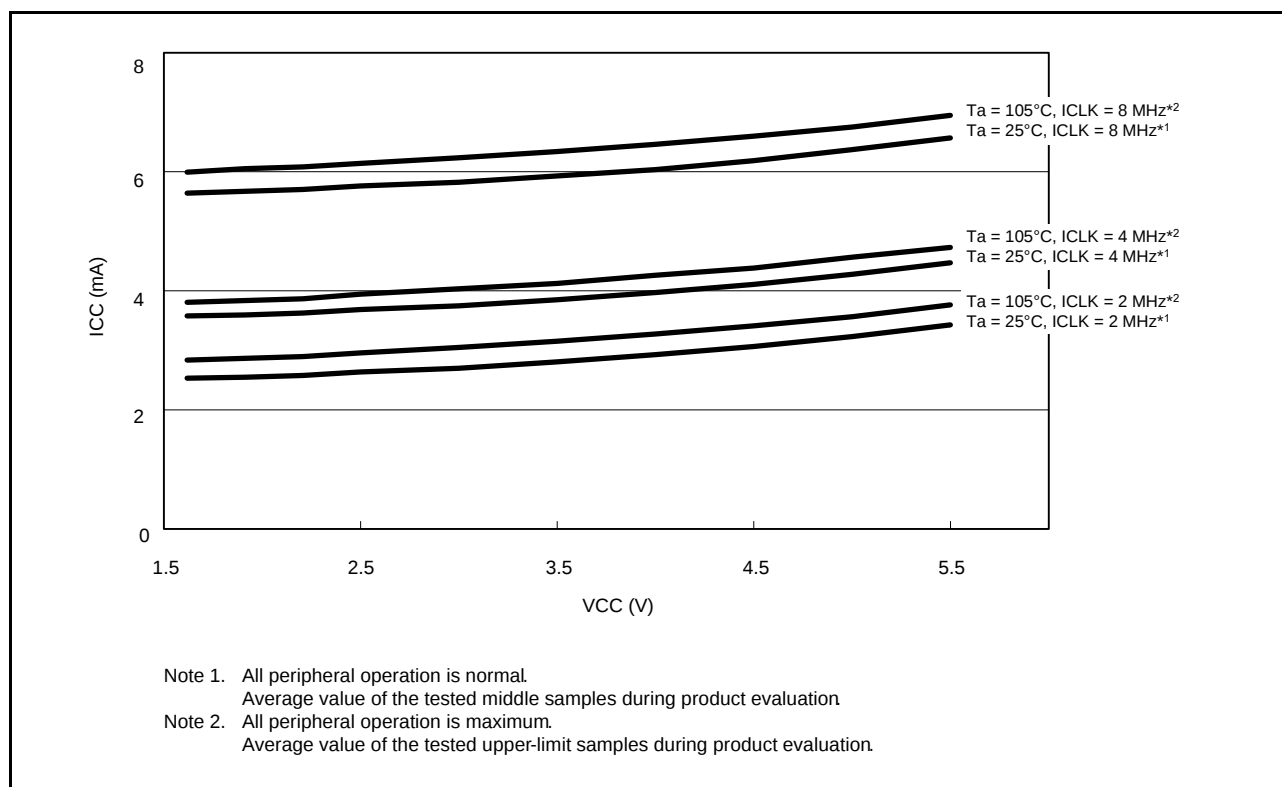

**Figure 5.20 Voltage Dependency in Low-Speed Operating Mode 1 (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

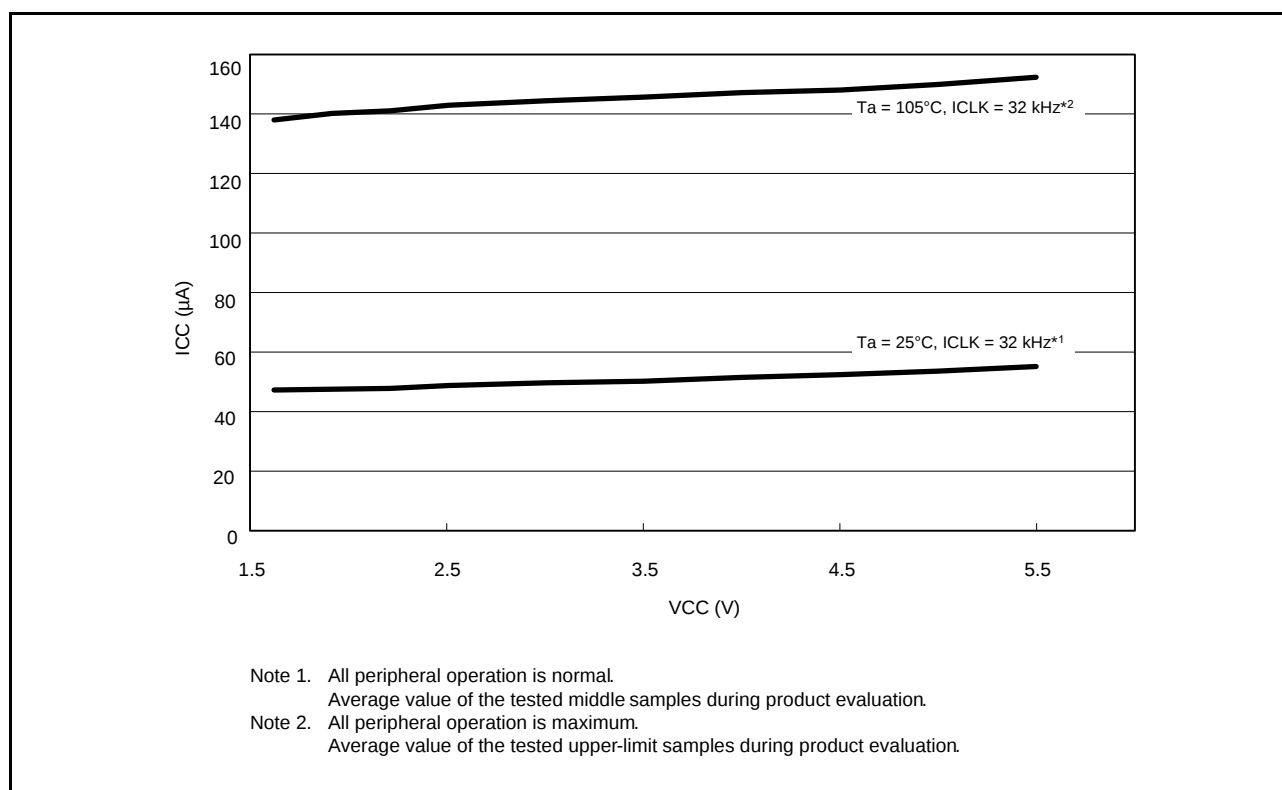

**Figure 5.21 Voltage Dependency in Low-Speed Operating Mode 2 (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

[Chip version B with 256 Kbytes or less of flash memory and 48 to 100 pins]

**Table 5.14 DC Characteristics (13)**


Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$

| Item             |                                                                                                                |                                                                                                                             |                        | Symbol          | Typ.*3 | Max. | Unit | Test Conditions |  |
|------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------|-----------------|--------|------|------|-----------------|--|
| Supply current*1 | Software standby mode*2                                                                                        | Flash memory power supplied, HOCO power supplied, POR low power consumption function disabled (SOFTCUT[2:0] bits = 000b)    | T <sub>a</sub> = 25°C  | I <sub>CC</sub> | 10     | 18   | μA   |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 13     | 35   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 20     | 81   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 34     | 154  |      |                 |  |
|                  |                                                                                                                | Flash memory power supplied, HOCO power not supplied, POR low power consumption function enabled (SOFTCUT[2:0] bits = 110b) | T <sub>a</sub> = 25°C  |                 | 1.8    | 7.7  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 3.3    | 20   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 9.2    | 60   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 20     | 124  |      |                 |  |
|                  | Deep software standby mode*2                                                                                   | Flash memory power not supplied, HOCO power not supplied, POR low power consumption function enabled (DEEPCUT1 bit = 1)     | T <sub>a</sub> = 25°C  |                 | 0.4    | 0.8  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 0.5    | 1.0  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 0.7    | 2.5  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 1.4    | 6.3  |      |                 |  |
|                  | Increments produced by running voltage detection circuits and disabling the POR low power consumption function |                                                                                                                             |                        |                 | 1.4    | —    |      |                 |  |
|                  | Increment for RTC operation (low CL)                                                                           |                                                                                                                             |                        |                 | 0.8    | —    |      |                 |  |
|                  | Increment for RTC operation (standard CL)                                                                      |                                                                                                                             |                        |                 | 2.0    | —    |      |                 |  |


Note 1. Supply current values are with all output pins unloaded and all input pull-up MOSs in the off state.

Note 2. The IWDT and LVD are stopped.


Note 3.  $V_{CC} = 3.3$  V.

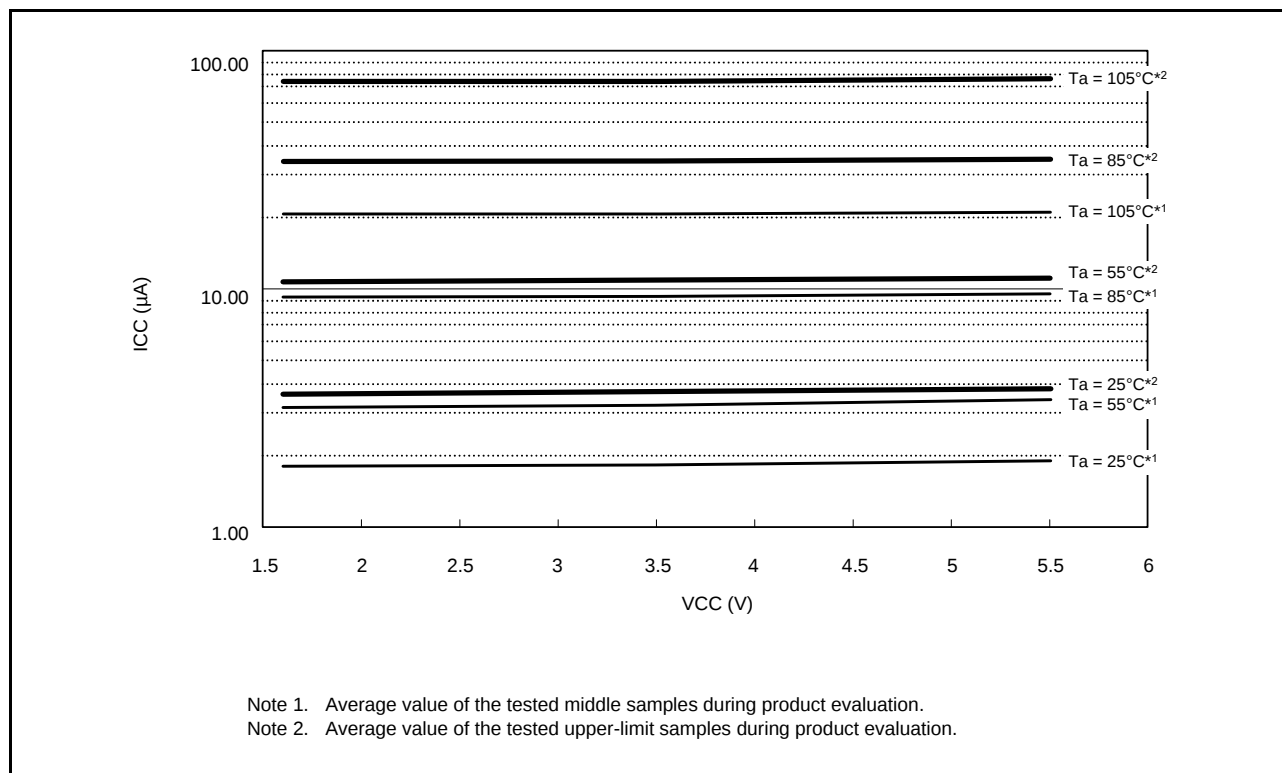


**Figure 5.22 Voltage Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

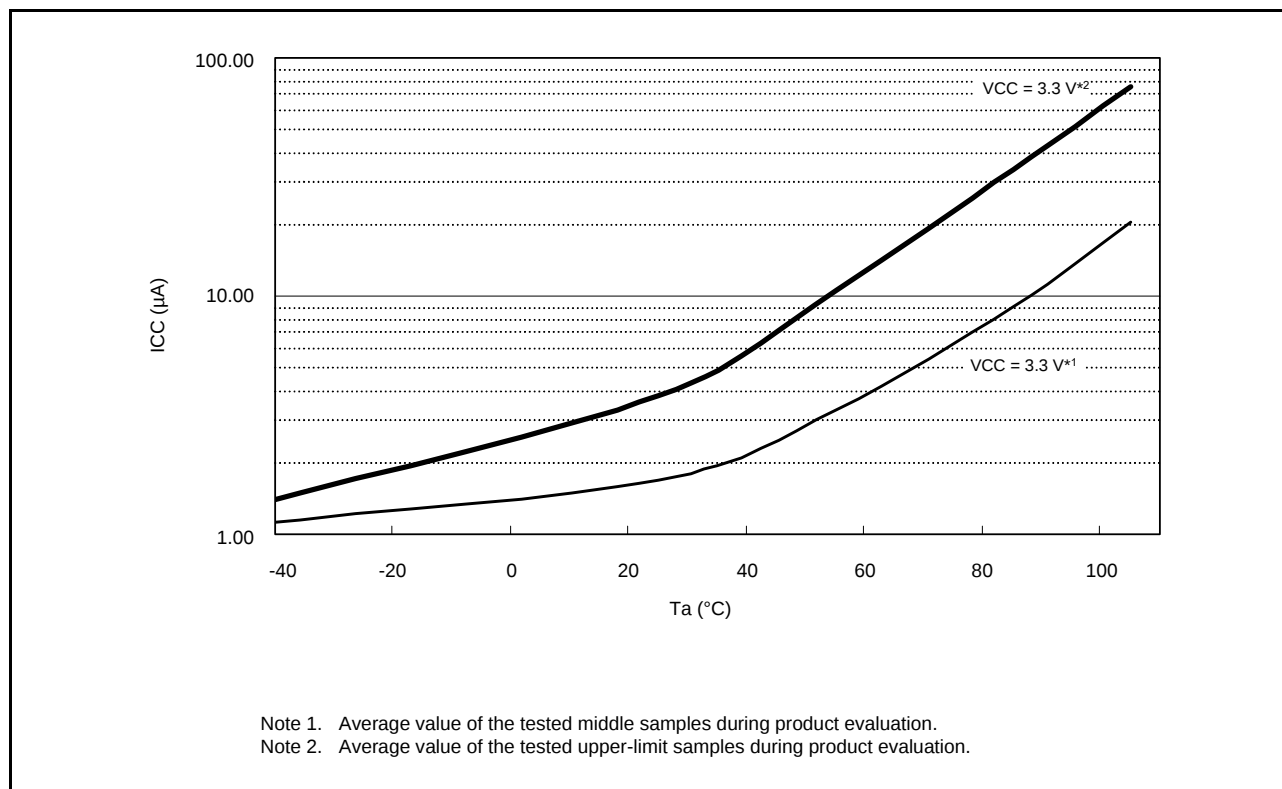

**Figure 5.23 Temperature Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

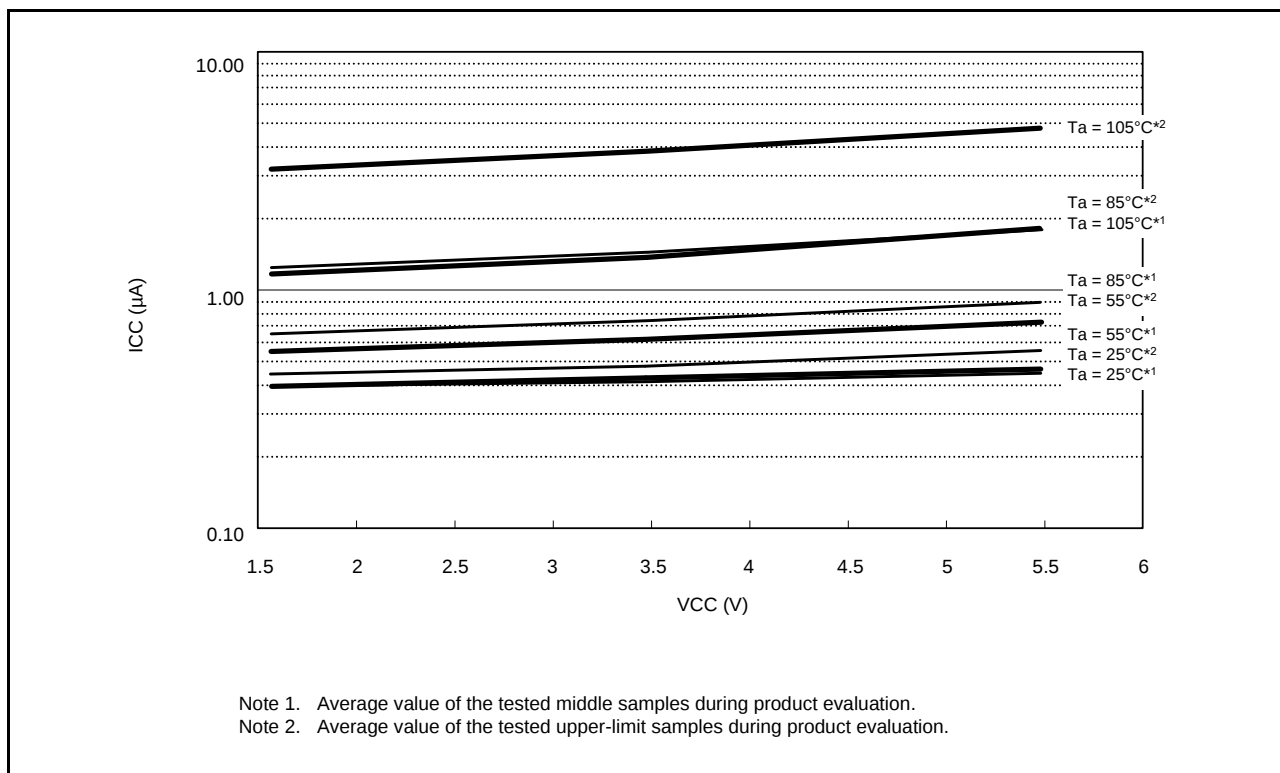

**Figure 5.24 Voltage Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

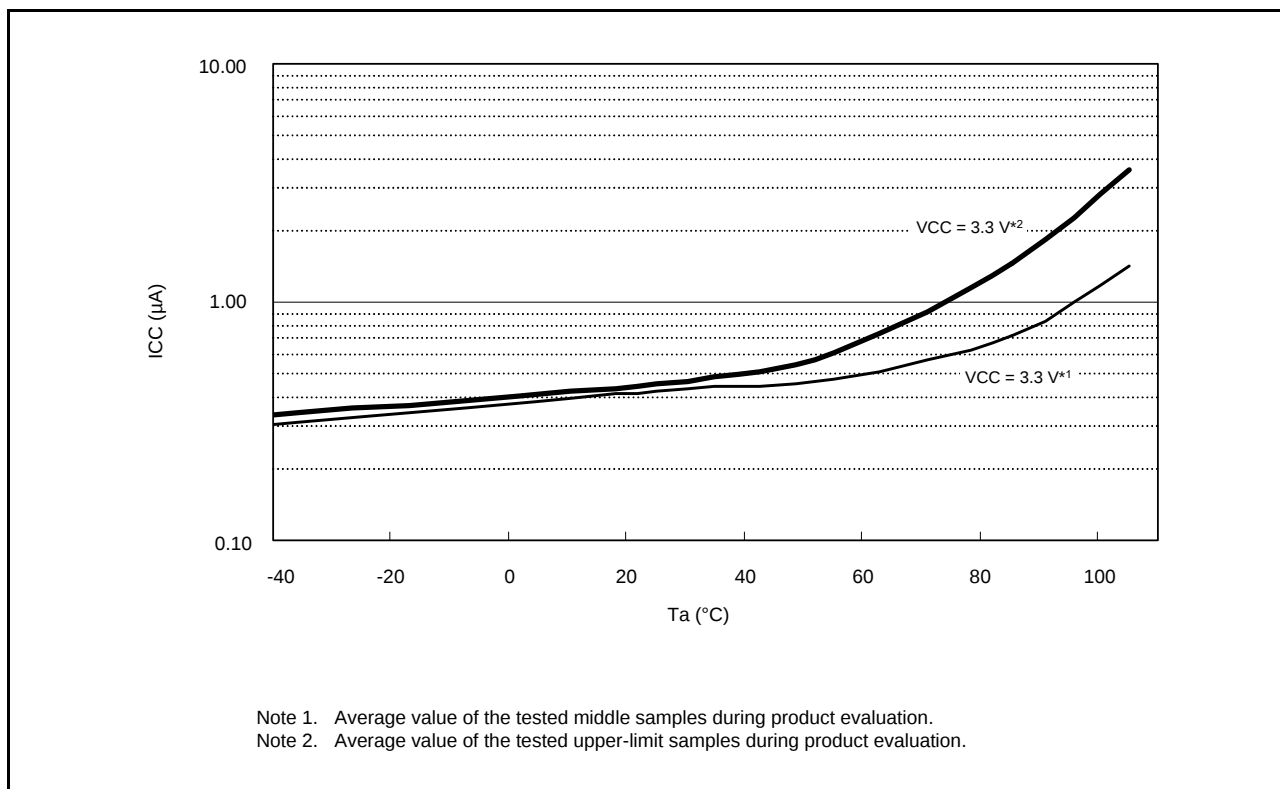

**Figure 5.25 Temperature Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version B with 256 Kbytes or Less of Flash Memory and 48 to 100 Pins**

[Chip version B with 768 Kbytes/1 Mbyte of flash memory and 100 to 145 pins]

**Table 5.15 DC Characteristics (14)**

Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = VREFL = VREFL0 = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$

| Item             |                           |                                 |                                    |               | Symbol          | Typ. | Max. | Unit | Test Conditions |  |
|------------------|---------------------------|---------------------------------|------------------------------------|---------------|-----------------|------|------|------|-----------------|--|
| Supply current*1 | High-speed operating mode | Normal operating mode           | No peripheral operation*2          | ICLK = 50 MHz | I <sub>CC</sub> | 7.8  | —    | mA   |                 |  |
|                  |                           |                                 | All peripheral operation: Normal*3 | ICLK = 50 MHz |                 | 29.8 | —    |      |                 |  |
|                  |                           |                                 | All peripheral operation: Max.*3   | ICLK = 50 MHz |                 | —    | 45   |      |                 |  |
|                  |                           | Sleep mode                      | No peripheral operation            | ICLK = 50 MHz |                 | 4.3  | —    |      |                 |  |
|                  |                           |                                 | All peripheral operation: Normal   | ICLK = 50 MHz |                 | 13.5 | —    |      |                 |  |
|                  |                           | All-module clock stop mode      |                                    |               |                 | 3.7  | —    |      |                 |  |
|                  |                           | Increase during BGO operation*4 |                                    |               |                 | 23   | —    |      |                 |  |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are ICLK divided by 2.

Note 4. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.

[Chip version B with 768 Kbytes/1 Mbyte of flash memory and 100 to 145 pins]

**Table 5.16 DC Characteristics (15)**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item             |                                        |                                 |                                    |                 | Symbol          | Typ.          | Max. | Unit | Test Conditions |   |
|------------------|----------------------------------------|---------------------------------|------------------------------------|-----------------|-----------------|---------------|------|------|-----------------|---|
| Supply current*1 | Middle-speed operating modes 1A and 1B | Normal operating mode           | No peripheral operation            | ICLK = 32 MHz*2 | I <sub>CC</sub> | 5.6           | —    | mA   |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*3 |                 | 4.6           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz*4 |                 | 25.5          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*5 |                 | 17.6          | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max.     | ICLK = 32 MHz*4 |                 | —             | 35   |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*5 |                 | —             | —    |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation            | ICLK = 32 MHz   |                 | 3.4           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz   |                 | 3.3           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz   |                 | 13.4          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz   |                 | 10.2          | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                    |                 |                 | ICLK = 32 MHz | 3    |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 20 MHz | 3    |      |                 | — |
|                  |                                        | Increase during BGO operation*6 | Middle-speed operating mode 1A     |                 |                 | 23            | —    |      |                 |   |
|                  |                                        |                                 | Middle-speed operating mode 1B     |                 |                 | 20            | —    |      |                 |   |
|                  | Middle-speed operating modes 2A and 2B | Normal operating mode           | No peripheral operation*2          | ICLK = 32 MHz   |                 | 5.1           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 3.5           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 2.7           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal*4 | ICLK = 32 MHz   |                 | 25            | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 14            | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 8.5           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max.*4   | ICLK = 32 MHz   |                 | —             | 34   |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | —             | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | —             | —    |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation            | ICLK = 32 MHz   |                 | 2.9           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 2.5           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 2.2           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz   |                 | 13            | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 8.2           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 5.8           | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                    |                 |                 | ICLK = 32 MHz | 2.5  |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 16 MHz | 2.2  |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 8 MHz  | 2.1  |      |                 | — |
|                  |                                        | Increase during BGO operation*6 | Middle-speed operating mode 1A     |                 |                 | 23            | —    |      |                 |   |
|                  |                                        |                                 | Middle-speed operating mode 1B     |                 |                 | 20            | —    |      |                 |   |

| Item             |                            |                            |                                     |               | Symbol          | Typ.         | Max. | Unit | Test Conditions |   |
|------------------|----------------------------|----------------------------|-------------------------------------|---------------|-----------------|--------------|------|------|-----------------|---|
| Supply current*1 | Low-speed operating mode 1 | Normal operating mode      | No peripheral operation*7           | ICLK = 8 MHz  | I <sub>CC</sub> | 2.1          | —    | mA   |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 1.7          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 1.5          | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal*8  | ICLK = 8 MHz  |                 | 7.3          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 4.5          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 3.1          | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Max.*7    | ICLK = 8 MHz  |                 | —            | 12   |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | —            | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | —            | —    |      |                 |   |
|                  |                            | Sleep mode                 | No peripheral operation             | ICLK = 8 MHz  |                 | 1.5          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 1.4          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 1.3          | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal    | ICLK = 8 MHz  |                 | 4.1          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 3.0          | —    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 2.3          | —    |      |                 |   |
|                  |                            | All-module clock stop mode |                                     |               |                 | ICLK = 8 MHz | 1.4  |      |                 | — |
|                  |                            |                            |                                     |               |                 | ICLK = 4 MHz | 1.3  |      |                 | — |
|                  |                            |                            |                                     |               |                 | ICLK = 2 MHz | 1.2  |      |                 | — |
|                  | Low-speed operating mode 2 | Normal operating mode      | No peripheral operation*9           | ICLK = 32 kHz |                 | 0.022        | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal*10 | ICLK = 32 kHz |                 | 0.06         | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Max.*10   | ICLK = 32 kHz |                 | —            | 3*11 |      |                 |   |
|                  |                            | Sleep mode                 | No peripheral operation             | ICLK = 32 kHz |                 | 0.017        | —    |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal    | ICLK = 32 kHz |                 | 0.036        | —    |      |                 |   |
|                  |                            | All-module clock stop mode |                                     |               |                 | 0.017        | —    |      |                 |   |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 4. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 5. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 6. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.


Note 7. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 8. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 9. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are set to divided by 64.

Note 10. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 11. Value when the main clock continues oscillating at 12.5 MHz.

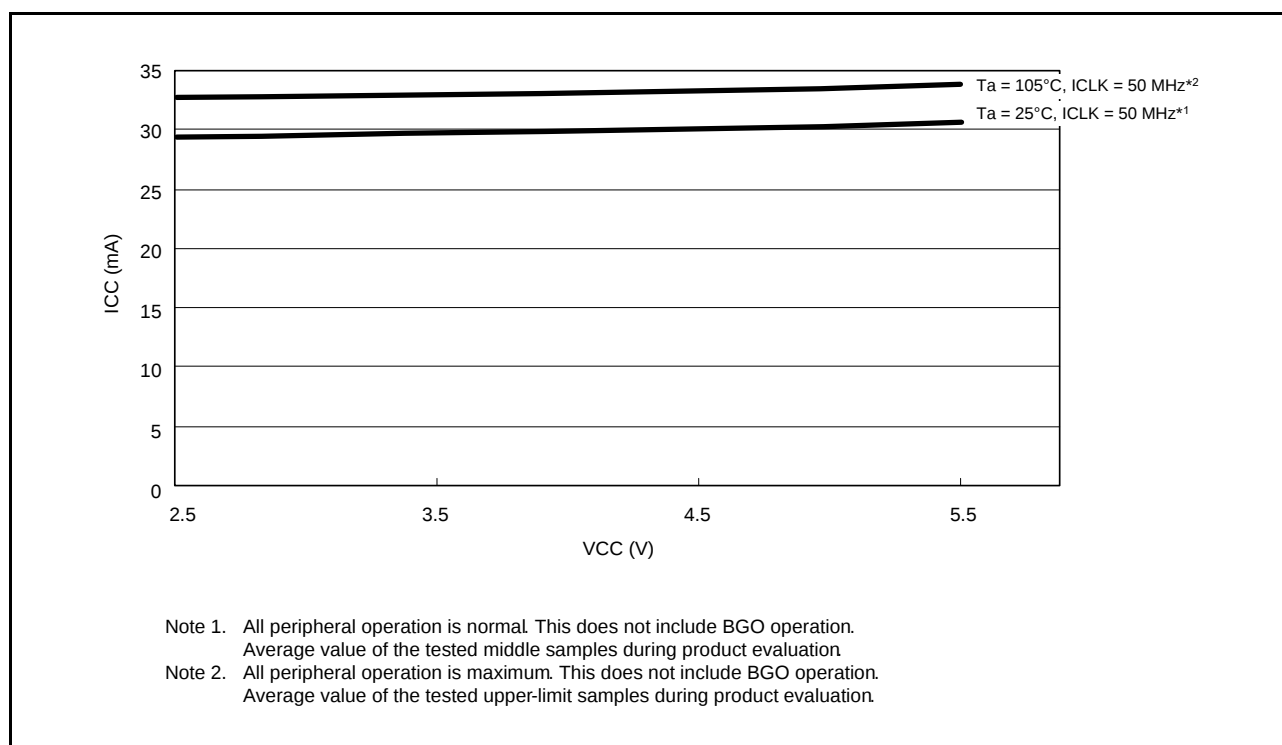


**Figure 5.26 Voltage Dependency in High-Speed Operating Mode (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins**

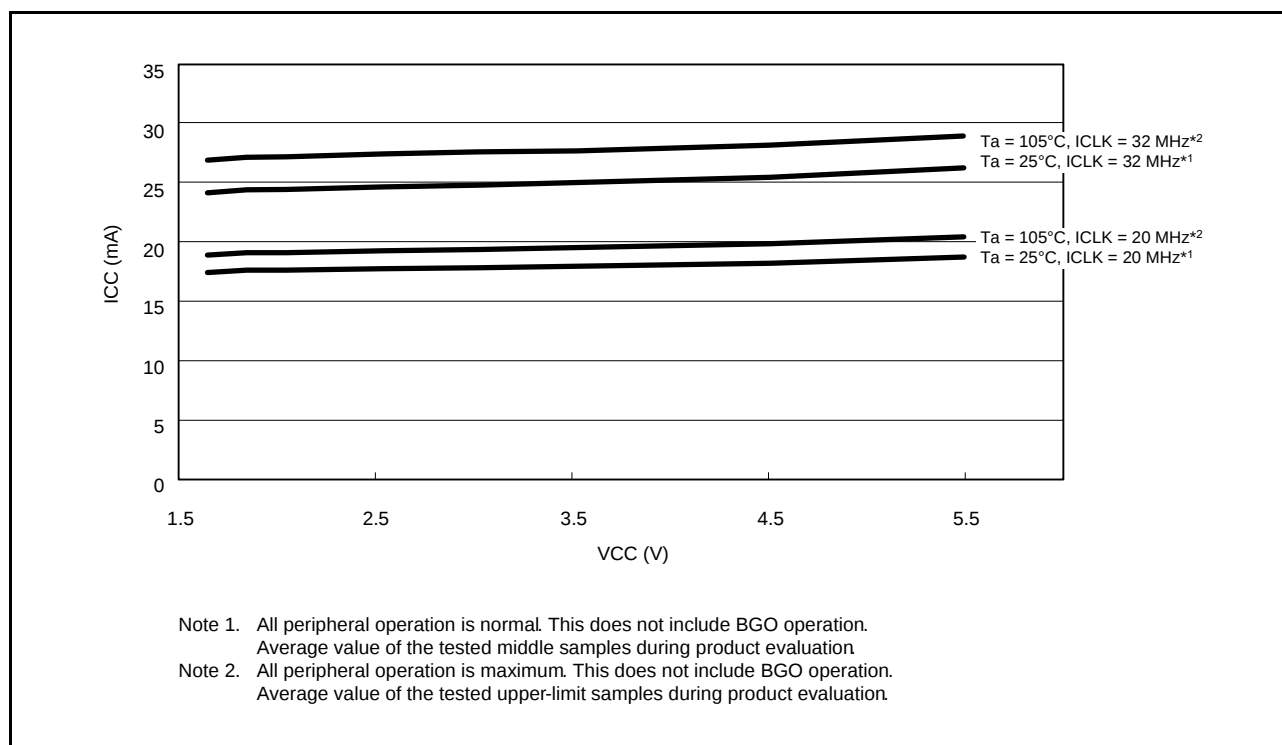


**Figure 5.27 Voltage Dependency in Middle-Speed Operating Modes 1A and 1B (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins**

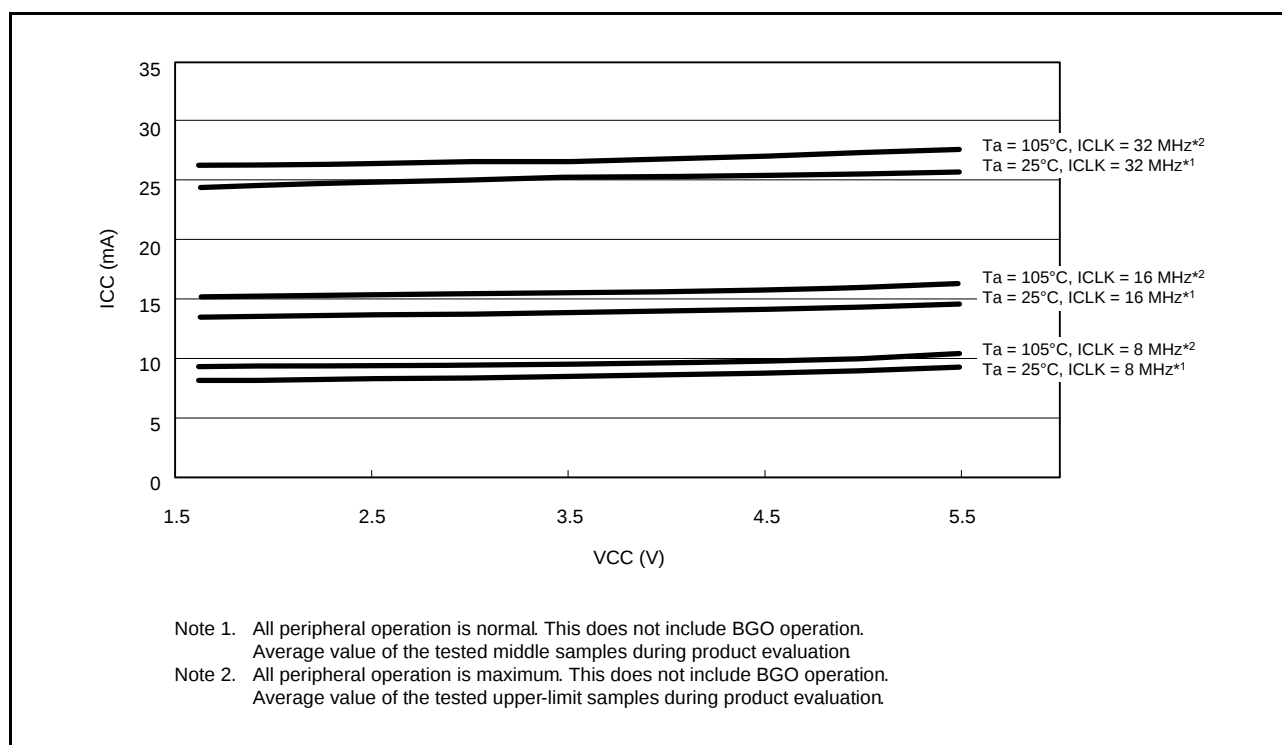

**Figure 5.28 Voltage Dependency in Middle-Speed Operating Modes 2A and 2B (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins**

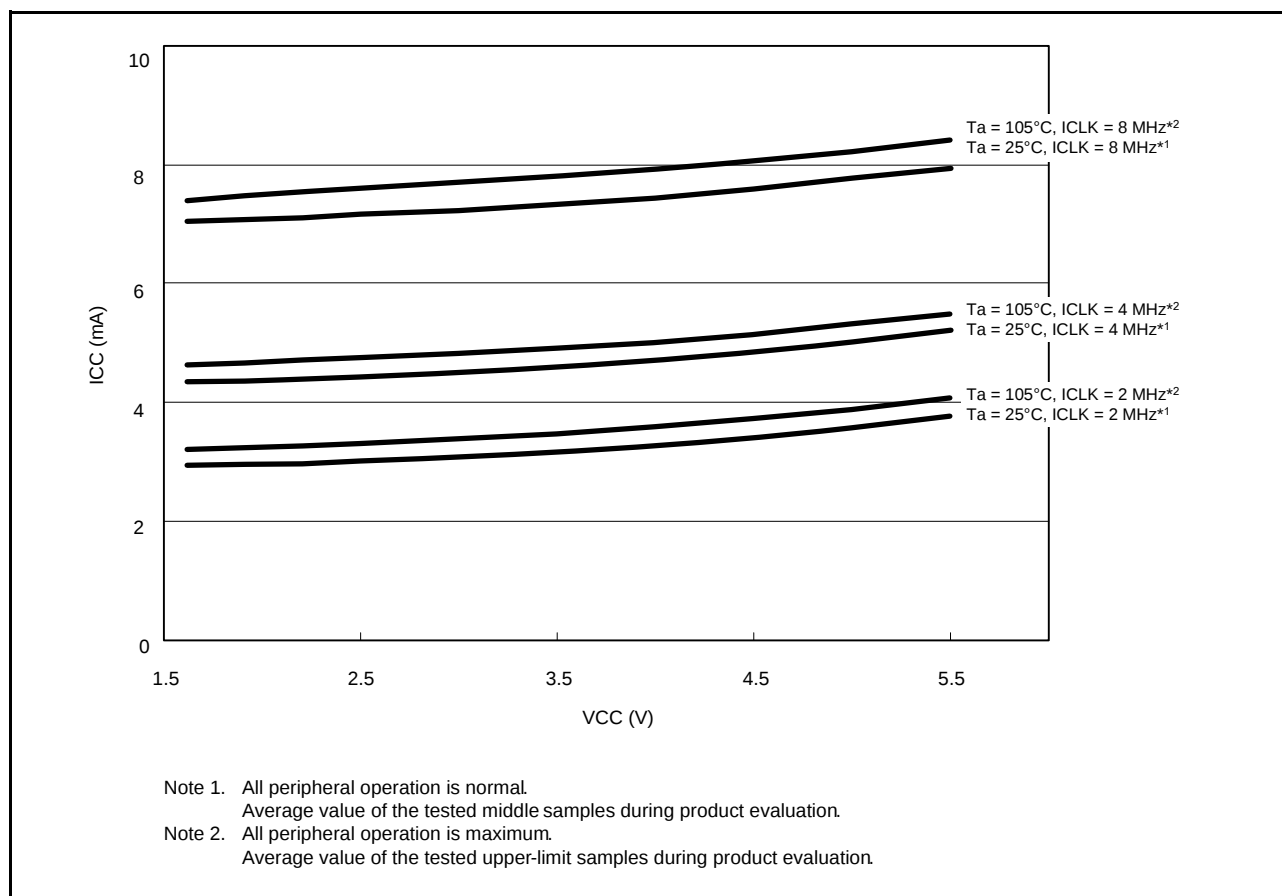

**Figure 5.29 Voltage Dependency in Low-Speed Operating Mode 1 (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins**

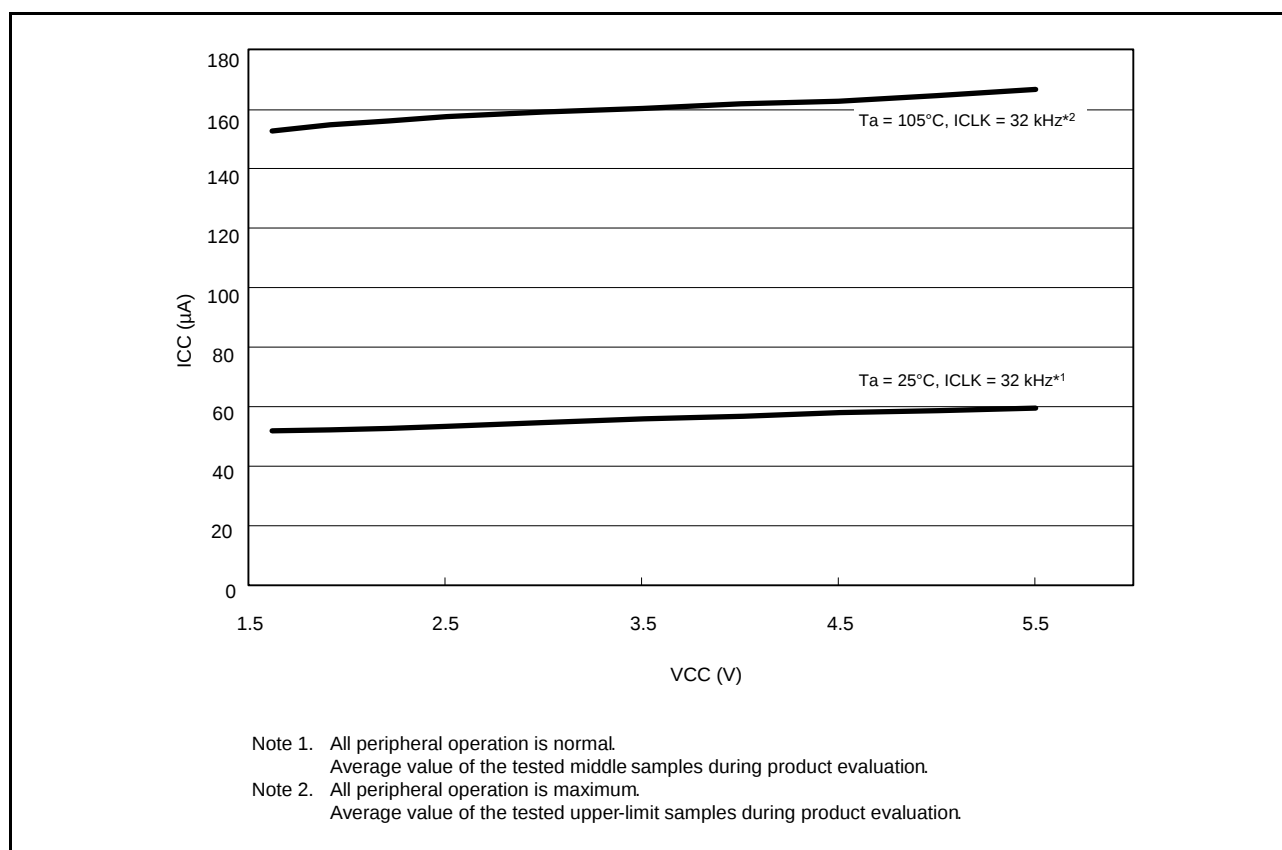

**Figure 5.30 Voltage Dependency in Low-Speed Operating Mode 2 (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins**

[Chip version B with 768 Kbytes/1 Mbyte of flash memory and 100 to 145 pins]

**Table 5.17 DC Characteristics (16)**


Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item             |                                                                                                                |                                                                                                                             |                        | Symbol          | Typ.*3 | Max. | Unit | Test Conditions |  |
|------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------|-----------------|--------|------|------|-----------------|--|
| Supply current*1 | Software standby mode*2                                                                                        | Flash memory power supplied, HOCO power supplied, POR low power consumption function disabled (SOFTCUT[2:0] bits = 000b)    | T <sub>a</sub> = 25°C  | I <sub>CC</sub> | 10     | 34   | μA   |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 13     | 87   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 21     | 201  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 40     | 352  |      |                 |  |
|                  |                                                                                                                | Flash memory power supplied, HOCO power not supplied, POR low power consumption function enabled (SOFTCUT[2:0] bits = 110b) | T <sub>a</sub> = 25°C  |                 | 1.8    | 24   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 3.3    | 70   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 10     | 168  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 25     | 302  |      |                 |  |
|                  | Deep software standby mode*2                                                                                   | Flash memory power not supplied, HOCO power not supplied, POR low power consumption function enabled (DEEPCUT1 bit = 1)     | T <sub>a</sub> = 25°C  |                 | 0.4    | 0.8  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 0.5    | 1.0  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 0.7    | 2.5  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 1.4    | 6.3  |      |                 |  |
|                  | Increments produced by running voltage detection circuits and disabling the POR low power consumption function |                                                                                                                             |                        |                 | 1.4    | —    |      |                 |  |
|                  | Increment for RTC operation (low CL)                                                                           |                                                                                                                             |                        |                 | 0.8    | —    |      |                 |  |
|                  | Increment for RTC operation (standard CL)                                                                      |                                                                                                                             |                        |                 | 2.0    | —    |      |                 |  |


Note 1. Supply current values are with all output pins unloaded and all input pull-up MOSs in the off state.

Note 2. The IWDT and LVD are stopped.


Note 3. VCC = 3.3 V.

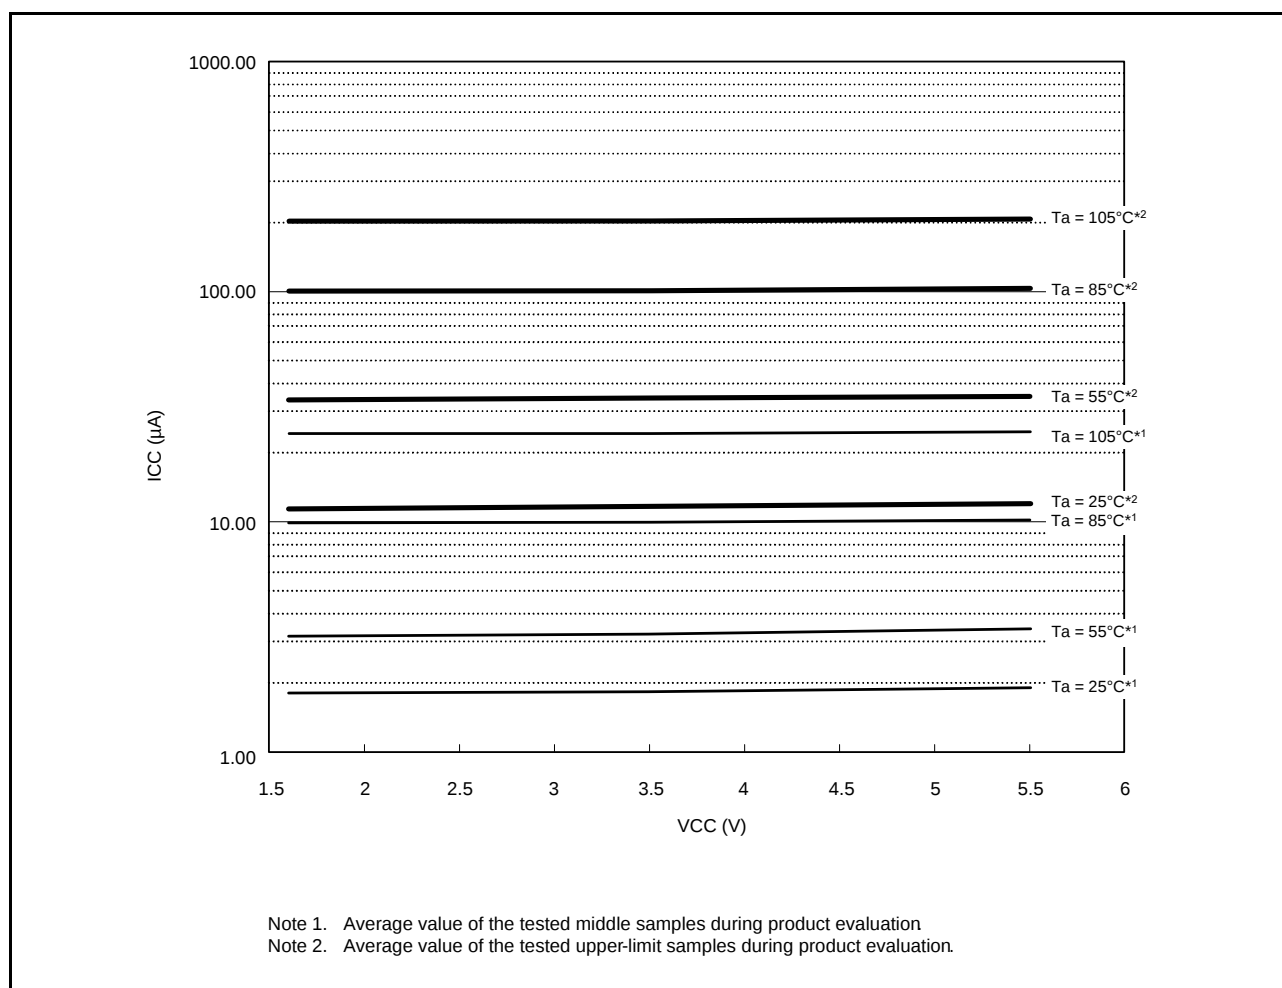


**Figure 5.31 Voltage Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins**

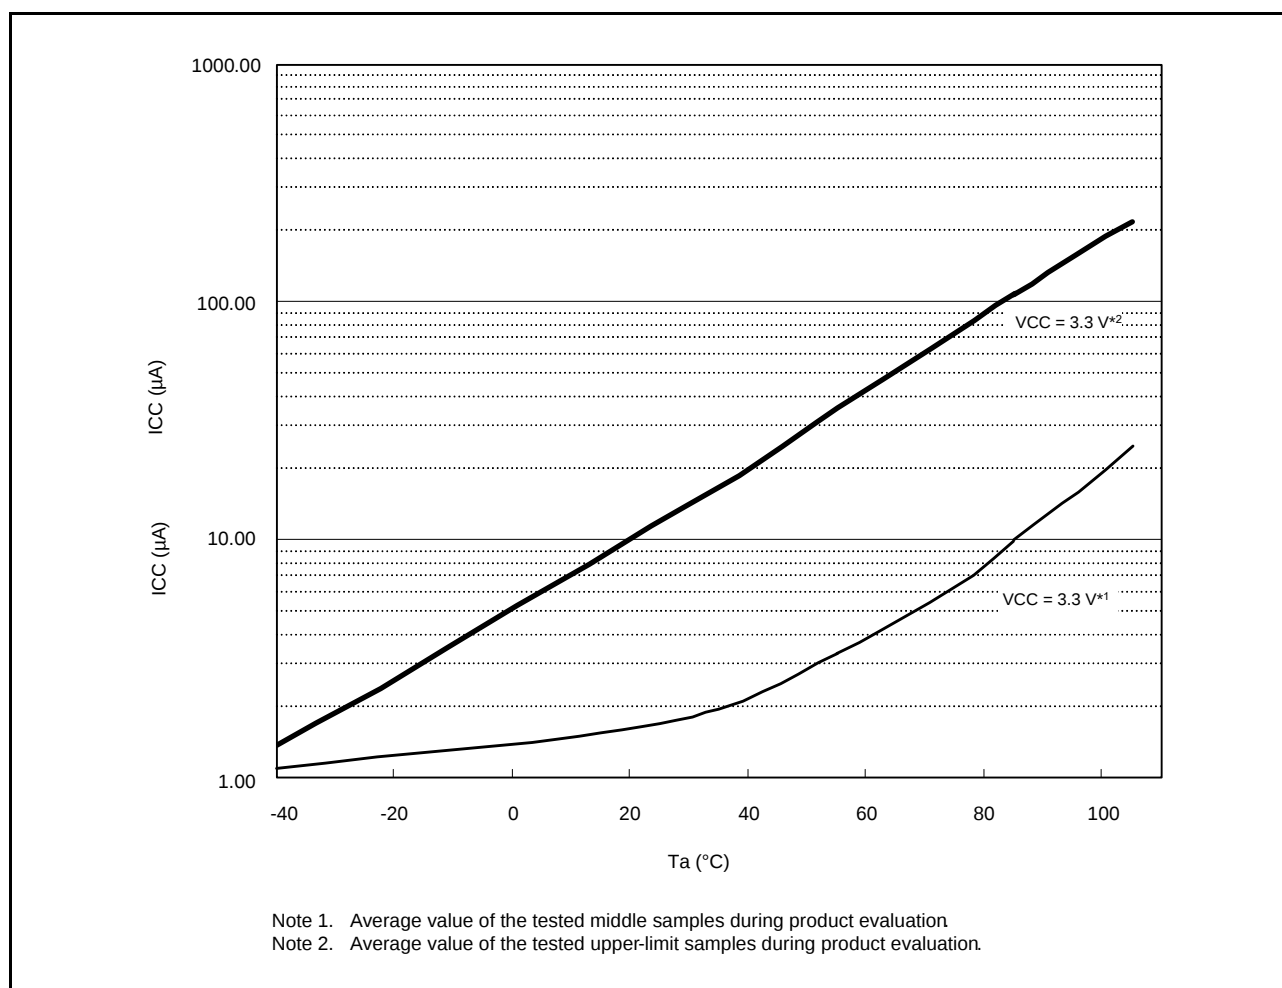

**Figure 5.32** Temperature Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins

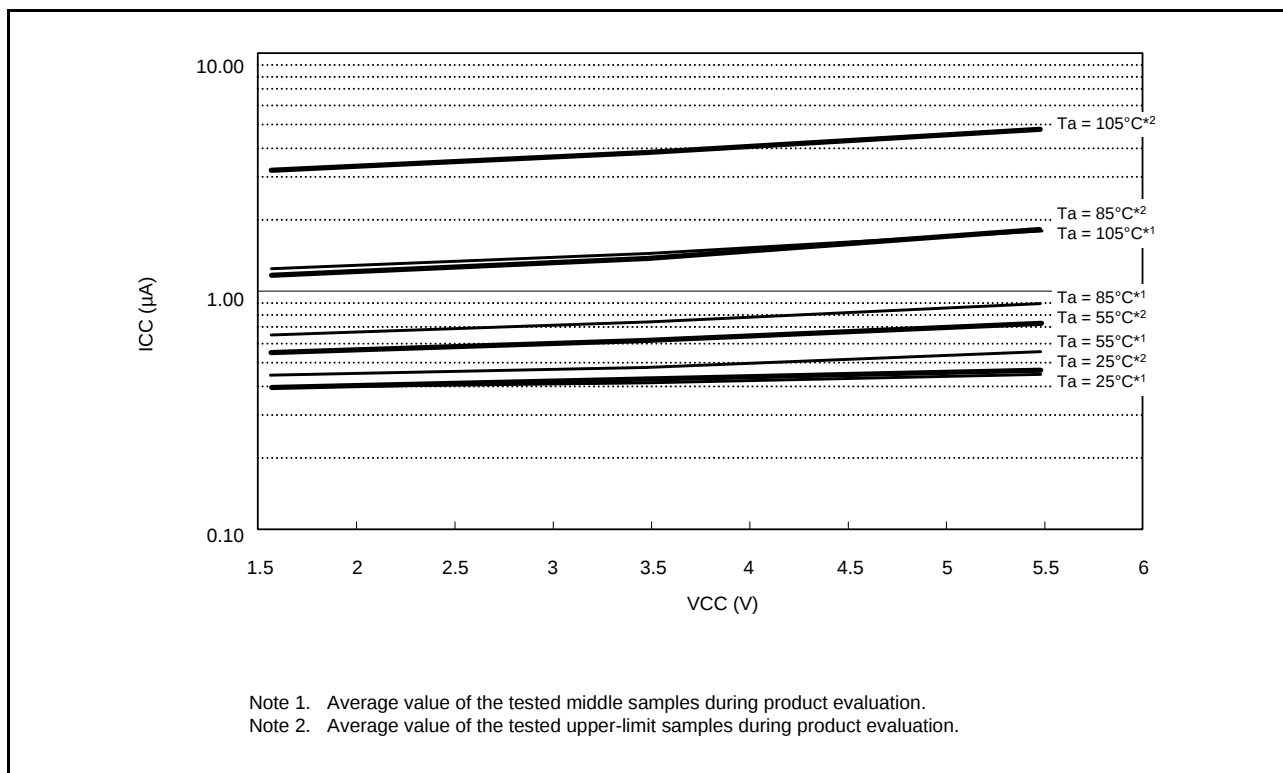

**Figure 5.33** Voltage Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins

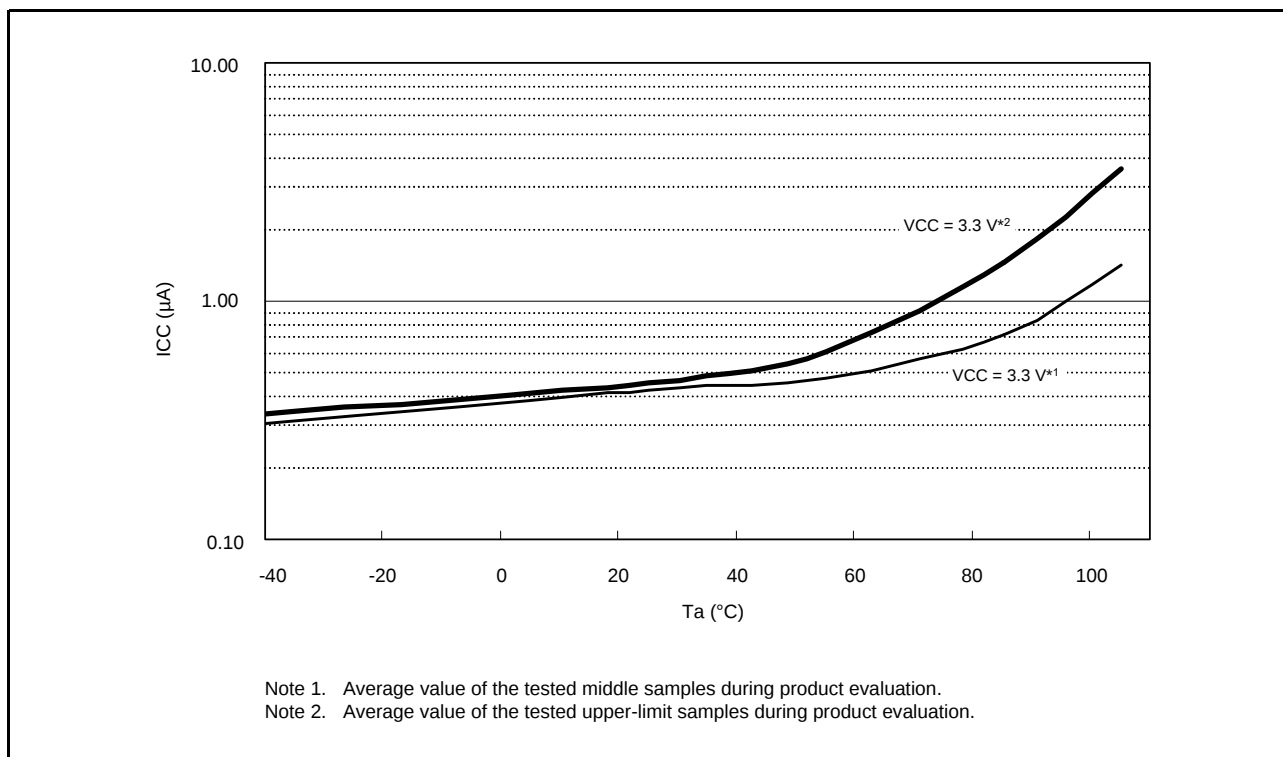

**Figure 5.34** Temperature Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins

[Chip version B with 512 Kbytes or less of flash memory and 144 and 145 pins]

**Table 5.18 DC Characteristics (17)**

Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$

| Item             |                           |                                 |                                    |               | Symbol          | Typ. | Max. | Unit | Test Conditions |  |
|------------------|---------------------------|---------------------------------|------------------------------------|---------------|-----------------|------|------|------|-----------------|--|
| Supply current*1 | High-speed operating mode | Normal operating mode           | No peripheral operation*2          | ICLK = 50 MHz | I <sub>CC</sub> | 7.2  | —    | mA   |                 |  |
|                  |                           |                                 | All peripheral operation: Normal*3 | ICLK = 50 MHz |                 | 25.9 | —    |      |                 |  |
|                  |                           |                                 | All peripheral operation: Max.*3   | ICLK = 50 MHz |                 | —    | 45   |      |                 |  |
|                  |                           | Sleep mode                      | No peripheral operation            | ICLK = 50 MHz |                 | 4.3  | —    |      |                 |  |
|                  |                           |                                 | All peripheral operation: Normal   | ICLK = 50 MHz |                 | 13   | —    |      |                 |  |
|                  |                           | All-module clock stop mode      |                                    |               |                 | 3.7  | —    |      |                 |  |
|                  |                           | Increase during BGO operation*4 |                                    |               |                 | 21   | —    |      |                 |  |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 100 MHz. BCLK, FCLK, and PCLK are ICLK divided by 2.

Note 4. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.

[Chip version B with 512 Kbytes or less of flash memory and 144 and 145 pins]

**Table 5.19 DC Characteristics (18)**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item             |                                        |                                 |                                    |                 | Symbol          | Typ.          | Max. | Unit | Test Conditions |   |
|------------------|----------------------------------------|---------------------------------|------------------------------------|-----------------|-----------------|---------------|------|------|-----------------|---|
| Supply current*1 | Middle-speed operating modes 1A and 1B | Normal operating mode           | No peripheral operation            | ICLK = 32 MHz*2 | I <sub>CC</sub> | 5.3           | —    | mA   |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*3 |                 | 4.6           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz*4 |                 | 22.3          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*5 |                 | 15.6          | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max.     | ICLK = 32 MHz*4 |                 | —             | 35   |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz*5 |                 | —             | —    |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation            | ICLK = 32 MHz   |                 | 3.4           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz   |                 | 3.3           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz   |                 | 12.8          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 20 MHz   |                 | 9.8           | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                    |                 |                 | ICLK = 32 MHz | 3    |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 20 MHz | 3    |      |                 | — |
|                  |                                        | Increase during BGO operation*6 | Middle-speed operating mode 1A     |                 |                 | 21            | —    |      |                 |   |
|                  |                                        |                                 | Middle-speed operating mode 1B     |                 |                 | 19            | —    |      |                 |   |
|                  | Middle-speed operating modes 2A and 2B | Normal operating mode           | No peripheral operation*2          | ICLK = 32 MHz   |                 | 4.7           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 3.4           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 2.7           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal*4 | ICLK = 32 MHz*3 |                 | 21.7          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz*3 |                 | 12.3          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 7.6           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Max.*4   | ICLK = 32 MHz*3 |                 | —             | 34   |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz*3 |                 | —             | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | —             | —    |      |                 |   |
|                  |                                        | Sleep mode                      | No peripheral operation            | ICLK = 32 MHz   |                 | 2.9           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 2.5           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 2.2           | —    |      |                 |   |
|                  |                                        |                                 | All peripheral operation: Normal   | ICLK = 32 MHz   |                 | 12.3          | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 16 MHz   |                 | 7.8           | —    |      |                 |   |
|                  |                                        |                                 |                                    | ICLK = 8 MHz    |                 | 5.6           | —    |      |                 |   |
|                  |                                        | All-module clock stop mode      |                                    |                 |                 | ICLK = 32 MHz | 2.5  |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 16 MHz | 2.2  |      |                 | — |
|                  |                                        |                                 |                                    |                 |                 | ICLK = 8 MHz  | 2.1  |      |                 | — |
|                  |                                        | Increase during BGO operation*6 | Middle-speed operating mode 1A     |                 |                 | 21            | —    |      |                 |   |
|                  |                                        |                                 | Middle-speed operating mode 1B     |                 |                 | 19            | —    |      |                 |   |

| Item             |                            |                            |                                     |               | Symbol          | Typ.          | Max.  | Unit | Test Conditions |   |
|------------------|----------------------------|----------------------------|-------------------------------------|---------------|-----------------|---------------|-------|------|-----------------|---|
| Supply current*1 | Low-speed operating mode 1 | Normal operating mode      | No peripheral operation*7           | ICLK = 8 MHz  | I <sub>CC</sub> | 2.0           | —     | mA   |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 1.6           | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 1.5           | —     |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal*8  | ICLK = 8 MHz  |                 | 6.4           | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 4.0           | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 2.8           | —     |      |                 |   |
|                  |                            |                            | All peripheral operation: Max.*8    | ICLK = 8 MHz  |                 | —             | 12    |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | —             | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | —             | —     |      |                 |   |
|                  |                            | Sleep mode                 | No peripheral operation             | ICLK = 8 MHz  |                 | 1.5           | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 1.4           | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 1.3           | —     |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal    | ICLK = 8 MHz  |                 | 3.9           | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 4 MHz  |                 | 2.8           | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 2 MHz  |                 | 2.2           | —     |      |                 |   |
|                  |                            | All-module clock stop mode |                                     |               |                 | ICLK = 8 MHz  | 1.4   |      |                 | — |
|                  |                            |                            |                                     |               |                 | ICLK = 4 MHz  | 1.3   |      |                 | — |
|                  |                            |                            |                                     |               |                 | ICLK = 2 MHz  | 1.2   |      |                 | — |
|                  | Low-speed operating mode 2 | Normal operating mode      | No peripheral operation*9           | ICLK = 32 kHz |                 | 0.021         | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 32 kHz |                 | 0.06          | —     |      |                 |   |
|                  |                            |                            | All peripheral operation: Normal*10 | ICLK = 32 kHz |                 | —             | 3*11  |      |                 |   |
|                  |                            | Sleep mode                 | No peripheral operation             | ICLK = 32 kHz |                 | 0.017         | —     |      |                 |   |
|                  |                            |                            |                                     | ICLK = 32 kHz |                 | 0.035         | —     |      |                 |   |
|                  |                            | All-module clock stop mode |                                     |               |                 | ICLK = 32 kHz | 0.016 |      |                 | — |
|                  |                            |                            |                                     |               |                 | ICLK = 32 kHz | 0.016 |      |                 | — |

Note 1. Supply current values do not include output charge/discharge current from all pins. The values apply when internal pull-up MOSs are in the off state.

Note 2. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 3. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 4. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is PLL and the VCO oscillation frequency is 64 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 5. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 40 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.

Note 6. This is the increase if data is programmed to or erasing from the ROM or E2 DataFlash during program execution.


Note 7. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are set to divided by 64.

Note 8. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is HOCO and the oscillation frequency is 32 MHz. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 9. Clock supply to the peripheral functions is stopped. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are set to divided by 64.

Note 10. Clocks are supplied to the peripheral functions. This does not include BGO operation. The clock source is the sub oscillation circuit. BCLK, FCLK, and PCLK are ICLK divided by 1.


Note 11. Value when the main clock continues oscillating at 12.5 MHz.

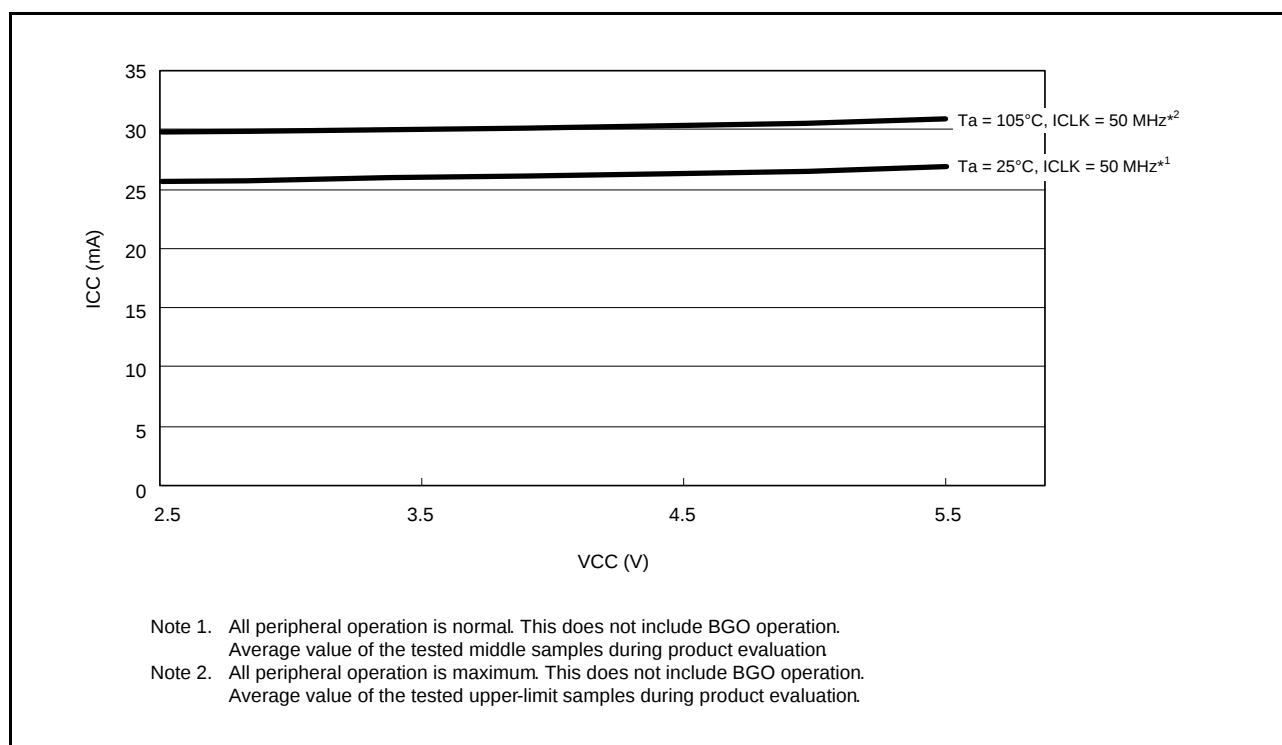


**Figure 5.35 Voltage Dependency in High-Speed Operating Mode (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins**

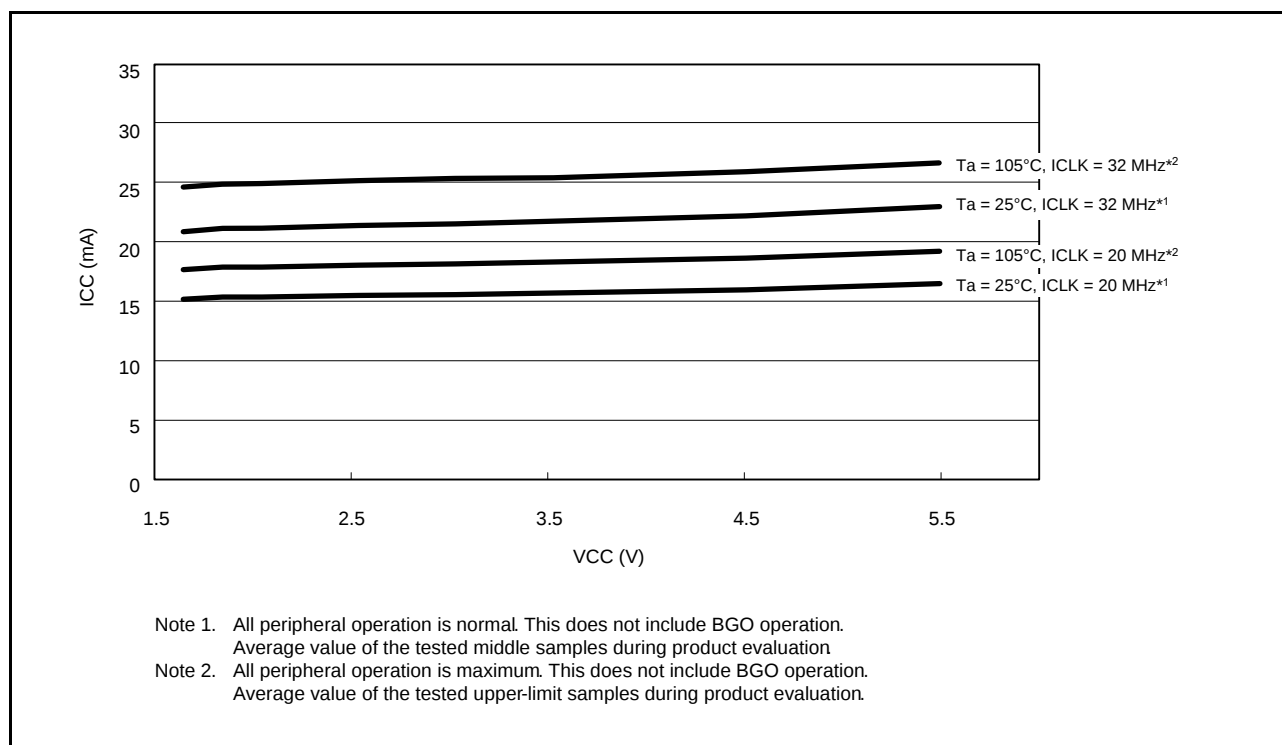


**Figure 5.36 Voltage Dependency in Middle-Speed Operating Modes 1A and 1B (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins**

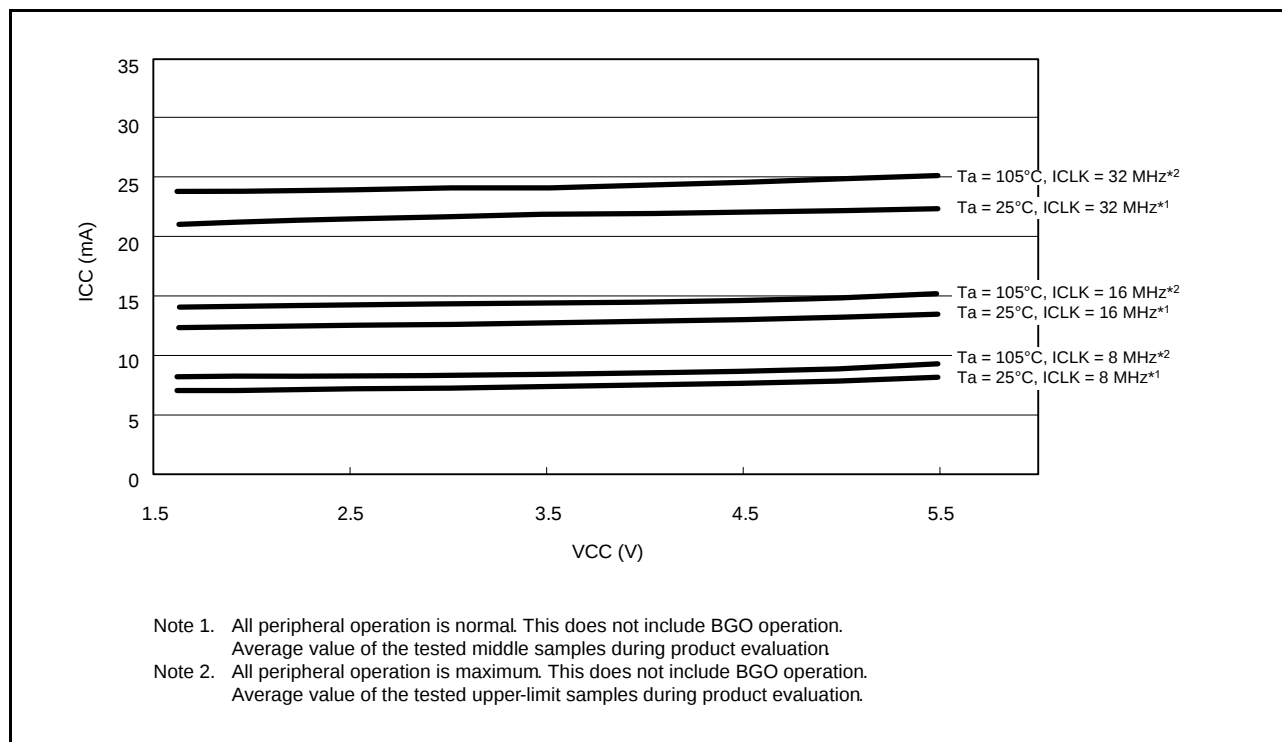

**Figure 5.37 Voltage Dependency in Middle-Speed Operating Modes 2A and 2B (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins**

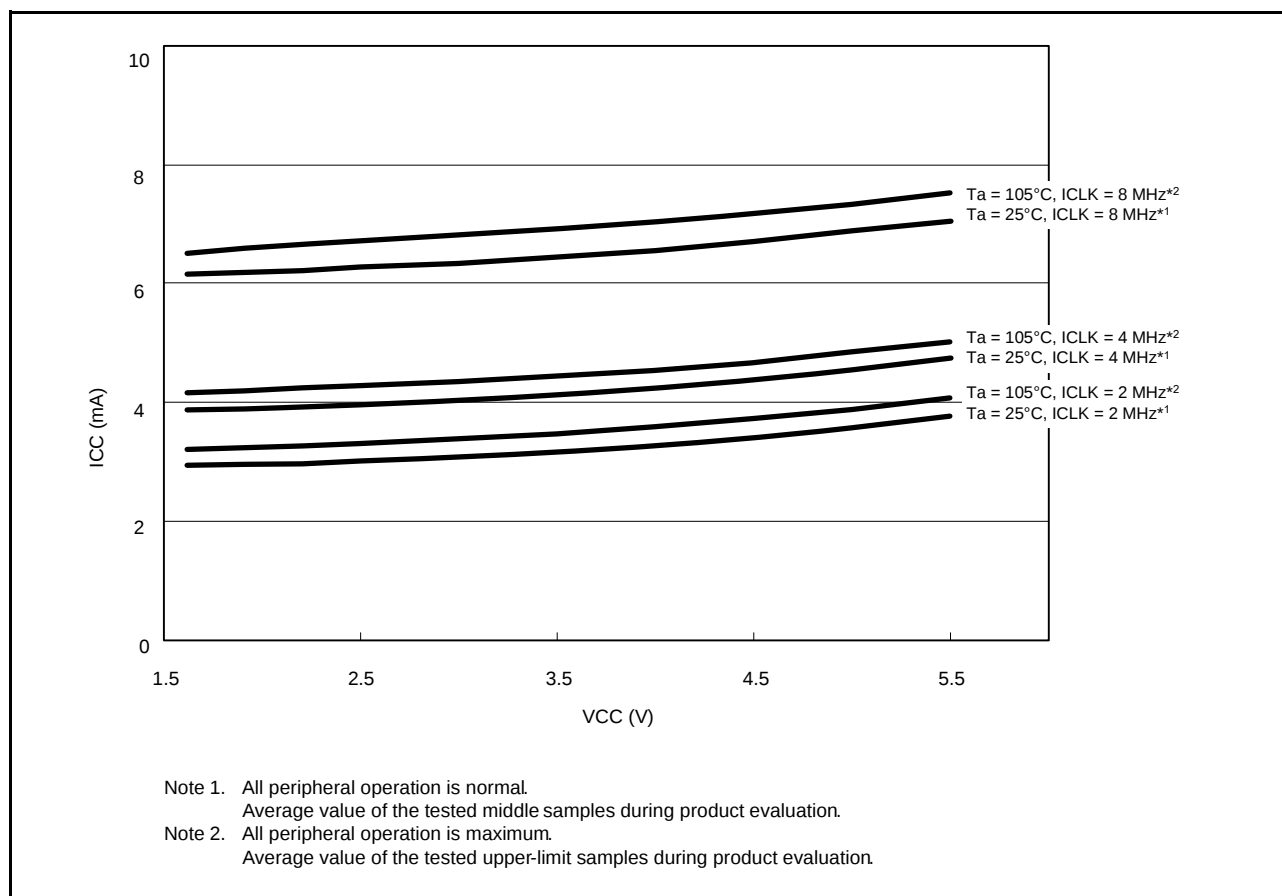

**Figure 5.38 Voltage Dependency in Low-Speed Operating Mode 1 (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins**

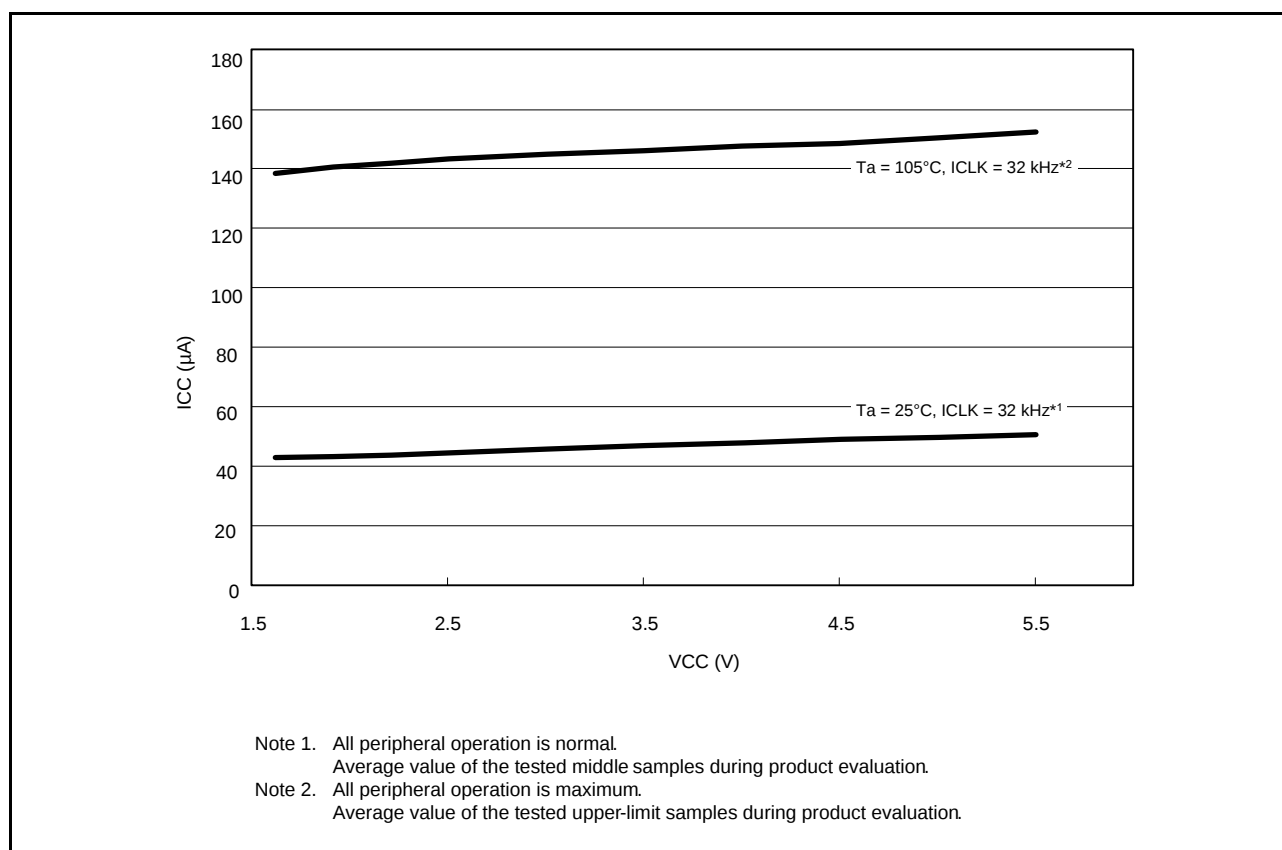

**Figure 5.39 Voltage Dependency in Low-Speed Operating Mode 2 (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins**

[Chip version B with 512 Kbytes or less of flash memory and 144 and 145 pins]


**Table 5.20 DC Characteristics (19)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item             |                                                                                                                |                                                                                                                             |                        | Symbol          | Typ.*3 | Max. | Unit | Test Conditions |  |
|------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------|-----------------|--------|------|------|-----------------|--|
| Supply current*1 | Software standby mode*2                                                                                        | Flash memory power supplied, HOCO power supplied, POR low power consumption function disabled (SOFTCUT[2:0] bits = 000b)    | T <sub>a</sub> = 25°C  | I <sub>CC</sub> | 10     | 18   | μA   |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 13     | 52   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 20     | 101  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 34     | 173  |      |                 |  |
|                  |                                                                                                                | Flash memory power supplied, HOCO power not supplied, POR low power consumption function enabled (SOFTCUT[2:0] bits = 110b) | T <sub>a</sub> = 25°C  |                 | 1.8    | 7.7  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 3.3    | 30   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 9.2    | 75   |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 20     | 139  |      |                 |  |
|                  | Deep software standby mode*2                                                                                   | Flash memory power not supplied, HOCO power not supplied, POR low power consumption function enabled (DEEPCUT1 bit = 1)     | T <sub>a</sub> = 25°C  |                 | 0.4    | 0.8  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 55°C  |                 | 0.5    | 1.0  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 85°C  |                 | 0.7    | 2.5  |      |                 |  |
|                  |                                                                                                                |                                                                                                                             | T <sub>a</sub> = 105°C |                 | 1.4    | 6.3  |      |                 |  |
|                  | Increments produced by running voltage detection circuits and disabling the POR low power consumption function |                                                                                                                             |                        |                 | 1.4    | —    |      |                 |  |
|                  | Increment for RTC operation (low CL)                                                                           |                                                                                                                             |                        |                 | 0.8    | —    |      |                 |  |
|                  | Increment for RTC operation (standard CL)                                                                      |                                                                                                                             |                        |                 | 2.0    | —    |      |                 |  |


Note 1. Supply current values are with all output pins unloaded and all input pull-up MOSs in the off state.

Note 2. The IWDT and LVD are stopped.


Note 3. VCC = 3.3 V.

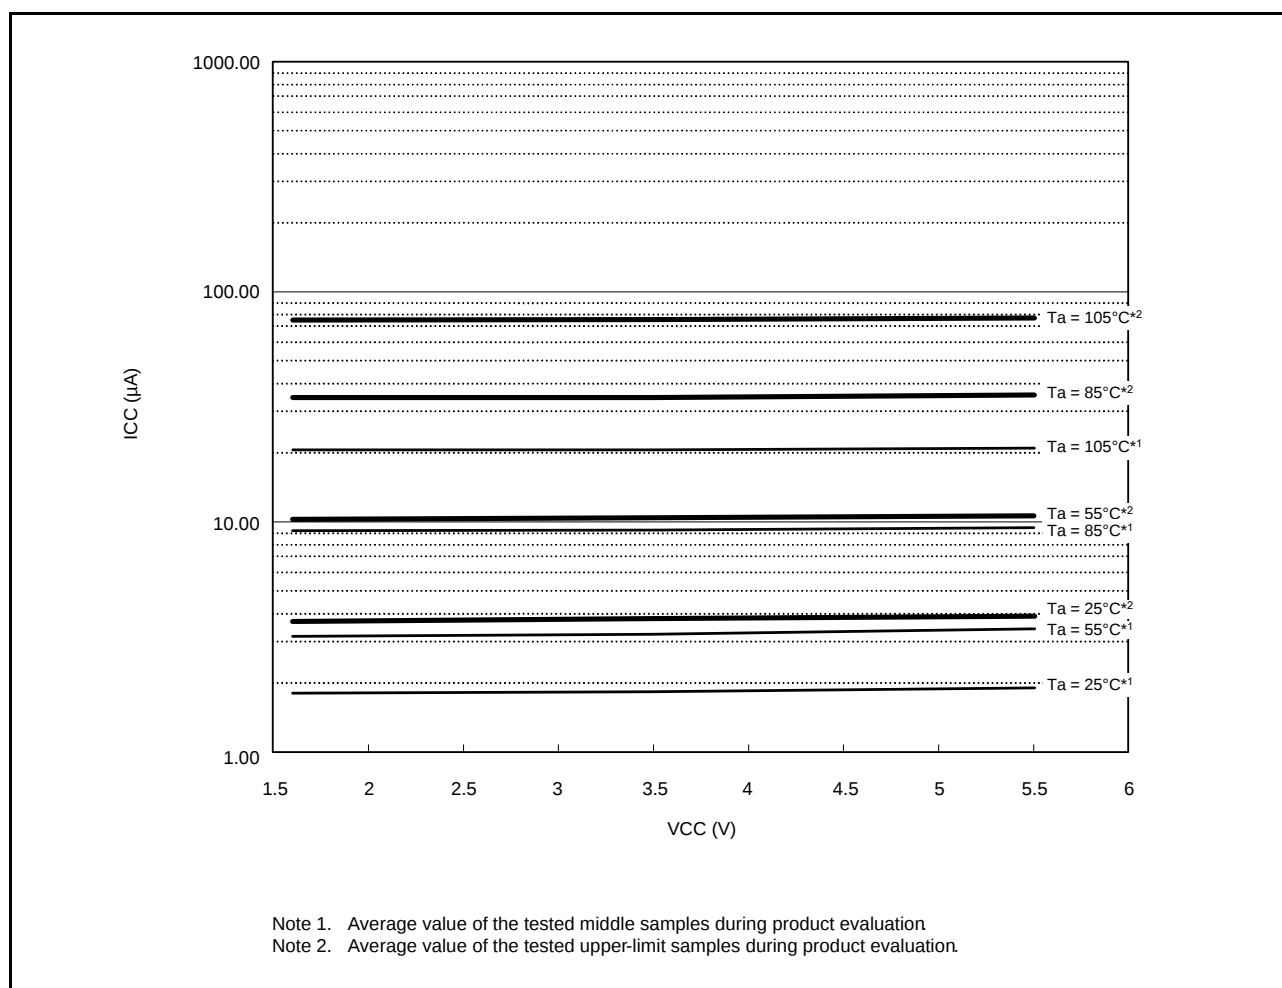


**Figure 5.40** Voltage Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins

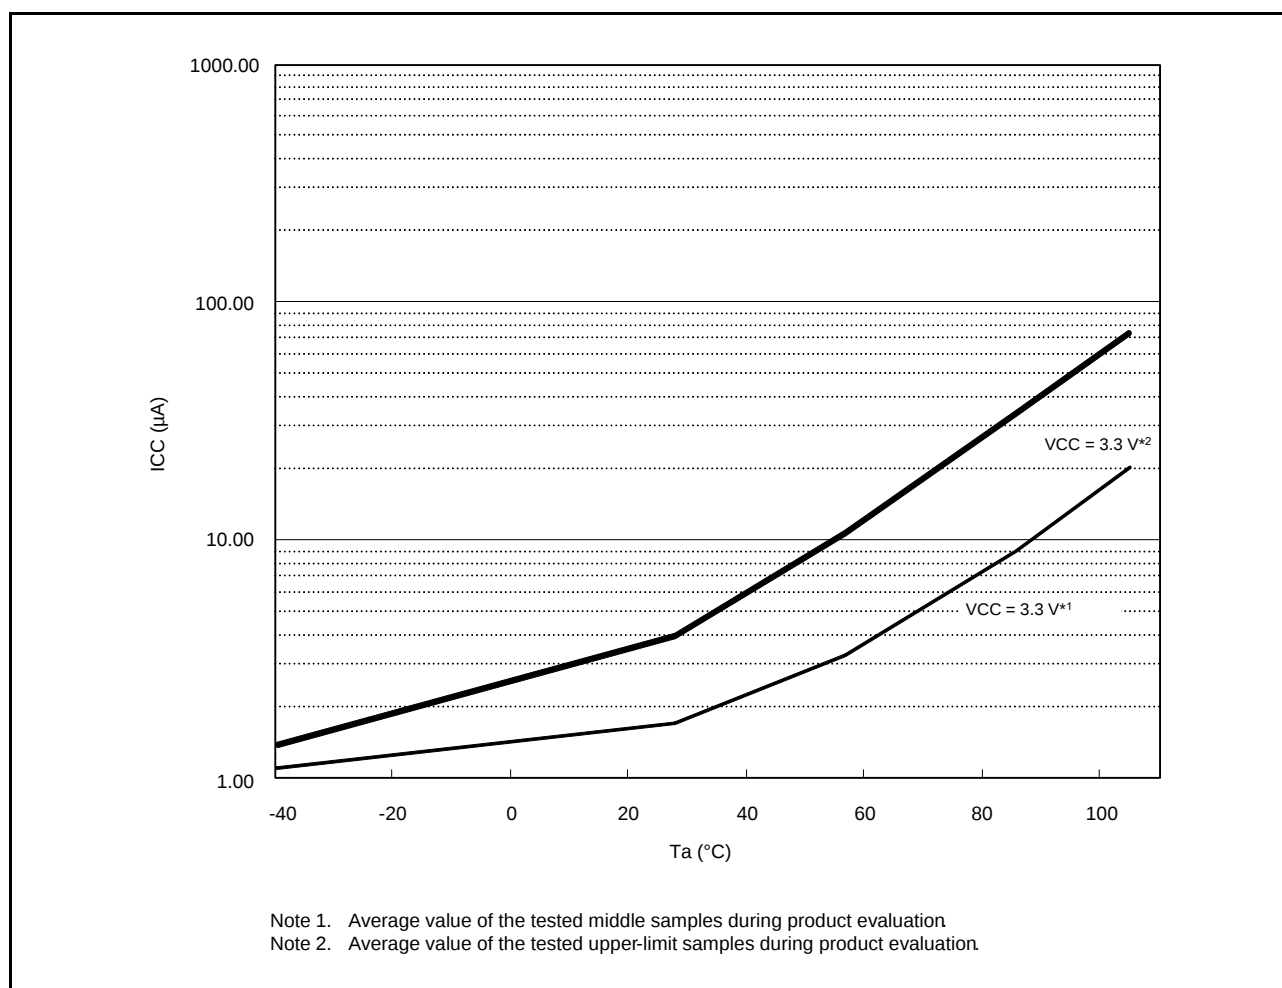

**Figure 5.41** Temperature Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins

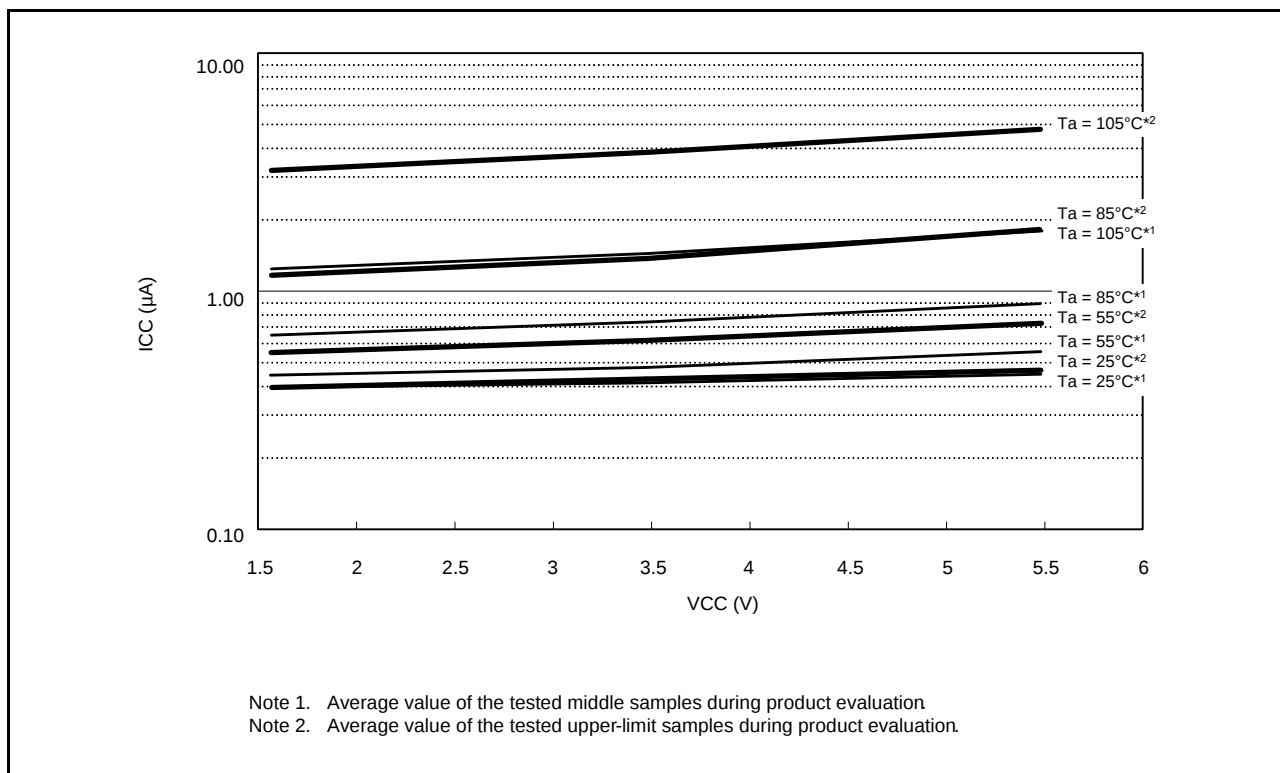

**Figure 5.42 Voltage Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins**

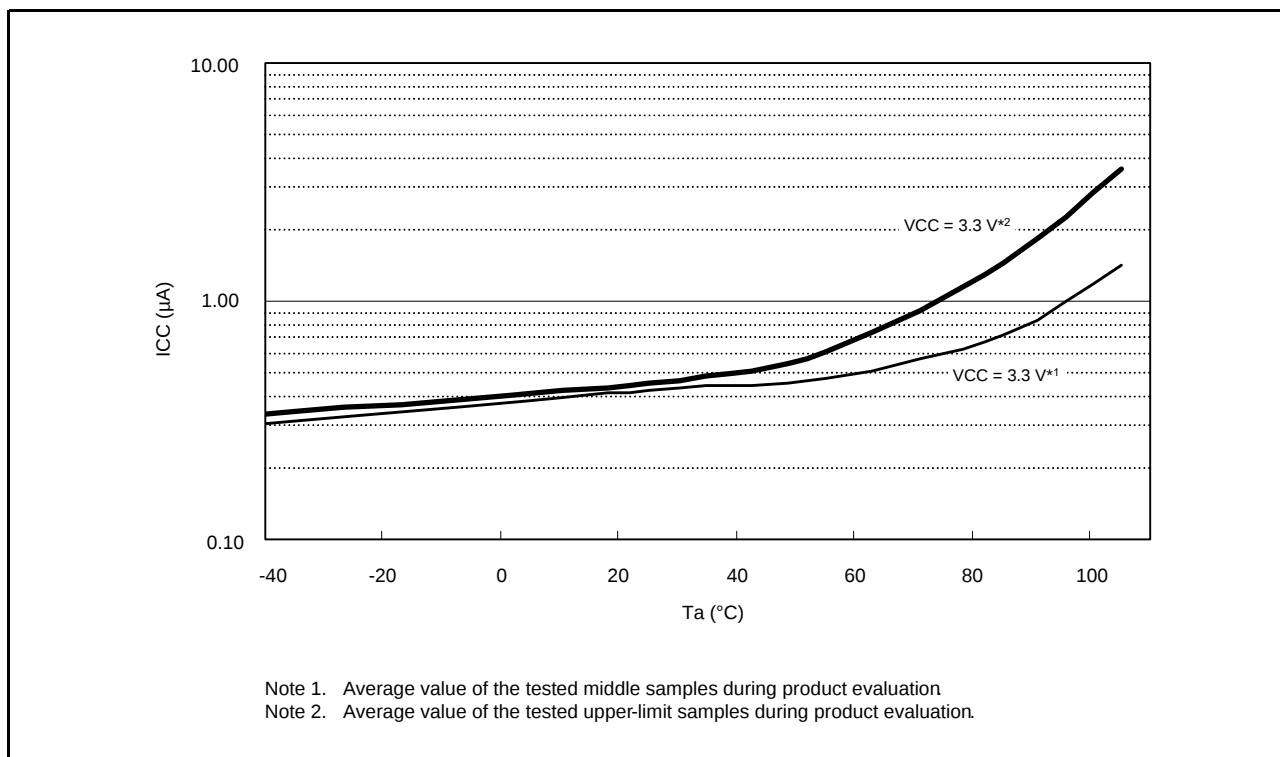

**Figure 5.43 Temperature Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins**

**Table 5.21 DC Characteristics (20)**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item                                  | Symbol | Typ. | Max. | Unit | Test Conditions                                 |
|---------------------------------------|--------|------|------|------|-------------------------------------------------|
| Permissible total consumption power*1 | Pd     | —    | 350  | mW   | $T_a = -40$ to $85^\circ\text{C}$               |
|                                       |        | —    | 150  |      | $85^\circ\text{C} < T_a \leq 105^\circ\text{C}$ |

Note: • Please contact Renesas Electronics sales office for derating of operation under  $T_a = +85^\circ\text{C}$  to  $+105^\circ\text{C}$ . Derating is the systematic reduction of load for the sake of improved reliability.

Note 1. Total power dissipated by the entire chip (including output currents)

**Table 5.22 DC Characteristics (21)**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{REFH} = 1.8$  to  $AVCC0$ ,  $V_{REFH0} = 1.62$  to  $AVCC0$ ,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item                           |                                                          | Symbol           | Min. | Typ. | Max. | Unit          | Test Conditions |
|--------------------------------|----------------------------------------------------------|------------------|------|------|------|---------------|-----------------|
| Analog power supply current    | During A/D conversion                                    | $I_{AVCC0}$      | —    | 1.0  | 3.2  | mA            |                 |
|                                | Temperature sensor operating, waiting for A/D conversion |                  | —    | 60   | 200  | $\mu\text{A}$ |                 |
|                                | During D/A conversion (per channel)                      | $I_{VREFH}^{*1}$ | —    | 0.25 | 0.75 | mA            |                 |
|                                | Waiting for A/D, D/A conversion (all units)*2            | —                | —    | 0.2  | 5.0  | $\mu\text{A}$ |                 |
| Reference power supply current | During A/D conversion                                    | $I_{VREFH0}$     | —    | 0.1  | 0.2  | mA            |                 |
|                                | Waiting for A/D conversion                               |                  | —    | 0.2  | 0.4  | $\mu\text{A}$ |                 |

Note: • The values for A/D conversion apply when the sample and hold circuit is not in use.

Note 1. The reference power supply current is included in the power supply current value for D/A conversion.

Note 2. The value is the total value of  $I_{AVCC0}$  and  $I_{VREFH}$ .

**Table 5.23 DC Characteristics (22)**Conditions:  $V_{CC} = AVCC0$ ,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item                | Symbol    | Min. | Typ. | Max. | Unit | Test Conditions |
|---------------------|-----------|------|------|------|------|-----------------|
| RAM standby voltage | $V_{RAM}$ | 1.62 | —    | —    | V    |                 |

**Table 5.24 DC Characteristics (23)**Conditions:  $V_{CC} = AVCC0 = 0$  to  $5.5$  V,  $V_{REFH} = V_{REFH0} = 0$  to  $AVCC0$ ,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item                | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|---------------------|--------|------|------|------|------|-----------------|
| VCC rising gradient | SrVCC  | 0.02 | —    | 20   | ms/V | At cold start   |


**Table 5.25 DC Characteristics (24)**

Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$

The ripple voltage must meet the allowable ripple frequency  $f_{r(VCC)}$  within the range between the VCC upper limit (5.5 V) and lower limit (1.62 V).

When VCC change exceeds  $V_{CC} \pm 10\%$ , the allowable voltage change rising/falling gradient  $dt/dV_{CC}$  must be met.

| Item                                             | Symbol       | Min. | Typ. | Max. | Unit | Test Conditions                                                         |
|--------------------------------------------------|--------------|------|------|------|------|-------------------------------------------------------------------------|
| Allowable ripple frequency                       | $f_{r(VCC)}$ | —    | —    | 10   | kHz  | Figure 5.44<br>$V_{CC} \times 0.1 < V_{r(VCC)} \leq V_{CC} \times 0.2$  |
|                                                  |              | —    | —    | 1    | MHz  | Figure 5.44<br>$V_{CC} \times 0.05 < V_{r(VCC)} \leq V_{CC} \times 0.1$ |
|                                                  |              | —    | —    | 10   | MHz  | Figure 5.44<br>$V_{r(VCC)} \leq V_{CC} \times 0.05$                     |
| Allowable voltage change rising/falling gradient | $dt/dV_{CC}$ | 1.0  | —    | —    | ms/V | When VCC change exceeds $V_{CC} \pm 10\%$                               |

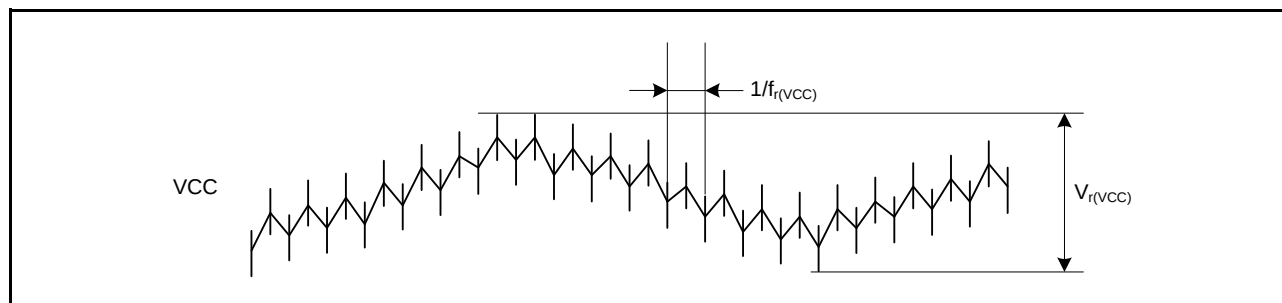**Figure 5.44 Ripple Waveform****Table 5.26 Permissible Output Currents (1)**

Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V, when total power (mW)  $< 1000 - 10 \times T_a$

| Item                                                         |                          | Symbol          | Max. | Unit |
|--------------------------------------------------------------|--------------------------|-----------------|------|------|
| Permissible output low current<br>(average value per 1 pin)  | Normal output mode       | $I_{OL}$        | 4.0  | mA   |
|                                                              | High-drive output mode   |                 | 8.0  |      |
| Permissible output low current<br>(maximum value per 1 pin)  | Normal output mode       |                 | 4.0  | mA   |
|                                                              | High-drive output mode   |                 | 8.0  |      |
| Permissible output low current (total)                       | Total of all output pins | $\Sigma I_{OL}$ | 80   | mA   |
| Permissible output high current<br>(average value per 1 pin) | Normal output mode       | $I_{OH}$        | -4.0 | mA   |
|                                                              | High-drive output mode   |                 | -8.0 |      |
| Permissible output high current<br>(maximum value per 1 pin) | Normal output mode       |                 | -4.0 | mA   |
|                                                              | High-drive output mode   |                 | -8.0 |      |
| Permissible output high current (total)                      | Total of all output pins | $\Sigma I_{OH}$ | -80  | mA   |

**Table 5.27 Permissible Output Currents (2)**Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V, when total power (mW)  $\geq 1000 - 10 \times T_a$ 

| Item                                                         |                          | Symbol          | Max. | Unit |
|--------------------------------------------------------------|--------------------------|-----------------|------|------|
| Permissible output low current<br>(average value per 1 pin)  | Normal output mode       | $I_{OL}$        | 2.0  | mA   |
|                                                              | High-drive output mode   |                 | 4.0  |      |
| Permissible output low current<br>(maximum value per 1 pin)  | Normal output mode       |                 | 2.0  | mA   |
|                                                              | High-drive output mode   |                 | 4.0  |      |
| Permissible output low current (total)                       | Total of all output pins | $\Sigma I_{OL}$ | 40   | mA   |
| Permissible output high current<br>(average value per 1 pin) | Normal output mode       | $I_{OH}$        | -2.0 | mA   |
|                                                              | High-drive output mode   |                 | -4.0 |      |
| Permissible output high current<br>(maximum value per 1 pin) | Normal output mode       |                 | -2.0 | mA   |
|                                                              | High-drive output mode   |                 | -4.0 |      |
| Permissible output high current (total)                      | Total of all output pins | $\Sigma I_{OH}$ | -40  | mA   |

[Chip version A]

**Table 5.28 Output Values of Voltage (1)**Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $2.7$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item        |                                      |                        | Symbol   | Min.           | Max. | Unit | Test Conditions    |
|-------------|--------------------------------------|------------------------|----------|----------------|------|------|--------------------|
| Output low  | All output pins<br>(other than RIIC) | Normal output mode     | $V_{OL}$ | —              | 0.4  | V    | $I_{OL} = 0.5$ mA  |
|             |                                      | High-drive output mode |          | —              | 0.4  |      | $I_{OL} = 1.0$ mA  |
| Output high | All output pins                      | Normal output mode     | $V_{OH}$ | $V_{CC} - 0.4$ | —    | V    | $I_{OH} = -0.5$ mA |
|             |                                      | High-drive output mode |          | $V_{CC} - 0.4$ | —    |      | $I_{OH} = -1.0$ mA |

[Chip version A]

**Table 5.29 Output Values of Voltage (2)**Conditions:  $V_{CC} = AV_{CC0} = 2.7$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item       |                                      |                        | Symbol          | Min.                   | Max.            | Unit | Test Conditions          |                          |   |                            |                            |
|------------|--------------------------------------|------------------------|-----------------|------------------------|-----------------|------|--------------------------|--------------------------|---|----------------------------|----------------------------|
|            |                                      |                        |                 |                        |                 |      | VCC = 2.7 to 4.0 V       | VCC = 4.0 to 5.5 V       |   |                            |                            |
| Output low | All output pins<br>(other than RIIC) | Normal output mode     | V <sub>OL</sub> | —                      | 1.0             | V    | I <sub>OL</sub> = 3.0 mA | I <sub>OL</sub> = 4.0 mA |   |                            |                            |
|            |                                      | High-drive output mode |                 | —                      | 1.0             |      | I <sub>OL</sub> = 5.0 mA | I <sub>OL</sub> = 8.0 mA |   |                            |                            |
|            | RIIC pins                            |                        |                 | —                      | 0.4             |      | I <sub>OL</sub> = 3.0 mA |                          |   |                            |                            |
|            |                                      |                        |                 | —                      | 0.6             |      | I <sub>OL</sub> = 6.0 mA |                          |   |                            |                            |
|            | Output high                          | All output pins        |                 | Normal output mode     | V <sub>OH</sub> |      | VCC – 1.0                | —                        | V | I <sub>OH</sub> = – 3.0 mA | I <sub>OH</sub> = – 4.0 mA |
|            |                                      |                        |                 | High-drive output mode |                 |      | VCC – 1.0                | —                        |   | I <sub>OH</sub> = – 5.0 mA | I <sub>OH</sub> = – 8.0 mA |

[Chip versions B and C]

**Table 5.30 Output Values of Voltage (3)**Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $2.7$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item        |                                      |                        | Symbol   | Min.           | Max. | Unit | Test Conditions    |
|-------------|--------------------------------------|------------------------|----------|----------------|------|------|--------------------|
| Output low  | All output pins<br>(other than RIIC) | Normal output mode     | $V_{OL}$ | —              | 0.3  | V    | $I_{OL} = 0.5$ mA  |
|             |                                      | High-drive output mode |          | —              | 0.3  |      | $I_{OL} = 1.0$ mA  |
| Output high | All output pins                      | Normal output mode     | $V_{OH}$ | $V_{CC} - 0.3$ | —    | V    | $I_{OH} = -0.5$ mA |
|             |                                      | High-drive output mode |          | $V_{CC} - 0.3$ | —    |      | $I_{OH} = -1.0$ mA |

[Chip versions B and C]

**Table 5.31 Output Values of Voltage (4)**Conditions:  $V_{CC} = AV_{CC0} = 2.7$  to  $4.0$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item        |                                      |                        | Symbol          | Min.      | Max. | Unit | Test Conditions           |
|-------------|--------------------------------------|------------------------|-----------------|-----------|------|------|---------------------------|
| Output low  | All output pins<br>(other than RIIC) | Normal output mode     | V <sub>OL</sub> | —         | 0.5  | V    | I <sub>OL</sub> = 1.0 mA  |
|             |                                      | High-drive output mode |                 | —         | 0.5  |      | I <sub>OL</sub> = 2.0 mA  |
|             |                                      |                        |                 | —         | 0.4  |      | I <sub>OL</sub> = 3.0 mA  |
|             |                                      |                        |                 | —         | 0.6  |      | I <sub>OL</sub> = 6.0 mA  |
|             |                                      |                        |                 |           |      |      |                           |
| Output high | All output pins                      | Normal output mode     | V <sub>OH</sub> | VCC – 0.5 | —    | V    | I <sub>OH</sub> = –1.0 mA |
|             |                                      | High-drive output mode |                 | VCC – 0.5 | —    |      | I <sub>OH</sub> = –2.0 mA |


[Chip versions B and C]

**Table 5.32 Output Values of Voltage (5)**Conditions:  $V_{CC} = AV_{CC0} = 4.0$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 


| Item        |                                      |                        | Symbol   | Min.           | Max. | Unit | Test Conditions           |
|-------------|--------------------------------------|------------------------|----------|----------------|------|------|---------------------------|
| Output low  | All output pins<br>(other than RIIC) | Normal output mode     | $V_{OL}$ | —              | 0.8  | V    | $I_{OL} = 2.0\text{ mA}$  |
|             |                                      | High-drive output mode |          | —              | 0.8  |      | $I_{OL} = 4.0\text{ mA}$  |
|             | RIIC pins                            |                        |          | —              | 0.4  |      | $I_{OL} = 3.0\text{ mA}$  |
|             |                                      |                        |          | —              | 0.6  |      | $I_{OL} = 6.0\text{ mA}$  |
|             |                                      |                        |          |                |      |      |                           |
| Output high | All output pins                      | Normal output mode     | $V_{OH}$ | $V_{CC} - 0.8$ | —    | V    | $I_{OH} = -2.0\text{ mA}$ |
|             |                                      | High-drive output mode |          | $V_{CC} - 0.8$ | —    |      | $I_{OH} = -4.0\text{ mA}$ |

### 5.2.1 Standard I/O Pin Output Characteristics (1)


Figure 5.45 to Figure 5.49 show the characteristics when normal output is selected by the drive capacity control register.

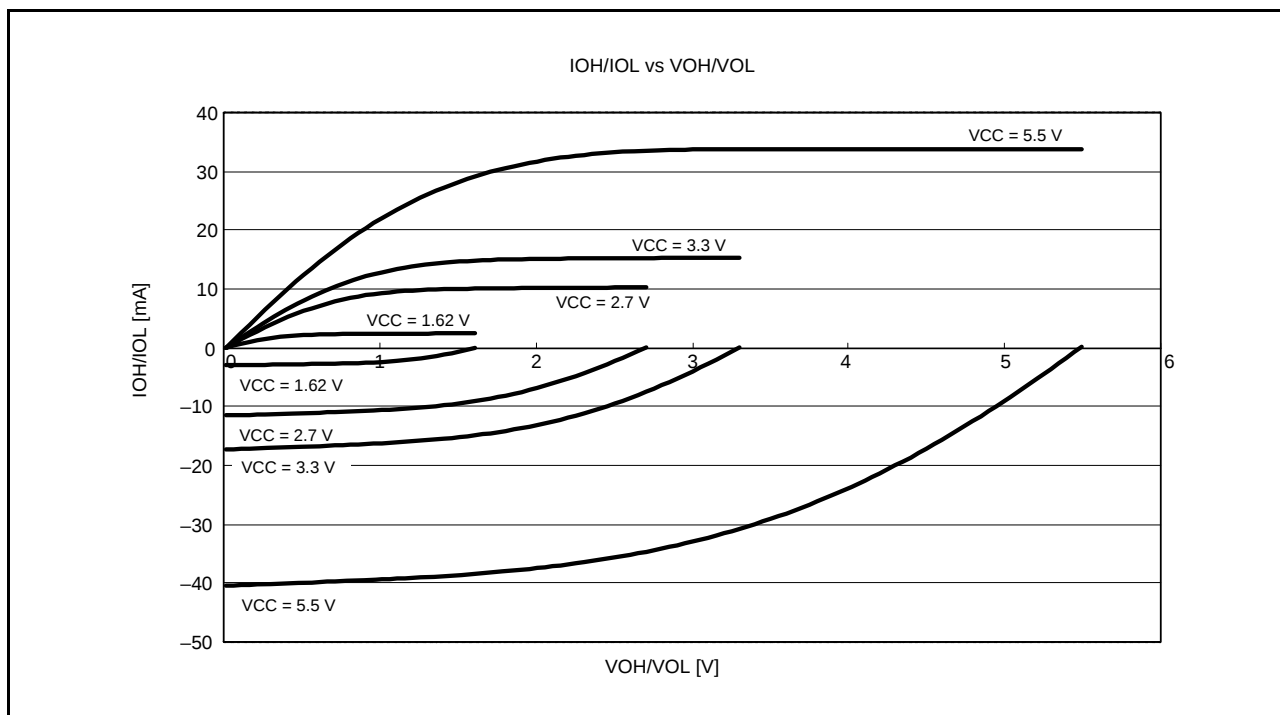


**Figure 5.45  $V_{OH}/V_{OL}$  and  $I_{OH}/I_{OL}$  Voltage Characteristics at  $T_a = 25^\circ\text{C}$  when Normal Output is Selected (Reference Data)**

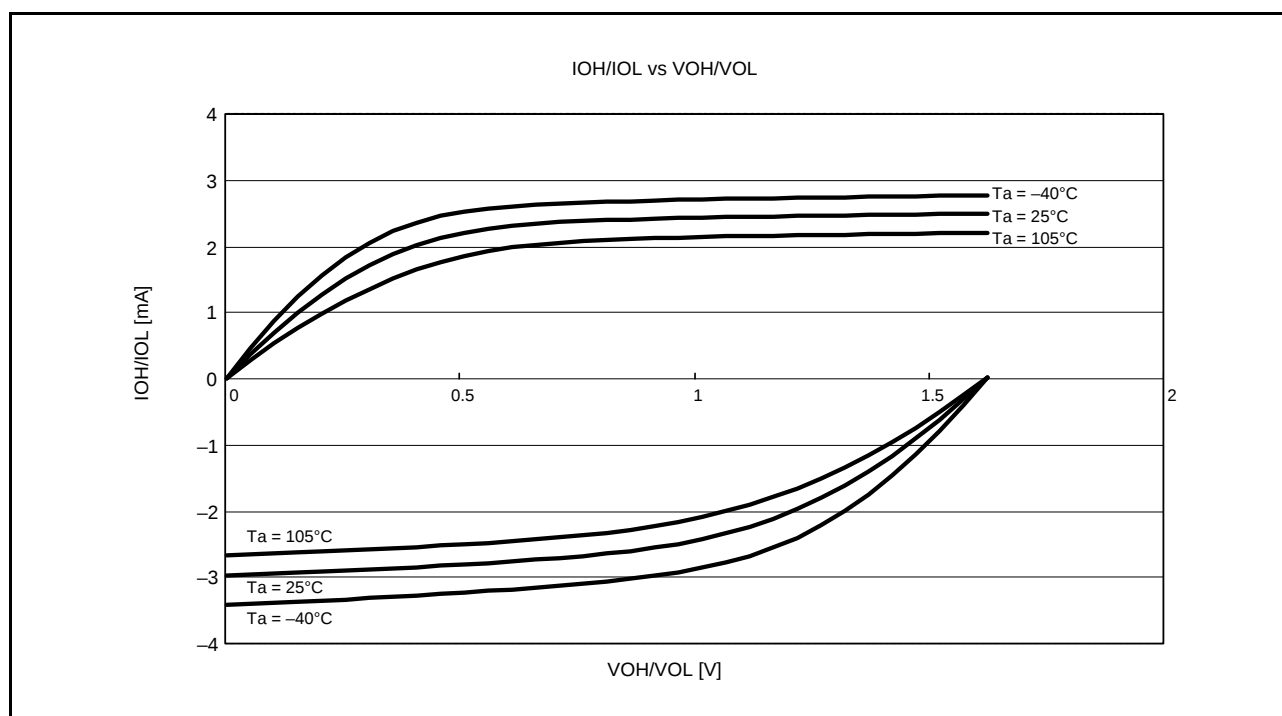


**Figure 5.46**  $V_{OH}/V_{OL}$  and  $I_{OH}/I_{OL}$  Temperature Characteristics at  $V_{CC} = 1.62$  V when Normal Output is Selected (Reference Data)

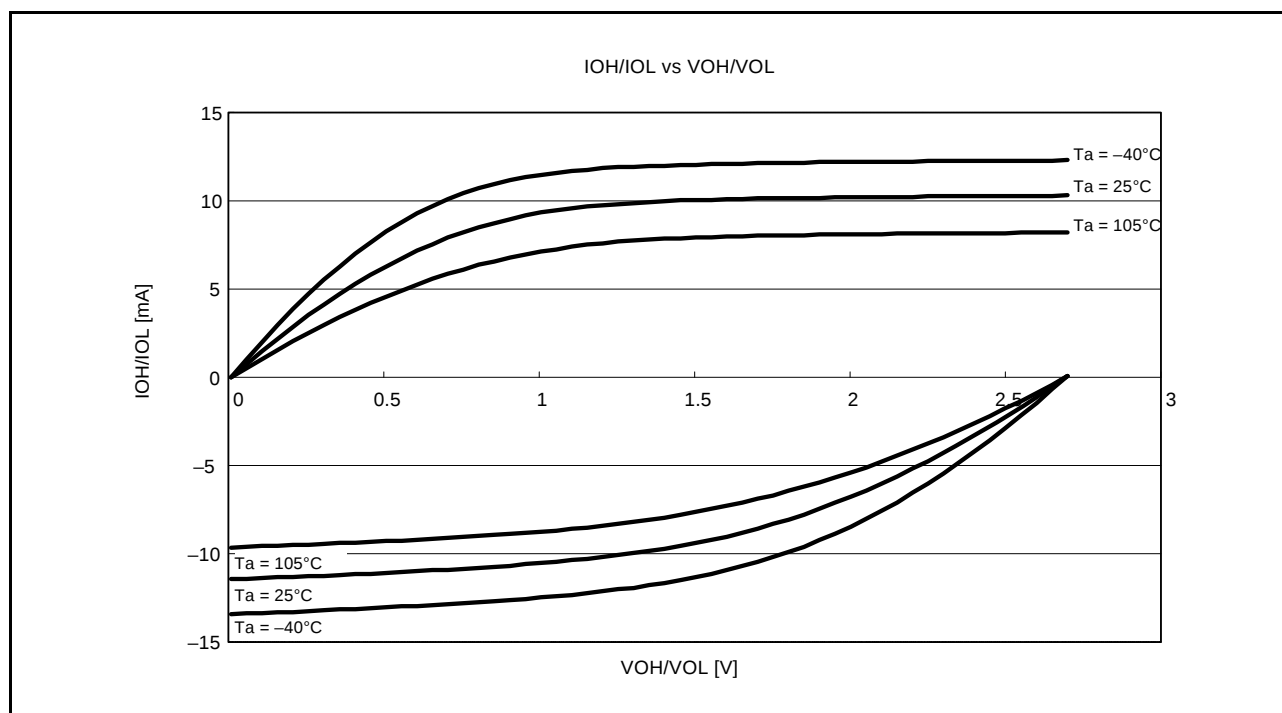

**Figure 5.47**  $V_{OH}/V_{OL}$  and  $I_{OH}/I_{OL}$  Temperature Characteristics at  $V_{CC} = 2.7$  V when Normal Output is Selected (Reference Data)

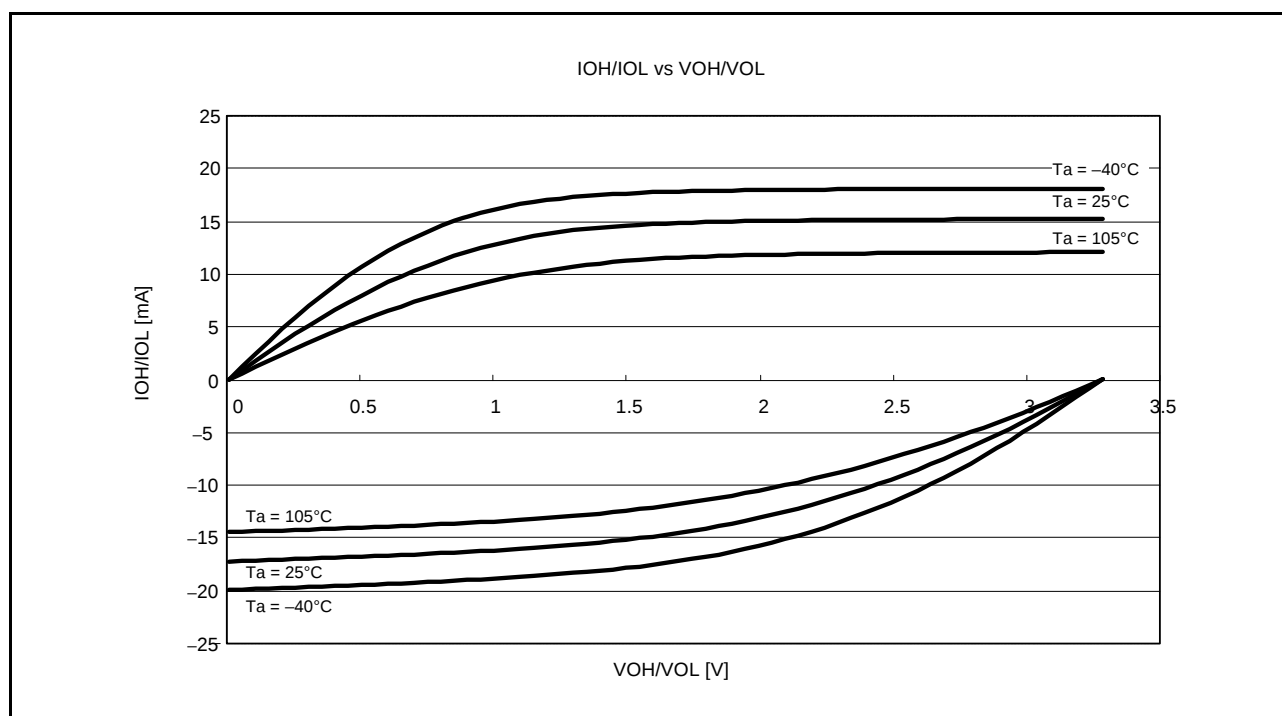


**Figure 5.48** VOH/VOL and IOH/IOL Temperature Characteristics at VCC = 3.3 V when Normal Output is Selected (Reference Data)

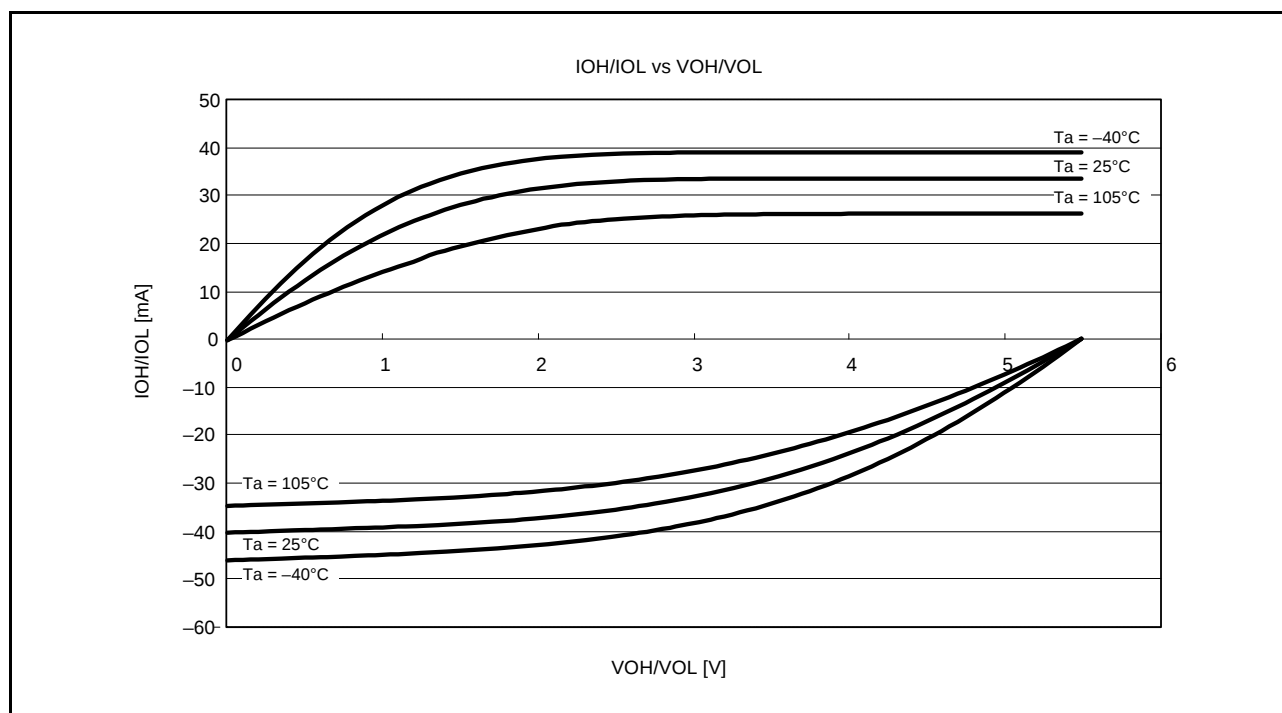


**Figure 5.49** VOH/VOL and IOH/IOL Temperature Characteristics at VCC = 5.5 V when Normal Output is Selected (Reference Data)

### 5.2.2 Standard I/O Pin Output Characteristics (2)


Figure 5.50 to Figure 5.54 show the characteristics when high-drive output is selected by the drive capacity control register.

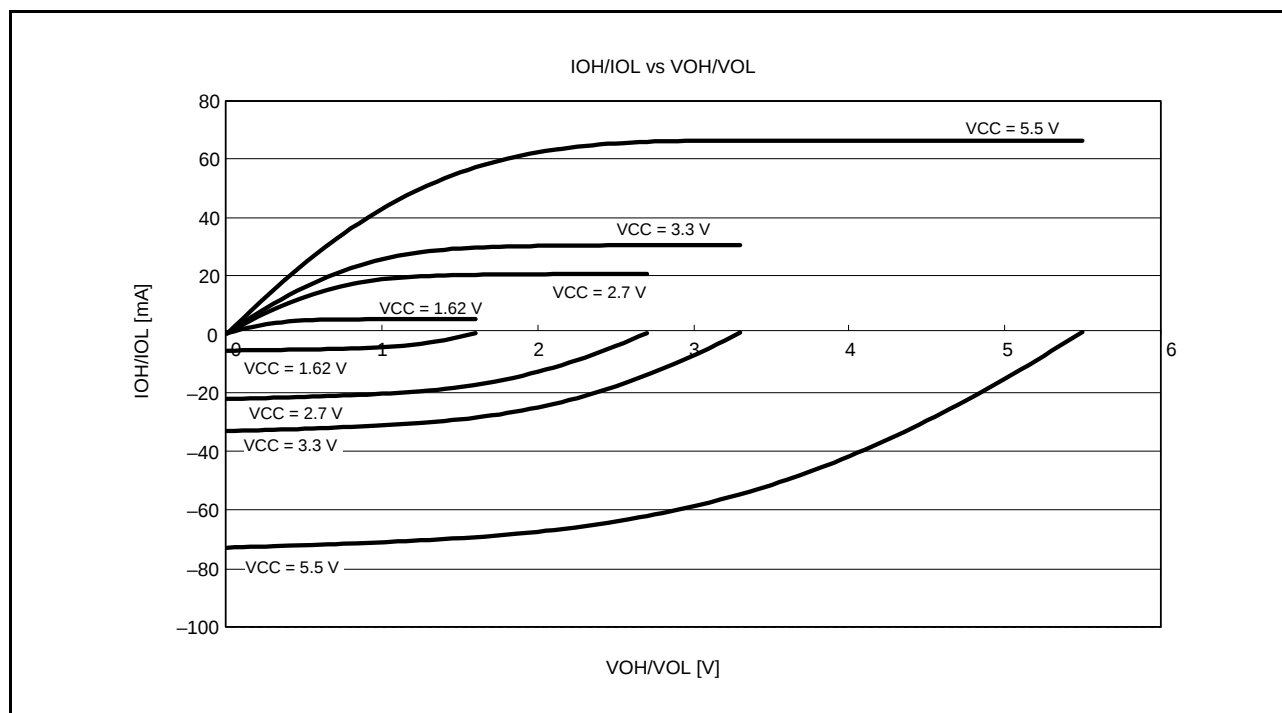


**Figure 5.50** VOH/VOL and IOH/IOL Voltage Characteristics at  $T_a = 25^\circ\text{C}$  when High-Drive Output is Selected (Reference Data)

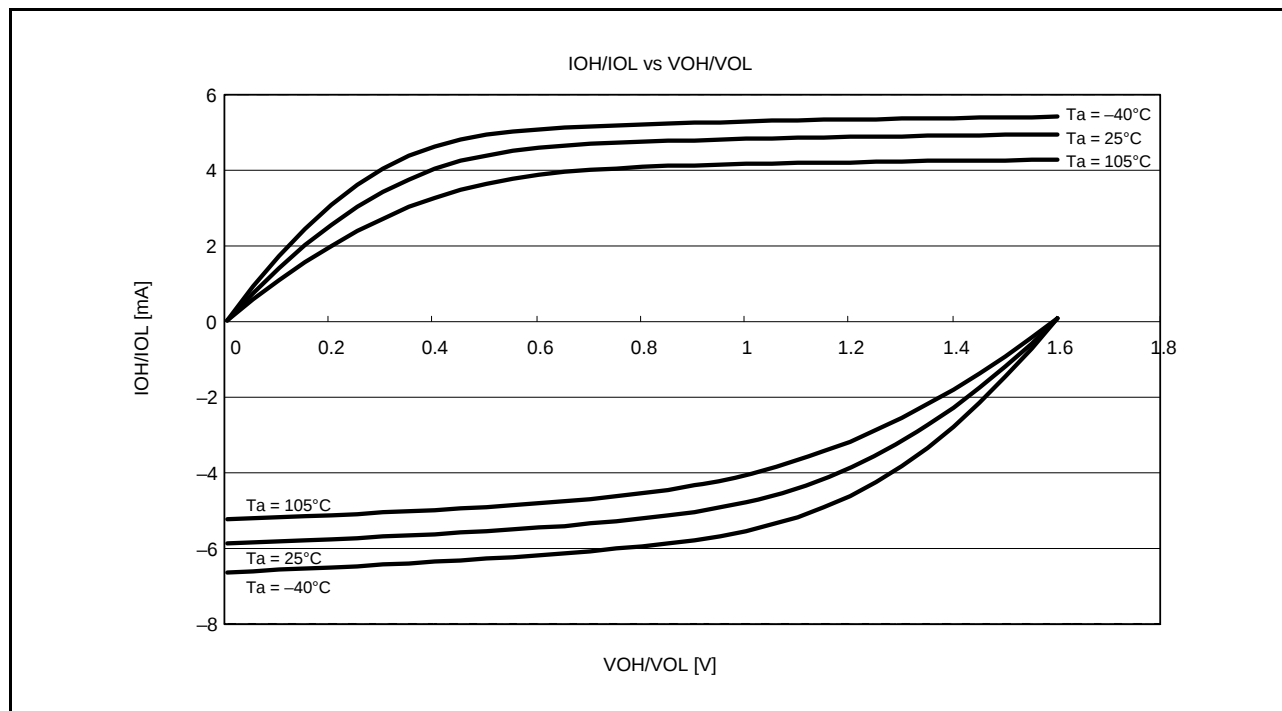


**Figure 5.51** VOH/VOL and IOH/IOL Temperature Characteristics at  $V_{CC} = 1.62\text{ V}$  when High-Drive Output is Selected (Reference Data)

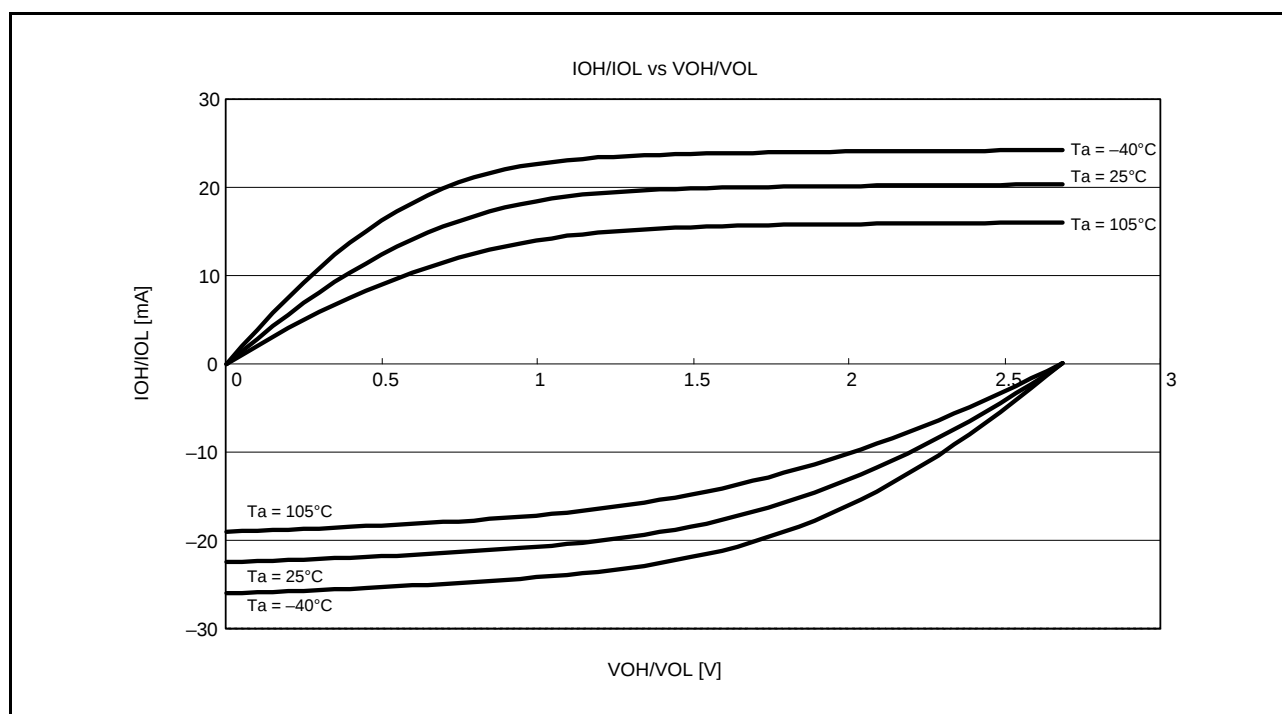

**Figure 5.52**  $V_{OH}/V_{OL}$  and  $I_{OH}/I_{OL}$  Temperature Characteristics at  $V_{CC} = 2.7$  V when High-Drive Output is Selected (Reference Data)

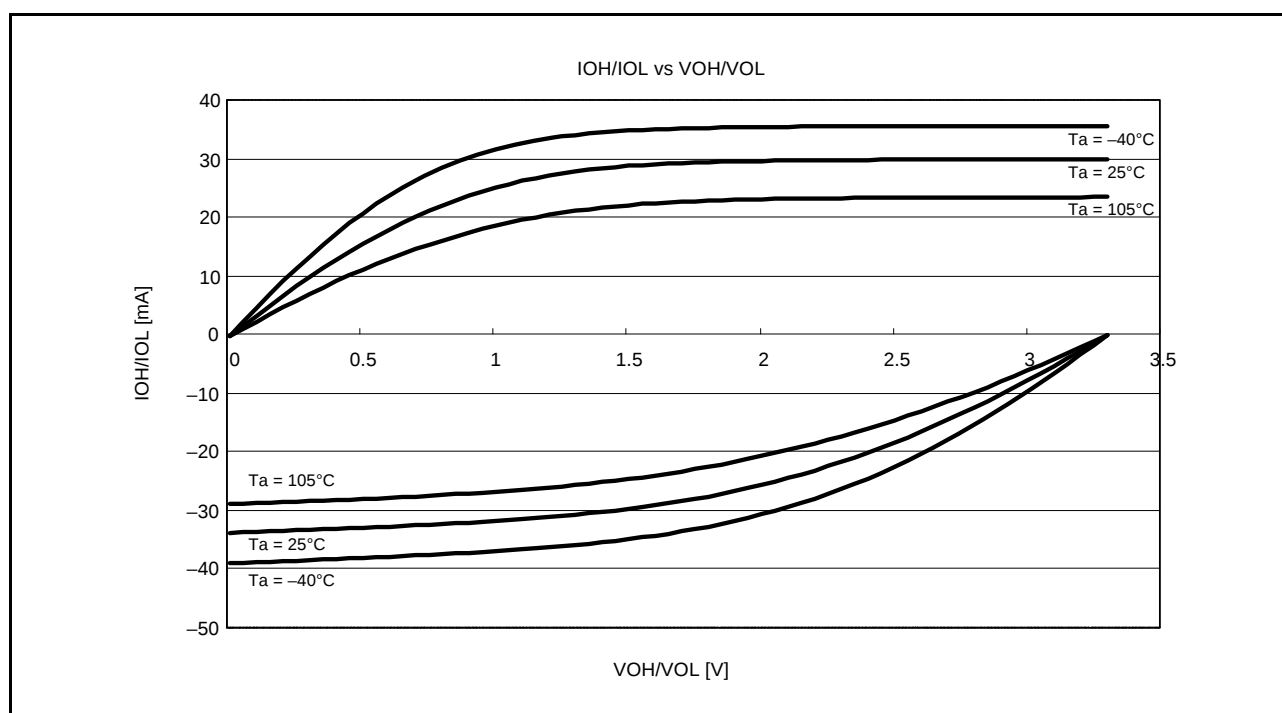

**Figure 5.53**  $V_{OH}/V_{OL}$  and  $I_{OH}/I_{OL}$  Temperature Characteristics at  $V_{CC} = 3.3$  V when High-Drive Output is Selected (Reference Data)

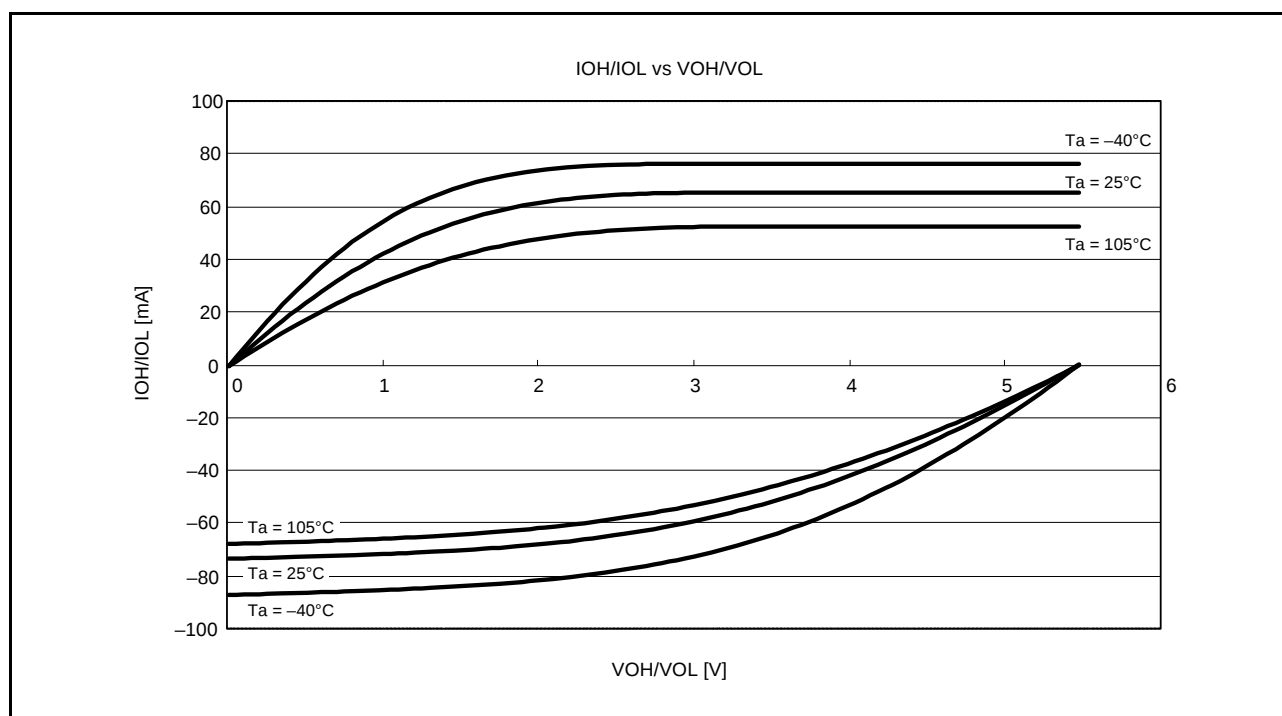

**Figure 5.54** VOH/VOL and IOH/IOL Temperature Characteristics at VCC = 5.5 V when High-Drive Output is Selected (Reference Data)

### 5.2.3 RIIC Pin Output Characteristics

Figure 5.55 to Figure 5.58 show the output characteristics of the RIIC pin.

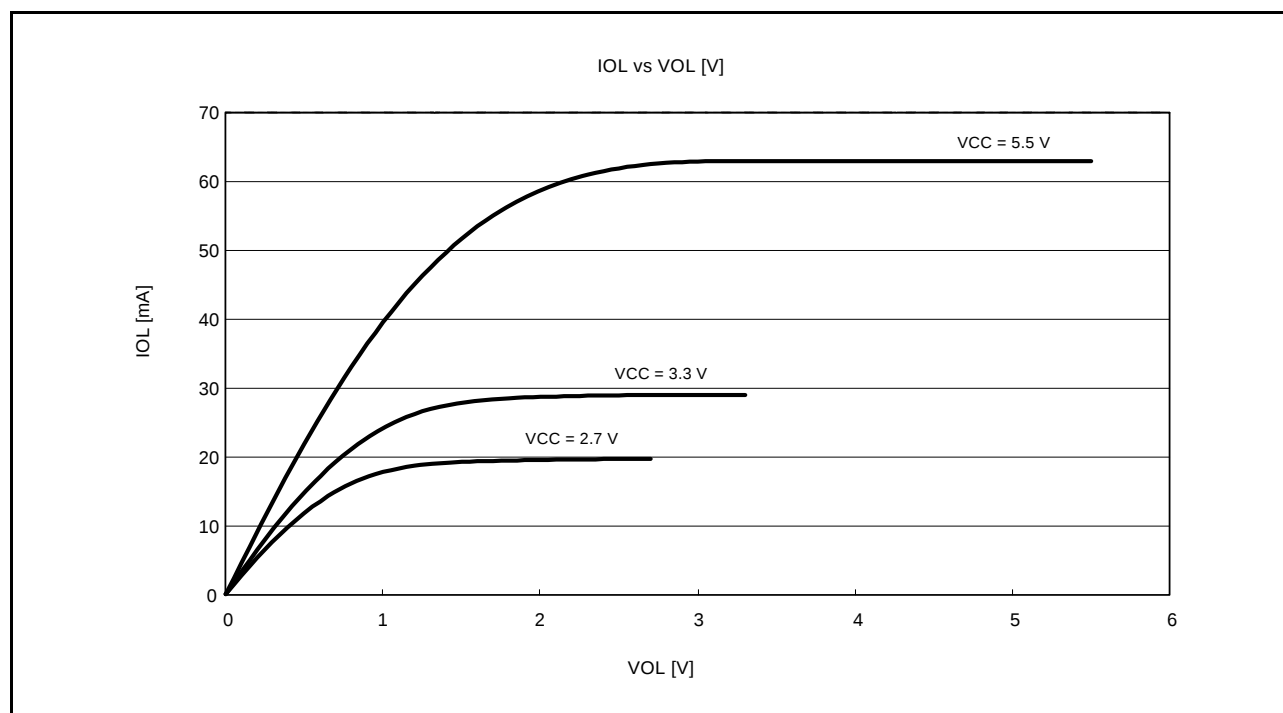


Figure 5.55  $V_{OL}$  and  $I_{OL}$  Voltage Characteristics of RIIC Output Pin at  $T_a = 25^\circ\text{C}$  (Reference Data)



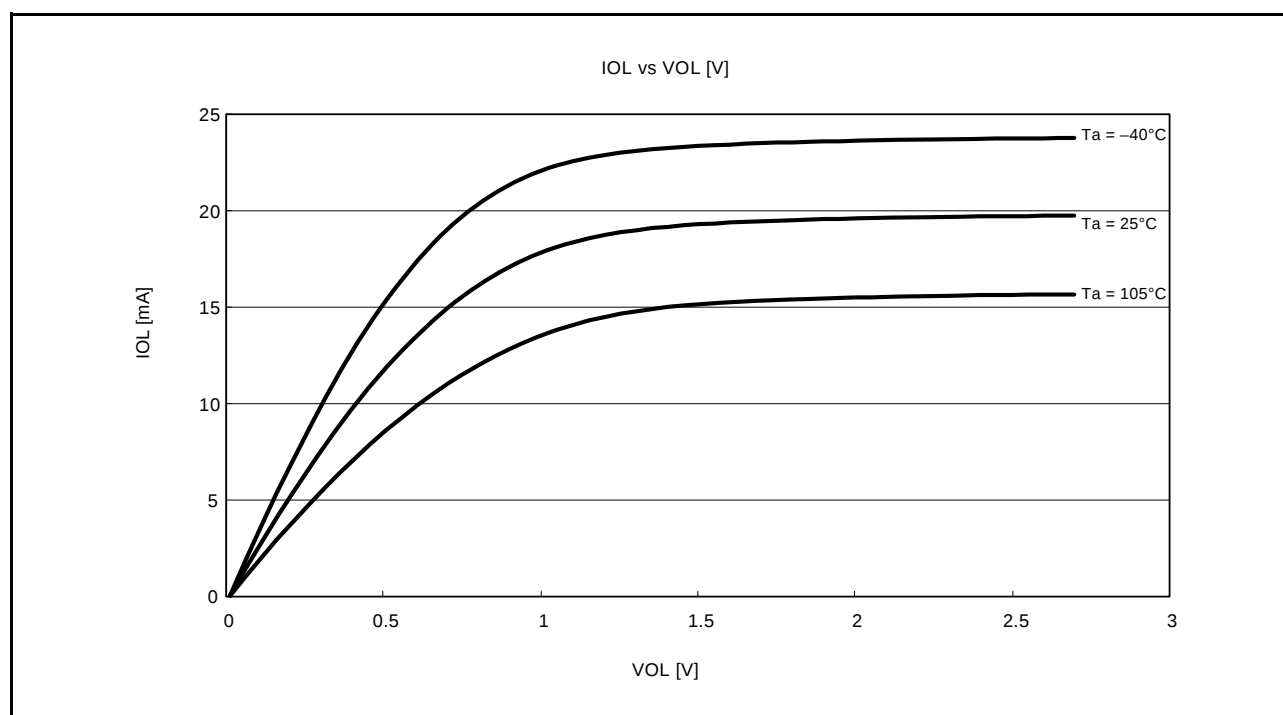


Figure 5.56  $V_{OL}$  and  $I_{OL}$  Temperature Characteristics of RIIC Output Pin at  $V_{CC} = 2.7\text{ V}$  (Reference Data)

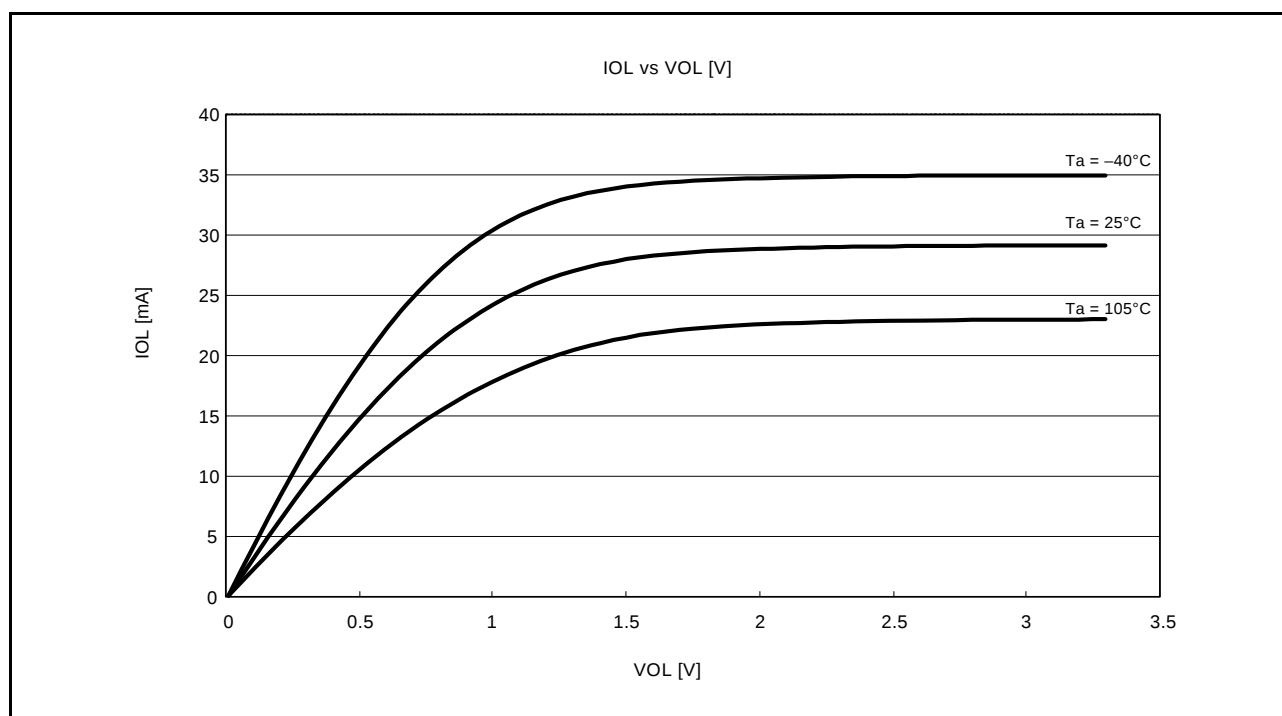

**Figure 5.57** VOL and IOL Temperature Characteristics of RIIC Output Pin at VCC = 3.3 V (Reference Data)

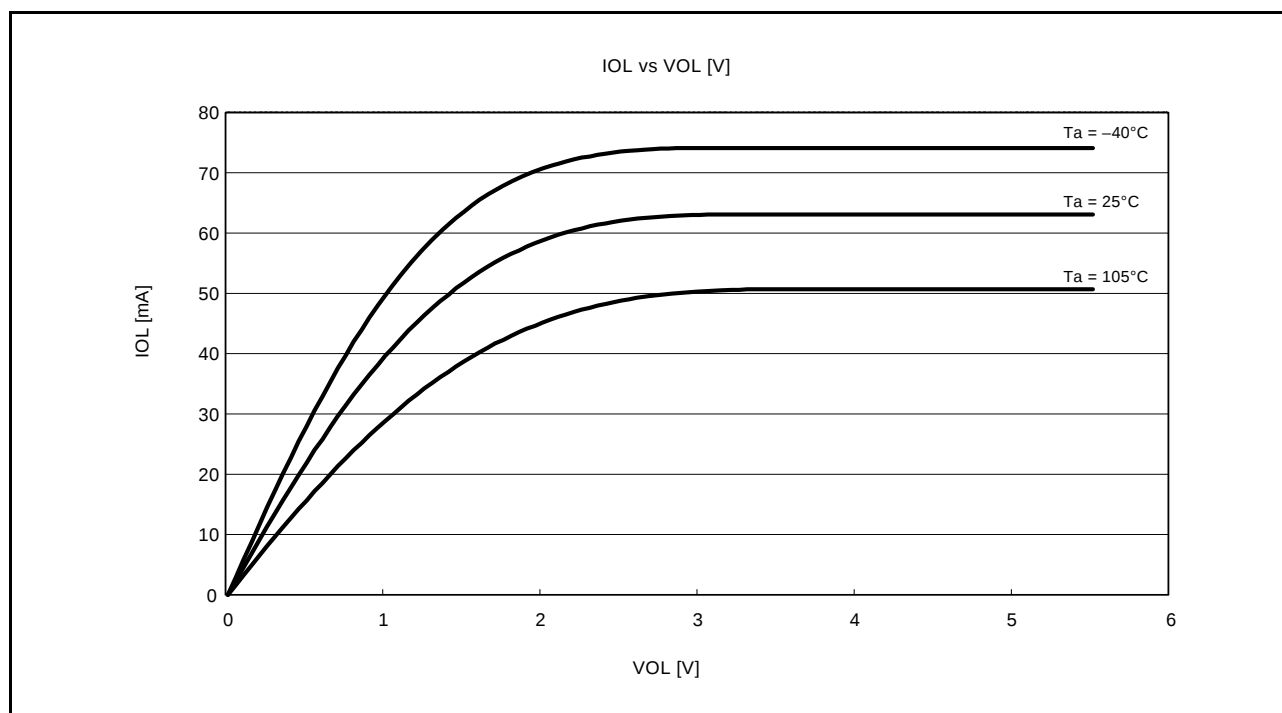

**Figure 5.58** VOL and IOL Temperature Characteristics of RIIC Output Pin at VCC = 5.5 V (Reference Data)

### 5.3 AC Characteristics

[Chip versions A, B, and C]

**Table 5.33 Operation Frequency Value (High-Speed Operating Mode)**

Conditions: VCC = AVCC0 = 2.7 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                        |                                   | Symbol           | VCC          | Unit |
|-----------------------------|-----------------------------------|------------------|--------------|------|
|                             |                                   |                  | 2.7 to 5.5 V |      |
| Maximum operating frequency | System clock (ICLK)               | f <sub>max</sub> | 50           | MHz  |
|                             | FlashIF clock (FCLK)*1            |                  | 32           |      |
|                             | Peripheral module clock (PCLKB)   |                  | 32           |      |
|                             | Peripheral module clock (PCLKD)*2 |                  | 50           |      |
|                             | External bus clock (BCLK)         |                  | 25           |      |
|                             | BCLK pin output                   |                  | 12.5         |      |

Note 1. The lower-limit frequency of FCLK is 4 MHz during programming or erasing of the flash memory.

Note 2. The lower-limit frequency of PCLKD is 1 MHz when the A/D converter is in use.

[Chip versions A, B, and C]

**Table 5.34 Operation Frequency Value (MiddleSpeed Operating Mode 1A)**

Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                        | Symbol                            | VCC              |              |              | Unit |
|-----------------------------|-----------------------------------|------------------|--------------|--------------|------|
|                             |                                   | 1.62 to 1.8 V    | 1.8 to 2.7 V | 2.7 to 5.5 V |      |
| Maximum operating frequency | System clock (ICLK)               | f <sub>max</sub> | 20           | 32           | MHz  |
|                             | FlashIF clock (FCLK)*1            |                  | 20           | 32           |      |
|                             | Peripheral module clock (PCLKB)   |                  | 20           | 32           |      |
|                             | Peripheral module clock (PCLKD)*2 |                  | 20           | 32           |      |
|                             | External bus clock (BCLK)         |                  | 12           | 16           |      |
|                             | BCLK pin output                   |                  | 6            | 8            |      |

Note 1. The VCC is 2.7 to 5.5 V and the lower-limit frequency of FCLK is 4 MHz during programming or erasing of the flash memory.

Note 2. The lower-limit frequency of PCLKD is 1 MHz when the A/D converter is in use.

[Chip versions A, B, and C]

**Table 5.35 Operation Frequency Value (Middle-Speed Operating Mode 1B)**

Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                        | Symbol                            | VCC              |              |              | Unit |
|-----------------------------|-----------------------------------|------------------|--------------|--------------|------|
|                             |                                   | 1.62 to 1.8 V    | 1.8 to 2.7 V | 2.7 to 5.5 V |      |
| Maximum operating frequency | System clock (ICLK)               | f <sub>max</sub> | 20           | 32           | MHz  |
|                             | FlashIF clock (FCLK)*1            |                  | 20           | 32           |      |
|                             | Peripheral module clock (PCLKB)   |                  | 20           | 32           |      |
|                             | Peripheral module clock (PCLKD)*2 |                  | 20           | 32           |      |
|                             | External bus clock (BCLK)         |                  | 12           | 16           |      |
|                             | BCLK pin output                   |                  | 6            | 8            |      |

Note 1. The VCC is 1.62 to 3.6 V and the lower-limit frequency of FCLK is 4 MHz during programming or erasing of the flash memory.

Note 2. The lower-limit frequency of PCLKD is 1 MHz when the A/D converter is in use.

[Chip version B]

**Table 5.36 Operation Frequency Value (Middle-Speed Operating Mode 2A)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                        |                                   | Symbol           | VCC           |              |              | Unit |
|-----------------------------|-----------------------------------|------------------|---------------|--------------|--------------|------|
|                             |                                   |                  | 1.62 to 1.8 V | 1.8 to 2.7 V | 2.7 to 5.5 V |      |
| Maximum operating frequency | System clock (ICLK)               | f <sub>max</sub> | 8             | 16           | 32           | MHz  |
|                             | FlashIF clock (FCLK)*1            |                  | 8             | 16           | 32           |      |
|                             | Peripheral module clock (PCLKB)   |                  | 8             | 16           | 32           |      |
|                             | Peripheral module clock (PCLKD)*2 |                  | 8             | 16           | 32           |      |
|                             | External bus clock (BCLK)         |                  | 8             | 16           | 25           |      |
|                             | BCLK pin output                   |                  | 8             | 8            | 12.5         |      |

Note 1. The VCC is 2.7 to 5.5 V and the lower-limit frequency of FCLK is 4 MHz during programming or erasing of the flash memory.

Note 2. The lower-limit frequency of PCLKD is 1 MHz when the A/D converter is in use.

[Chip version B]

**Table 5.37 Operation Frequency Value (Middle-Speed Operating Mode 2B)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                        |                                   | Symbol           | VCC           |              |              | Unit |
|-----------------------------|-----------------------------------|------------------|---------------|--------------|--------------|------|
|                             |                                   |                  | 1.62 to 1.8 V | 1.8 to 2.7 V | 2.7 to 5.5 V |      |
| Maximum operating frequency | System clock (ICLK)               | f <sub>max</sub> | 8             | 16           | 32           | MHz  |
|                             | FlashIF clock (FCLK)*1            |                  | 8             | 16           | 32           |      |
|                             | Peripheral module clock (PCLKB)   |                  | 8             | 16           | 32           |      |
|                             | Peripheral module clock (PCLKD)*2 |                  | 8             | 16           | 32           |      |
|                             | External bus clock (BCLK)         |                  | 8             | 16           | 25           |      |
|                             | BCLK pin output                   |                  | 8             | 8            | 12.5         |      |

Note 1. The VCC is 1.62 to 3.6 V and the lower-limit frequency of FCLK is 4 MHz during programming or erasing of the flash memory.

Note 2. The lower-limit frequency of PCLKD is 1 MHz when the A/D converter is in use.

[Chip versions A and C]

**Table 5.38 Operation Frequency Value (Low-Speed Operating Mode 1)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                        |                                   | Symbol           | VCC           |              |              | Unit |
|-----------------------------|-----------------------------------|------------------|---------------|--------------|--------------|------|
|                             |                                   |                  | 1.62 to 1.8 V | 1.8 to 2.7 V | 2.7 to 5.5 V |      |
| Maximum operating frequency | System clock (ICLK)               | f <sub>max</sub> | 1             | 1            | 1            | MHz  |
|                             | FlashIF clock (FCLK)*1            |                  | 1             | 1            | 1            |      |
|                             | Peripheral module clock (PCLKB)   |                  | 1             | 1            | 1            |      |
|                             | Peripheral module clock (PCLKD)*2 |                  | 1             | 1            | 1            |      |
|                             | External bus clock (BCLK)         |                  | 1             | 1            | 1            |      |
|                             | BCLK pin output                   |                  | 1             | 1            | 1            |      |

Note 1. Programming and erasing the flash memory is impossible.

Note 2. The lower-limit frequency of PCLKD is 1 MHz when the A/D converter is in use.

[Chip version B]

**Table 5.39 Operation Frequency Value (Low-Speed Operating Mode 1)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                        |                                   | Symbol           | VCC           |              |              | Unit |
|-----------------------------|-----------------------------------|------------------|---------------|--------------|--------------|------|
|                             |                                   |                  | 1.62 to 1.8 V | 1.8 to 2.7 V | 2.7 to 5.5 V |      |
| Maximum operating frequency | System clock (ICLK)               | f <sub>max</sub> | 2             | 4            | 8            | MHz  |
|                             | FlashIF clock (FCLK)*1            |                  | 2             | 4            | 8            |      |
|                             | Peripheral module clock (PCLKB)   |                  | 2             | 4            | 8            |      |
|                             | Peripheral module clock (PCLKD)*2 |                  | 2             | 4            | 8            |      |
|                             | External bus clock (BCLK)         |                  | 2             | 4            | 8            |      |
|                             | BCLK pin output                   |                  | 2             | 4            | 8            |      |

Note 1. Programming and erasing the flash memory is impossible.

Note 2. The lower-limit frequency of PCLKD is 1 MHz when the A/D converter is in use.

[Chip versions A, B, and C]

**Table 5.40 Operation Frequency Value (Low-Speed Operating Mode 2)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                        |                                   | Symbol           | VCC           |              |              | Unit |
|-----------------------------|-----------------------------------|------------------|---------------|--------------|--------------|------|
|                             |                                   |                  | 1.62 to 1.8 V | 1.8 to 2.7 V | 2.7 to 5.5 V |      |
| Maximum operating frequency | System clock (ICLK)               | f <sub>max</sub> | 32.768        | 32.768       | 32.768       | kHz  |
|                             | FlashIF clock (FCLK)*1            |                  | 32.768        | 32.768       | 32.768       |      |
|                             | Peripheral module clock (PCLKB)   |                  | 32.768        | 32.768       | 32.768       |      |
|                             | Peripheral module clock (PCLKD)*2 |                  | 32.768        | 32.768       | 32.768       |      |
|                             | External bus clock (BCLK)         |                  | 32.768        | 32.768       | 32.768       |      |
|                             | BCLK pin output                   |                  | 32.768        | 32.768       | 32.768       |      |

Note 1. Programming and erasing the flash memory is impossible.

Note 2. The A/D converter cannot be used.

## 5.3.1 Clock Timing

**Table 5.41 BCLK Timing (1)**

Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  
 $f_{BCLK} =$  up to 25 MHz (BCLK pin output frequency = up to 12.5 MHz),  $T_a = -40$  to  $+105^{\circ}\text{C}$

| Item                               | Symbol     | Min. | Typ. | Max. | Unit | Test Conditions |
|------------------------------------|------------|------|------|------|------|-----------------|
| BCLK pin output cycle time         | $t_{Bcyc}$ | 80   | —    | —    | ns   | Figure 5.59     |
| BCLK pin output high pulse width*1 | $t_{CH}$   | 20   | —    | —    | ns   |                 |
| BCLK pin output low pulse width*1  | $t_{CL}$   | 20   | —    | —    | ns   |                 |
| BCLK pin output rising time        | $t_{Cr}$   | —    | —    | 15   | ns   |                 |
| BCLK pin output falling time       | $t_{Cf}$   | —    | —    | 15   | ns   |                 |

Note 1. When the EXTAL external clock input is used with divided by 1 (SCKCR.BCK[3:0] bits = 0000b and BCKCR.BCLKDIV bit = 0) to output from the BCLK pin, the above should be satisfied with a duty cycle of 45 to 55%.

**Table 5.42 BCLK Timing (2)**

Conditions:  $V_{CC} = AVCC0 = 1.8$  to  $2.7$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  
 $f_{BCLK} =$  up to 16 MHz (BCLK pin output frequency = up to 8 MHz),  $T_a = -40$  to  $+105^{\circ}\text{C}$

| Item                               | Symbol     | Min. | Typ. | Max. | Unit | Test Conditions |
|------------------------------------|------------|------|------|------|------|-----------------|
| BCLK pin output cycle time         | $t_{Bcyc}$ | 125  | —    | —    | ns   | Figure 5.59     |
| BCLK pin output high pulse width*1 | $t_{CH}$   | 30   | —    | —    | ns   |                 |
| BCLK pin output low pulse width*1  | $t_{CL}$   | 30   | —    | —    | ns   |                 |
| BCLK pin output rising time        | $t_{Cr}$   | —    | —    | 25   | ns   |                 |
| BCLK pin output falling time       | $t_{Cf}$   | —    | —    | 25   | ns   |                 |

Note 1. When the EXTAL external clock input is used with divided by 1 (SCKCR.BCK[3:0] bits = 0000b and BCKCR.BCLKDIV bit = 0) to output from the BCLK pin, the above should be satisfied with a duty cycle of 45 to 55%.

**Table 5.43 BCLK Timing (3)**

Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $1.8$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  
 $f_{BCLK} =$  up to 12 MHz (BCLK pin output frequency = up to 6 MHz),  $T_a = -40$  to  $+105^{\circ}\text{C}$

| Item                               | Symbol     | Min.  | Typ. | Max. | Unit | Test Conditions |
|------------------------------------|------------|-------|------|------|------|-----------------|
| BCLK pin output cycle time         | $t_{Bcyc}$ | 166.6 | —    | —    | ns   | Figure 5.59     |
| BCLK pin output high pulse width*1 | $t_{CH}$   | 42    | —    | —    | ns   |                 |
| BCLK pin output low pulse width*1  | $t_{CL}$   | 42    | —    | —    | ns   |                 |
| BCLK pin output rising time        | $t_{Cr}$   | —     | —    | 35   | ns   |                 |
| BCLK pin output falling time       | $t_{Cf}$   | —     | —    | 35   | ns   |                 |

Note: • Set high driving ability for the output port pin to be used for the BCLK pin function.

Note 1. When the EXTAL external clock input is used with divided by 1 (SCKCR.BCK[3:0] bits = 0000b and BCKCR.BCLKDIV bit = 0) to output from the BCLK pin, the above should be satisfied with a duty cycle of 45 to 55%.

**Table 5.44 Clock Timing**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                                                                 |                                                                 | Symbol                 | Min.   | Typ.   | Max.   | Unit | Test Conditions   |
|----------------------------------------------------------------------|-----------------------------------------------------------------|------------------------|--------|--------|--------|------|-------------------|
| EXTAL external clock input cycle time                                |                                                                 | t <sub>EXcyc</sub>     | 50     | —      | —      | ns   | Figure 5.60       |
| EXTAL external clock input high pulse width                          |                                                                 | t <sub>EXH</sub>       | 20     | —      | —      | ns   |                   |
| EXTAL external clock input low pulse width                           |                                                                 | t <sub>EXL</sub>       | 20     | —      | —      | ns   |                   |
| EXTAL external clock rising time                                     |                                                                 | t <sub>EXr</sub>       | —      | —      | 5      | ns   |                   |
| EXTAL external clock falling time                                    |                                                                 | t <sub>EXf</sub>       | —      | —      | 5      | ns   |                   |
| EXTAL external clock input wait time*1                               |                                                                 | t <sub>EXWT</sub>      | 1      | —      | —      | ms   | Figure 5.61       |
| Main clock oscillator oscillation frequency*2                        |                                                                 | f <sub>MAIN</sub>      | 1      | —      | 20     | MHz  |                   |
| Main clock oscillation stabilization time (crystal)*2                |                                                                 | t <sub>MAINOSC</sub>   | —      | 3      | —      | ms   |                   |
| Main clock oscillation stabilization time (ceramic resonator)*2      |                                                                 | t <sub>MAINOSC</sub>   | —      | 50     |        | μs   |                   |
| Main clock oscillation stabilization wait time (crystal)*2           |                                                                 | t <sub>MAINOSCWT</sub> | —      | 6      | —      | ms   |                   |
| Main clock oscillation stabilization wait time (ceramic resonator)*2 |                                                                 | t <sub>MAINOSCWT</sub> | —      | 100    |        | μs   | Figure 5.62       |
| LOCO clock cycle time                                                |                                                                 | t <sub>cyc</sub>       | 7.27   | 8      | 8.89   | μs   |                   |
| LOCO clock oscillation frequency*6                                   |                                                                 | f <sub>LOCO</sub>      | 112.5  | 125    | 137.5  | kHz  |                   |
| LOCO clock oscillation stabilization wait time                       |                                                                 | t <sub>LOCOWT</sub>    | —      | —      | 20     | μs   |                   |
| HOCO clock oscillation frequency*7                                   |                                                                 | f <sub>HOCO</sub>      | 31.680 | 32     | 32.320 | MHz  |                   |
|                                                                      |                                                                 |                        | 36.495 | 36.864 | 37.233 |      |                   |
|                                                                      |                                                                 |                        | 39.600 | 40     | 40.400 |      |                   |
|                                                                      |                                                                 |                        | 49.500 | 50     | 50.500 |      |                   |
|                                                                      |                                                                 |                        | 31.520 | 32     | 32.480 |      | Ta = -40 to 105°C |
|                                                                      |                                                                 |                        | 36.311 | 36.864 | 37.417 |      |                   |
|                                                                      |                                                                 |                        | 39.400 | 40     | 40.600 |      |                   |
|                                                                      |                                                                 |                        | 49.250 | 50     | 50.750 |      |                   |
| HOCO clock oscillation stabilization time 1                          |                                                                 | t <sub>HOCO1</sub>     | —      | —      | 300    | μs   | Figure 5.63       |
| HOCO clock oscillation stabilization time 2                          |                                                                 | t <sub>HOCO2</sub>     | —      | —      | 175    | μs   | Figure 5.64       |
| HOCO clock oscillation stabilization wait time                       |                                                                 | t <sub>HOCOWT</sub>    | —      | —      | 350    | μs   | Figure 5.64       |
| HOCO clock power supply stabilization time                           |                                                                 | t <sub>HOCOP</sub>     | —      | —      | 350    | μs   | Figure 5.65       |
| PLL input frequency                                                  |                                                                 | f <sub>PLLIN</sub>     | 4      | —      | 12.5   | MHz  | Figure 5.66       |
| PLL circuit oscillation frequency                                    |                                                                 | f <sub>PLL</sub>       | 50     | —      | 100    | MHz  |                   |
| PLL clock oscillation stabilization time                             | PLL operation started after main clock oscillation has settled  | t <sub>PLL1</sub>      | —      | —      | 500    | μs   | Figure 5.66       |
| PLL clock oscillation stabilization wait time                        |                                                                 | t <sub>PLLWT1</sub>    | 1.5    | —      | —      | ms   |                   |
| PLL clock oscillation stabilization time*4                           | PLL operation started before main clock oscillation has settled | t <sub>PLL2</sub>      | —      | 3.5*3  | —      | ms   | Figure 5.67       |
| PLL clock oscillation stabilization wait time*4                      |                                                                 | t <sub>PLLWT2</sub>    | —      | 7      | —      | ms   |                   |
| PLL clock power supply stabilization time (for chip version B only)  |                                                                 | t <sub>PLLPW</sub>     | —      | —      | 30     | μs   | Figure 5.68       |
| Sub-clock oscillator oscillation frequency                           |                                                                 | f <sub>SUB</sub>       | —      | 32.768 | —      | kHz  | Figure 5.69       |
| Sub-clock oscillation stabilization time*5                           |                                                                 | t <sub>SUBOSC</sub>    | 2      | —      | —      | s    |                   |
| Sub-clock oscillation stabilization wait time*5                      |                                                                 | t <sub>SUBOSCWT</sub>  | 4      | —      | —      | s    |                   |

Note 1. The time interval from the time P36 and P37 are configured for input and the main clock oscillator stopping bit (MOSCCR.MOSTP) is set to 0 (operating) until the clock becomes available.

Note 2. When specifying the main clock oscillator stabilization time, load the MOSCWTCR register with a stabilization time value that is greater than the resonator-vendor-recommended value. When determining the main lock oscillation stabilization wait time, allow an adequate margin (2 times is recommended) for the main clock oscillation stabilization time.

Start using the main clock in the main clock oscillation stabilization wait time (tMAINOSCWT) after setting up the main clock oscillator for operation with the MOSCCR.MOSTP bit.

The indicated value is a reference value that is measured for an 8 MHz resonator.

Note 3. Sum of the main clock oscillation stabilization time and the PLL oscillation stabilization time.

Note 4. The indicated value is a reference value that is measured for an 8 MHz resonator.

Note 5. When specifying the sub-clock oscillation stabilization time, load the SOSCWTCR register with the resonator-vendor-recommended stabilization time value minus 2 seconds. When determining the sub-clock oscillation stabilization wait time, allow an adequate margin (2 times is recommended) for the sub-clock oscillation stabilization time. Start using the sub-clock in the sub-clock oscillation stabilization wait time (tSUBOSCWT) after setting up the sub-clock oscillator for operation with the SOSCCR.SOSTP or RCR3.RTCEN bit.

Note 6. There is no minimum or maximum value for 69-pin WLBGA.

Note 7. Characteristic value before mounting on the board for 69-pin WLBGA.

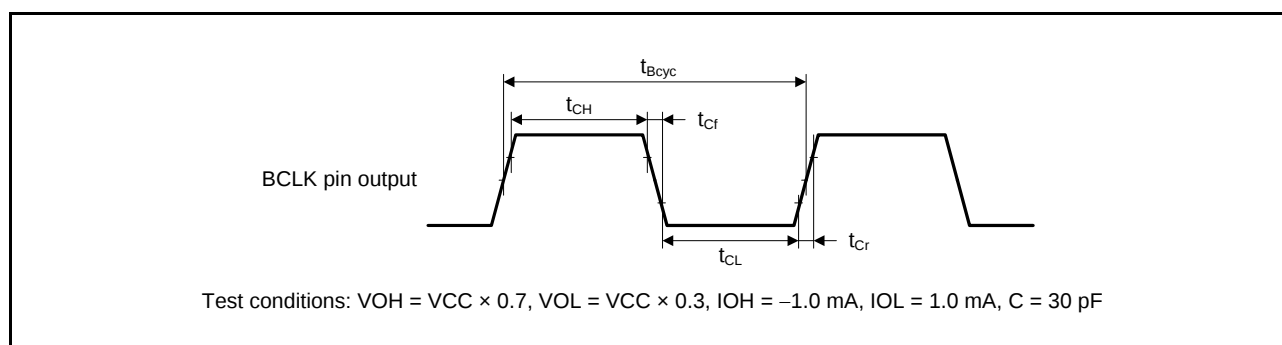


Figure 5.59 BCLK Pin Output Timing

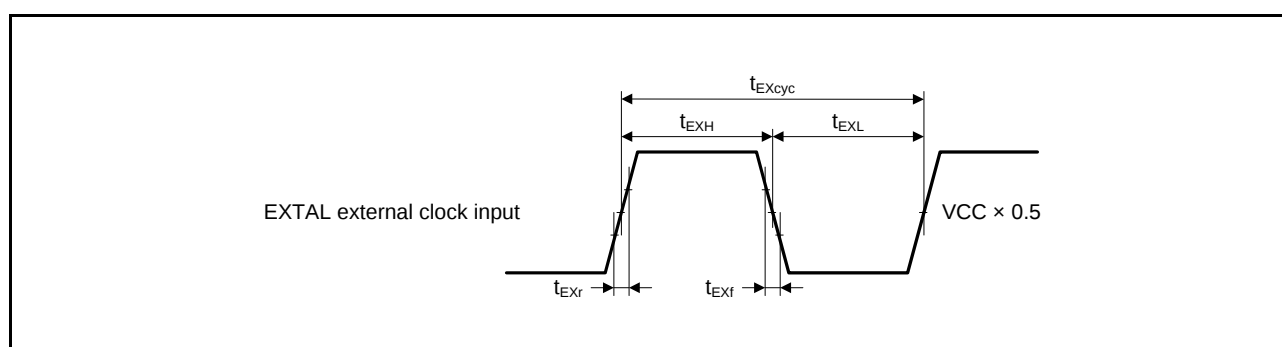


Figure 5.60 EXTAL External Clock Input Timing

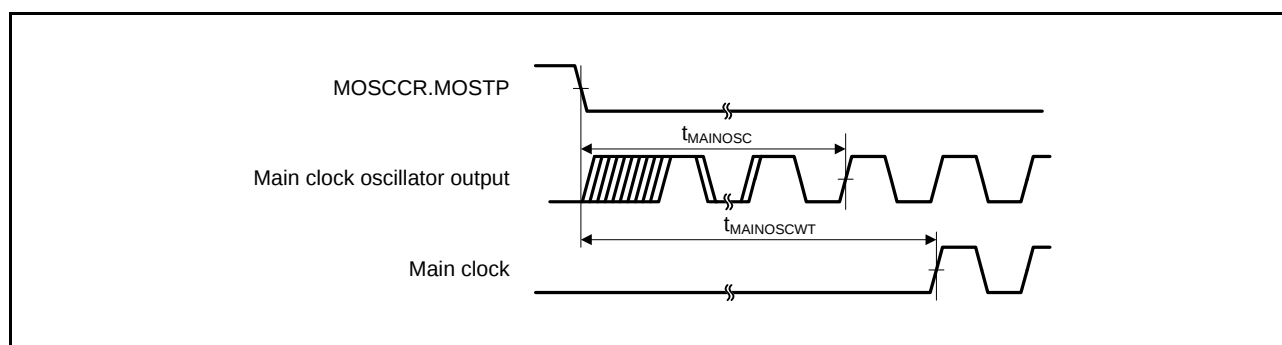


Figure 5.61 Main Clock Oscillation Start Timing



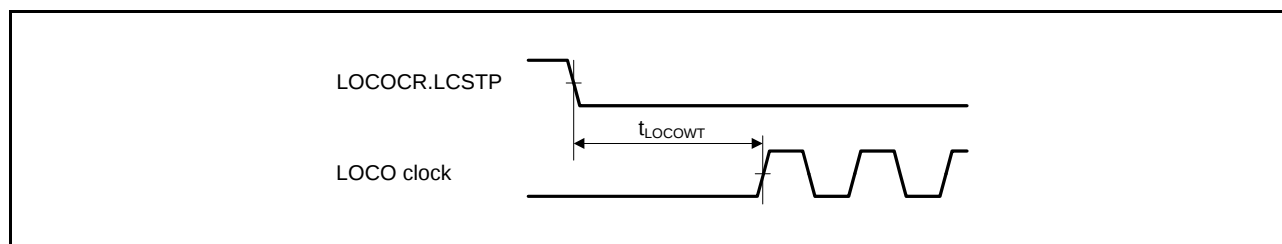



Figure 5.62 LOCO Clock Oscillation Start Timing

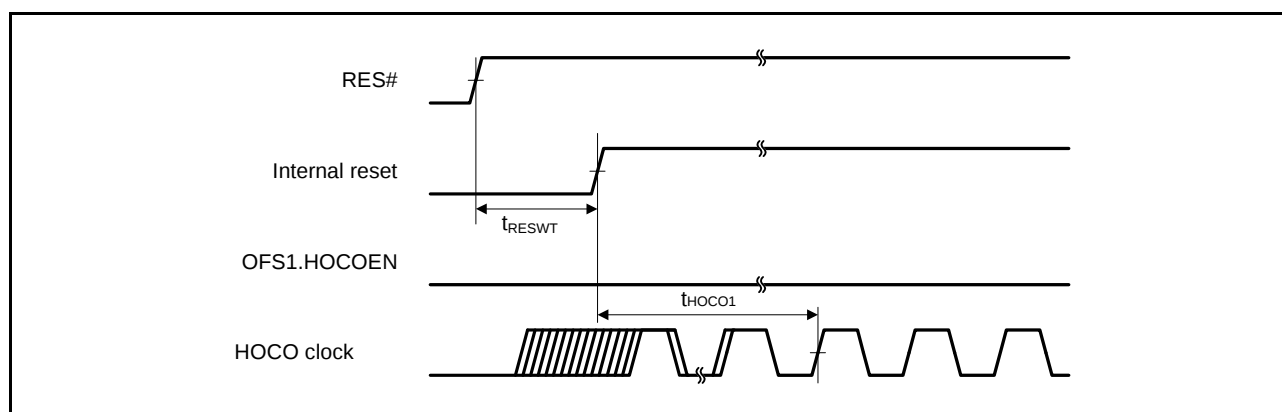


**Figure 5.63** HOCO Clock Oscillation Start Timing (After Reset is Canceled by Setting the OFS1.HOCOEN Bit to 0)

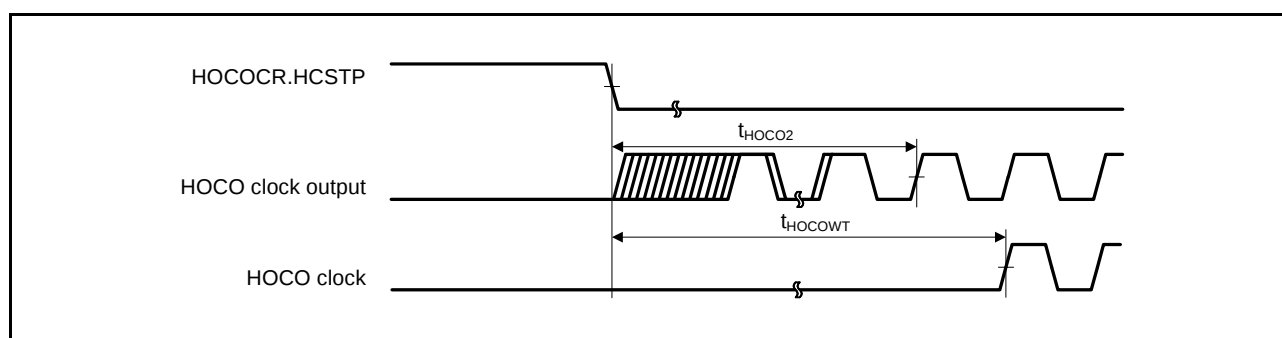


**Figure 5.64** HOCO Clock Oscillation Start Timing (Oscillation is Started by Setting the HOCOCR.HCSTP Bit)

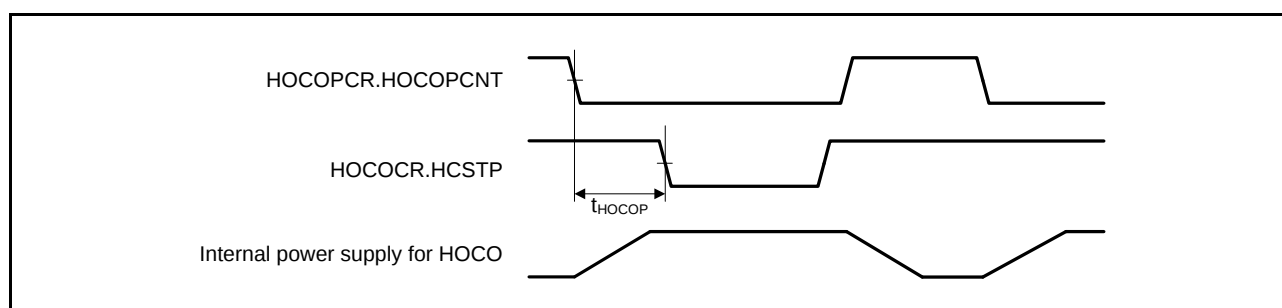


**Figure 5.65** HOCO Power Control Timing

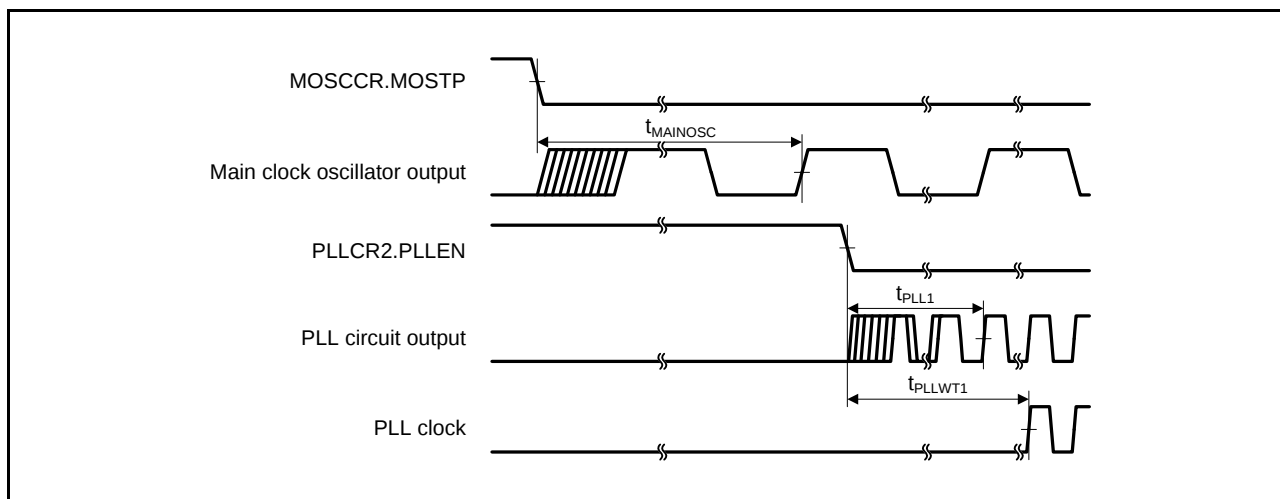


**Figure 5.66** PLL Clock Oscillation Start Timing (PLL is Operated after Main Clock Oscillation Has Settled)

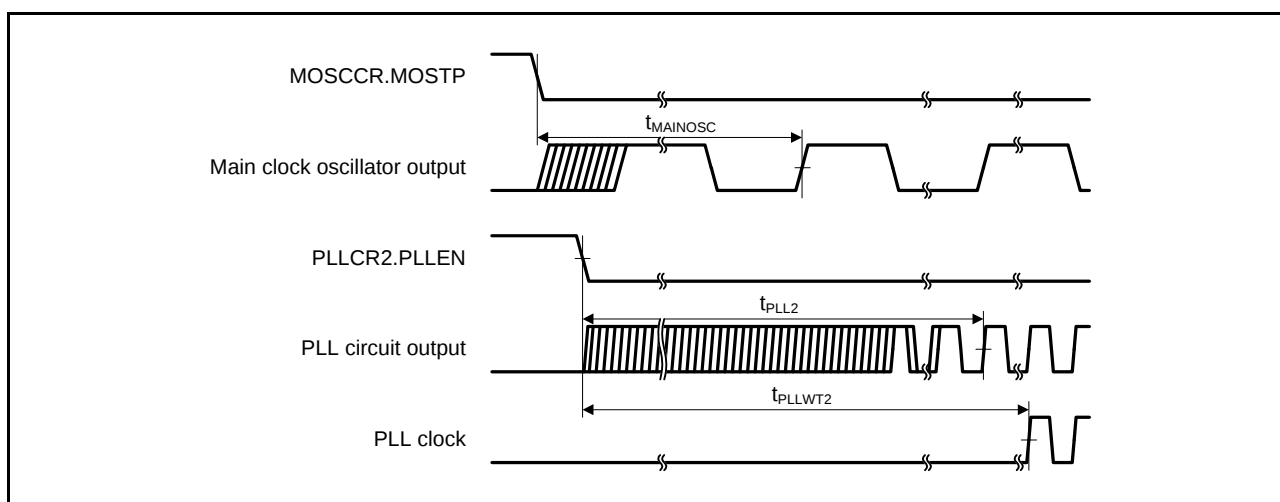

**Figure 5.67** PLL Clock Oscillation Start Timing (PLL is Operated before Main Clock Oscillation Has Settled)

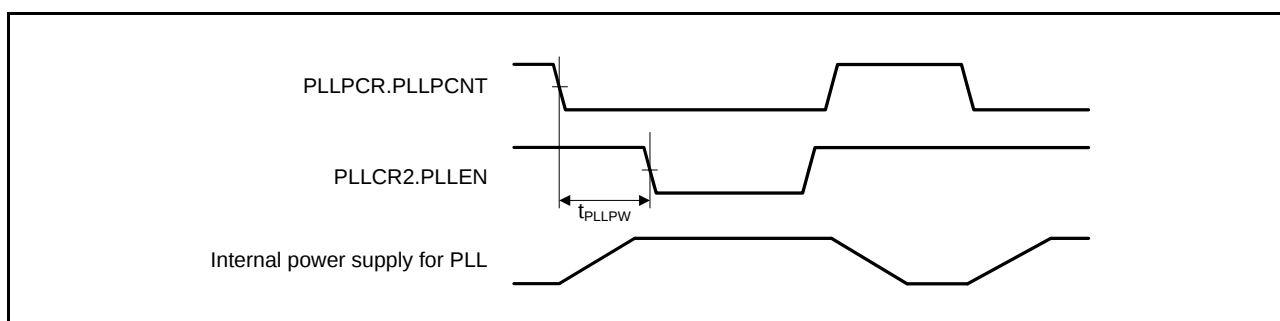

**Figure 5.68** PLL Power Control Timing


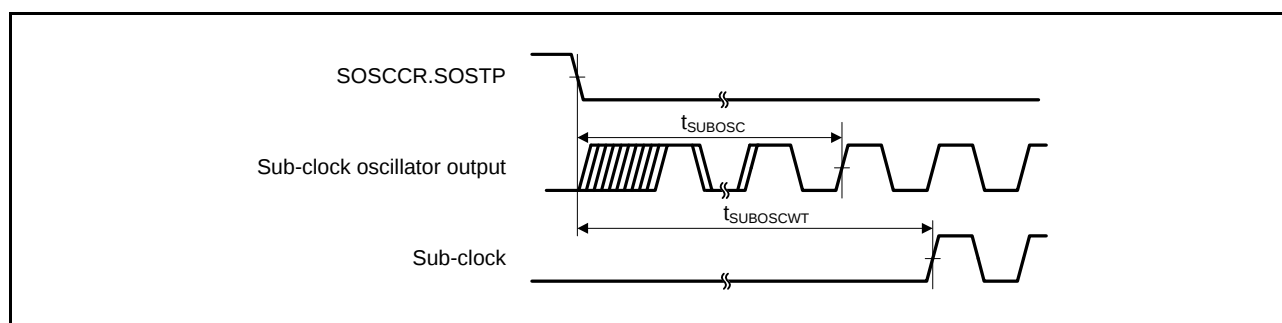


**Figure 5.69** Sub-clock Oscillation Start Timing

## 5.3.2 Reset Timing

**Table 5.45 Reset Timing**Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

| Item                                                                                            |                                                                                                       | Symbol      | Min. | Typ. | Max. | Unit          | Test Conditions |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------|------|------|------|---------------|-----------------|
| RES# pulse width                                                                                | Power-on                                                                                              | $t_{RESWP}$ | 8    | —    | —    | ms            | Figure 5.70     |
|                                                                                                 | Deep software standby mode                                                                            | $t_{RESWD}$ | 8    | —    | —    | ms            | Figure 5.71     |
|                                                                                                 | Software standby mode, low-speed operating modes 1 and 2                                              | $t_{RESWS}$ | 1    | —    | —    | ms            |                 |
|                                                                                                 | Programming or erasure of the ROM or E2 DataFlash memory or blank checking of the E2 DataFlash memory | $t_{RESWF}$ | 200  | —    | —    | $\mu\text{s}$ |                 |
|                                                                                                 | Other than above                                                                                      | $t_{RESW}$  | 200  | —    | —    | $\mu\text{s}$ |                 |
| Wait time after RES# cancellation                                                               |                                                                                                       | $t_{RESWT}$ | —    | —    | 912  | $\mu\text{s}$ | Figure 5.70     |
| Internal reset time<br>(independent watchdog timer reset, watchdog timer reset, software reset) |                                                                                                       | $t_{RESW2}$ | —    | —    | 1.4  | ms            |                 |

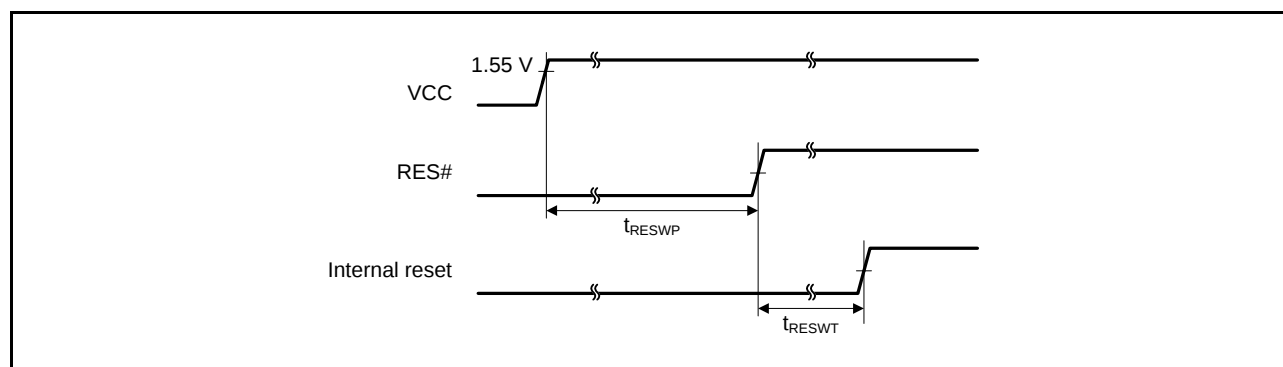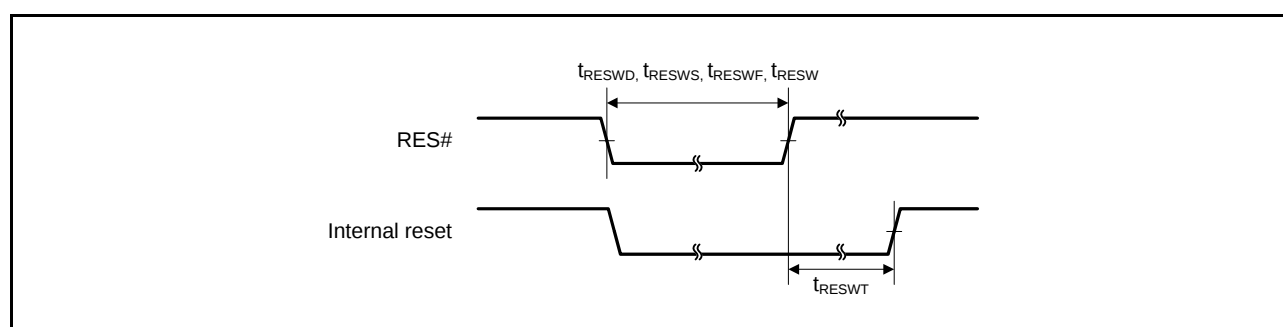**Figure 5.70 Reset Input Timing at Power-On****Figure 5.71 Reset Input Timing**

### 5.3.3 Timing of Recovery from Low Power Consumption Modes

[Chip versions A and C]

**Table 5.46 Timing of Recovery from Low Power Consumption Modes**

Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                                                                                                                                          |                                                        |                                                 | Symbol              | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------|---------------------|------|------|------|------|-----------------|
| Recovery time after cancellation of software standby mode (flash memory, HOCO power supplied) (SOFTCUT[2:0] bits = 000b)*1                    | Crystal resonator connected to main clock oscillator*2 | Main clock oscillator operating                 | t <sub>SBYMC</sub>  | —    | 3    | —    | ms   | Figure 5.72     |
|                                                                                                                                               |                                                        | Main clock oscillator and PLL circuit operating | t <sub>SBYPC</sub>  | —    | 3.5  | —    | ms   |                 |
|                                                                                                                                               | External clock input to main clock oscillator          | Main clock oscillator operating                 | t <sub>SBYEX</sub>  | 10   | —    | —    | μs   |                 |
|                                                                                                                                               |                                                        | Main clock oscillator and PLL circuit operating | t <sub>SBYPE</sub>  | 0.5  | —    | —    | ms   |                 |
|                                                                                                                                               | Sub-clock oscillator operating                         |                                                 | t <sub>SBYSC</sub>  | 2*3  | —    | —    | s    |                 |
|                                                                                                                                               | HOCO clock oscillator operating                        |                                                 | t <sub>SBYHO</sub>  | —    | —    | 500  | μs   |                 |
|                                                                                                                                               | LOCO clock oscillator operating                        |                                                 | t <sub>SBYLO</sub>  | —    | —    | 90   | μs   |                 |
| Recovery time after cancellation of software standby mode (flash memory power supplied, HOCO power not supplied) (SOFTCUT[2:0] bits = 110b)*1 | Crystal resonator connected to main clock oscillator*2 | Main clock oscillator operating                 | t <sub>SBYMC</sub>  | —    | 3    | —    | ms   | Figure 5.72     |
|                                                                                                                                               |                                                        | Main clock oscillator and PLL circuit operating | t <sub>SBYPC</sub>  | —    | 3.5  | —    | ms   |                 |
|                                                                                                                                               | External clock input to main clock oscillator          | Main clock oscillator operating                 | t <sub>SBYEX</sub>  | 40   | —    | —    | μs   |                 |
|                                                                                                                                               |                                                        | Main clock oscillator and PLL circuit operating | t <sub>SBYPE</sub>  | 0.5  | —    | —    | ms   |                 |
|                                                                                                                                               | Sub-clock oscillator operating                         |                                                 | t <sub>SBYSC</sub>  | 2*3  | —    | —    | s    |                 |
|                                                                                                                                               | HOCO clock oscillator operating                        |                                                 | t <sub>SBYHO</sub>  | —    | —    | 1.2  | ms   |                 |
|                                                                                                                                               | LOCO clock oscillator operating                        |                                                 | t <sub>SBYLO</sub>  | —    | —    | 90   | μs   |                 |
| Recovery time after cancellation of software standby mode (flash memory, HOCO power not supplied) (SOFTCUT[2:0] bits = 111b)*1                | Crystal resonator connected to main clock oscillator*2 | Main clock oscillator operating                 | t <sub>SBYMC</sub>  | —    | 3    | —    | ms   | Figure 5.72     |
|                                                                                                                                               |                                                        | Main clock oscillator and PLL circuit operating | t <sub>SBYPC</sub>  | —    | 3.5  | —    | ms   |                 |
|                                                                                                                                               | External clock input to main clock oscillator          | Main clock oscillator operating                 | t <sub>SBYEX</sub>  | 100  | —    | —    | μs   |                 |
|                                                                                                                                               |                                                        | Main clock oscillator and PLL circuit operating | t <sub>SBYPE</sub>  | 0.5  | —    | —    | ms   |                 |
|                                                                                                                                               | Sub-clock oscillator operating                         |                                                 | t <sub>SBYSC</sub>  | 2*4  | —    | —    | s    |                 |
|                                                                                                                                               | HOCO clock oscillator operating                        |                                                 | t <sub>SBYHO</sub>  | —    | —    | 1.2  | ms   |                 |
|                                                                                                                                               | LOCO clock oscillator operating                        |                                                 | t <sub>SBYLO</sub>  | —    | —    | 10   | ms   |                 |
| Recovery time after cancellation of deep software standby mode                                                                                |                                                        |                                                 | t <sub>DSBY</sub>   | —    | —    | 8    | ms   | Figure 5.73     |
| Wait time after cancellation of deep software standby mode                                                                                    |                                                        |                                                 | t <sub>DSBYWT</sub> | —    | —    | 0.8  | ms   |                 |

Note 1. The recovery time varies depending on the state of each oscillator when the WAIT instruction is executed. The recovery time when multiple oscillators are operating varies depending on the operating state of the oscillators that are not selected as the system clock source, and depends on the time set in the wait control registers corresponding to the oscillators.

Note 2. The indicated value is measured for an 8 MHz crystal resonator.

Note 3. When RCR3.RTCEN = 1, the time will be the time set in the SOSWTCR register minus 2 s.

Note 4. When RCR3.RTCEN = 1, the time will be the time set in the SOSWTCR register minus 2 s and plus 31.25 ms.

[Chip version B]

**Table 5.47 Timing of Recovery from Low Power Consumption Modes**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                                                                                                                         |                                                                    |                                                 | Symbol              | Min.            | Typ. | Max. | Unit | Test Conditions |
|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------|---------------------|-----------------|------|------|------|-----------------|
| Recovery time after cancellation of software standby mode (HOCO power supplied) (SOFTCUT[2:0] bits = 000b)* <sup>1</sup>     | Crystal resonator connected to main clock oscillator* <sup>2</sup> | Main clock oscillator operating                 | t <sub>SBYMC</sub>  | —               | 3    | —    | ms   | Figure 5.72     |
|                                                                                                                              |                                                                    | Main clock oscillator and PLL circuit operating | t <sub>SBYPC</sub>  | —               | 3.5  | —    | ms   |                 |
|                                                                                                                              | External clock input to main clock oscillator                      | Main clock oscillator operating                 | t <sub>SBYEX</sub>  | 10              | —    | —    | μs   |                 |
|                                                                                                                              |                                                                    | Main clock oscillator and PLL circuit operating | t <sub>SBYPE</sub>  | 0.5             | —    | —    | ms   |                 |
|                                                                                                                              | Sub-clock oscillator operating                                     |                                                 | t <sub>SBYSC</sub>  | 2* <sup>3</sup> | —    | —    | s    |                 |
|                                                                                                                              | HOCO clock oscillator operating                                    |                                                 | t <sub>SBYHO</sub>  | —               | —    | 500  | μs   |                 |
|                                                                                                                              | LOCO clock oscillator operating                                    |                                                 | t <sub>SBYLO</sub>  | —               | —    | 90   | μs   |                 |
|                                                                                                                              |                                                                    |                                                 |                     |                 |      |      |      |                 |
| Recovery time after cancellation of software standby mode (HOCO power not supplied) (SOFTCUT[2:0] bits = 110b)* <sup>1</sup> | Crystal resonator connected to main clock oscillator* <sup>2</sup> | Main clock oscillator operating                 | t <sub>SBYMC</sub>  | —               | 3    | —    | ms   | Figure 5.72     |
|                                                                                                                              |                                                                    | Main clock oscillator and PLL circuit operating | t <sub>SBYPC</sub>  | —               | 3.5  | —    | ms   |                 |
|                                                                                                                              | External clock input to main clock oscillator                      | Main clock oscillator operating                 | t <sub>SBYEX</sub>  | 40              | —    | —    | μs   |                 |
|                                                                                                                              |                                                                    | Main clock oscillator and PLL circuit operating | t <sub>SBYPE</sub>  | 0.5             | —    | —    | ms   |                 |
|                                                                                                                              | Sub-clock oscillator operating                                     |                                                 | t <sub>SBYSC</sub>  | 2* <sup>3</sup> | —    | —    | s    |                 |
|                                                                                                                              | HOCO clock oscillator operating                                    |                                                 | t <sub>SBYHO</sub>  | —               | —    | 1.2  | ms   |                 |
|                                                                                                                              | LOCO clock oscillator operating                                    |                                                 | t <sub>SBYLO</sub>  | —               | —    | 90   | μs   |                 |
|                                                                                                                              |                                                                    |                                                 |                     |                 |      |      |      |                 |
| Recovery time after cancellation of deep software standby mode                                                               |                                                                    |                                                 | t <sub>DSBY</sub>   | —               | —    | 8    | ms   | Figure 5.73     |
| Wait time after cancellation of deep software standby mode                                                                   |                                                                    |                                                 | t <sub>DSBYWT</sub> | —               | —    | 0.8  | ms   |                 |

Note 1. The recovery time varies depending on the state of each oscillator when the WAIT instruction is executed. The recovery time when multiple oscillators are operating varies depending on the operating state of the oscillators that are not selected as the system clock source, and depends on the time set in the wait control registers corresponding to the oscillators.

Note 2. The indicated value is measured for an 8 MHz crystal resonator.

Note 3. When RCR3.RTCEN = 1, the time will be the time set in the SOSWTCR register minus 2 s.

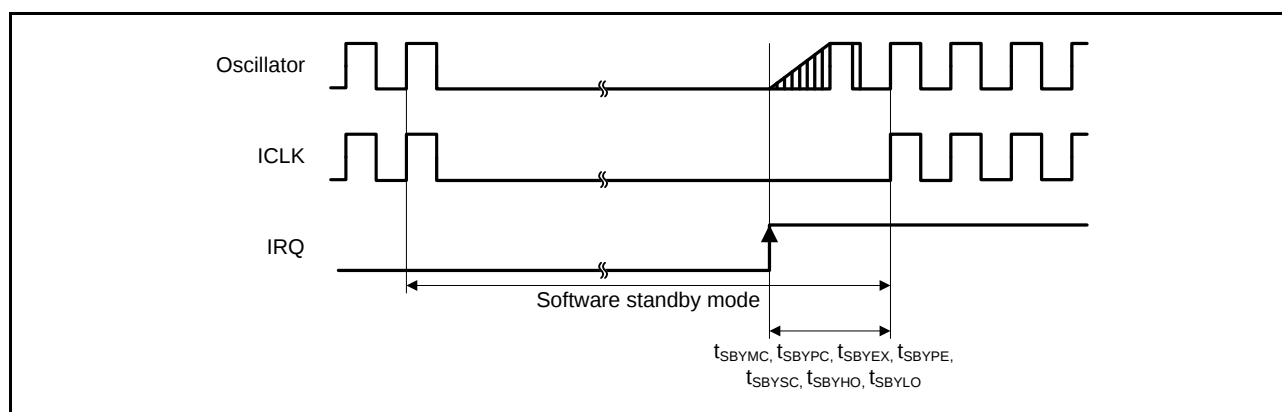


Figure 5.72 Software Standby Mode Cancellation Timing

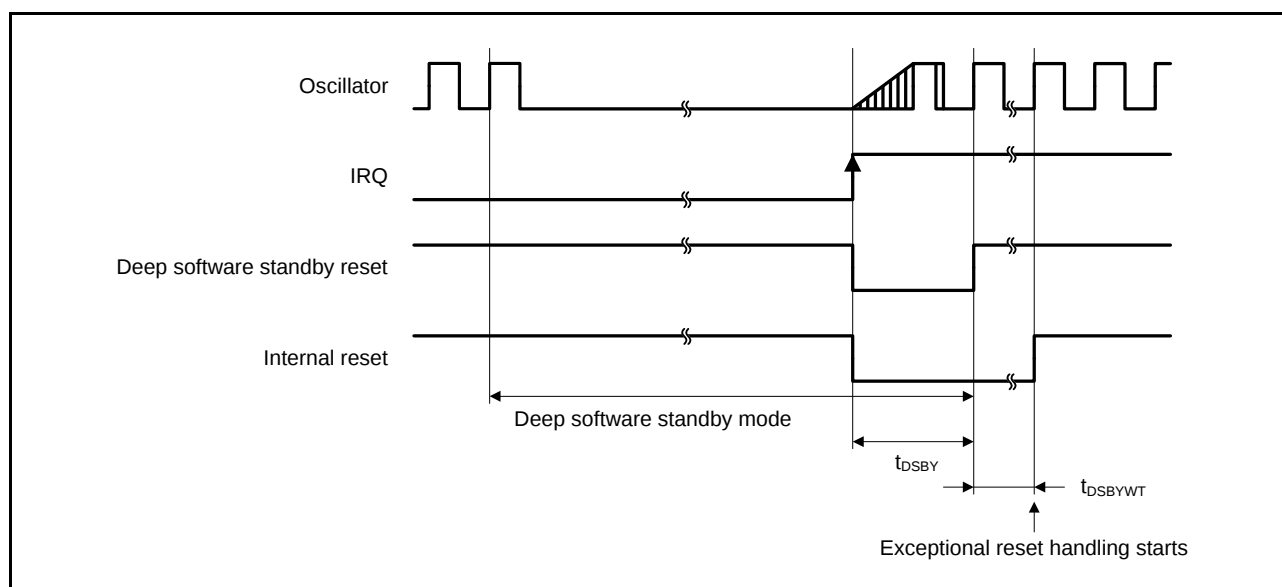


Figure 5.73 Deep Software Standby Mode Cancellation Timing



### 5.3.4 Control Signal Timing

**Table 5.48 Control Signal Timing**

Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^{\circ}\text{C}$

| Item            | Symbol     | Min.                    | Typ. | Max. | Unit | Test Conditions                                  |
|-----------------|------------|-------------------------|------|------|------|--------------------------------------------------|
| NMI pulse width | $t_{NMIW}$ | 200                     | —    | —    | ns   | $t_{c(PCLKB)} \times 2 \leq 200$ ns, Figure 5.74 |
|                 |            | $t_{c(PCLKB)} \times 2$ | —    | —    | ns   | $t_{c(PCLKB)} \times 2 > 200$ ns, Figure 5.74    |
| IRQ pulse width | $t_{IRQW}$ | 200                     | —    | —    | ns   | $t_{c(PCLKB)} \times 2 \leq 200$ ns, Figure 5.75 |
|                 |            | $t_{c(PCLKB)} \times 2$ | —    | —    | ns   | $t_{c(PCLKB)} \times 2 > 200$ ns, Figure 5.75    |

Note: • 200 ns minimum in deep software standby and software standby modes.

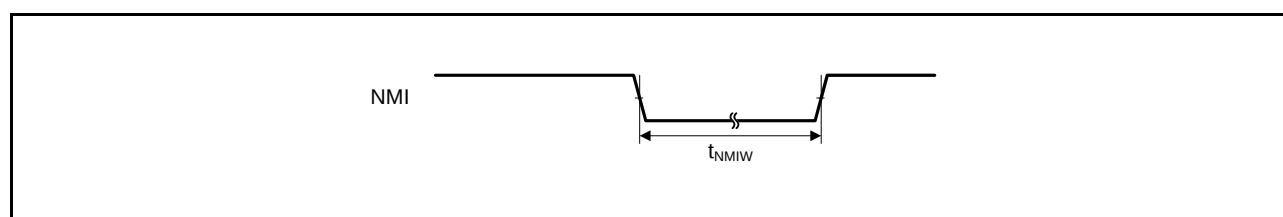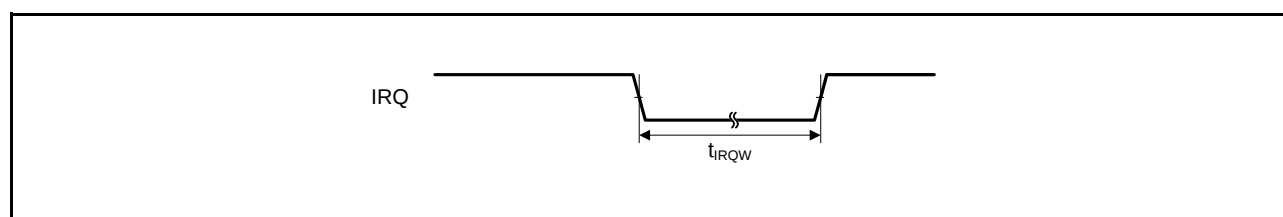
**Figure 5.74 NMI Interrupt Input Timing**

**Figure 5.75 IRQ Interrupt Input Timing**

### 5.3.5 Bus Timing

**Table 5.49 Bus Timing (1)**

Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  
 $f_{BCLK} \leq 25$  MHz (BCLK pin output frequency  $\leq 12.5$  MHz),  $T_a = -40$  to  $+105^\circ\text{C}$ ,  $V_{OH} = V_{CC} \times 0.5$ ,  
 $V_{OL} = V_{CC} \times 0.5$ ,  $I_{OH} = -1.0$  mA,  $I_{OL} = 1.0$  mA,  $C_L = 30$  pF  
 When normal output is selected by the drive capacity register

| Item                    | Symbol    | Min. | Max. | Unit | Test Conditions               |
|-------------------------|-----------|------|------|------|-------------------------------|
| Address delay time      | $t_{AD}$  | —    | 60   | ns   | Figure 5.76 to<br>Figure 5.79 |
| Byte control delay time | $t_{BCD}$ | —    | 60   | ns   |                               |
| CS# delay time          | $t_{CSD}$ | —    | 60   | ns   |                               |
| RD# delay time          | $t_{RSD}$ | —    | 60   | ns   |                               |
| Read data setup time    | $t_{RDS}$ | 40   | —    | ns   |                               |
| Read data hold time     | $t_{RDH}$ | 0    | —    | ns   |                               |
| WR# delay time          | $t_{WRD}$ | —    | 60   | ns   |                               |
| Write data delay time   | $t_{WDD}$ | —    | 60   | ns   |                               |
| Write data hold time    | $t_{WDH}$ | 0    | —    | ns   |                               |
| WAIT# setup time        | $t_{WTS}$ | 40   | —    | ns   | Figure 5.80                   |
| WAIT# hold time         | $t_{WTH}$ | 0    | —    | ns   |                               |

**Table 5.50 Bus Timing (2)**

Conditions:  $V_{CC} = AVCC0 = 1.8$  to  $2.7$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  
 $f_{BCLK} \leq 16$  MHz (BCLK pin output frequency  $\leq 8$  MHz),  $T_a = -40$  to  $+105^\circ\text{C}$ ,  $V_{OH} = V_{CC} \times 0.5$ ,  
 $V_{OL} = V_{CC} \times 0.5$ ,  $I_{OH} = -1.0$  mA,  $I_{OL} = 1.0$  mA,  $C_L = 30$  pF  
 When normal output is selected by the drive capacity register

| Item                    | Symbol    | Min. | Max. | Unit | Test Conditions               |
|-------------------------|-----------|------|------|------|-------------------------------|
| Address delay time      | $t_{AD}$  | —    | 90   | ns   | Figure 5.76 to<br>Figure 5.79 |
| Byte control delay time | $t_{BCD}$ | —    | 90   | ns   |                               |
| CS# delay time          | $t_{CSD}$ | —    | 90   | ns   |                               |
| RD# delay time          | $t_{RSD}$ | —    | 90   | ns   |                               |
| Read data setup time    | $t_{RDS}$ | 60   | —    | ns   |                               |
| Read data hold time     | $t_{RDH}$ | 0    | —    | ns   |                               |
| WR# delay time          | $t_{WRD}$ | —    | 90   | ns   |                               |
| Write data delay time   | $t_{WDD}$ | —    | 90   | ns   |                               |
| Write data hold time    | $t_{WDH}$ | 0    | —    | ns   |                               |
| WAIT# setup time        | $t_{WTS}$ | 60   | —    | ns   | Figure 5.80                   |
| WAIT# hold time         | $t_{WTH}$ | 0    | —    | ns   |                               |

**Table 5.51 Bus Timing (3)**

Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $1.8$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  
 $f_{BCLK} \leq 12$  MHz (BCLK pin output frequency  $\leq 6$  MHz),  $T_a = -40$  to  $+105^\circ\text{C}$ ,  $V_{OH} = V_{CC} \times 0.5$ ,  
 $V_{OL} = V_{CC} \times 0.5$ ,  $I_{OH} = -0.5$  mA,  $I_{OL} = 0.5$  mA,  $C_L = 30$  pF  
 When normal output is selected by the drive capacity register

| Item                    | Symbol    | Min. | Max. | Unit | Test Conditions               |
|-------------------------|-----------|------|------|------|-------------------------------|
| Address delay time      | $t_{AD}$  | —    | 125  | ns   | Figure 5.76 to<br>Figure 5.79 |
| Byte control delay time | $t_{BCD}$ | —    | 125  | ns   |                               |
| CS# delay time          | $t_{CSD}$ | —    | 125  | ns   |                               |
| RD# delay time          | $t_{RSD}$ | —    | 125  | ns   |                               |
| Read data setup time    | $t_{RDS}$ | 85   | —    | ns   |                               |
| Read data hold time     | $t_{RDH}$ | 0    | —    | ns   |                               |
| WR# delay time          | $t_{WRD}$ | —    | 125  | ns   |                               |
| Write data delay time   | $t_{WDD}$ | —    | 125  | ns   |                               |
| Write data hold time    | $t_{WDH}$ | 0    | —    | ns   |                               |
| WAIT# setup time        | $t_{WTS}$ | 85   | —    | ns   | Figure 5.80                   |
| WAIT# hold time         | $t_{WTH}$ | 0    | —    | ns   |                               |


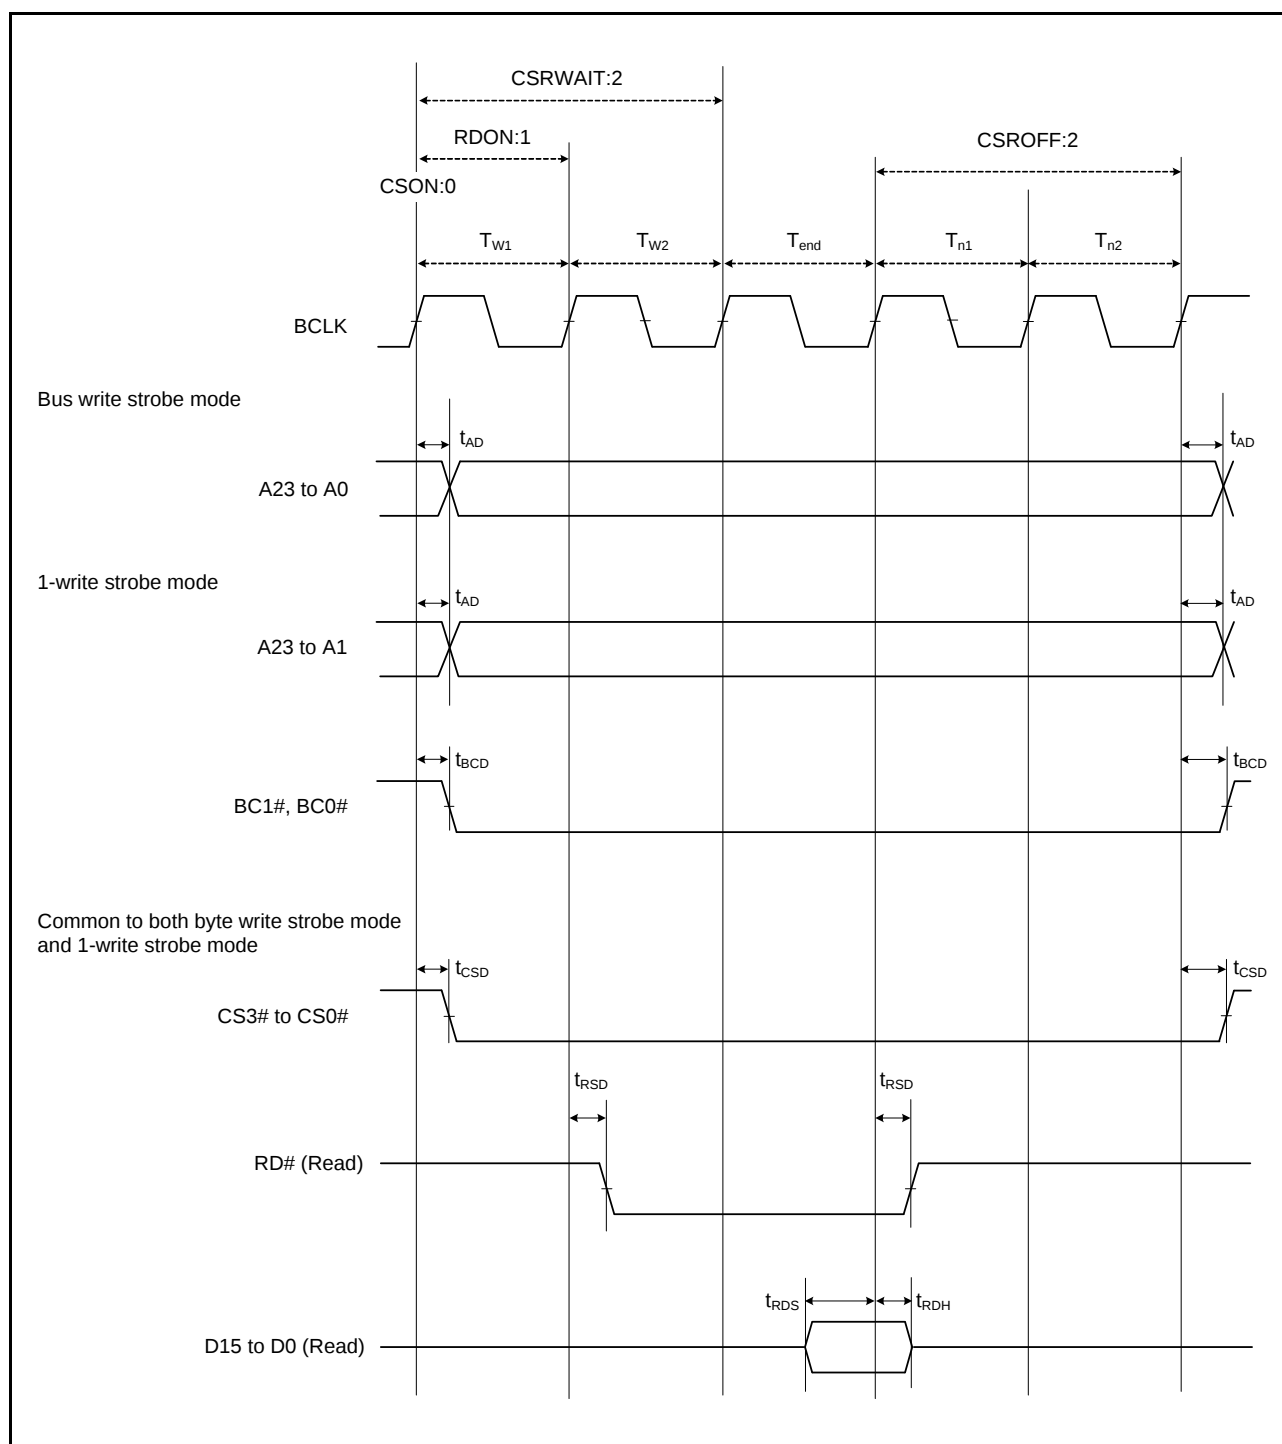


Figure 5.76 External Bus Timing/Normal Read Cycle (Bus Clock Synchronized)

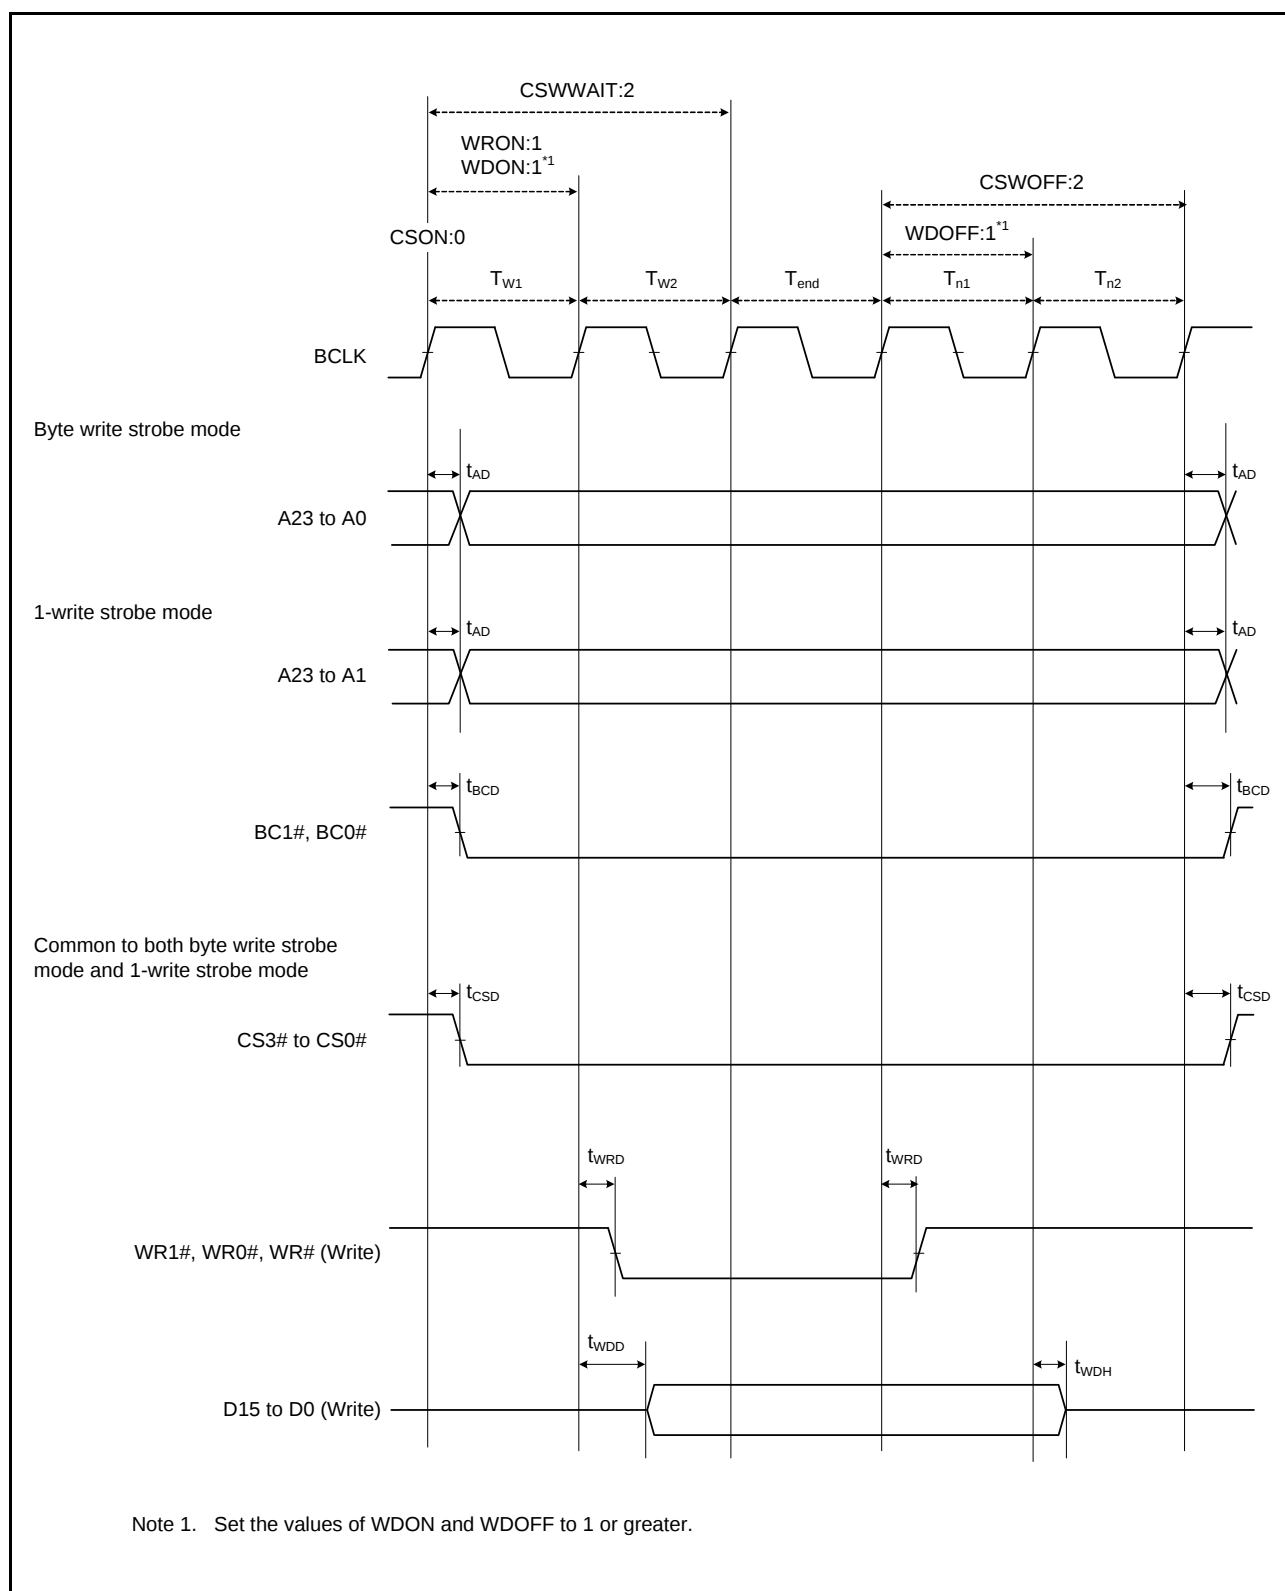

**Figure 5.77 External Bus Timing/Normal Write Cycle (Bus Clock Synchronized)**

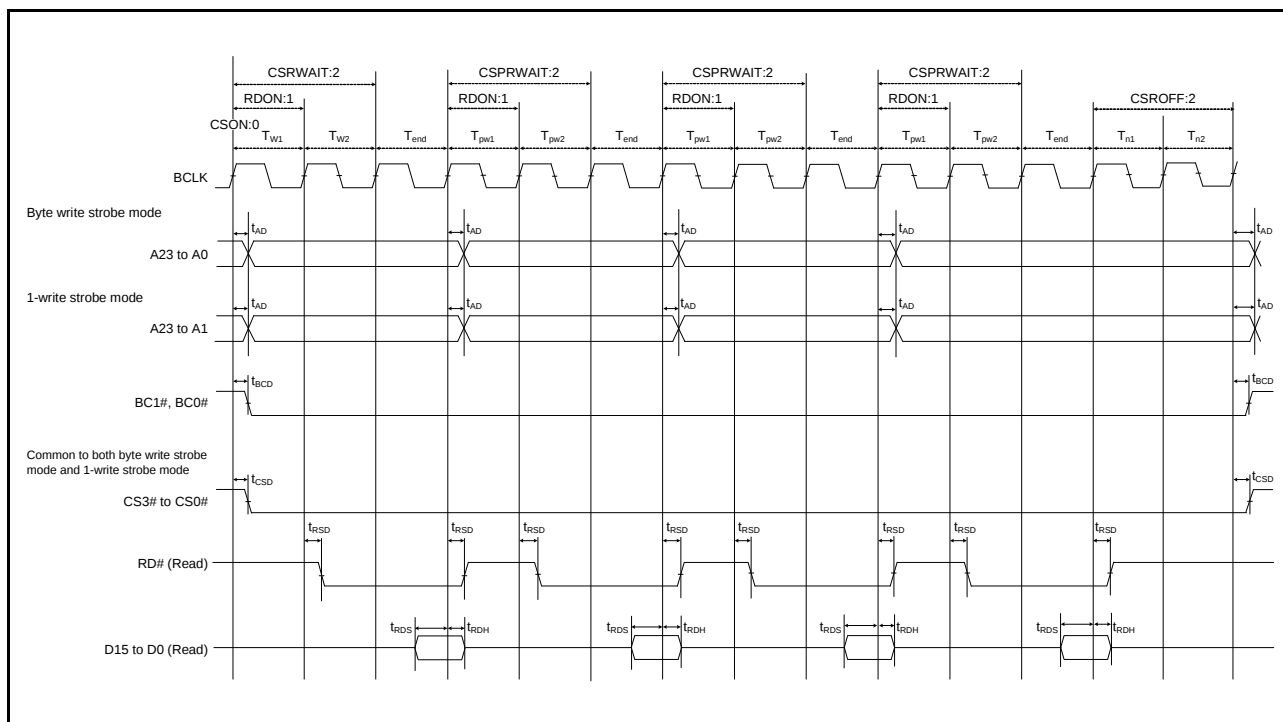


Figure 5.78 External Bus Timing/Page Read Cycle (Bus Clock Synchronized)

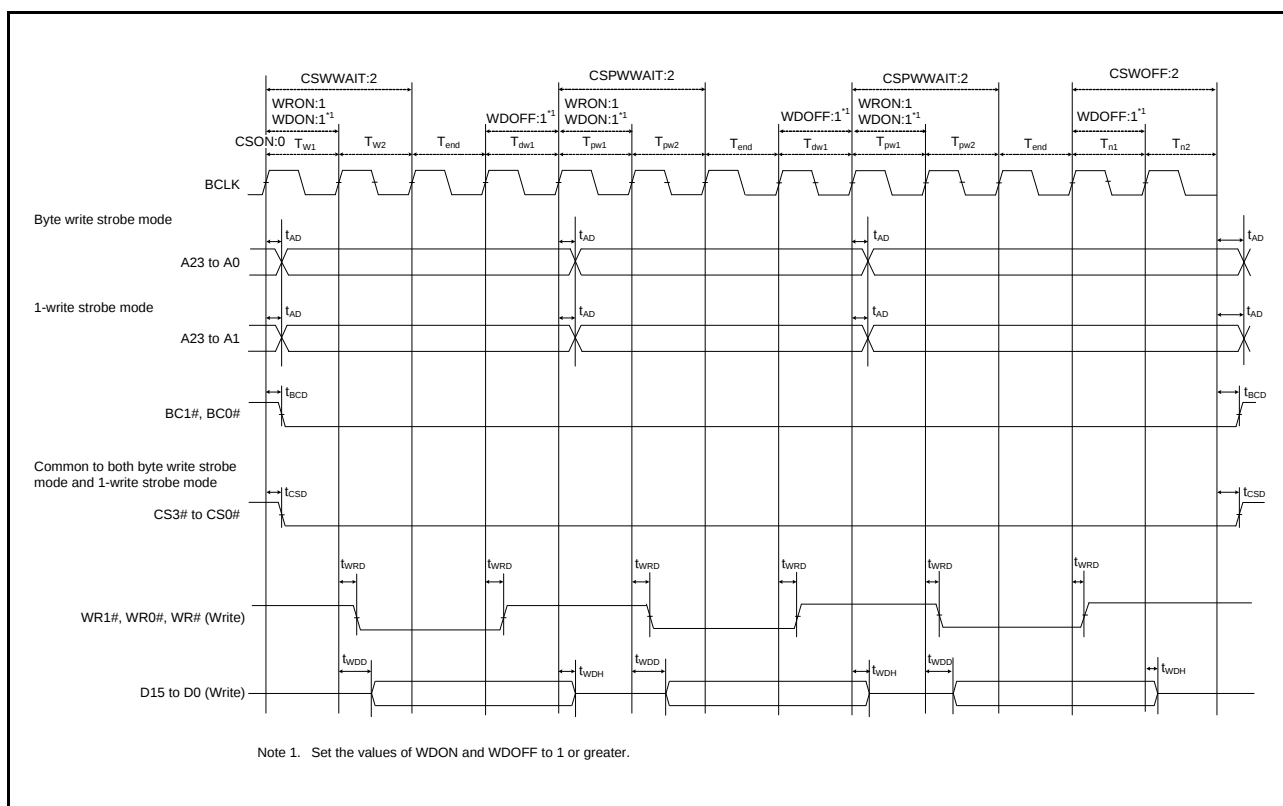


Figure 5.79 External Bus Timing/Page Write Cycle (Bus Clock Synchronized)

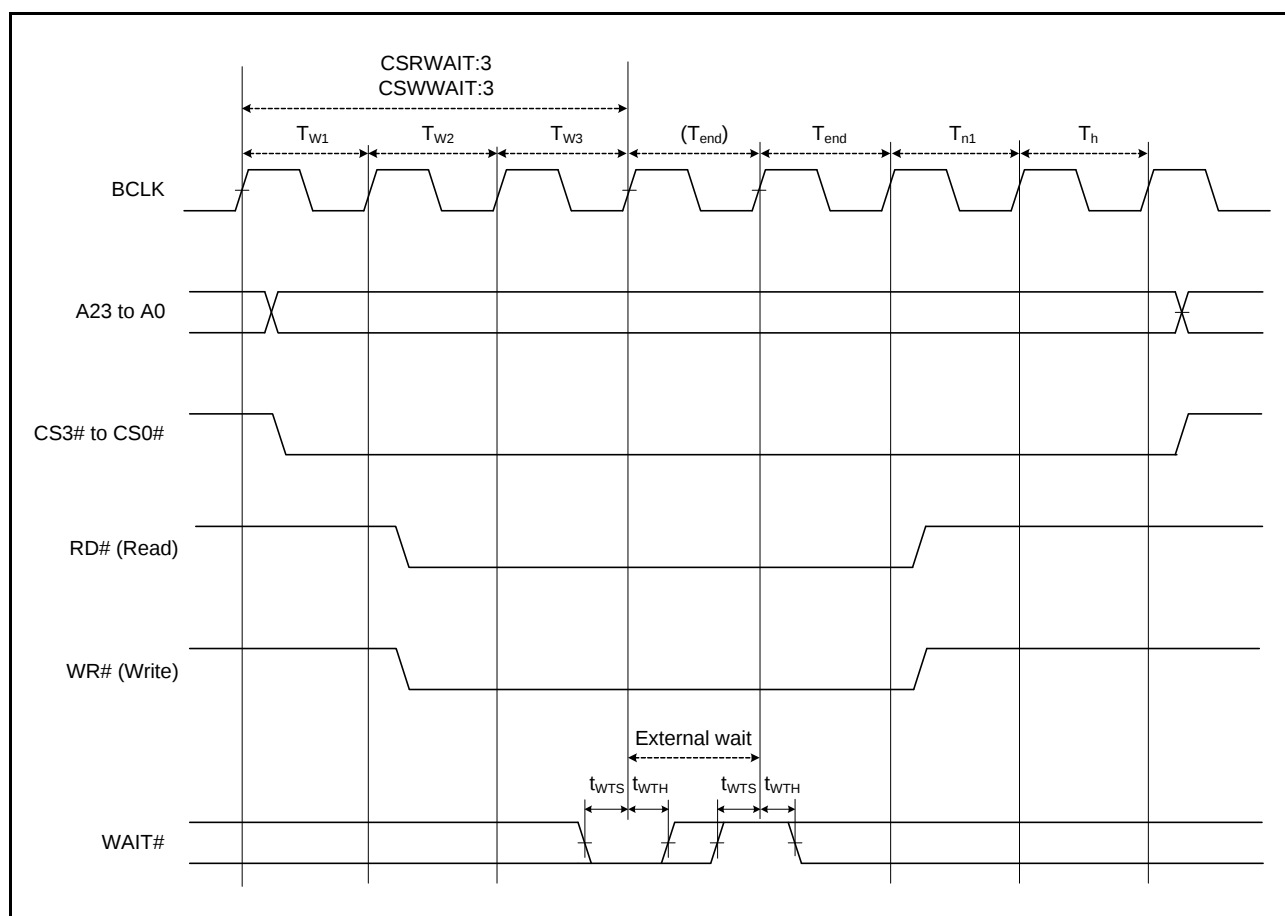


Figure 5.80 External Bus Timing/External Wait Control

**Table 5.52 Bus Timing (Multiplexed Bus) (1)**

Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = VREFL = VREFL0 = 0$  V,  
 $f_{BCLK} \leq 25$  MHz (BCLK pin output frequency  $\leq 12.5$  MHz),  $T_a = -40$  to  $+105^\circ\text{C}$ ,  $V_{OH} = V_{CC} \times 0.5$ ,  
 $V_{OL} = V_{CC} \times 0.5$ ,  $I_{OH} = -1.0$  mA,  $I_{OL} = 1.0$  mA,  $C_L = 30$  pF  
 When normal output is selected by the drive capacity register

| Item                    | Symbol     | Min. | Typ. | Max. | Unit                           |
|-------------------------|------------|------|------|------|--------------------------------|
| Address delay time      | $t_{AD}$   | —    | 60   | ns   | Figure 5.81 and<br>Figure 5.82 |
| Byte control delay time | $t_{BCD}$  | —    | 60   | ns   |                                |
| CS# delay time          | $t_{CSD}$  | —    | 60   | ns   |                                |
| RD# delay time          | $t_{RSD}$  | —    | 60   | ns   |                                |
| ALE delay time          | $t_{ALED}$ | —    | 60   | ns   |                                |
| Read data setup time    | $t_{RDS}$  | 40   | —    | ns   |                                |
| Read data hold time     | $t_{RDH}$  | 0    | —    | ns   |                                |
| WR# delay time          | $t_{WRD}$  | —    | 60   | ns   |                                |
| Write data delay time   | $t_{WDD}$  | —    | 60   | ns   |                                |
| Write data hold time    | $t_{WDH}$  | 0    | —    | ns   |                                |
| WAIT# setup time        | $t_{WTS}$  | 40   | —    | ns   | Figure 5.80                    |
| WAIT# hold time         | $t_{WTH}$  | 0    | —    | ns   |                                |

**Table 5.53 Bus Timing (Multiplexed Bus) (2)**

Conditions:  $V_{CC} = AVCC0 = 1.8$  to  $2.7$  V,  $V_{SS} = AVSS0 = VREFL = VREFL0 = 0$  V,  
 $f_{BCLK} \leq 16$  MHz (BCLK pin output frequency  $\leq 8$  MHz),  $T_a = -40$  to  $+105^\circ\text{C}$ ,  $V_{OH} = V_{CC} \times 0.5$ ,  
 $V_{OL} = V_{CC} \times 0.5$ ,  $I_{OH} = -1.0$  mA,  $I_{OL} = 1.0$  mA,  $C_L = 30$  pF  
 When normal output is selected by the drive capacity register

| Item                    | Symbol     | Min. | Typ. | Max. | Unit                           |
|-------------------------|------------|------|------|------|--------------------------------|
| Address delay time      | $t_{AD}$   | —    | 90   | ns   | Figure 5.81 and<br>Figure 5.82 |
| Byte control delay time | $t_{BCD}$  | —    | 90   | ns   |                                |
| CS# delay time          | $t_{CSD}$  | —    | 90   | ns   |                                |
| RD# delay time          | $t_{RSD}$  | —    | 90   | ns   |                                |
| ALE delay time          | $t_{ALED}$ | —    | 90   | ns   |                                |
| Read data setup time    | $t_{RDS}$  | 60   | —    | ns   |                                |
| Read data hold time     | $t_{RDH}$  | 0    | —    | ns   |                                |
| WR# delay time          | $t_{WRD}$  | —    | 90   | ns   |                                |
| Write data delay time   | $t_{WDD}$  | —    | 90   | ns   |                                |
| Write data hold time    | $t_{WDH}$  | 0    | —    | ns   |                                |
| WAIT# setup time        | $t_{WTS}$  | 60   | —    | ns   | Figure 5.80                    |
| WAIT# hold time         | $t_{WTH}$  | 0    | —    | ns   |                                |

**Table 5.54 Bus Timing (Multiplexed Bus) (3)**

Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $1.8$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  
 $f_{BCLK} \leq 12$  MHz (BCLK pin output frequency  $\leq 6$  MHz),  $T_a = -40$  to  $+105^\circ\text{C}$ ,  $V_{OH} = V_{CC} \times 0.5$ ,  
 $V_{OL} = V_{CC} \times 0.5$ ,  $I_{OH} = -0.5$  mA,  $I_{OL} = 0.5$  mA,  $C_L = 30$  pF  
 When normal output is selected by the drive capacity register

| Item                    | Symbol     | Min. | Typ. | Max. | Unit                           |
|-------------------------|------------|------|------|------|--------------------------------|
| Address delay time      | $t_{AD}$   | —    | 125  | ns   | Figure 5.81 and<br>Figure 5.82 |
| Byte control delay time | $t_{BCD}$  | —    | 125  | ns   |                                |
| CS# delay time          | $t_{CSD}$  | —    | 125  | ns   |                                |
| RD# delay time          | $t_{RSD}$  | —    | 125  | ns   |                                |
| ALE delay time          | $t_{ALED}$ | —    | 125  | ns   |                                |
| Read data setup time    | $t_{RDS}$  | 85   | —    | ns   |                                |
| Read data hold time     | $t_{RDH}$  | 0    | —    | ns   |                                |
| WR# delay time          | $t_{WRD}$  | —    | 125  | ns   |                                |
| Write data delay time   | $t_{WDD}$  | —    | 125  | ns   |                                |
| Write data hold time    | $t_{WDH}$  | 0    | —    | ns   |                                |
| WAIT# setup time        | $t_{WTS}$  | 85   | —    | ns   | Figure 5.80                    |
| WAIT# hold time         | $t_{WTH}$  | 0    | —    | ns   |                                |

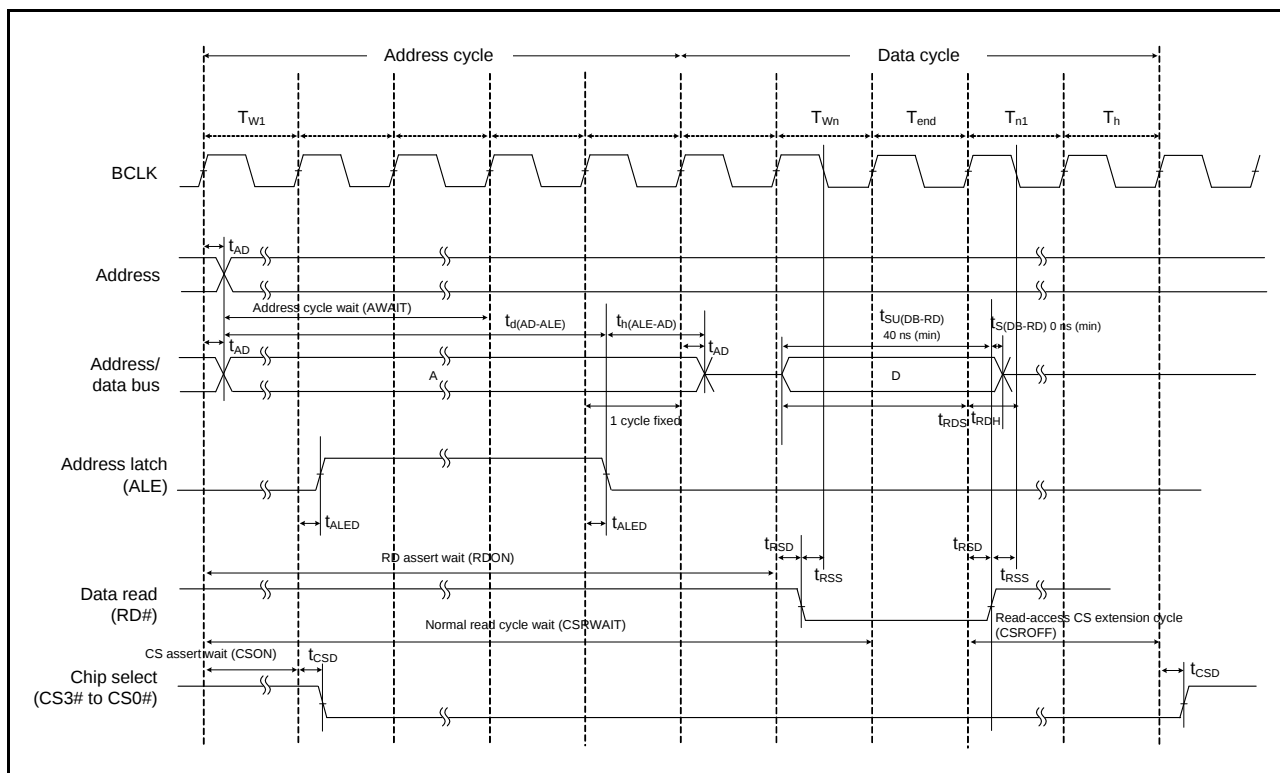


Figure 5.81 Example of Operation in Read Access over the External Bus (Multiplexed)

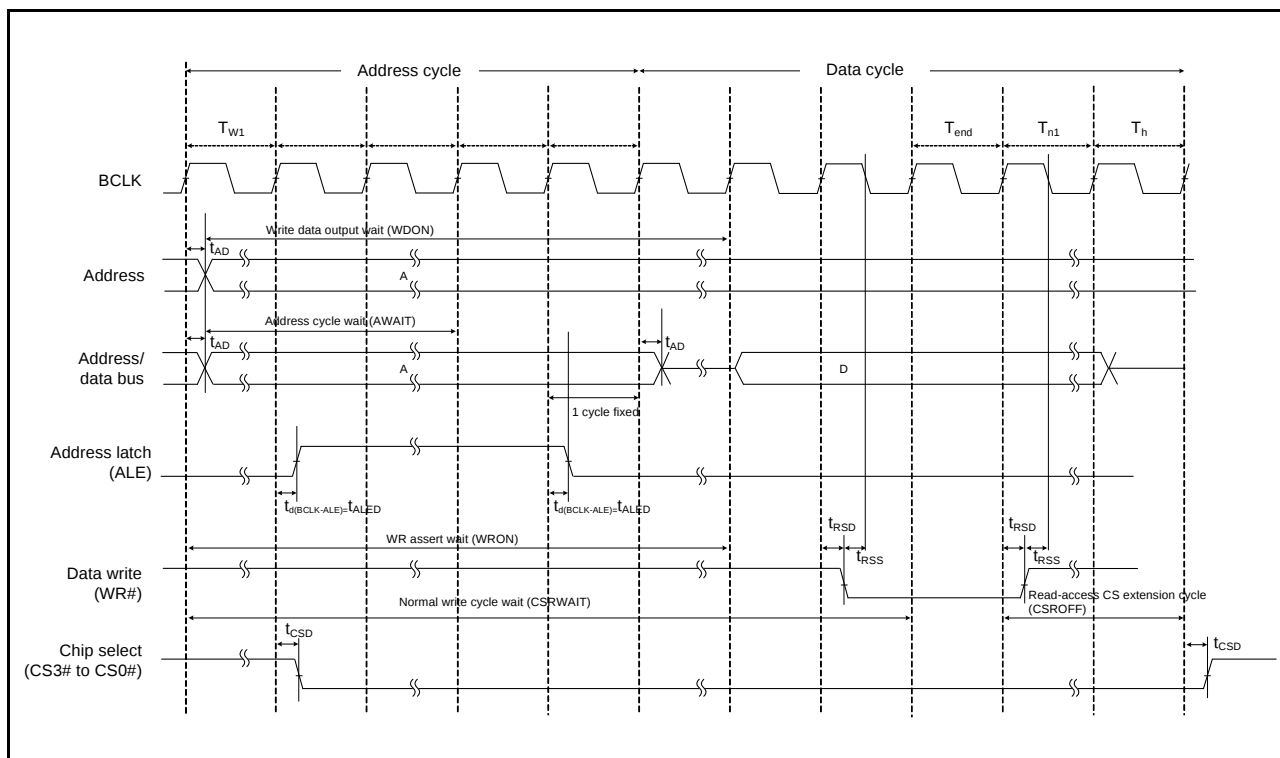


Figure 5.82 Example of Operation in Write Access over the External Bus (Multiplexed)

## 5.3.6 Timing of On-Chip Peripheral Modules

**Table 5.55 Timing of On-Chip Peripheral Modules (1)**Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$ 

When high-drive output is selected by the drive capacity register

| Item          |                                   |                                              | Symbol                                       | Min.                       | Max. | Unit       | Test Conditions          |
|---------------|-----------------------------------|----------------------------------------------|----------------------------------------------|----------------------------|------|------------|--------------------------|
| I/O ports     | Input data pulse width            |                                              | $t_{PRW}$                                    | 1.5                        | —    | $t_{Pcyc}$ | Figure 5.83              |
| MTU/<br>TPU   | Input capture input pulse width   | Single-edge setting                          | $t_{TICW}$                                   | 1.5                        | —    | $t_{Pcyc}$ | Figure 5.84              |
|               |                                   | Both-edge setting                            |                                              | 2.5                        | —    |            |                          |
|               | Timer clock pulse width           | Single-edge setting                          | $t_{TCKWH}$ ,<br>$t_{TCKWL}$                 | 1.5                        | —    | $t_{Pcyc}$ | Figure 5.85              |
|               |                                   | Both-edge setting                            |                                              | 2.5                        | —    |            |                          |
|               |                                   | Phase counting mode                          |                                              | 2.5                        | —    |            |                          |
| POE           | POE# input pulse width            |                                              | $t_{POEW}$                                   | 1.5                        | —    | $t_{Pcyc}$ | Figure 5.86              |
| 8-bit timer   | Timer clock pulse width           | Single-edge setting                          | $t_{TMCWH}$ ,<br>$t_{TMCWL}$                 | 1.5                        | —    | $t_{Pcyc}$ | Figure 5.87              |
|               |                                   | Both-edge setting                            |                                              | 2.5                        | —    |            |                          |
| SCI           | Input clock cycle                 | Asynchronous                                 | $t_{Scyc}$                                   | 4                          | —    | $t_{Pcyc}$ | Figure 5.88              |
|               |                                   | Clock synchronous                            |                                              | 6                          | —    |            |                          |
|               | Input clock pulse width           |                                              | $t_{SCKW}$                                   | 0.4                        | 0.6  | $t_{Scyc}$ | C = 30 pF<br>Figure 5.89 |
|               | Input clock rise time             |                                              | $t_{SCKr}$                                   | —                          | 20   | ns         |                          |
|               | Input clock fall time             |                                              | $t_{SCKf}$                                   | —                          | 20   | ns         |                          |
|               | Output clock cycle                | Asynchronous                                 | $t_{Scyc}$                                   | 16                         | —    | $t_{Pcyc}$ |                          |
|               |                                   | Clock synchronous                            |                                              | 4                          | —    |            |                          |
|               | Output clock pulse width          | $2.7\text{ V} \leq V_{CC} \leq 5.5\text{ V}$ | $t_{SCKW}$                                   | 0.4                        | 0.6  | $t_{Scyc}$ |                          |
|               |                                   | $1.8\text{ V} \leq V_{CC} < 2.7\text{ V}$    |                                              | 0.35                       | 0.65 |            |                          |
|               |                                   | $1.62\text{ V} \leq V_{CC} < 1.8\text{ V}$   |                                              | 0.35                       | 0.65 |            |                          |
|               | Output clock rise time            |                                              | $t_{SCKr}$                                   | —                          | 20   | ns         |                          |
|               | Output clock fall time            |                                              | $t_{SCKf}$                                   | —                          | 20   | ns         |                          |
|               | Transmit data delay time (master) | Clock synchronous                            | $t_{TXD}$                                    | —                          | 40   | ns         |                          |
|               | Transmit data delay time (slave)  | Clock synchronous                            | $2.7\text{ V} \leq V_{CC} \leq 5.5\text{ V}$ | —                          | 65   | ns         |                          |
|               |                                   |                                              | $1.8\text{ V} \leq V_{CC} < 2.7\text{ V}$    | —                          | 85   | ns         |                          |
|               |                                   |                                              | $1.62\text{ V} \leq V_{CC} < 1.8\text{ V}$   | —                          | 95   | ns         |                          |
|               | Receive data setup time (master)  | Clock synchronous                            | $2.7\text{ V} \leq V_{CC} \leq 5.5\text{ V}$ | 65                         | —    | ns         |                          |
|               |                                   |                                              | $1.8\text{ V} \leq V_{CC} < 2.7\text{ V}$    | 75                         | —    | ns         |                          |
|               |                                   |                                              | $1.62\text{ V} \leq V_{CC} < 1.8\text{ V}$   | 80                         | —    | ns         |                          |
|               | Receive data setup time (slave)   | Clock synchronous                            |                                              | 40                         | —    | ns         |                          |
|               | Receive data hold time            | Clock synchronous                            | $t_{RXH}$                                    | 40                         | —    | ns         |                          |
| A/D converter | Trigger input pulse width         |                                              | $t_{TRGW}$                                   | 1.5                        | —    | $t_{Pcyc}$ | Figure 5.90              |
| CAC           | CACREF input pulse width          | $t_{Pcyc} \leq t_{cac}^{*2}$                 | $t_{CACREF}$                                 | $4.5 t_{cac} + 3 t_{Pcyc}$ | —    | ns         |                          |
|               |                                   | $t_{Pcyc} > t_{cac}^{*2}$                    |                                              | $5 t_{cac} + 6.5 t_{Pcyc}$ |      |            |                          |

Note 1.  $t_{Pcyc}$ : PCLK cycleNote 2.  $t_{cac}$ : CAC count clock source cycle

[512 Kbytes or less of flash memory and 48 to 100 pins]

**Table 5.56 Timing of On-Chip Peripheral Modules (2)**Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

When high-drive output is selected by the drive capacity register

| Item                               |                              |                                                  |                                                  | Symbol                          | Min.                                         | Max.        | Unit*1        | Test Conditions                            |
|------------------------------------|------------------------------|--------------------------------------------------|--------------------------------------------------|---------------------------------|----------------------------------------------|-------------|---------------|--------------------------------------------|
| RSPI                               | RSPCK clock cycle            | Master                                           |                                                  | $t_{SPcyc}$                     | 2                                            | 4096        | $t_{Pcyc}$    | C = 30 pF<br>Figure 5.91                   |
|                                    |                              |                                                  |                                                  |                                 | 125                                          | —           | ns            |                                            |
|                                    |                              | Slave                                            |                                                  |                                 | 8                                            | 4096        | $t_{Pcyc}$    |                                            |
|                                    | RSPCK clock high pulse width | Master                                           | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{SPCKWH}$                    | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 3$  | —           | ns            |                                            |
|                                    |                              |                                                  | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                                 | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 3$  | —           |               |                                            |
|                                    |                              |                                                  | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                                 | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 10$ | —           |               |                                            |
|                                    |                              | Slave                                            |                                                  |                                 | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2$      | —           |               |                                            |
|                                    |                              |                                                  |                                                  |                                 |                                              |             |               |                                            |
|                                    | RSPCK clock low pulse width  | Master                                           | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{SPCKWL}$                    | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 3$  | —           | ns            |                                            |
|                                    |                              |                                                  | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                                 | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 3$  | —           |               |                                            |
|                                    |                              |                                                  | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                                 | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 10$ | —           |               |                                            |
|                                    |                              | Slave                                            |                                                  |                                 | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2$      | —           |               |                                            |
|                                    |                              |                                                  |                                                  |                                 |                                              |             |               |                                            |
|                                    | RSPCK clock rise/fall time   | Output                                           | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{SPCKr},$<br>$t_{SPCKf}$     | —                                            | 10          | ns            |                                            |
|                                    |                              |                                                  | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                                 | —                                            | 15          |               |                                            |
|                                    |                              |                                                  | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                                 | —                                            | 20          |               |                                            |
|                                    |                              | Input                                            |                                                  |                                 | —                                            | 1           | $\mu\text{s}$ |                                            |
|                                    | Data input setup time        | Master                                           | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{SU}$                        | 50                                           | —           | ns            | C = 30 pF<br>Figure 5.92 to<br>Figure 5.97 |
|                                    |                              |                                                  | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                                 | 65                                           | —           |               |                                            |
|                                    |                              |                                                  | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                                 | 75                                           | —           |               |                                            |
| Slave                              |                              | $25 - t_{Pcyc}$                                  | —                                                |                                 |                                              |             |               |                                            |
| Data input hold time               | Master                       |                                                  | $t_H$                                            | $t_{Pcyc}$                      | —                                            | ns          |               |                                            |
|                                    | Slave                        |                                                  |                                                  | $20 + 2 \times t_{Pcyc}$        | —                                            |             |               |                                            |
| SSL setup time                     | Master                       |                                                  | $t_{LEAD}$                                       | 1                               | 8                                            | $t_{SPcyc}$ |               |                                            |
|                                    | Slave                        |                                                  |                                                  | 4                               | —                                            | $t_{Pcyc}$  |               |                                            |
| SSL hold time                      | Master                       |                                                  | $t_{LAG}$                                        | 1                               | 8                                            | $t_{SPcyc}$ |               |                                            |
|                                    | Slave                        |                                                  |                                                  | 4                               | —                                            | $t_{Pcyc}$  |               |                                            |
| Data output delay time             | Master                       | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{OD}$                                         | —                               | 50                                           | ns          |               |                                            |
|                                    |                              | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                                                  | —                               | 55                                           |             |               |                                            |
|                                    |                              | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                                                  | —                               | 60                                           |             |               |                                            |
|                                    | Slave                        | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ |                                                  | —                               | $3 \times t_{Pcyc} + 65$                     |             |               |                                            |
|                                    |                              | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                                                  | —                               | $3 \times t_{Pcyc} + 85$                     |             |               |                                            |
|                                    |                              | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                                                  | —                               | $3 \times t_{Pcyc} + 95$                     |             |               |                                            |
| Data output hold time              | Master                       |                                                  | $t_{OH}$                                         | 0                               | —                                            | ns          |               |                                            |
|                                    | Slave                        |                                                  |                                                  | 0                               | —                                            |             |               |                                            |
| Successive transmission delay time | Master                       |                                                  | $t_{TD}$                                         | $t_{SPcyc} + 2 \times t_{Pcyc}$ | $8 \times t_{SPcyc} + 2 \times t_{Pcyc}$     | ns          |               |                                            |
|                                    | Slave                        |                                                  |                                                  | $4 \times t_{Pcyc}$             | —                                            |             |               |                                            |

| Item |                              |                                                  | Symbol               | Min. | Max. | Unit*1     | Test Conditions                             |
|------|------------------------------|--------------------------------------------------|----------------------|------|------|------------|---------------------------------------------|
| RSPI | MOSI and MISO rise/fall time | Output                                           | $t_{Dr}, t_{Df}$     | —    | 20   | ns         | C = 30 pF<br>Figure 5.92 to<br>Figure 5.97  |
|      |                              | Input                                            |                      | —    | 1    | μs         |                                             |
|      | SSL rise/fall time           | Output                                           | $t_{SSLr}, t_{SSLf}$ | —    | 20   | ns         |                                             |
|      |                              | Input                                            |                      | —    | 1    | μs         |                                             |
|      | Slave access time            | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{SA}$             | —    | 6    | $t_{Pcyc}$ | C = 30 pF<br>Figure 5.96 and<br>Figure 5.97 |
|      |                              | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                      | —    | 7    |            |                                             |
|      |                              | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                      | —    | 7    |            |                                             |
|      | Slave output release time    | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{REL}$            | —    | 5    | $t_{Pcyc}$ |                                             |
|      |                              | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                      | —    | 6    |            |                                             |
|      |                              | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                      | —    | 6    |            |                                             |

Note 1.  $t_{Pcyc}$ : PCLK cycle

[768 Kbytes/1 Mbyte of flash memory or 144/145 pins]

**Table 5.57 Timing of On-Chip Peripheral Modules (3)**

Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V,  $T_a = -40$  to  $+105^\circ\text{C}$

When high-drive output is selected by the drive capacity register

| Item |                                                |                             |                                                  | Symbol                                       | Min.                                             | Max.         | Unit*1     | Test Conditions         |                                             |   |    |
|------|------------------------------------------------|-----------------------------|--------------------------------------------------|----------------------------------------------|--------------------------------------------------|--------------|------------|-------------------------|---------------------------------------------|---|----|
| RSPI | RSPCK clock cycle                              | Master                      |                                                  | $t_{SPcyc}$                                  | 2                                                | 4096         | $t_{pcyc}$ | C = 30pF<br>Figure 5.91 |                                             |   |    |
|      |                                                | Slave                       |                                                  |                                              | 8                                                | 4096         |            |                         |                                             |   |    |
|      | RSPCK clock high pulse width                   | Master                      | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{SPCKWH}$                                 | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 3$      | —            | ns         |                         |                                             |   |    |
|      |                                                |                             | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                                              | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 3$      | —            |            |                         |                                             |   |    |
|      |                                                |                             | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                                              | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 10$     | —            |            |                         |                                             |   |    |
|      |                                                | Slave                       |                                                  |                                              | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2$          | —            |            |                         |                                             |   |    |
|      |                                                | RSPCK clock low pulse width | Master                                           |                                              | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{SPCKWL}$ |            |                         | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 3$ | — | ns |
|      |                                                |                             |                                                  |                                              | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |              |            |                         | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 3$ | — |    |
|      | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$ |                             |                                                  | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2 - 10$ | —                                                |              |            |                         |                                             |   |    |
|      | Slave                                          |                             | $(t_{SPcyc} - t_{SPCKr} - t_{SPCKf})/2$          | —                                            |                                                  |              |            |                         |                                             |   |    |
|      | RSPCK clock rise/fall time                     | Output                      | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$ | $t_{SPCKr},$<br>$t_{SPCKf}$                  | —                                                |              | 10         |                         | ns                                          |   |    |
|      |                                                |                             | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$    |                                              | —                                                |              | 15         |                         |                                             |   |    |
|      |                                                |                             | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$   |                                              | —                                                | 20           |            |                         |                                             |   |    |
|      |                                                | Input                       |                                                  |                                              | —                                                | 1            | μs         |                         |                                             |   |    |

| Item |                                    |        |                                                       | Symbol                             | Min.                                          | Max.                                                   | Unit*1             | Test Conditions                            |
|------|------------------------------------|--------|-------------------------------------------------------|------------------------------------|-----------------------------------------------|--------------------------------------------------------|--------------------|--------------------------------------------|
| RSPI | Data input setup time              | Master | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$      | $t_{\text{SU}}$                    | 10                                            | —                                                      | ns                 | C = 30pF<br>Figure 5.92 to<br>Figure 5.97  |
|      |                                    |        | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$         |                                    | 25                                            | —                                                      |                    |                                            |
|      |                                    |        | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$        |                                    | 30                                            | —                                                      |                    |                                            |
|      |                                    | Slave  |                                                       |                                    | $25 - t_{\text{Pcyc}}$                        | —                                                      |                    |                                            |
|      | Data input hold time               | Master | PCLKB set to a division ratio other than divided by 2 | $t_{\text{H}}$                     | $t_{\text{Pcyc}}$                             | —                                                      | ns                 |                                            |
|      |                                    |        | PCLKB set to divided by 2*2                           | $t_{\text{HF}}$                    | 0                                             | —                                                      |                    |                                            |
|      |                                    | Slave  |                                                       | $t_{\text{H}}$                     | $20 + 2 \times t_{\text{Pcyc}}$               | —                                                      |                    |                                            |
|      | SSL setup time                     | Master |                                                       | $t_{\text{LEAD}}$                  | 1                                             | 8                                                      | $t_{\text{SPcyc}}$ |                                            |
|      |                                    | Slave  |                                                       |                                    | 4                                             | —                                                      | $t_{\text{Pcyc}}$  |                                            |
|      | SSL hold time                      | Master |                                                       | $t_{\text{LAG}}$                   | 1                                             | 8                                                      | $t_{\text{SPcyc}}$ |                                            |
|      |                                    | Slave  |                                                       |                                    | 4                                             | —                                                      | $t_{\text{Pcyc}}$  |                                            |
|      | Data output delay time             | Master | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$      | $t_{\text{OD}}$                    | —                                             | 14                                                     | ns                 |                                            |
|      |                                    |        | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$         |                                    | —                                             | 20                                                     |                    |                                            |
|      |                                    |        | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$        |                                    | —                                             | 25                                                     |                    |                                            |
|      |                                    | Slave  | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$      |                                    | —                                             | $3 \times t_{\text{Pcyc}} + 65$                        |                    |                                            |
|      |                                    |        | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$         |                                    | —                                             | $3 \times t_{\text{Pcyc}} + 85$                        |                    |                                            |
|      |                                    |        | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$        |                                    | —                                             | $3 \times t_{\text{Pcyc}} + 95$                        |                    |                                            |
|      | Data output hold time              | Master |                                                       | $t_{\text{OH}}$                    | 0                                             | —                                                      | ns                 |                                            |
|      |                                    | Slave  |                                                       |                                    | 0                                             | —                                                      |                    |                                            |
|      | Successive transmission delay time | Master |                                                       | $t_{\text{TD}}$                    | $t_{\text{SPcyc}} + 2 \times t_{\text{Pcyc}}$ | $8 \times t_{\text{SPcyc}} + 2 \times t_{\text{Pcyc}}$ | ns                 |                                            |
|      |                                    | Slave  |                                                       |                                    | $4 \times t_{\text{Pcyc}}$                    | —                                                      |                    |                                            |
|      | MOSI and MISO rise/fall time       | Output | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$      | $t_{\text{Dr}}, t_{\text{Df}}$     | —                                             | 10                                                     | ns                 |                                            |
|      |                                    |        | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$         |                                    | —                                             | 15                                                     |                    |                                            |
|      |                                    |        | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$        |                                    | —                                             | 20                                                     |                    |                                            |
|      |                                    | Input  |                                                       |                                    | —                                             | 1                                                      | $\mu\text{s}$      |                                            |
|      | SSL rise/fall time                 | Output | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$      | $t_{\text{SSLr}}, t_{\text{SSLf}}$ | —                                             | 10                                                     | ns                 |                                            |
|      |                                    |        | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$         |                                    | —                                             | 15                                                     |                    |                                            |
|      |                                    |        | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$        |                                    | —                                             | 20                                                     |                    |                                            |
|      |                                    | Input  |                                                       |                                    | —                                             | 1                                                      | $\mu\text{s}$      |                                            |
|      | Slave access time                  |        | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$      | $t_{\text{SA}}$                    | —                                             | 6                                                      | $t_{\text{Pcyc}}$  | C = 30pF<br>Figure 5.96 and<br>Figure 5.97 |
|      |                                    |        | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$         |                                    | —                                             | 7                                                      |                    |                                            |
|      |                                    |        | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$        |                                    | —                                             | 7                                                      |                    |                                            |
|      | Slave output release time          |        | $2.7\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$      | $t_{\text{REL}}$                   | —                                             | 5                                                      | $t_{\text{Pcyc}}$  |                                            |
|      |                                    |        | $1.8\text{ V} \leq \text{VCC} < 2.7\text{ V}$         |                                    | —                                             | 6                                                      |                    |                                            |
|      |                                    |        | $1.62\text{ V} \leq \text{VCC} < 1.8\text{ V}$        |                                    | —                                             | 6                                                      |                    |                                            |

Note 1.  $t_{\text{Pcyc}}$ : PCLK cycle

Note 2. Divided by 2 can be set only in packages with 768 Kbytes/1 Mbyte of flash memory or 144/145 pins.

**Table 5.58 Timing of On-Chip Peripheral Modules (4)**

Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$   
 When high-drive output is selected by the drive capacity register

| Item                            |                                           |                                           | Symbol                 | Min. | Max.       | Unit*1                                      | Test Conditions                            |
|---------------------------------|-------------------------------------------|-------------------------------------------|------------------------|------|------------|---------------------------------------------|--------------------------------------------|
| Simple SPI                      | SCK clock cycle output (master)           |                                           | $t_{SPCyc}$            | 4    | 65536      | $t_{Pcyc}$                                  | C = 30 pF<br>Figure 5.91                   |
|                                 | SCK clock cycle input (slave)             |                                           |                        | 6    | 65536      |                                             |                                            |
|                                 | SCK input clock high pulse width          |                                           | $t_{SPCKWH}$           | 0.4  | 0.6        | $t_{SPCyc}$                                 |                                            |
|                                 | SCK input clock low pulse width           |                                           | $t_{SPCKWL}$           | 0.4  | 0.6        | $t_{SPCyc}$                                 |                                            |
|                                 | SCK output clock high pulse width         | $2.7\text{ V} \leq VCC \leq 5.5\text{ V}$ | $t_{SPCKWH}$           | 0.4  | 0.6        | $t_{SPCyc}$                                 |                                            |
|                                 |                                           | $1.8\text{ V} \leq VCC < 2.7\text{ V}$    |                        | 0.35 | 0.65       |                                             |                                            |
|                                 |                                           | $1.62\text{ V} \leq VCC < 1.8\text{ V}$   |                        | 0.35 | 0.65       |                                             |                                            |
|                                 | SCK output clock low pulse width          | $2.7\text{ V} \leq VCC \leq 5.5\text{ V}$ | $t_{SPCKWL}$           | 0.4  | 0.6        | $t_{SPCyc}$                                 |                                            |
|                                 |                                           | $1.8\text{ V} \leq VCC < 2.7\text{ V}$    |                        | 0.35 | 0.65       |                                             |                                            |
|                                 |                                           | $1.62\text{ V} \leq VCC < 1.8\text{ V}$   |                        | 0.35 | 0.65       |                                             |                                            |
|                                 | SCK clock rise/fall time                  |                                           | $t_{SPCKr}, t_{SPCKf}$ | —    | 20         | ns                                          |                                            |
|                                 | Data input setup time (Master)            | $2.7\text{ V} \leq VCC \leq 5.5\text{ V}$ | $t_{SU}$               | 65   | —          | ns                                          | C = 30 pF<br>Figure 5.92 to<br>Figure 5.97 |
|                                 |                                           | $1.8\text{ V} \leq VCC < 2.7\text{ V}$    |                        | 75   | —          |                                             |                                            |
|                                 |                                           | $1.62\text{ V} \leq VCC < 1.8\text{ V}$   |                        | 80   | —          |                                             |                                            |
| Data input setup time (Slave)   |                                           | 40                                        | —                      |      |            |                                             |                                            |
| Data input hold time            |                                           | $t_H$                                     | 40                     | —    | ns         |                                             |                                            |
| SS input setup time             |                                           | $t_{LEAD}$                                | 6                      | —    | $t_{Pcyc}$ |                                             |                                            |
| SS input hold time              |                                           | $t_{LAG}$                                 | 6                      | —    | $t_{Pcyc}$ |                                             |                                            |
| Data output delay time (Master) |                                           | $t_{OD}$                                  | —                      | 40   | ns         |                                             |                                            |
| Data output delay time (Slave)  | $2.7\text{ V} \leq VCC \leq 5.5\text{ V}$ |                                           | —                      | 65   |            |                                             |                                            |
|                                 | $1.8\text{ V} \leq VCC < 2.7\text{ V}$    |                                           | —                      | 85   |            |                                             |                                            |
|                                 | $1.62\text{ V} \leq VCC < 1.8\text{ V}$   |                                           | —                      | 95   |            |                                             |                                            |
| Data output hold time           |                                           | $t_{OH}$                                  | −10                    | —    | ns         |                                             |                                            |
| Data rise/fall time             |                                           | $t_{Dr}, t_{Df}$                          | —                      | 20   | ns         |                                             |                                            |
| SS input rise/fall time         |                                           | $t_{SSLr}, t_{SSLf}$                      | —                      | 20   | ns         |                                             |                                            |
| Slave access time               |                                           | $t_{SA}$                                  | —                      | 6    | $t_{Pcyc}$ | C = 30 pF<br>Figure 5.96 and<br>Figure 5.97 |                                            |
| Slave output release time       |                                           | $t_{REL}$                                 | —                      | 6    | $t_{Pcyc}$ |                                             |                                            |

Note 1.  $t_{PCyc}$ : PCLK cycle

**Table 5.59 Timing of On-Chip Peripheral Modules (5)**

Conditions:  $V_{CC} = AV_{CC0} = 2.7$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $f_{PCLKB} =$  up to 32 MHz,  
 $T_a = -40$  to  $+105^\circ\text{C}$

| Item                              |                                         | Symbol     | Min.*1,*2                         | Max.                      | Unit | Test Conditions |
|-----------------------------------|-----------------------------------------|------------|-----------------------------------|---------------------------|------|-----------------|
| RIIC<br>(Standard mode,<br>SMBus) | SCL input cycle time                    | $t_{SCL}$  | $6 (12) \times t_{IICcyc} + 1300$ | —                         | ns   | Figure 5.98     |
|                                   | SCL input high pulse width              | $t_{SCLH}$ | $3 (6) \times t_{IICcyc} + 300$   | —                         | ns   |                 |
|                                   | SCL input low pulse width               | $t_{SCLL}$ | $3 (6) \times t_{IICcyc} + 300$   | —                         | ns   |                 |
|                                   | SCL, SDA input rise time                | $t_{Sr}$   | —                                 | 1000                      | ns   |                 |
|                                   | SCL, SDA input fall time                | $t_{Sf}$   | —                                 | 300                       | ns   |                 |
|                                   | SCL, SDA input spike pulse removal time | $t_{SP}$   | 0                                 | $1 (4) \times t_{IICcyc}$ | ns   |                 |
|                                   | SDA input bus free time                 | $t_{BUF}$  | $3 (6) \times t_{IICcyc} + 300$   | —                         | ns   |                 |
|                                   | Start condition input hold time         | $t_{STAH}$ | $t_{IICcyc} + 300$                | —                         | ns   |                 |
|                                   | Restart condition input setup time      | $t_{STAS}$ | 1000                              | —                         | ns   |                 |
|                                   | Stop condition input setup time         | $t_{STOS}$ | 1000                              | —                         | ns   |                 |
|                                   | Data input setup time                   | $t_{SDAS}$ | $t_{IICcyc} + 50$                 | —                         | ns   |                 |
|                                   | Data input hold time                    | $t_{SDAH}$ | 0                                 | —                         | ns   |                 |
|                                   | SCL, SDA capacitive load                | $C_b$      | —                                 | 400                       | pF   |                 |
|                                   |                                         |            |                                   |                           |      |                 |
| RIIC<br>(Fast mode)               | SCL input cycle time                    | $t_{SCL}$  | $6 (12) \times t_{IICcyc} + 600$  | —                         | ns   | Figure 5.98     |
|                                   | SCL input high pulse width              | $t_{SCLH}$ | $3 (6) \times t_{IICcyc} + 300$   | —                         | ns   |                 |
|                                   | SCL input low pulse width               | $t_{SCLL}$ | $3 (6) \times t_{IICcyc} + 300$   | —                         | ns   |                 |
|                                   | SCL, SDA input rise time                | $t_{Sr}$   | $20 + 0.1C_b$                     | 300                       | ns   |                 |
|                                   | SCL, SDA input fall time                | $t_{Sf}$   | $20 + 0.1C_b$                     | 300                       | ns   |                 |
|                                   | SCL, SDA input spike pulse removal time | $t_{SP}$   | 0                                 | $1 (4) \times t_{IICcyc}$ | ns   |                 |
|                                   | SDA input bus free time                 | $t_{BUF}$  | $3 (6) \times t_{IICcyc} + 300$   | —                         | ns   |                 |
|                                   | Start condition input hold time         | $t_{STAH}$ | $t_{IICcyc} + 300$                | —                         | ns   |                 |
|                                   | Restart condition input setup time      | $t_{STAS}$ | 300                               | —                         | ns   |                 |
|                                   | Stop condition input setup time         | $t_{STOS}$ | 300                               | —                         | ns   |                 |
|                                   | Data input setup time                   | $t_{SDAS}$ | $t_{IICcyc} + 50$                 | —                         | ns   |                 |
|                                   | Data input hold time                    | $t_{SDAH}$ | 0                                 | —                         | ns   |                 |
|                                   | SCL, SDA capacitive load                | $C_b$      | —                                 | 400                       | pF   |                 |
|                                   |                                         |            |                                   |                           |      |                 |

Note: •  $t_{IICcyc}$ : RIIC internal reference count clock (IIC $\phi$ ) cycle

Note 1. The value in parentheses is used when the ICMR3.NF[1:0] bits are set to 11b while a digital filter is enabled with the ICFER.NFE bits = 1.

Note 2.  $C_b$  indicates the total capacity of the bus line.

**Table 5.60 Timing of On-Chip Peripheral Modules (6)**Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{SS} = AVSS0 = VREFL = VREFL0 = 0$  V,  $f_{PCLKB} =$  up to 32 MHz, $T_a = -40$  to  $+105^\circ\text{C}$ 

When high-drive output is selected by the drive capacity register

| Item                          |                                         | Symbol     | Min.*1        | Max.                     | Unit | Test Conditions |
|-------------------------------|-----------------------------------------|------------|---------------|--------------------------|------|-----------------|
| Simple IIC<br>(Standard mode) | SDA input rise time                     | $t_{Sr}$   | —             | 1000                     | ns   | Figure 5.98     |
|                               | SDA input fall time                     | $t_{Sf}$   | —             | 300                      | ns   |                 |
|                               | SDA input spike pulse removal time      | $t_{SP}$   | 0             | $4 \times t_{pcyc}^{*2}$ | ns   |                 |
|                               | Data input setup time                   | $t_{SDAS}$ | 250           | —                        | ns   |                 |
|                               | Data input hold time                    | $t_{SDAH}$ | 0             | —                        | ns   |                 |
|                               | SCL, SDA capacitive load                | $C_b$      | —             | 400                      | pF   |                 |
| Simple IIC<br>(Fast mode)     | SCL, SDA input rise time                | $t_{Sr}$   | $20 + 0.1C_b$ | 300                      | ns   | Figure 5.98     |
|                               | SCL, SDA input fall time                | $t_{Sf}$   | $20 + 0.1C_b$ | 300                      | ns   |                 |
|                               | SCL, SDA input spike pulse removal time | $t_{SP}$   | 0             | $4 \times t_{pcyc}^{*2}$ | ns   |                 |
|                               | Data input setup time                   | $t_{SDAS}$ | 100           | —                        | ns   |                 |
|                               | Data input hold time                    | $t_{SDAH}$ | 0             | —                        | ns   |                 |
|                               | SCL, SDA capacitive load                | $C_b$      | —             | 400                      | pF   |                 |

Note: •  $t_{pcyc}$ : PCLK cycleNote 1.  $C_b$  indicates the total capacity of the bus line.

Note 2. This applies when the SMR.CKS[1:0] bits = 00b and the SNFR.NFCS[2:0] bits = 010b while the SNFR.NFE bit = 1 and the digital filter is enabled.

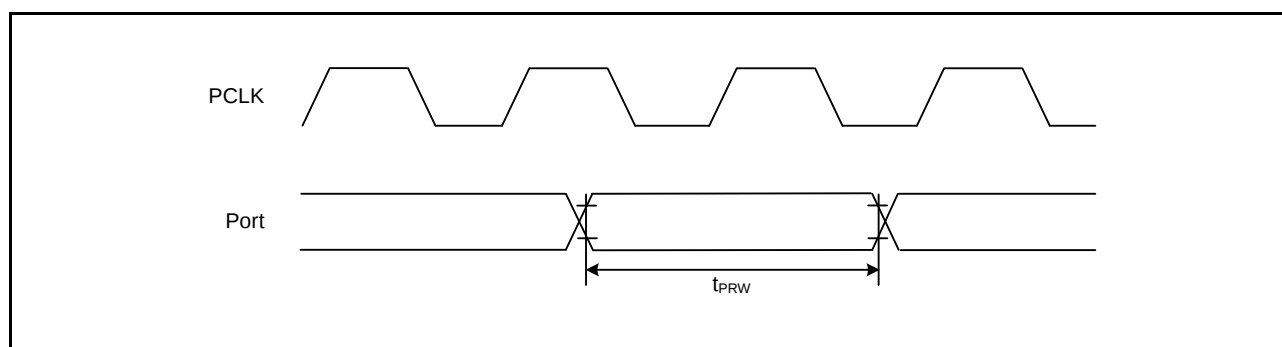


Figure 5.83 I/O Port Input Timing

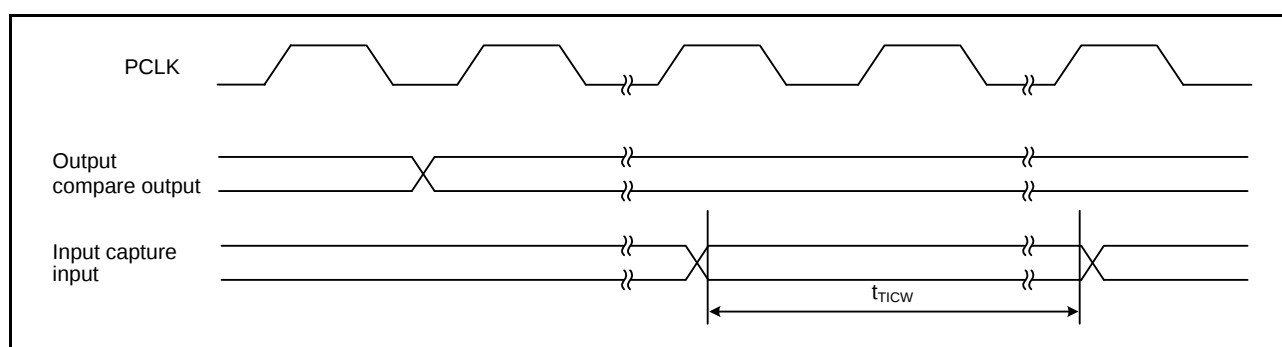


Figure 5.84 MTU/TPU Input/Output Timing

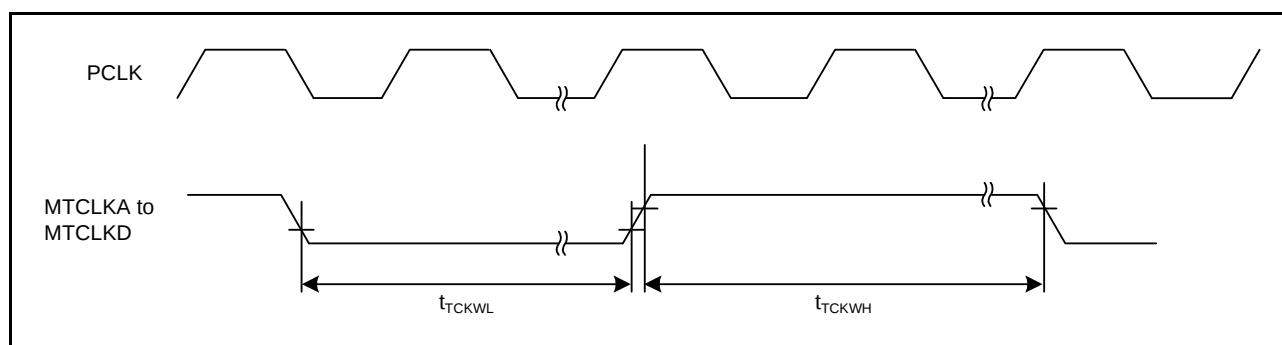


Figure 5.85 MTU/TPU Clock Input Timing

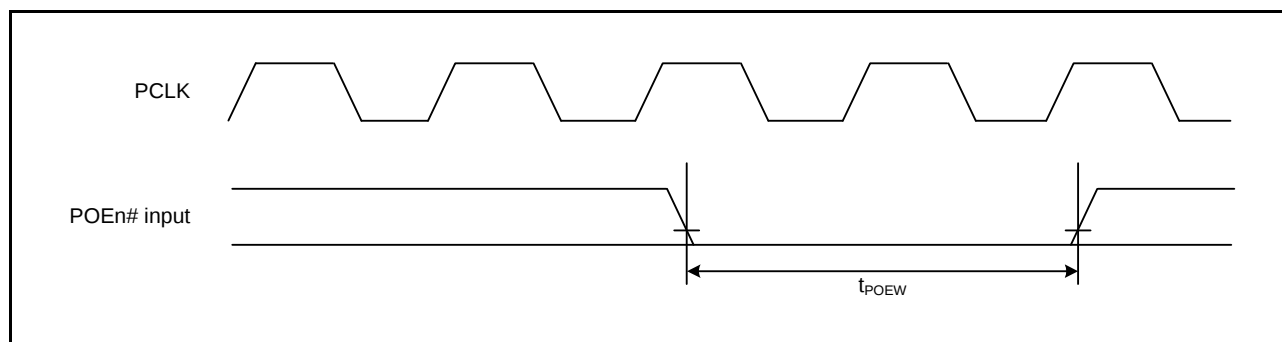


Figure 5.86 POE# Input Timing

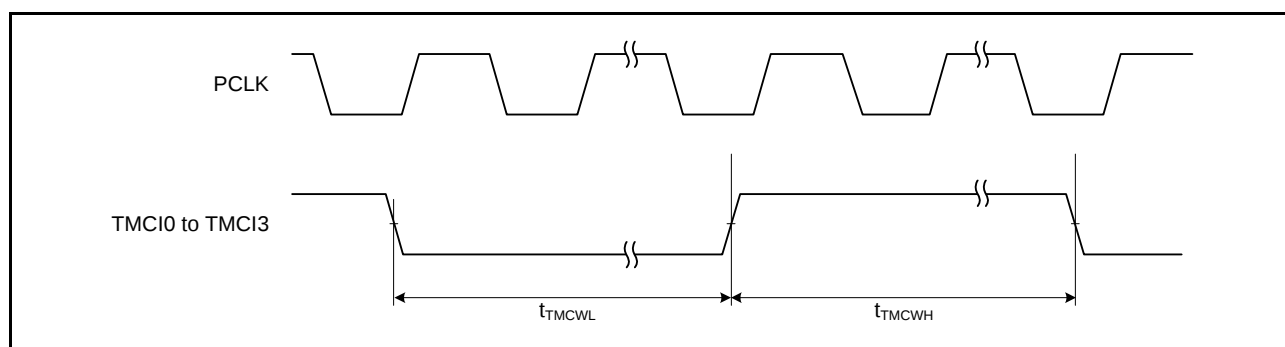


Figure 5.87 8-Bit Timer Clock Input Timing

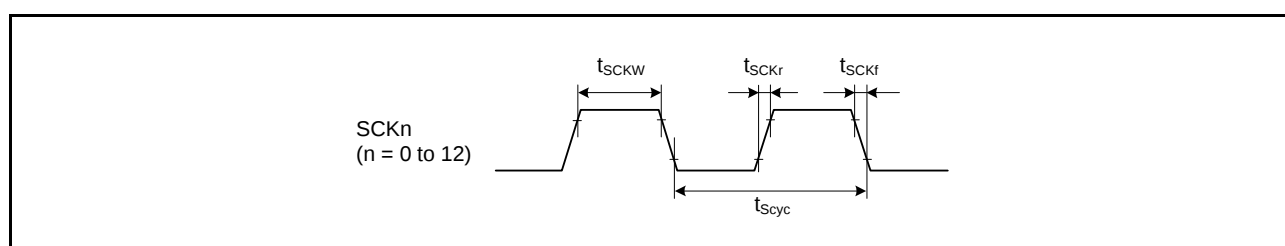


Figure 5.88 SCK Clock Input Timing

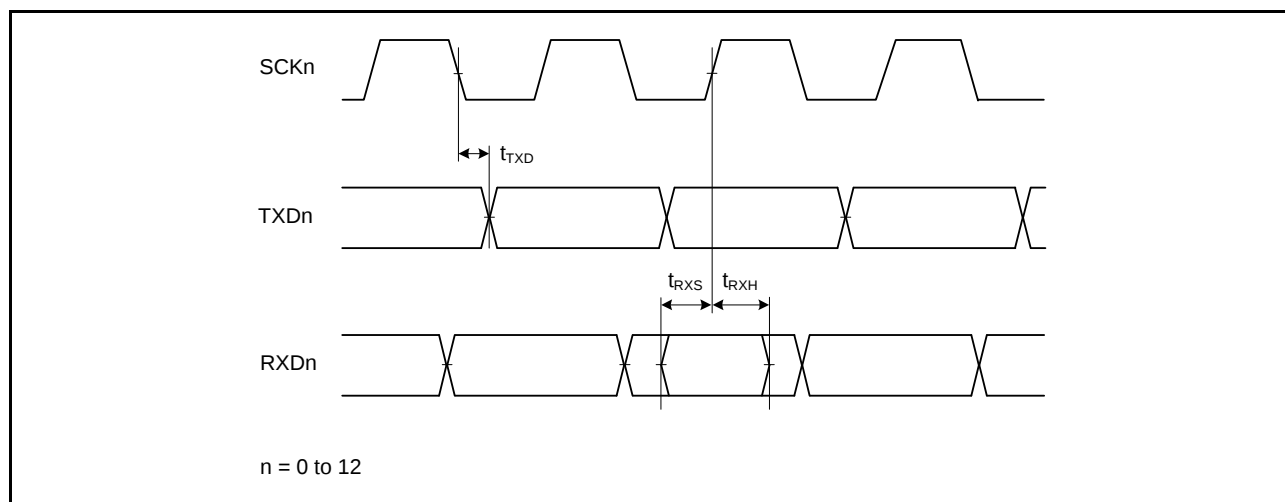


Figure 5.89 SCI Input/Output Timing: Clock Synchronous Mode

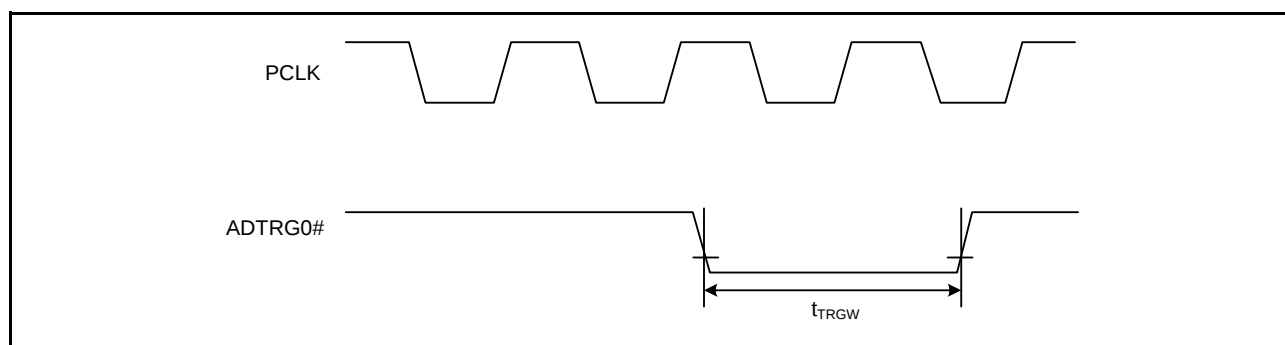


Figure 5.90 A/D Converter External Trigger Input Timing



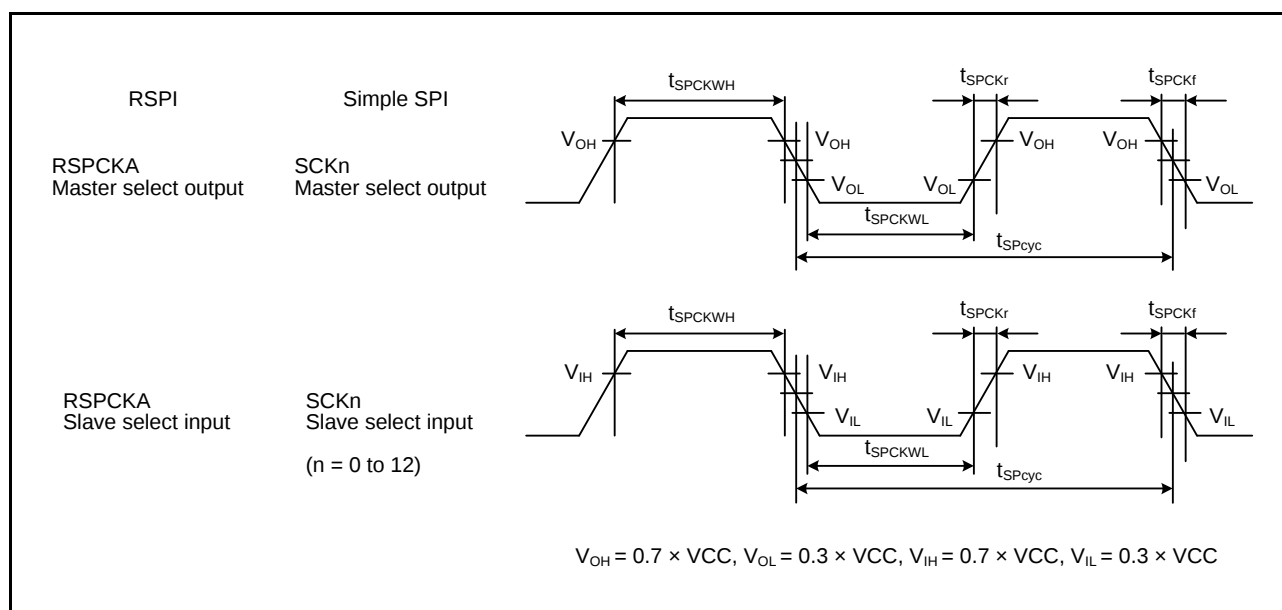



Figure 5.91 RSPI Clock Timing and Simple SPI Clock Timing

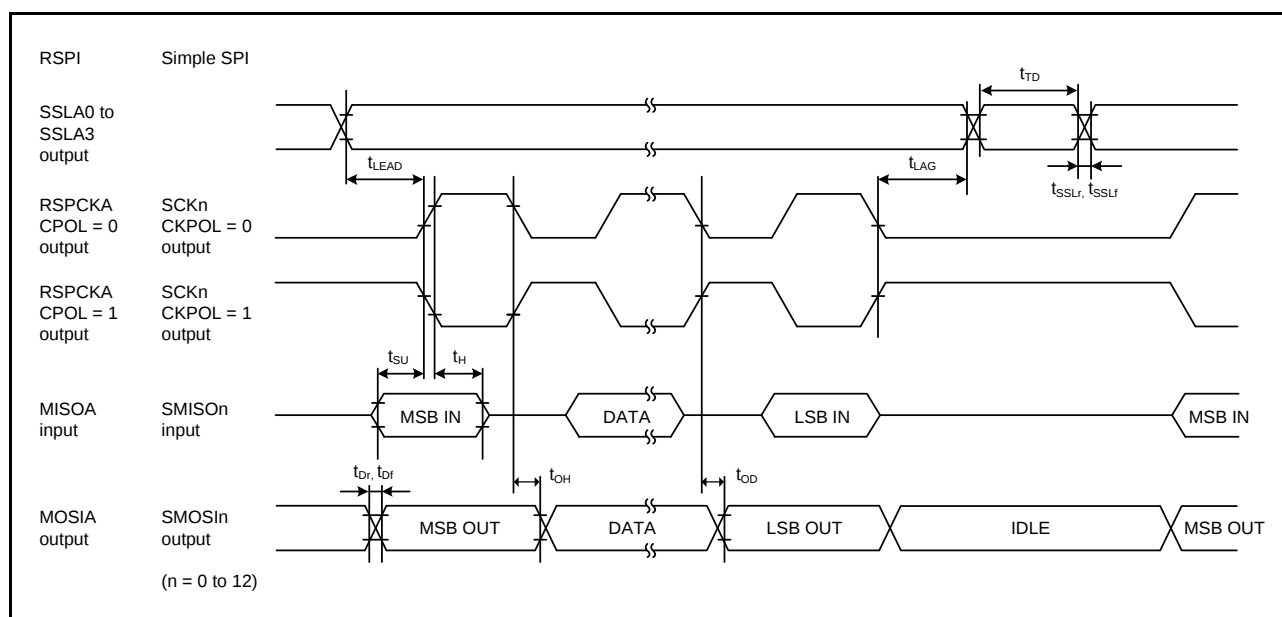


**Figure 5.92 RSPI Timing (Master, CPHA = 0) (Bit Rate: PCLKB Set to Division Ratio Other Than Divided by 2) and Simple SPI Timing (Master, CKPH = 1)**

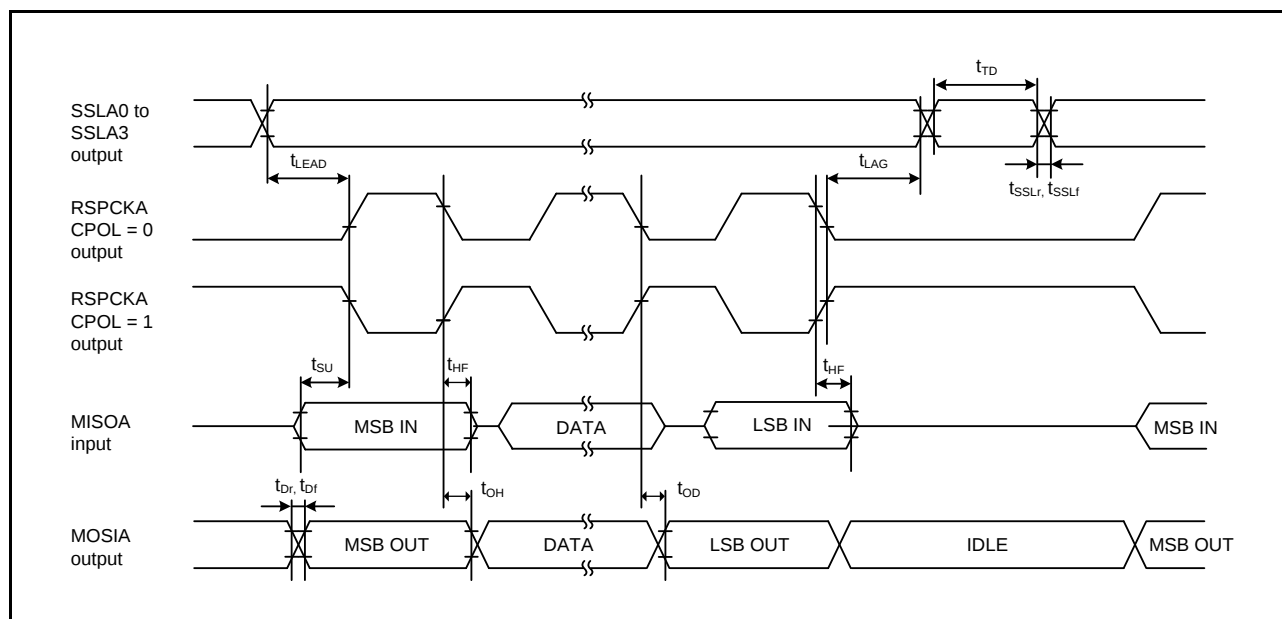


**Figure 5.93 RSPI Timing (Master, CPHA = 0) (Bit Rate: PCLKB Set to Divided by 2)**

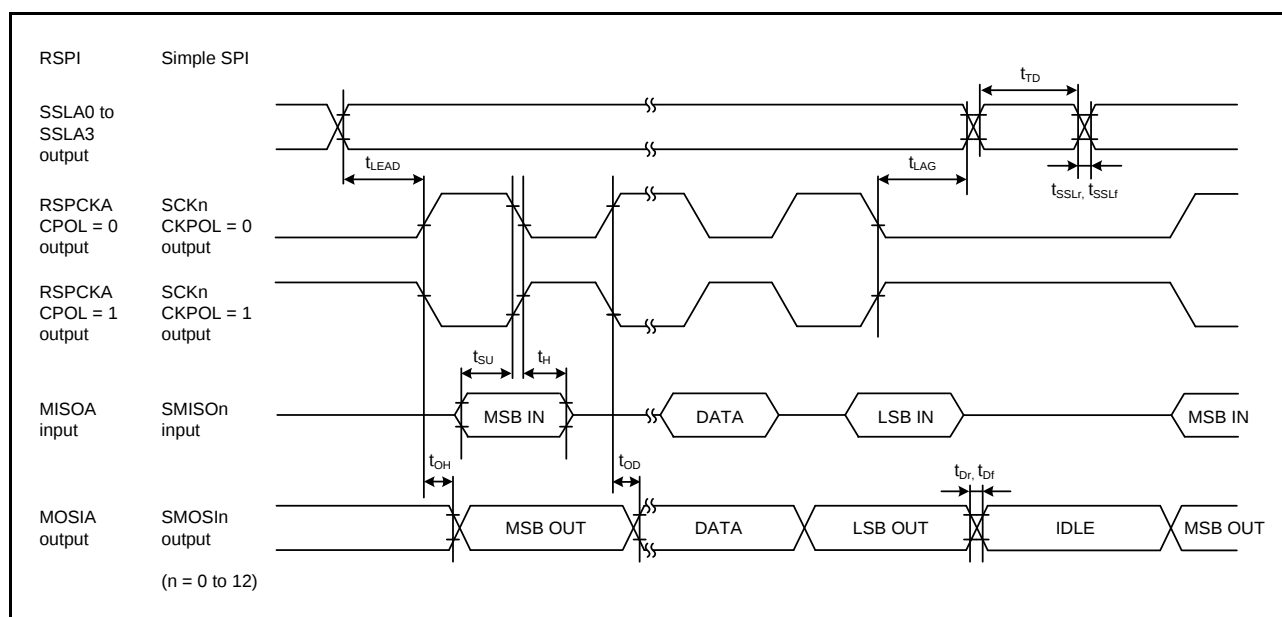


**Figure 5.94** RSPI Timing (Master, CPHA = 1) (Bit Rate: PCLKB Set to Division Ratio Other Than Divided by 2) and Simple SPI Timing (Master, CKPH = 0)

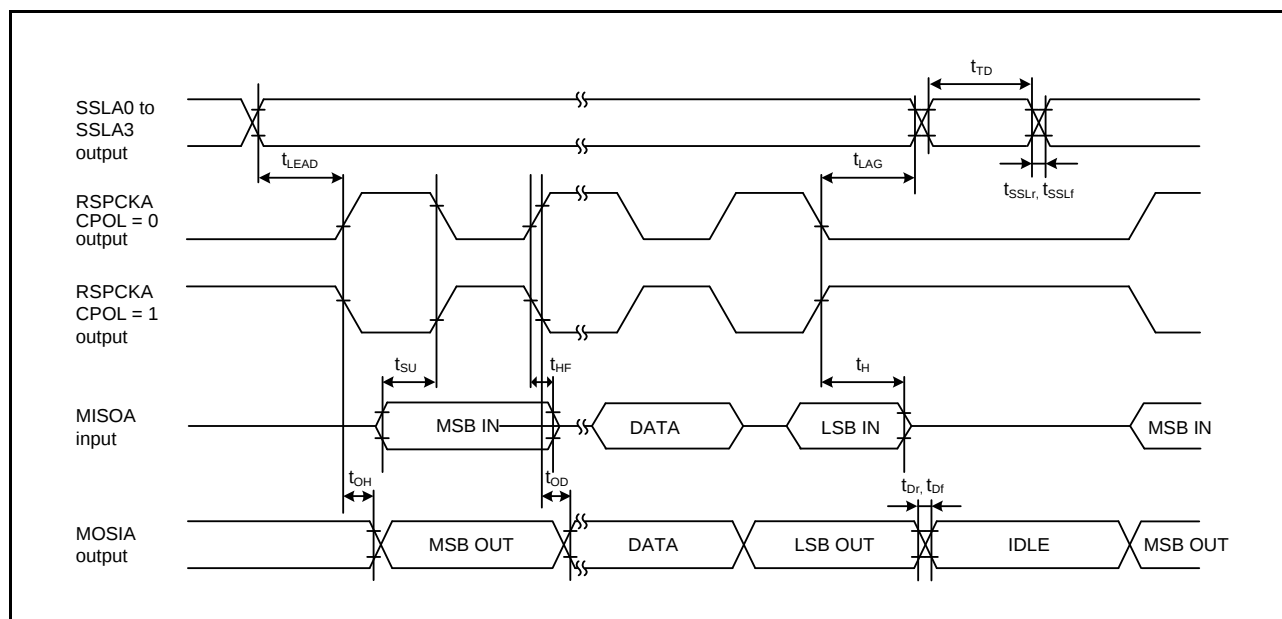


**Figure 5.95** RSPI Timing (Master, CPHA = 1) (Bit Rate: PCLKB Set to Divided by 2)

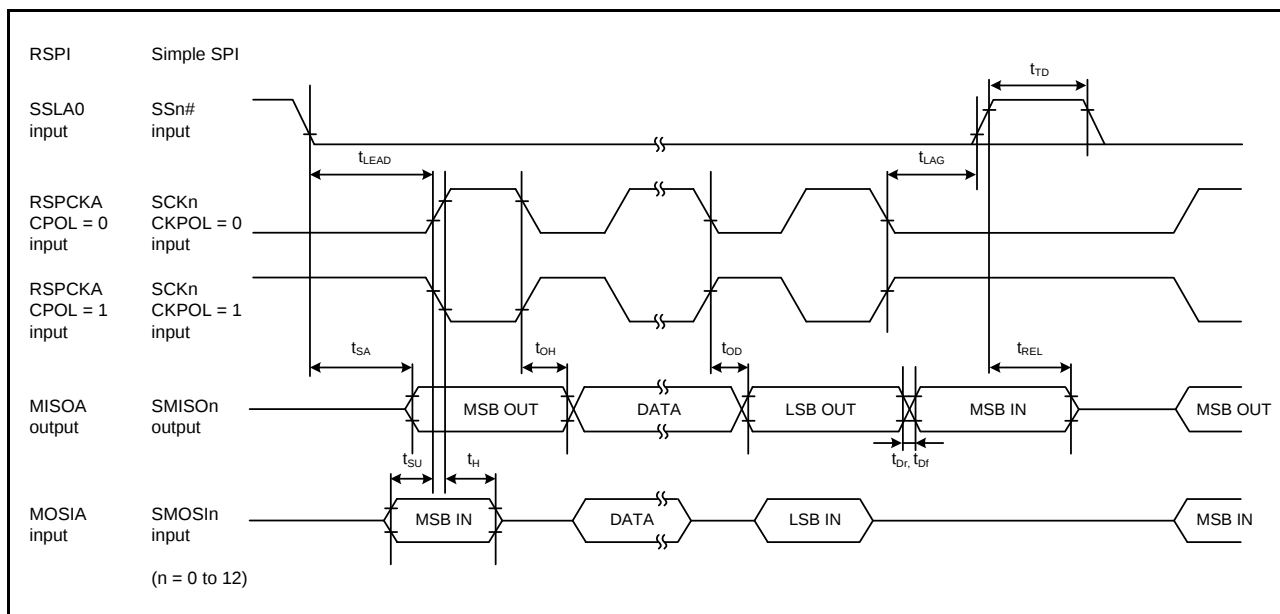

**Figure 5.96 RSPI Timing (Slave, CPHA = 0) and Simple SPI Timing (Slave, CKPH = 1)**

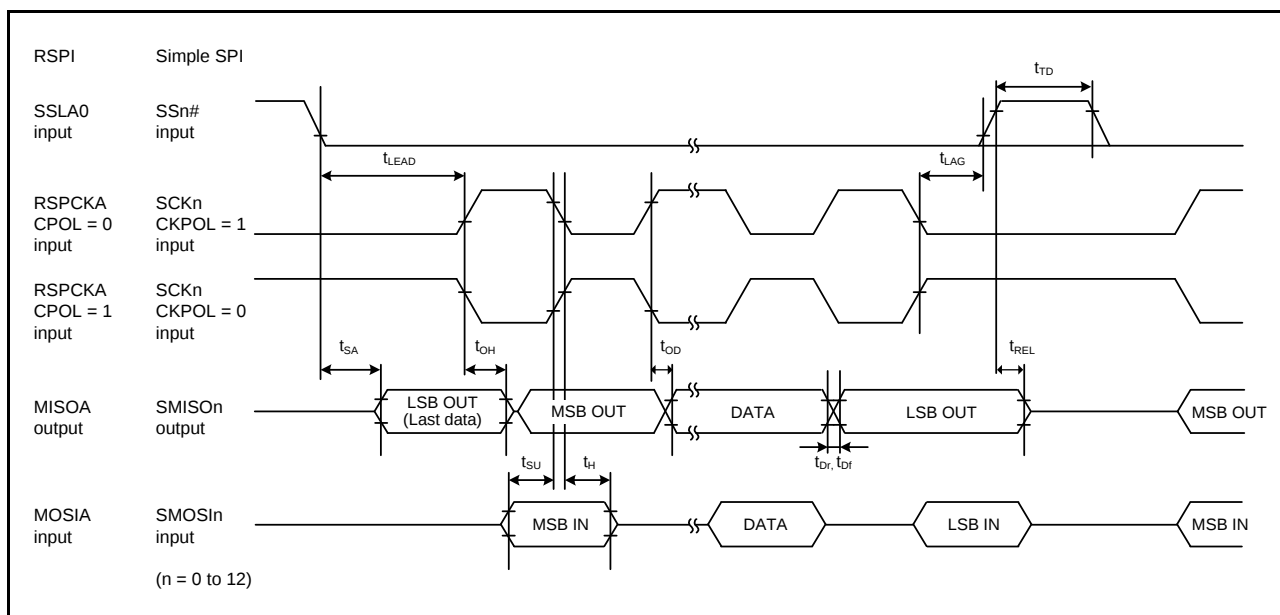

**Figure 5.97 RSPI Timing (Slave, CPHA = 1) and Simple SPI Timing (Slave, CKPH = 0)**

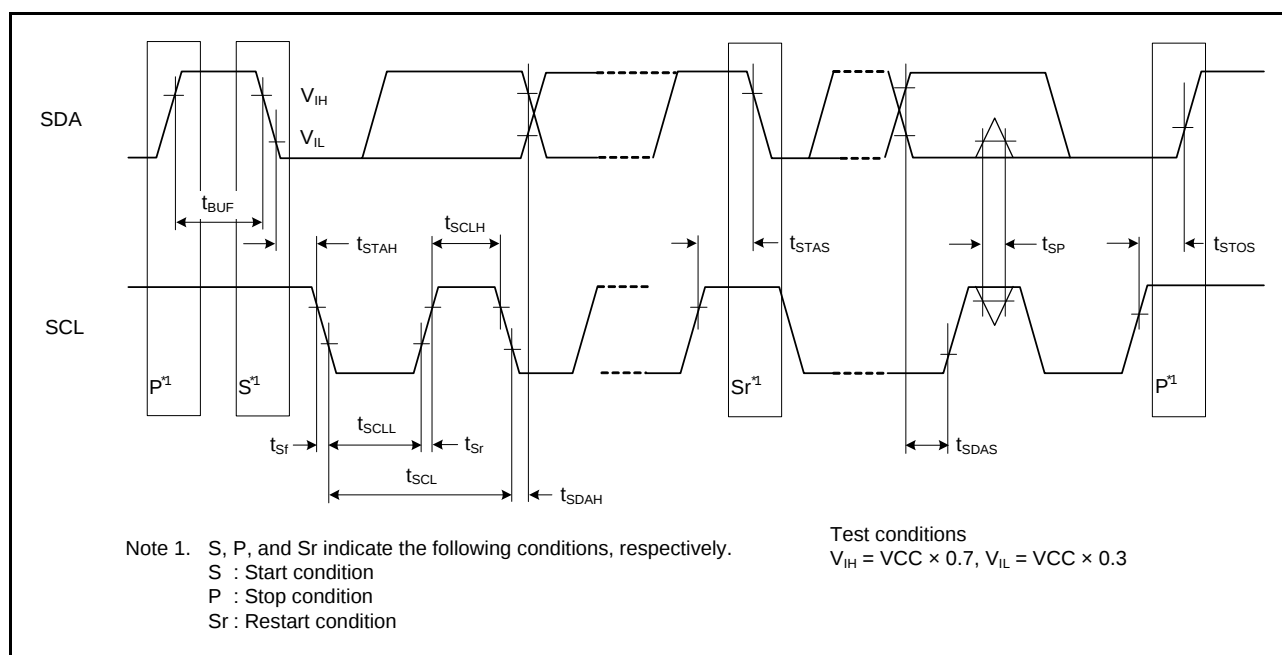

**Figure 5.98** IIC Bus Interface Input/Output Timing and Simple IIC Bus Interface Input/Output Timing

## 5.4 A/D Conversion Characteristics

**Table 5.61 A/D Conversion Characteristics (1)**

Conditions:  $V_{CC} = AV_{CC0} = 2.7$  to  $5.5$  V,  $V_{REFH0} \geq 2.7$  V,  $AV_{CC0} - 0.9$  V  $\leq V_{REFH0} \leq AV_{CC0} \times 3$ ,  
 $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$

| Item                                                   |                                                                | Min.           | Typ.       | Max.      | Unit          | Test Conditions          |
|--------------------------------------------------------|----------------------------------------------------------------|----------------|------------|-----------|---------------|--------------------------|
| A/D conversion clock frequency (fPCLKD)                |                                                                | 1              | —          | 50        | MHz           |                          |
| Resolution                                             |                                                                | —              | —          | 12        | Bit           |                          |
| Conversion time*1<br>(Operation at<br>fPCLKD = 50 MHz) | Permissible signal source<br>impedance (Max.) = 0.5 k $\Omega$ | 1.0<br>(0.4)*2 | —          | —         | $\mu\text{s}$ | Sampling in 20 states    |
|                                                        | Permissible signal source<br>impedance (Max.) = 1 k $\Omega$   | 1.1<br>(0.5)*2 | —          | —         |               | Sampling in 25 states    |
|                                                        | Permissible signal source<br>impedance (Max.) = 5 k $\Omega$   | 1.5<br>(0.9)*2 | —          | —         |               | Sampling in 45 states    |
| Analog input capacitance                               |                                                                | —              | —          | 30        | pF            |                          |
| Offset error                                           |                                                                | —              | $\pm 0.5$  | $\pm 4.5$ | LSB           | High-precision channel   |
|                                                        |                                                                |                |            | $\pm 7.5$ |               | Normal-precision channel |
| Full-scale error                                       |                                                                | —              | $\pm 0.75$ | $\pm 4.5$ | LSB           | High-precision channel   |
|                                                        |                                                                |                |            | $\pm 7.5$ |               | Normal-precision channel |
| Quantization error                                     |                                                                | —              | $\pm 0.5$  | —         | LSB           |                          |
| Absolute accuracy                                      |                                                                | —              | $\pm 1.25$ | $\pm 5.0$ | LSB           | High-precision channel   |
|                                                        |                                                                | —              | $\pm 1.25$ | $\pm 8.0$ | LSB           | Normal-precision channel |
| DNL differential nonlinearity error                    |                                                                | —              | $\pm 1.0$  | —         | LSB           |                          |
| INL integral nonlinearity error                        |                                                                | —              | $\pm 1.0$  | $\pm 3.0$ | LSB           |                          |


Note: • PCLKD must be set to 40 MHz or lower when HOCO is to be selected as the A/D conversion clock. The characteristics apply when no pin functions other than A/D converter input are used. Absolute accuracy includes quantization errors. Offset error, full-scale error, DNL differential nonlinearity error, and INL integral nonlinearity error do not include quantization errors.

Note: • When using the channel-dedicated sample-and-hold circuit, use the AN000 to AN002 analog input voltage ( $V_{AN}$ ) that satisfies all the following conditions:  $0.25$  V  $\leq V_{AN} \leq AV_{CC0} - 0.25$  V,  $V_{AN} \leq V_{REFH0}$ , and  $AV_{CC0} \geq 2.7$  V.

Note 1. The conversion time is the sum of the sampling time and the comparison time. As the test conditions, the number of sampling states is indicated.

Note 2. The value in parentheses indicates the sampling time.

Note 3. When using the temperature sensor, use it when  $AV_{CC0} = V_{REFH0}$ .

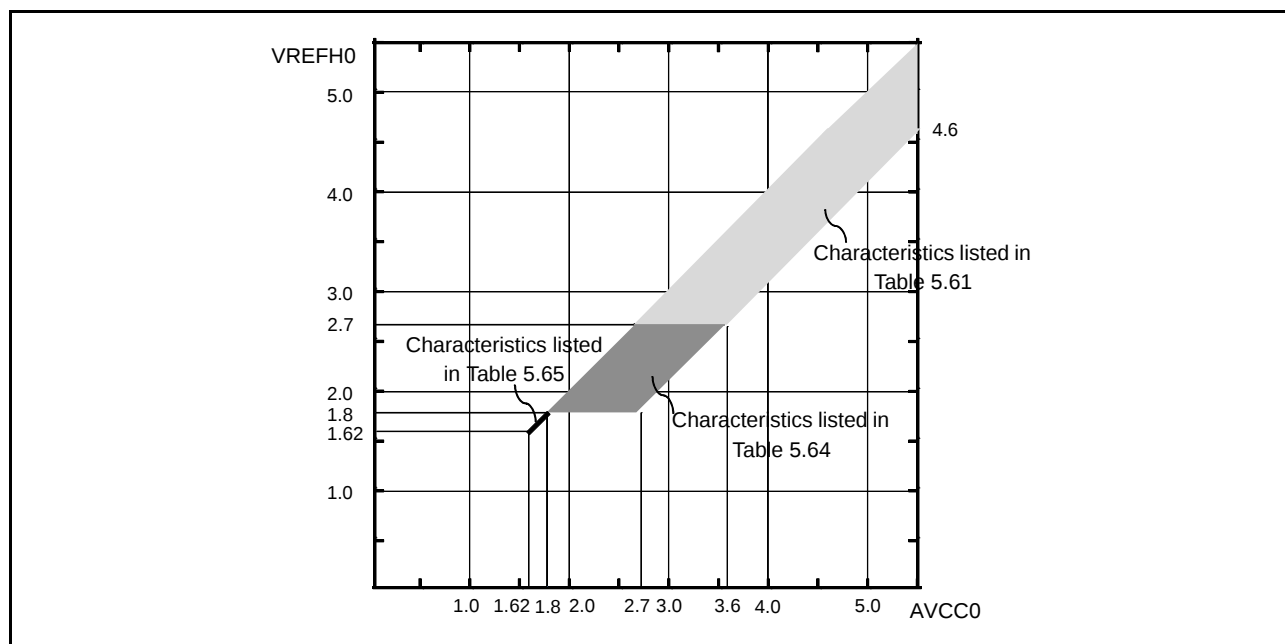**Figure 5.99 AVCC0 to VREFH0 Voltage Range**

**Table 5.62 Channel Classification for A/D Converter**

| Classification           | Channel        | Channel-Dedicated Sample-and-Hold Circuit | Conditions                                                                                                                                                                                                                                                                                      |                                                                                                |
|--------------------------|----------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| High-precision channel   | AN000 to AN002 | Used                                      | $AVCC0 = 2.7 \text{ to } 5.5 \text{ V}$<br>$AVCC0 - 0.9 \text{ V} \leq VREFH0 \leq AVCC0$<br>$VREFH0 \geq 2.7 \text{ V}$<br>$AVSS0 = VREFL0 = 0 \text{ V}$<br>$0.25 \text{ V} \leq V_{AN} \leq AVCC0 - 0.25 \text{ V}$<br>$V_{AN} \leq VREFH0$                                                  | It is disallowed to use pins AN000 to AN007 as digital outputs when the A/D converter is used. |
|                          |                | Not used                                  | $AVCC0 = 1.62 \text{ to } 5.5 \text{ V}$<br>When $AVCC0 \geq 1.8 \text{ V}$ ,<br>$AVCC0 - 0.9 \text{ V} \leq VREFH0 \leq AVCC0$<br>$VREFH0 \geq 1.8 \text{ V}$<br>When $AVCC0 < 1.8 \text{ V}$ ,<br>$VREFH0 = AVCC0$<br>$AVSS0 = VREFL0 = 0 \text{ V}$<br>$0 \text{ V} \leq V_{AN} \leq VREFH0$ |                                                                                                |
| Normal-precision channel | AN003 to AN007 | —                                         |                                                                                                                                                                                                                                                                                                 |                                                                                                |
|                          | AN008 to AN015 | —                                         |                                                                                                                                                                                                                                                                                                 |                                                                                                |

**Table 5.63 A/D Internal Reference Voltage Characteristics**

Conditions:  $VCC = AVCC0 = 1.62 \text{ to } 5.5 \text{ V}$ ,  $VSS = AVSS0 = VREFL = VREFL0 = 0 \text{ V}$ ,  $T_a = -40 \text{ to } +105^\circ\text{C}$

| Item                           | Min. | Typ. | Max. | Unit | Test Conditions |
|--------------------------------|------|------|------|------|-----------------|
| A/D internal reference voltage | 1.35 | 1.50 | 1.65 | V    |                 |

**Table 5.64 A/D Conversion Characteristics (2)**

Conditions:  $V_{CC} = AVCC0 = 1.8$  to  $3.6$  V,  $1.8$  V  $\leq VREFH0 \leq 2.7$  V,  $AVCC0 - 0.9$  V  $\leq VREFH0 \leq AVCC0^{*3}$ ,  
 $VSS = AVSS0 = VREFL = VREFL0 = 0$  V,  $T_a = -40$  to  $+105^{\circ}\text{C}$

| Item                                                   |                                                              | Min.           | Typ.       | Max.      | Unit          | Test Conditions       |
|--------------------------------------------------------|--------------------------------------------------------------|----------------|------------|-----------|---------------|-----------------------|
| A/D conversion clock frequency (fPCLKD)                |                                                              | 1              | —          | 25        | MHz           |                       |
| Resolution                                             |                                                              | —              | —          | 12        | Bit           |                       |
| Conversion time*1<br>(Operation at<br>fPCLKD = 25 MHz) | Permissible signal source<br>impedance (Max.) = 1 k $\Omega$ | 2.0<br>(0.8)*2 | —          | —         | $\mu\text{s}$ | Sampling in 20 states |
|                                                        | Permissible signal source<br>impedance (Max.) = 5 k $\Omega$ | 2.2<br>(1.0)*2 | —          | —         |               | Sampling in 25 states |
| Analog input capacitance                               |                                                              | —              | —          | 30        | pF            |                       |
| Offset error                                           |                                                              | —              | $\pm 0.5$  | $\pm 7.5$ | LSB           |                       |
| Full-scale error                                       |                                                              | —              | $\pm 1.25$ | $\pm 7.5$ | LSB           |                       |
| Quantization error                                     |                                                              | —              | $\pm 0.5$  | —         | LSB           |                       |
| Absolute accuracy                                      |                                                              | —              | $\pm 3.0$  | $\pm 8.0$ | LSB           |                       |
| DNL differential nonlinearity error                    |                                                              | —              | $\pm 1.25$ | —         | LSB           |                       |
| INL integral nonlinearity error                        |                                                              | —              | $\pm 1.5$  | $\pm 3.0$ | LSB           |                       |

Note: • The characteristics apply when no pin functions other than A/D converter input are used. Absolute accuracy includes quantization errors. Offset error, full-scale error, DNL differential nonlinearity error, and INL integral nonlinearity error do not include quantization errors.

Note: • When using the channel-dedicated sample-and-hold circuit, use the AN000 to AN002 analog input voltage ( $V_{AN}$ ) that satisfies all the following conditions:  $0.25$  V  $\leq V_{AN} \leq AVCC0 - 0.25$  V,  $V_{AN} \leq VREFH0$ , and  $AVCC0 \geq 2.7$  V.

Note 1. The conversion time is the sum of the sampling time and the comparison time. As the test conditions, the number of sampling states is indicated.

Note 2. The value in parentheses indicates the sampling time.

Note 3. When using the temperature sensor, use it when  $AVCC0 = VREFH0$ .

**Table 5.65 A/D Conversion Characteristics (3)**

Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $1.8$  V,  $VREFH0 = AVCC0$ ,  
 $VSS = AVSS0 = VREFL = VREFL0 = 0$  V,  $T_a = -40$  to  $+105^{\circ}\text{C}$

| Item                                                        |                                                              | Min.             | Typ.       | Max.      | Unit          | Test Conditions       |
|-------------------------------------------------------------|--------------------------------------------------------------|------------------|------------|-----------|---------------|-----------------------|
| A/D conversion clock frequency (fPCLKD)                     |                                                              | 1                | —          | 12.5      | MHz           |                       |
| Resolution                                                  |                                                              | —                | —          | 12        | Bit           |                       |
| Conversion time*1<br>(Operation at<br>fPCLKD = 12.5<br>MHz) | Permissible signal source<br>impedance (Max.) = 1 k $\Omega$ | 3.36<br>(0.96)*2 | —          | —         | $\mu\text{s}$ | Sampling in 12 states |
|                                                             | Permissible signal source<br>impedance (Max.) = 5 k $\Omega$ | 3.6<br>(1.2)*2   | —          | —         |               | Sampling in 15 states |
| Analog input capacitance                                    |                                                              | —                | —          | 30        | pF            |                       |
| Offset error                                                |                                                              | —                | $\pm 0.5$  | $\pm 7.5$ | LSB           |                       |
| Full-scale error                                            |                                                              | —                | $\pm 1.25$ | $\pm 7.5$ | LSB           |                       |
| Quantization error                                          |                                                              | —                | $\pm 0.5$  | —         | LSB           |                       |
| Absolute accuracy                                           |                                                              | —                | $\pm 2.75$ | $\pm 8.0$ | LSB           |                       |
| DNL differential nonlinearity error                         |                                                              | —                | $\pm 1.25$ | —         | LSB           |                       |
| INL integral nonlinearity error                             |                                                              | —                | $\pm 1.25$ | $\pm 3.0$ | LSB           |                       |


Note: • The characteristics apply when no pin functions other than A/D converter input are used. Absolute accuracy includes quantization errors. Offset error, full-scale error, DNL differential nonlinearity error, and INL integral nonlinearity error do not include quantization errors.


Note 1. The conversion time is the sum of the sampling time and the comparison time. As the test conditions, the number of sampling states is indicated.

Note 2. The value in parentheses indicates the sampling time.

**Table 5.66 Sampling Time**Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^{\circ}\text{C}$ 

| Item          |                          | Symbol | Typ.                                   | Unit          | Test Conditions |
|---------------|--------------------------|--------|----------------------------------------|---------------|-----------------|
| Sampling time | High-precision channel   | $T_s$  | $0.2 + 0.14 \times R_0$ (K $\Omega$ )  | $\mu\text{s}$ | Figure 5.100    |
|               | Normal-precision channel |        | $0.35 + 0.14 \times R_0$ (K $\Omega$ ) |               |                 |

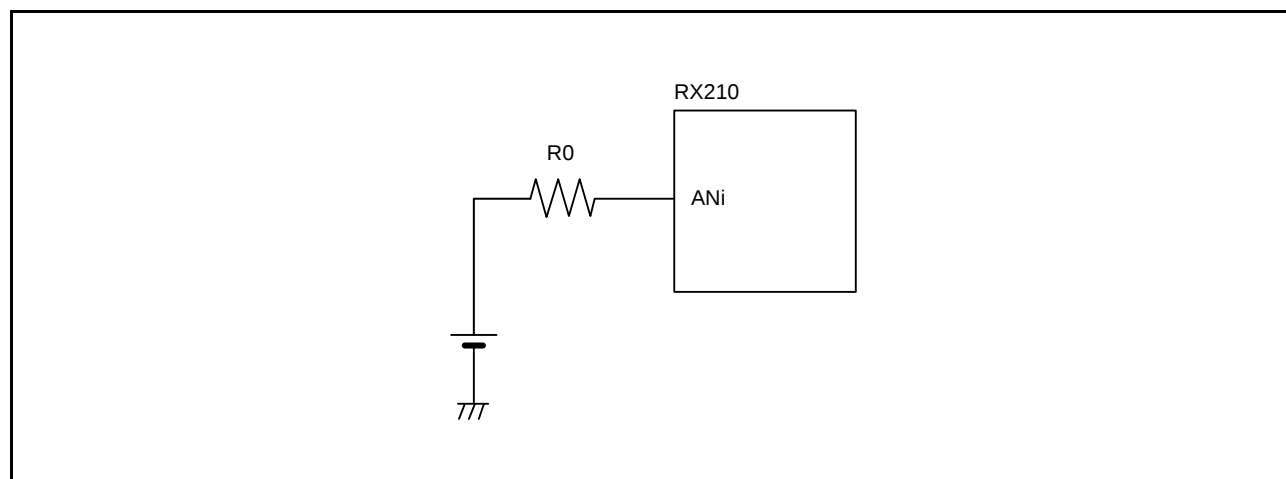**Figure 5.100 Internal Equivalent Circuit of Analog Input Pin**

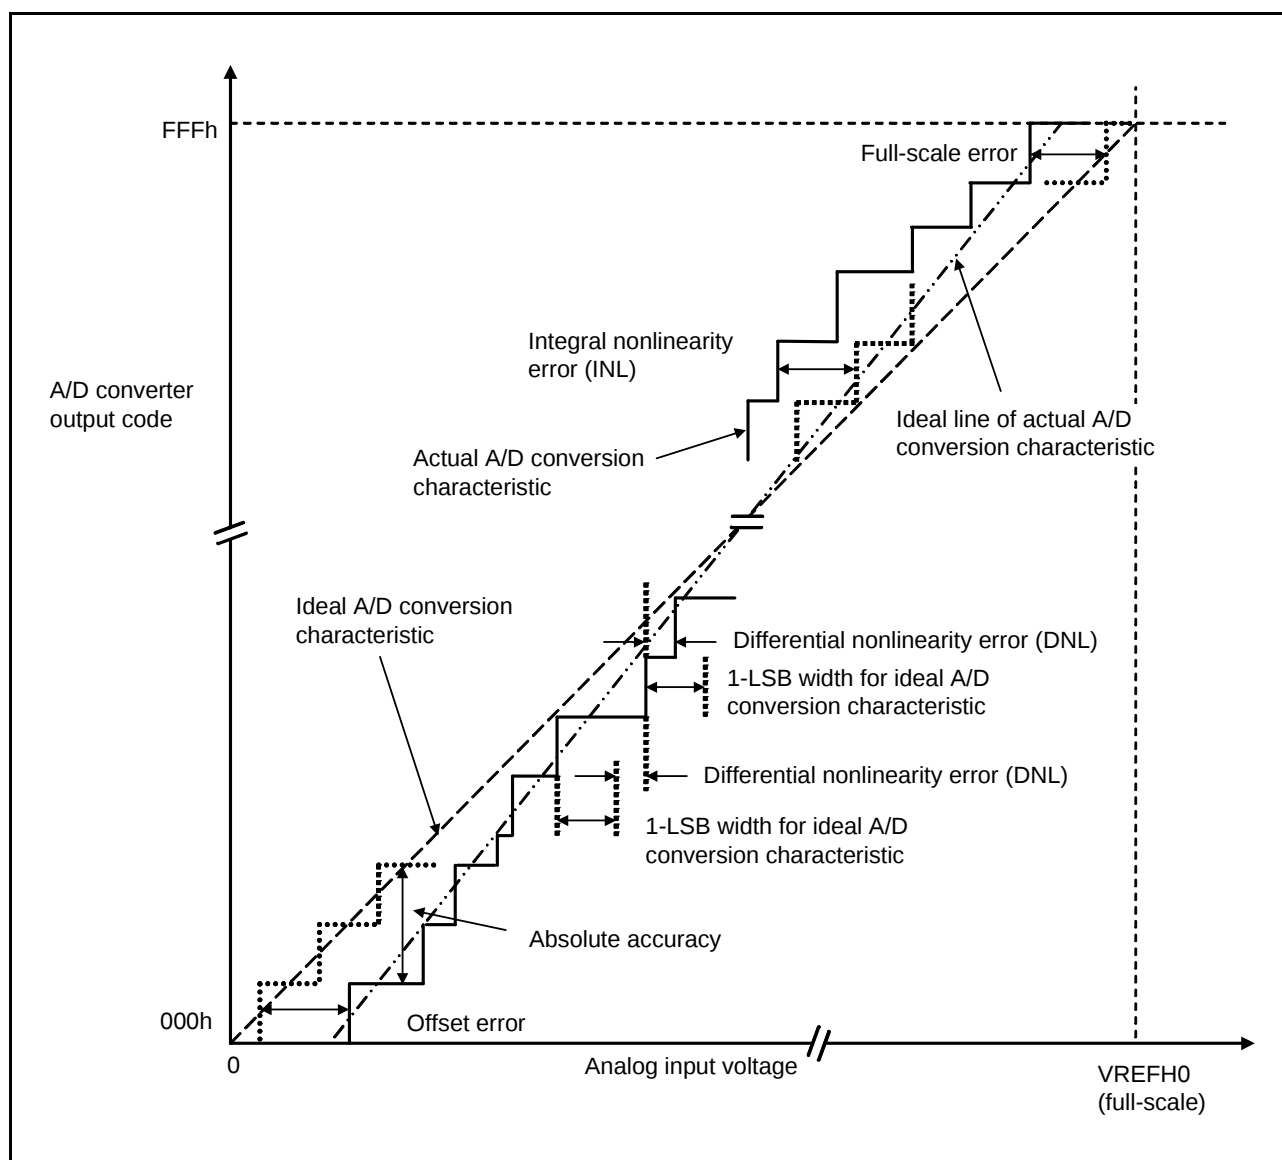

**Figure 5.101 Illustration of A/D Converter Characteristic Terms**

### Absolute accuracy

Absolute accuracy is the difference between output code based on the theoretical A/D conversion characteristics, and the actual A/D conversion result. When measuring absolute accuracy, the voltage at the midpoint of the width of analog input voltage (1-LSB width), that can meet the expectation of outputting an equal code based on the theoretical A/D conversion characteristics, is used as an analog input voltage. For example, if 12-bit resolution is used and if reference voltage ( $V_{REFH0} = 5.12\text{ V}$ ), then 1-LSB width becomes 1.25 mV, and 0 mV, 1.25 mV, 2.5 mV, ... are used as analog input voltages.

If analog input voltage is 10 mV, absolute accuracy =  $\pm 5\text{ LSB}$  means that the actual A/D conversion result is in the range of 003h to 00Dh though an output code, 008h, can be expected from the theoretical A/D conversion characteristics.

### Integral nonlinearity error (INL)

Integral nonlinearity error is the maximum deviation between the ideal line when the measured offset and full-scale errors are zeroed, and the actual output code.

**Differential nonlinearity error (DNL)**

Differential nonlinearity error is the difference between 1-LSB width based on the ideal A/D conversion characteristics and the width of the actually output code.

**Offset error**

Offset error is the difference between a transition point of the ideal first output code and the actual first output code.

**Full-scale error**

Full-scale error is the difference between a transition point of the ideal last output code and the actual last output code.

## 5.5 D/A Conversion Characteristics

**Table 5.67 D/A Conversion Characteristics (1)**

Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{REFH} = 2.7$  V to  $AVCC0$ ,  
 $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $f_{PCLKB} =$  up to 32 MHz,  $T_a = -40$  to  $+105^{\circ}\text{C}$

| Item                 | Min. | Typ.      | Max.      | Unit          | Test Conditions             |
|----------------------|------|-----------|-----------|---------------|-----------------------------|
| Resolution           | —    | —         | 10        | Bit           |                             |
| Conversion time      | —    | —         | 3.0       | $\mu\text{s}$ | 20-pF capacitive load       |
| Absolute accuracy    | —    | $\pm 3.0$ | $\pm 5.0$ | LSB           | 4-M $\Omega$ resistive load |
|                      | —    | —         | $\pm 4.0$ | LSB           | 8-M $\Omega$ resistive load |
| RO output resistance | —    | 4.1       | —         | k $\Omega$    |                             |

**Table 5.68 D/A Conversion Characteristics (2)**

Conditions:  $V_{CC} = AVCC0 = 2.7$  to  $5.5$  V,  $V_{REFH} = 1.8$  V to  $AVCC0$ ,  
 $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $f_{PCLKB} =$  up to 32 MHz,  $T_a = -40$  to  $+105^{\circ}\text{C}$


| Item                 | Min. | Typ.      | Max.      | Unit          | Test Conditions             |
|----------------------|------|-----------|-----------|---------------|-----------------------------|
| Resolution           | —    | —         | 10        | Bit           |                             |
| Conversion time      | —    | —         | 10.0      | $\mu\text{s}$ | 20-pF capacitive load       |
| Absolute accuracy    | —    | $\pm 5.0$ | $\pm 6.0$ | LSB           | 4-M $\Omega$ resistive load |
|                      | —    | —         | $\pm 5.0$ | LSB           | 8-M $\Omega$ resistive load |
| RO output resistance | —    | 4.1       | —         | k $\Omega$    |                             |

## 5.6 Temperature Sensor Characteristics

**Table 5.69 Temperature Sensor Characteristics**

Conditions:  $V_{CC} = AVCC0 = V_{REFH0} = 1.8$  to  $5.5$  V,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^{\circ}\text{C}$

| Item                                     | Symbol                    | Min. | Typ.      | Max. | Unit                         | Test Conditions  |
|------------------------------------------|---------------------------|------|-----------|------|------------------------------|------------------|
| Relative accuracy                        | —                         | —    | $\pm 1.0$ | —    | $^{\circ}\text{C}$           |                  |
| Temperature slope                        | $1.8 \leq AVCC0 < 2.7$    | —    | 7.27      | —    | $\text{mV}/^{\circ}\text{C}$ | PGAGAIN = 00b    |
|                                          | $2.7 \leq AVCC0 < 3.6$    | —    | 10.46     | —    |                              | PGAGAIN = 01b    |
|                                          | $3.6 \leq AVCC0 < 4.5$    | —    | 13.98     | —    |                              | PGAGAIN = 10b    |
|                                          | $4.5 \leq AVCC0 \leq 5.5$ | —    | 21.65     | —    |                              | PGAGAIN = 11b    |
| Output voltage (@ $25^{\circ}\text{C}$ ) | —                         | —    | 1.375     | —    | V                            | $V_{CC} = 3.6$ V |
| Temperature sensor start time            | $t_{\text{START}}$        | —    | —         | 80   | $\mu\text{s}$                | Figure 5.102     |
| Sampling time                            | —                         | 30   | 72        | 300  | $\mu\text{s}$                |                  |
| PGA restart time                         | $t_{\text{RST\_PGA}}$     | —    | —         | 40   | $\mu\text{s}$                |                  |

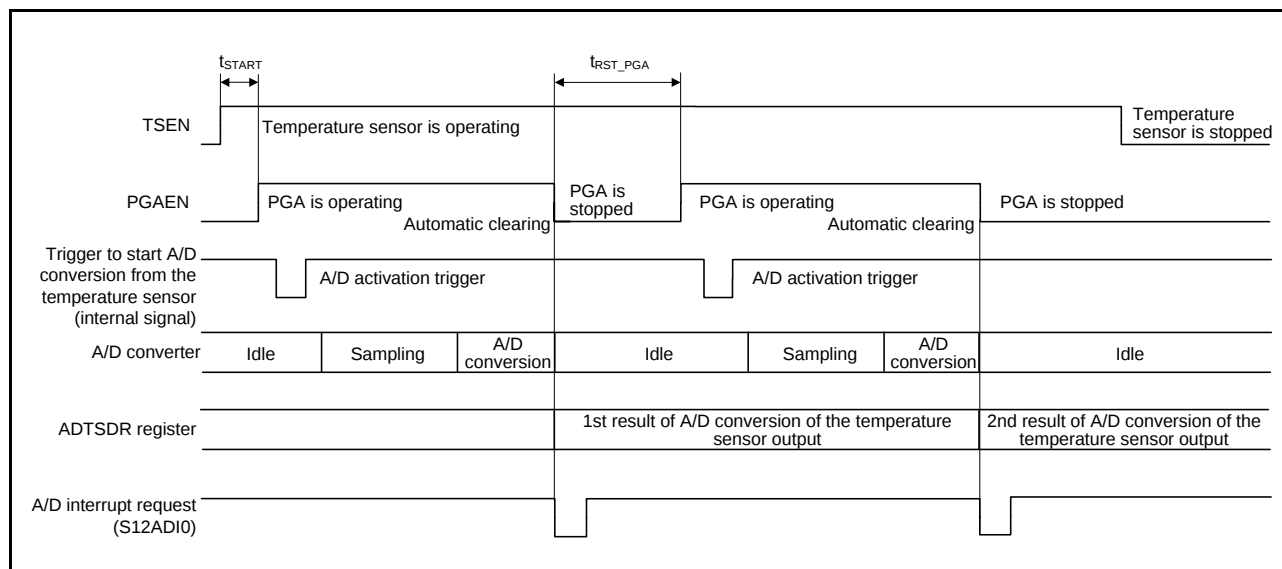

**Figure 5.102 A/D Conversion Timing Example of the Temperature Sensor (Two Conversions Performed)**

## 5.7 Comparator Characteristics

**Table 5.70 Comparator Characteristics**

Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $5.5$  V,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  V,  $T_a = -40$  to  $+105^\circ\text{C}$

| Item         | Symbol                                                 | Min.  | Typ. | Max. | Unit      | Test Conditions                        |
|--------------|--------------------------------------------------------|-------|------|------|-----------|----------------------------------------|
| Comparator A | External reference voltage input range                 | LVREF | 1.4  | —    | VCC       | V                                      |
|              | External comparison voltage (CMPA1, CMPA2) input range | VI    | -0.3 | —    | VCC + 0.3 | V                                      |
|              | Offset                                                 | —     | —    | ±50  | ±150      | mV                                     |
|              | Comparator output delay time*1                         | —     | 3    | —    | μs        | At falling edge<br>VI = LVREF - 110 mV |
|              |                                                        | —     | 2    | —    | μs        | At falling edge<br>VI < LVREF - 1 V    |
|              |                                                        | —     | 3    | —    | μs        | At rising edge<br>VI = LVREF + 160 mV  |
|              |                                                        | —     | 1.5  | —    | μs        | At rising edge<br>VI > LVREF + 1 V     |
| Comparator B | Comparator operating current                           | ICMPA | —    | 0.5  | —         | μA                                     |
|              | Input reference voltage for CVREFB0, CVREFB1           | VREF  | 0    | —    | VCC - 1.4 | V                                      |
|              | Input voltage for CMPB0, CMPB1                         | VI    | -0.3 | —    | VCC + 0.3 | V                                      |
|              | Offset                                                 | —     | —    | ±10  | ±100      | mV                                     |
|              | Comparator output delay time                           | $t_d$ | —    | —    | 1         | μs                                     |
| Comparator B | Comparator operating current                           | ICMPB | —    | 75   | 150       | μA                                     |
|              |                                                        |       |      |      |           | VCC = 5.0 V<br>For total two channels  |

Note 1. When the digital filter is disabled.

## 5.8 Power-on Reset Circuit and Voltage Detection Circuit Characteristics

**Table 5.71 Power-on Reset Circuit and Voltage Detection Circuit Characteristics (1)**Conditions: VCC = AVCC0, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item                    |                                    |                                           | Symbol              | Min. | Typ. | Max. | Unit | Test Conditions                         |
|-------------------------|------------------------------------|-------------------------------------------|---------------------|------|------|------|------|-----------------------------------------|
| Voltage detection level | Power-on reset (POR)               | Low power consumption function disabled*1 | V <sub>POR</sub>    | 1.30 | 1.40 | 1.55 | V    | Figure 5.103 and Figure 5.104           |
|                         |                                    | Low power consumption function enabled*2  |                     | 1.00 | 1.20 | 1.45 |      |                                         |
|                         | Voltage detection circuit (LVD0)*3 |                                           | V <sub>det0_0</sub> | 3.65 | 3.80 | 3.95 | V    | Figure 5.105                            |
|                         |                                    |                                           | V <sub>det0_1</sub> | 2.70 | 2.80 | 2.90 |      |                                         |
|                         |                                    |                                           | V <sub>det0_2</sub> | 1.80 | 1.90 | 2.00 |      |                                         |
|                         |                                    |                                           | V <sub>det0_3</sub> | 1.62 | 1.72 | 1.82 |      |                                         |
|                         | Voltage detection circuit (LVD1)*4 |                                           | V <sub>det1_0</sub> | 4.00 | 4.15 | 4.30 | V    | Figure 5.106<br><br>At falling edge VCC |
|                         |                                    |                                           | V <sub>det1_1</sub> | 3.85 | 4.00 | 4.15 |      |                                         |
|                         |                                    |                                           | V <sub>det1_2</sub> | 3.70 | 3.85 | 4.00 |      |                                         |
|                         |                                    |                                           | V <sub>det1_3</sub> | 3.55 | 3.70 | 3.85 |      |                                         |
|                         |                                    |                                           | V <sub>det1_4</sub> | 3.40 | 3.55 | 3.70 |      |                                         |
|                         |                                    |                                           | V <sub>det1_5</sub> | 3.25 | 3.40 | 3.55 |      |                                         |
|                         |                                    |                                           | V <sub>det1_6</sub> | 3.10 | 3.25 | 3.40 |      |                                         |
|                         |                                    |                                           | V <sub>det1_7</sub> | 2.95 | 3.10 | 3.25 |      |                                         |
|                         |                                    |                                           | V <sub>det1_8</sub> | 2.85 | 2.95 | 3.05 |      |                                         |
|                         |                                    |                                           | V <sub>det1_9</sub> | 2.70 | 2.80 | 2.90 |      |                                         |
|                         |                                    |                                           | V <sub>det1_A</sub> | 2.55 | 2.65 | 2.75 |      |                                         |
|                         |                                    |                                           | V <sub>det1_B</sub> | 2.40 | 2.50 | 2.60 |      |                                         |
|                         |                                    |                                           | V <sub>det1_C</sub> | 2.25 | 2.35 | 2.45 |      |                                         |
|                         |                                    |                                           | V <sub>det1_D</sub> | 2.10 | 2.20 | 2.30 |      |                                         |
|                         |                                    |                                           | V <sub>det1_E</sub> | 1.95 | 2.05 | 2.15 |      |                                         |
|                         |                                    |                                           | V <sub>det1_F</sub> | 1.80 | 1.90 | 2.00 |      |                                         |

Note: • These characteristics apply when noise is not superimposed on the power supply.

Note 1. When the CPU is in a mode other than software standby and deep software standby modes, when the CPU transits to software standby mode with the FHSSBYCR.SOFTCUT[2] bit set to 0, or when the CPU transits to deep software standby mode with the DPSBYCR.DEEPCUT1 bit set to 0.

Note 2. When the CPU transits to software standby mode with the FHSSBYCR.SOFTCUT[2] bit set to 1 or when the CPU transits to deep software standby mode with the DPSBYCR.DEEPCUT1 bit set to 1.

Note 3. # in the symbol Vdet0\_# denotes the value of the LDSEL[1:0] bits.

Note 4. # in the symbol Vdet1\_# denotes the value of the LVDLVLR.LVD1LVL[3:0] bits.

**Table 5.72 Power-on Reset Circuit and Voltage Detection Circuit Characteristics (2)**Conditions:  $V_{CC} = AV_{CC0}$ ,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0\text{ V}$ ,  $T_a = -40\text{ to }+105^\circ\text{C}$ 

| Item                                                    |                                    | Symbol               | Min. | Typ. | Max. | Unit          | Test Conditions                            |
|---------------------------------------------------------|------------------------------------|----------------------|------|------|------|---------------|--------------------------------------------|
| Voltage detection level                                 | Voltage detection circuit (LVD2)*1 | $V_{\text{det2\_0}}$ | 4.00 | 4.15 | 4.30 | V             | Figure 5.107<br><br>At falling edge VCC    |
|                                                         |                                    | $V_{\text{det2\_1}}$ | 3.85 | 4.00 | 4.15 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_2}}$ | 3.70 | 3.85 | 4.00 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_3}}$ | 3.55 | 3.70 | 3.85 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_4}}$ | 3.40 | 3.55 | 3.70 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_5}}$ | 3.25 | 3.40 | 3.55 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_6}}$ | 3.10 | 3.25 | 3.40 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_7}}$ | 2.95 | 3.10 | 3.25 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_8}}$ | 2.85 | 2.95 | 3.05 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_9}}$ | 2.70 | 2.80 | 2.90 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_A}}$ | 2.55 | 2.65 | 2.75 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_B}}$ | 2.40 | 2.50 | 2.60 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_C}}$ | 2.25 | 2.35 | 2.45 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_D}}$ | 2.10 | 2.20 | 2.30 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_E}}$ | 1.95 | 2.05 | 2.15 |               |                                            |
|                                                         |                                    | $V_{\text{det2\_F}}$ | 1.80 | 1.90 | 2.00 |               |                                            |
|                                                         |                                    | $V_{\text{CMPA2}}$   | 1.18 | 1.33 | 1.48 |               | EXVCCINP2 = 1                              |
| Internal reset time                                     | Power-on reset time                | $t_{\text{POR}}$     | —    | 9    | —    | ms            | Figure 5.104                               |
|                                                         | Voltage monitoring 0 reset time    | $t_{\text{LVD0}}$    | —    | 9    | —    |               | Figure 5.105                               |
|                                                         | Voltage monitoring 1 reset time    | $t_{\text{LVD1}}$    | —    | 1.4  | —    |               | Figure 5.106                               |
|                                                         | Voltage monitoring 2 reset time    | $t_{\text{LVD2}}$    | —    | 1.4  | —    |               | Figure 5.107                               |
| Minimum VCC down time*2                                 |                                    | $t_{\text{VOFF}}$    | 200  | —    | —    | $\mu\text{s}$ | Figure 5.103                               |
| Response delay time                                     |                                    | $t_{\text{det}}$     | —    | —    | 200  | $\mu\text{s}$ | Figure 5.104                               |
| LVD operation stabilization time (after LVD is enabled) |                                    | $T_{\text{d(E-A)}}$  | —    | —    | 15   | $\mu\text{s}$ | Figure 5.106 and Figure 5.107              |
| Power-on reset enable time                              |                                    | $t_{\text{W(POR)}}$  | 1    | —    | —    | ms            | Figure 5.104<br>VCC = 0.9 V or lower       |
| Hysteresis width (LVD1 and LVD2)                        |                                    | $V_{\text{LVH}}$     | —    | 100  | —    | mV            | When selection is from among VdetX_0 to 7. |
|                                                         |                                    |                      | —    | 50   | —    |               | When selection is from among VdetX_8 to F. |

Note: • These characteristics apply when noise is not superimposed on the power supply.

Note 1. # in the symbol Vdet2\_# denotes the value of the LVDLVLR.LVD2LVL[3:0] bits.

Note 2. The minimum VCC down time indicates the time when VCC is below the minimum value of voltage detection levels  $V_{\text{POR}}$ ,  $V_{\text{det0}}$ ,  $V_{\text{det1}}$ , and  $V_{\text{det2}}$  for the POR/LVD.

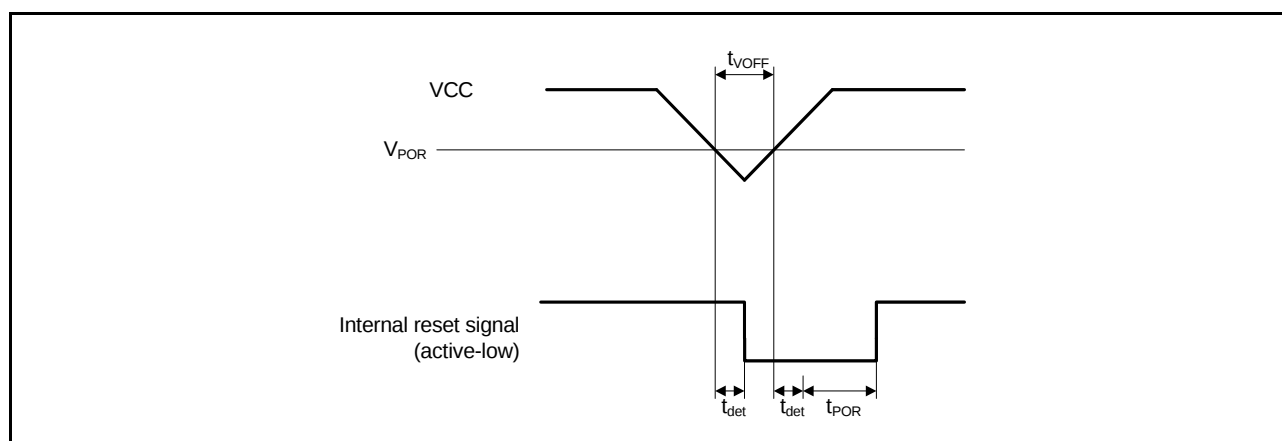


Figure 5.103 Voltage Detection Reset Timing

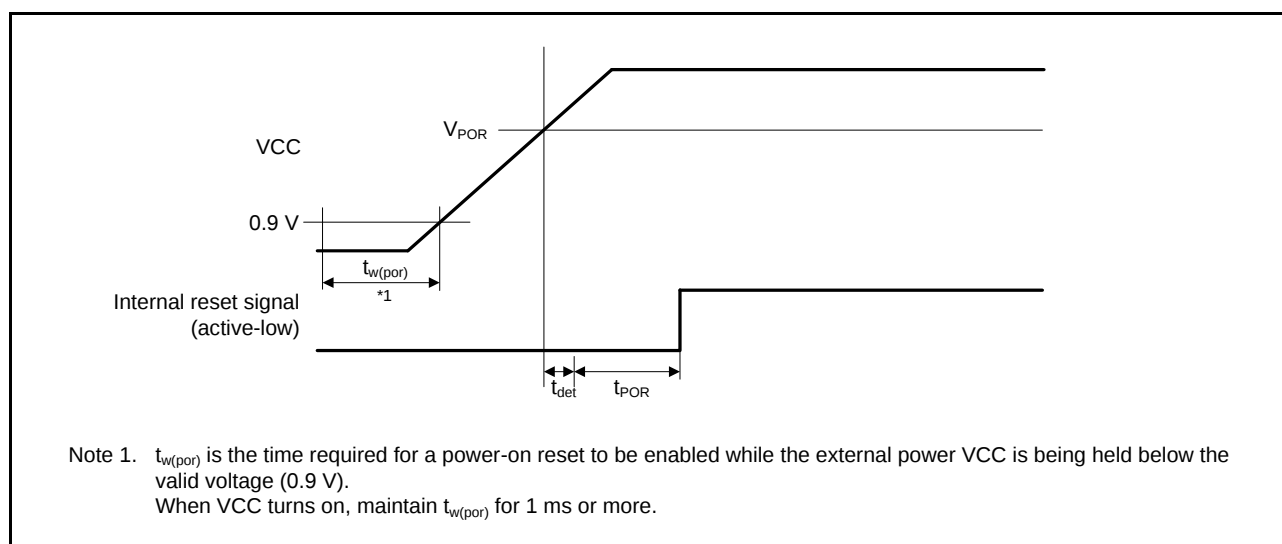
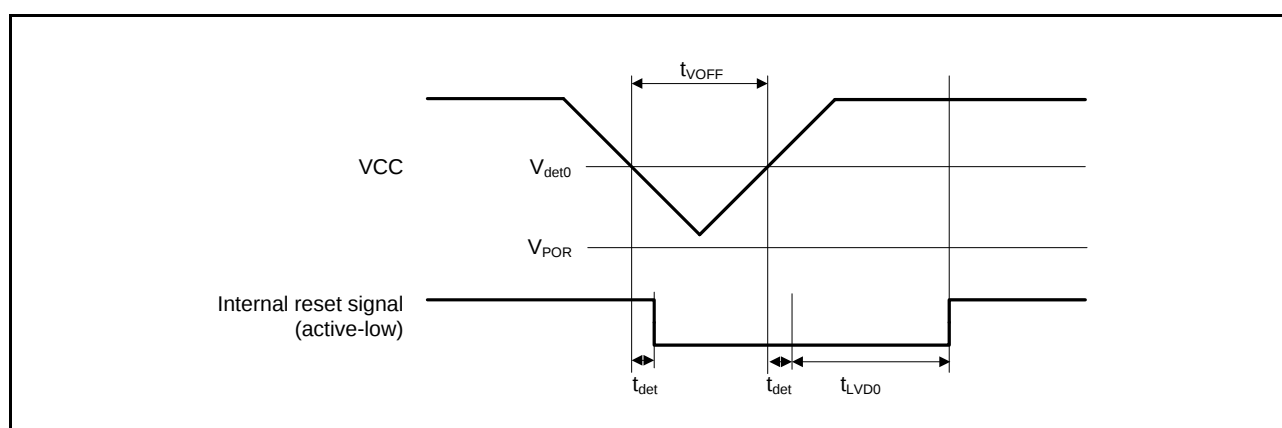
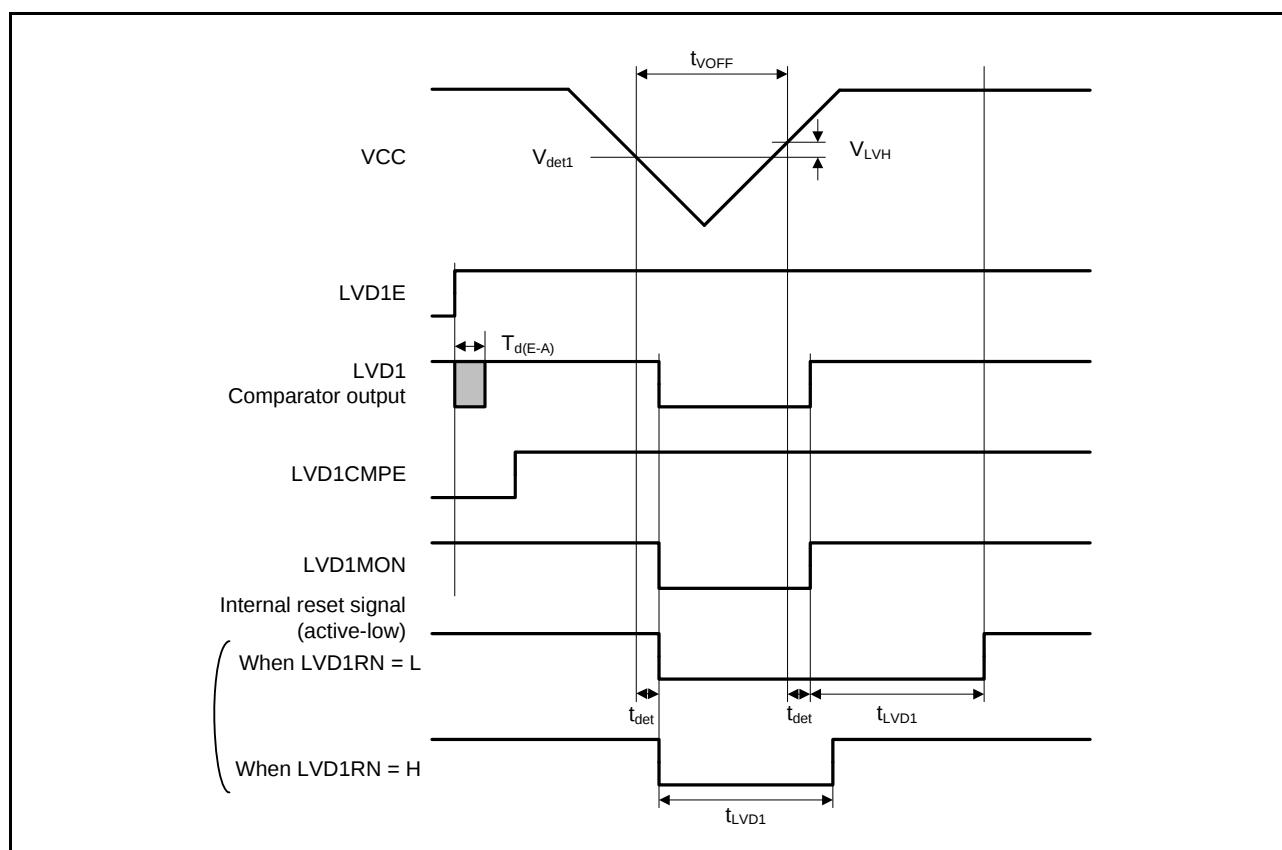
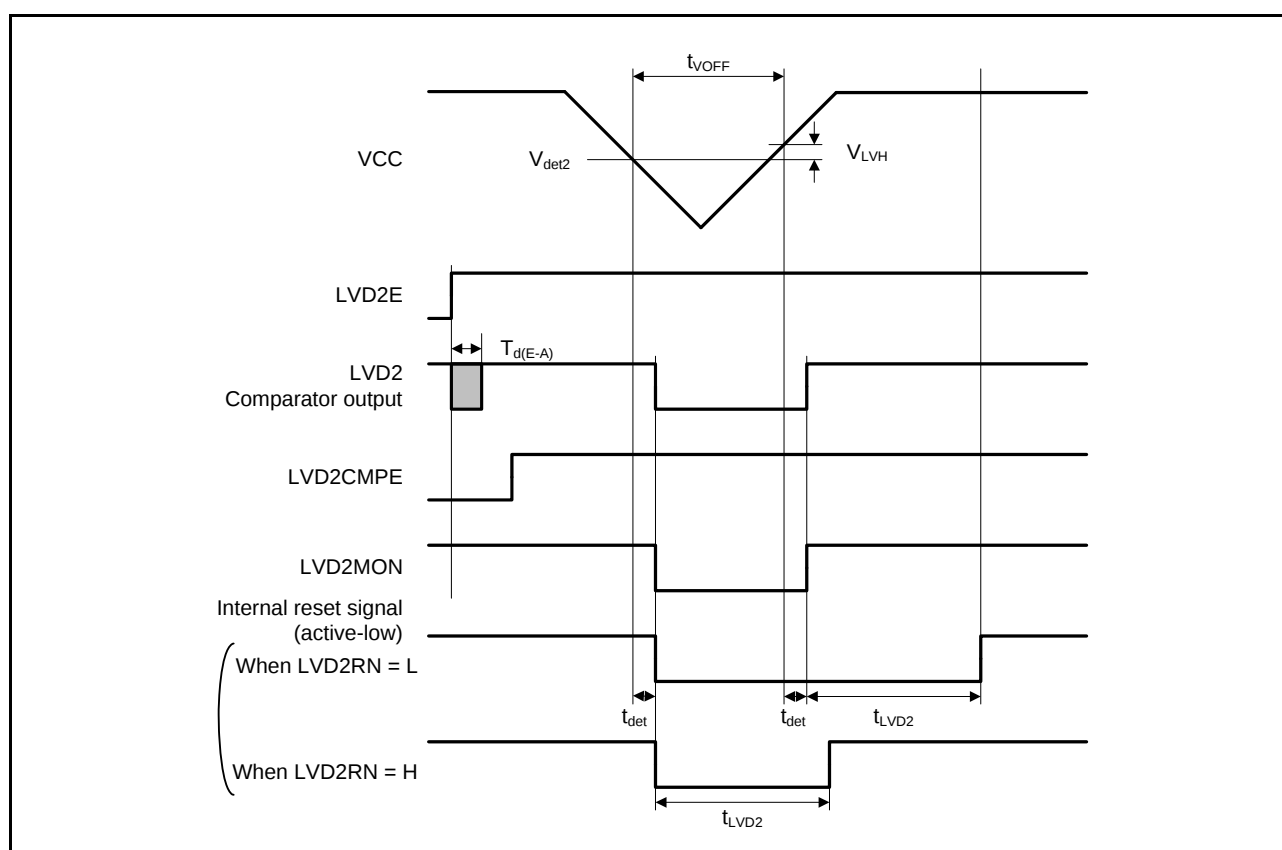


Figure 5.104 Power-on Reset Timing

Figure 5.105 Voltage Detection Circuit Timing ( $V_{det0}$ )


Figure 5.106 Voltage Detection Circuit Timing ( $V_{det1}$ )Figure 5.107 Voltage Detection Circuit Timing ( $V_{det2}$ )

## 5.9 Oscillation Stop Detection Timing

**Table 5.73 Oscillation Stop Detection Circuit Characteristics**

Conditions: VCC = AVCC0 = 1.62 to 5.5 V, VSS = AVSS0 = VREFL = VREFL0 = 0 V, T<sub>a</sub> = -40 to +105°C

| Item           | Symbol          | Min. | Typ. | Max. | Unit | Test Conditions |
|----------------|-----------------|------|------|------|------|-----------------|
| Detection time | t <sub>dr</sub> | —    | —    | 1    | ms   | Figure 5.108    |

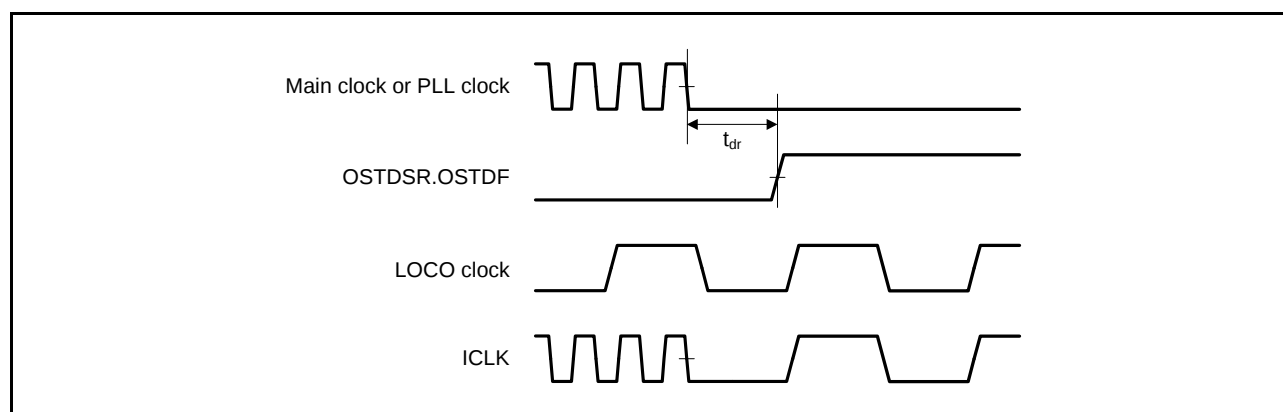

**Figure 5.108 Oscillation Stop Detection Timing**

## 5.10 ROM (Flash Memory for Code Storage) Characteristics

[Chip version A]

**Table 5.74 ROM (Flash Memory for Code Storage) Characteristics (1)**

| Item                        | Symbol           | Min. | Typ. | Max. | Unit  | Conditions |
|-----------------------------|------------------|------|------|------|-------|------------|
| Reprogramming/erase cycle*1 | N <sub>PEC</sub> | 1000 | —    | —    | Times |            |
| Data hold time              | t <sub>DRP</sub> | 10*2 | —    | —    | Year  |            |

Note 1. Definition of reprogram/erase cycle: The reprogram/erase cycle is the number of erasing for each block. When the reprogram/erase cycle is n times (n = 1000), erasing can be performed n times for each block. For instance, when 128-byte programming is performed 16 times for different addresses in 2-Kbyte block and then the entire block is erased, the reprogram/erase cycle is counted as one. However, programming the same address for several times as one erasing is not enabled (overwriting is prohibited).

Note 2. This result is obtained from reliability testing.

[Chip versions B and C]

**Table 5.75 ROM (Flash Memory for Code Storage) Characteristics (2)**

| Item                        | Symbol                                | Min.  | Typ. | Max. | Unit  | Conditions |
|-----------------------------|---------------------------------------|-------|------|------|-------|------------|
| Reprogramming/erase cycle*1 | N <sub>PEC</sub>                      | 10000 | —    | —    | Times | Ta = +85°C |
| Data hold time              | After 1000 times of N <sub>PEC</sub>  | 30*2  | —    | —    | Year  |            |
|                             | After 10000 times of N <sub>PEC</sub> | 1*2   | —    | —    | Year  |            |

Note 1. Definition of reprogram/erase cycle: The reprogram/erase cycle is the number of erasing for each block. When the reprogram/erase cycle is n times (n = 1000), erasing can be performed n times for each block. For instance, when 128-byte programming is performed 16 times for different addresses in 2-Kbyte block and then the entire block is erased, the reprogram/erase cycle is counted as one. However, programming the same address for several times as one erasing is not enabled (overwriting is prohibited).

Note 2. This result is obtained from reliability testing.

[Chip versions A and C]

**Table 5.76 ROM (Flash Memory for Code Storage) Characteristics (3)  
: high-speed operating mode, middle-speed operating mode 1A**

Conditions: VCC = AVCC0 = 2.7 to 5.5 V, VREFH = VREFH0 = AVCC0, VSS = AVSS0 = VREFL = VREFL0 = 0 V

Temperature range for the programming/erasure operation: T<sub>a</sub> = -40 to +105°C

| Item                                                                            |           | Symbol             | FCLK = 4 MHz                                  |      |       | FCLK = 32 MHz                                 |      |      | Unit |
|---------------------------------------------------------------------------------|-----------|--------------------|-----------------------------------------------|------|-------|-----------------------------------------------|------|------|------|
|                                                                                 |           |                    | Min.                                          | Typ. | Max.  | Min.                                          | Typ. | Max. |      |
| Programming time<br>when N <sub>PEC</sub> ≤ 100 times                           | 2 bytes   | t <sub>P2</sub>    | —                                             | 0.52 | 4.8   | —                                             | 0.19 | 2.5  | ms   |
|                                                                                 | 8 bytes   | t <sub>P8</sub>    | —                                             | 0.52 | 4.9   | —                                             | 0.19 | 2.5  |      |
|                                                                                 | 128 bytes | t <sub>P128</sub>  | —                                             | 1.50 | 10.7  | —                                             | 0.57 | 4.8  |      |
| Programming time<br>when N <sub>PEC</sub> > 100 times                           | 2 bytes   | t <sub>P2</sub>    | —                                             | 0.61 | 5.7   | —                                             | 0.23 | 3.0  | ms   |
|                                                                                 | 8 bytes   | t <sub>P8</sub>    | —                                             | 0.61 | 6.2   | —                                             | 0.23 | 3.2  |      |
|                                                                                 | 128 bytes | t <sub>P128</sub>  | —                                             | 1.71 | 13.2  | —                                             | 0.65 | 6.0  |      |
| Erase time<br>when N <sub>PEC</sub> ≤ 100 times                                 | 2 Kbytes  | t <sub>E2K</sub>   | —                                             | 17.0 | 92.9  | —                                             | 11.0 | 29   | ms   |
| Erase time<br>when N <sub>PEC</sub> > 100 times                                 | 2 Kbytes  | t <sub>E2K</sub>   | —                                             | 20.8 | 195.8 | —                                             | 13.5 | 60   | ms   |
| Suspend delay time during programming<br>(in programming/erasure priority mode) |           | t <sub>SPD</sub>   | —                                             | —    | 0.9   | —                                             | —    | 0.8  | ms   |
| First suspend delay time during<br>programming (in suspend priority mode)       |           | t <sub>SPSD1</sub> | —                                             | —    | 220   | —                                             | —    | 120  | μs   |
| Second suspend delay time during<br>programming (in suspend priority mode)      |           | t <sub>SPSD2</sub> | —                                             | —    | 0.9   | —                                             | —    | 0.8  | ms   |
| Suspend delay time during erasing<br>(in programming/erasure priority mode)     |           | t <sub>SED</sub>   | —                                             | —    | 0.9   | —                                             | —    | 0.8  | ms   |
| First suspend delay time during erasing<br>(in suspend priority mode)           |           | t <sub>ESD1</sub>  | —                                             | —    | 220   | —                                             | —    | 120  | μs   |
| Second suspend delay time during erasing<br>(in suspend priority mode)          |           | t <sub>ESD2</sub>  | —                                             | —    | 0.9   | —                                             | —    | 0.8  | ms   |
| FCU reset time                                                                  |           | t <sub>FCUR</sub>  | 20 μs or longer<br>and FCLK × 6<br>or greater | —    | —     | 20 μs or longer<br>and FCLK × 6<br>or greater | —    | —    | μs   |

[Chip versions A and C]

**Table 5.77 ROM (Flash Memory for Code Storage) Characteristics (4)  
: middle-speed operating mode 1B**

Conditions: VCC = AVCC0 = 1.62 to 3.6 V, VREFH = VREFH0 = AVCC0, VSS = AVSS0 = VREFL = VREFL0 = 0 V

Temperature range for the programming/erasure operation: T<sub>a</sub> = -40 to +105°C

| Item                                                                            |           | Symbol             | FCLK = 4 MHz                                     |      |       | FCLK = 32 MHz*1                                  |      |                                                                                                           | Unit |
|---------------------------------------------------------------------------------|-----------|--------------------|--------------------------------------------------|------|-------|--------------------------------------------------|------|-----------------------------------------------------------------------------------------------------------|------|
|                                                                                 |           |                    | Min.                                             | Typ. | Max.  | Min.                                             | Typ. | Max.                                                                                                      |      |
| Programming time<br>when N <sub>PEC</sub> ≤ 100 times                           | 2 bytes   | t <sub>P2</sub>    | —                                                | 0.69 | 6.0   | —                                                | 0.30 | 3.5                                                                                                       | ms   |
|                                                                                 | 8 bytes   | t <sub>P8</sub>    | —                                                | 0.69 | 6.0   | —                                                | 0.30 | 3.5                                                                                                       |      |
|                                                                                 | 128 bytes | t <sub>P128</sub>  | —                                                | 1.76 | 14.2  | —                                                | 0.85 | 8.3                                                                                                       |      |
| Programming time<br>when N <sub>PEC</sub> > 100 times                           | 2 bytes   | t <sub>P2</sub>    | —                                                | 0.81 | 7.1   | —                                                | 0.35 | 4.2                                                                                                       | ms   |
|                                                                                 | 8 bytes   | t <sub>P8</sub>    | —                                                | 0.81 | 7.6   | —                                                | 0.35 | 4.5                                                                                                       |      |
|                                                                                 | 128 bytes | t <sub>P128</sub>  | —                                                | 1.99 | 17.5  | —                                                | 0.96 | 10                                                                                                        |      |
| Erasure time<br>when N <sub>PEC</sub> ≤ 100 times                               | 2 Kbytes  | t <sub>E2K</sub>   | —                                                | 24.5 | 113.7 | —                                                | 19.0 | 46                                                                                                        | ms   |
| Erasure time<br>when N <sub>PEC</sub> > 100 times                               | 2 Kbytes  | t <sub>E2K</sub>   | —                                                | 29.8 | 225.8 | —                                                | 23.2 | 90 (1000 times ≥<br>N <sub>PEC</sub> > 100 times),<br>98 (10000 times ≥<br>N <sub>PEC</sub> > 1000 times) | ms   |
| Suspend delay time during programming<br>(in programming/erasure priority mode) |           | t <sub>SPD</sub>   | —                                                | —    | 1.7   | —                                                | —    | 1.6                                                                                                       | ms   |
| First suspend delay time during<br>programming (in suspend priority mode)       |           | t <sub>SPSD1</sub> | —                                                | —    | 220   | —                                                | —    | 120                                                                                                       | μs   |
| Second suspend delay time during<br>programming (in suspend priority mode)      |           | t <sub>SPSD2</sub> | —                                                | —    | 1.7   | —                                                | —    | 1.6                                                                                                       | ms   |
| Suspend delay time during erasing<br>(in programming/erasure priority mode)     |           | t <sub>SED</sub>   | —                                                | —    | 1.7   | —                                                | —    | 1.6                                                                                                       | ms   |
| First suspend delay time during erasing<br>(in suspend priority mode)           |           | t <sub>SESD1</sub> | —                                                | —    | 220   | —                                                | —    | 120                                                                                                       | μs   |
| Second suspend delay time during<br>erasing (in suspend priority mode)          |           | t <sub>SESD2</sub> | —                                                | —    | 1.7   | —                                                | —    | 1.6                                                                                                       | ms   |
| FCU reset time                                                                  |           | t <sub>FCUR</sub>  | 20 μs or<br>longer and<br>FCLK × 6<br>or greater | —    | —     | 20 μs or<br>longer and<br>FCLK × 6<br>or greater | —    | —                                                                                                         | μs   |

Note 1. The operating frequency is 20 MHz (max.) when the voltage is in the range from 1.62 V to less than 1.8 V.

[Chip version B]

**Table 5.78 ROM (Flash Memory for Code Storage) Characteristics (5)  
: middle-speed operating modes 1A and 2A**

Conditions: VCC = AVCC0 = 2.7 to 5.5 V, VREFH = VREFH0 = AVCC0, VSS = AVSS0 = VREFL = VREFL0 = 0 V

Temperature range for the programming/erasure operation: T<sub>a</sub> = -40 to +105°C

| Item                                                                            |           | Symbol             | FCLK = 4 MHz                                  |      |       | FCLK = 32 MHz                                 |      |      | Unit |
|---------------------------------------------------------------------------------|-----------|--------------------|-----------------------------------------------|------|-------|-----------------------------------------------|------|------|------|
|                                                                                 |           |                    | Min.                                          | Typ. | Max.  | Min.                                          | Typ. | Max. |      |
| Programming time<br>when N <sub>PEC</sub> ≤ 100 times                           | 2 bytes   | t <sub>P2</sub>    | —                                             | 0.19 | 4.3   | —                                             | 0.12 | 2.0  | ms   |
|                                                                                 | 8 bytes   | t <sub>P8</sub>    | —                                             | 0.19 | 4.4   | —                                             | 0.12 | 2.0  |      |
|                                                                                 | 128 bytes | t <sub>P128</sub>  | —                                             | 0.67 | 10.7  | —                                             | 0.41 | 4.8  |      |
| Programming time<br>when N <sub>PEC</sub> > 100 times                           | 2 bytes   | t <sub>P2</sub>    | —                                             | 0.23 | 5.3   | —                                             | 0.15 | 2.5  | ms   |
|                                                                                 | 8 bytes   | t <sub>P8</sub>    | —                                             | 0.23 | 5.4   | —                                             | 0.15 | 2.5  |      |
|                                                                                 | 128 bytes | t <sub>P128</sub>  | —                                             | 0.80 | 13.2  | —                                             | 0.48 | 6.0  |      |
| Erase time<br>when N <sub>PEC</sub> ≤ 100 times                                 | 2 Kbytes  | t <sub>E2K</sub>   | —                                             | 13.0 | 92.9  | —                                             | 10.5 | 29   | ms   |
| Erase time<br>when N <sub>PEC</sub> > 100 times                                 | 2 Kbytes  | t <sub>E2K</sub>   | —                                             | 15.9 | 176.9 | —                                             | 12.8 | 60   | ms   |
| Suspend delay time during programming<br>(in programming/erasure priority mode) |           | t <sub>SPD</sub>   | —                                             | —    | 0.9   | —                                             | —    | 0.8  | ms   |
| First suspend delay time during<br>programming (in suspend priority mode)       |           | t <sub>SPSD1</sub> | —                                             | —    | 220   | —                                             | —    | 120  | μs   |
| Second suspend delay time during<br>programming (in suspend priority mode)      |           | t <sub>SPSD2</sub> | —                                             | —    | 0.9   | —                                             | —    | 0.8  | ms   |
| Suspend delay time during erasing<br>(in programming/erasure priority mode)     |           | t <sub>SED</sub>   | —                                             | —    | 0.9   | —                                             | —    | 0.8  | ms   |
| First suspend delay time during erasing<br>(in suspend priority mode)           |           | t <sub>ESD1</sub>  | —                                             | —    | 220   | —                                             | —    | 120  | μs   |
| Second suspend delay time during erasing<br>(in suspend priority mode)          |           | t <sub>ESD2</sub>  | —                                             | —    | 0.9   | —                                             | —    | 0.8  | ms   |
| FCU reset time                                                                  |           | t <sub>FCUR</sub>  | 20 μs or longer<br>and FCLK × 6<br>or greater | —    | —     | 20 μs or longer<br>and FCLK × 6<br>or greater | —    | —    | μs   |

[Chip version B]

**Table 5.79 ROM (Flash Memory for Code Storage) Characteristics (6)  
: middle-speed operating modes 1B and 2B**Conditions:  $V_{CC} = AV_{CC0} = 1.62$  to  $3.6$  V,  $V_{REFH} = V_{REFH0} = AV_{CC0}$ ,  $V_{SS} = AV_{SS0} = V_{REFL} = V_{REFL0} = 0$  VTemperature range for the programming/erasure operation:  $T_a = -40$  to  $+105^{\circ}\text{C}$ 

| Item                                                                            |           | Symbol      | FCLK = 4 MHz                                                       |      |       | FCLK = 32 MHz*1                                                    |      |                                                                                                       | Unit          |
|---------------------------------------------------------------------------------|-----------|-------------|--------------------------------------------------------------------|------|-------|--------------------------------------------------------------------|------|-------------------------------------------------------------------------------------------------------|---------------|
|                                                                                 |           |             | Min.                                                               | Typ. | Max.  | Min.                                                               | Typ. | Max.                                                                                                  |               |
| Programming time<br>when $N_{PEC} \leq 100$ times                               | 2 bytes   | $t_{P2}$    | —                                                                  | 0.25 | 5.0   | —                                                                  | 0.21 | 2.8                                                                                                   | ms            |
|                                                                                 | 8 bytes   | $t_{P8}$    | —                                                                  | 0.25 | 5.3   | —                                                                  | 0.21 | 3.0                                                                                                   |               |
|                                                                                 | 128 bytes | $t_{P128}$  | —                                                                  | 0.92 | 14.0  | —                                                                  | 0.65 | 8.3                                                                                                   |               |
| Programming time<br>when $N_{PEC} > 100$ times                                  | 2 bytes   | $t_{P2}$    | —                                                                  | 0.31 | 6.2   | —                                                                  | 0.26 | 3.5                                                                                                   | ms            |
|                                                                                 | 8 bytes   | $t_{P8}$    | —                                                                  | 0.31 | 6.6   | —                                                                  | 0.26 | 3.7                                                                                                   |               |
|                                                                                 | 128 bytes | $t_{P128}$  | —                                                                  | 1.09 | 17.5  | —                                                                  | 0.77 | 10.0                                                                                                  |               |
| Erasure time<br>when $N_{PEC} \leq 100$ times                                   | 2 Kbytes  | $t_{E2K}$   | —                                                                  | 21.0 | 113.7 | —                                                                  | 18.5 | 46                                                                                                    | ms            |
| Erasure time<br>when $N_{PEC} > 100$ times                                      | 2 Kbytes  | $t_{E2K}$   | —                                                                  | 25.6 | 220.6 | —                                                                  | 22.5 | 90 (1000 times $\geq$<br>$N_{PEC} > 100$ times),<br>98 (10000 times $\geq$<br>$N_{PEC} > 1000$ times) | ms            |
| Suspend delay time during programming<br>(in programming/erasure priority mode) |           | $t_{SPD}$   | —                                                                  | —    | 1.7   | —                                                                  | —    | 1.6                                                                                                   | ms            |
| First suspend delay time during<br>programming (in suspend priority mode)       |           | $t_{SPSD1}$ | —                                                                  | —    | 220   | —                                                                  | —    | 120                                                                                                   | $\mu\text{s}$ |
| Second suspend delay time during<br>programming (in suspend priority mode)      |           | $t_{SPSD2}$ | —                                                                  | —    | 1.7   | —                                                                  | —    | 1.6                                                                                                   | ms            |
| Suspend delay time during erasing<br>(in programming/erasure priority mode)     |           | $t_{SED}$   | —                                                                  | —    | 1.7   | —                                                                  | —    | 1.6                                                                                                   | ms            |
| First suspend delay time during erasing<br>(in suspend priority mode)           |           | $t_{SESD1}$ | —                                                                  | —    | 220   | —                                                                  | —    | 120                                                                                                   | $\mu\text{s}$ |
| Second suspend delay time during<br>erasing (in suspend priority mode)          |           | $t_{SESD2}$ | —                                                                  | —    | 1.7   | —                                                                  | —    | 1.6                                                                                                   | ms            |
| FCU reset time                                                                  |           | $t_{FCUR}$  | 20 $\mu\text{s}$ or<br>longer and<br>FCLK $\times 6$<br>or greater | —    | —     | 20 $\mu\text{s}$ or<br>longer and<br>FCLK $\times 6$<br>or greater | —    | —                                                                                                     | $\mu\text{s}$ |

Note 1. The operating frequency is 20 MHz (max.) when the voltage is in the range from 1.62 V to less than 1.8 V.

### 5.11 E2 DataFlash Characteristics

[Chip version A]

**Table 5.80 E2 DataFlash Characteristics (1)**

| Item                          | Symbol     | Min.      | Typ. | Max. | Unit  | Conditions |
|-------------------------------|------------|-----------|------|------|-------|------------|
| Reprogramming/erasure cycle*1 | $N_{DPEC}$ | 100000    | —    | —    | Times |            |
| Data hold time                | $t_{DRP}$  | $10^{*2}$ | —    | —    | Year  |            |

Note 1. The reprogram/erase cycle is the number of erasing for each block. When the reprogram/erase cycle is n times ( $n = 100000$ ), erasing can be performed n times for each block. For instance, when 8-byte programming is performed 16 times for different addresses in 128-byte block and then the entire block is erased, the reprogram/erase cycle is counted as one. However, programming the same address for several times as one erasing is not enabled (overwriting is prohibited).

Note 2. This result is obtained from reliability testing.

[Chip versions B and C]

**Table 5.81 E2 DataFlash Characteristics (2)**

| Item                          | Symbol                                        | Min.      | Typ. | Max. | Unit  | Conditions |
|-------------------------------|-----------------------------------------------|-----------|------|------|-------|------------|
| Reprogramming/erasure cycle*1 | $N_{DPEC}$                                    | 100000    | —    | —    | Times |            |
| Data hold time                | After 100000 times of $N_{DPEC}$<br>$t_{DRP}$ | $30^{*2}$ | —    | —    | Year  |            |

Note 1. The reprogram/erase cycle is the number of erasing for each block. When the reprogram/erase cycle is n times ( $n = 100000$ ), erasing can be performed n times for each block. For instance, when 8-byte programming is performed 16 times for different addresses in 128-byte block and then the entire block is erased, the reprogram/erase cycle is counted as one. However, programming the same address for several times as one erasing is not enabled (overwriting is prohibited).

Note 2. This result is obtained from reliability testing.

[Chip versions A and C]

**Table 5.82 E2 DataFlash Characteristics (3)**  
**: high-speed operating mode, middle-speed operating mode 1A**

Conditions: VCC = AVCC0 = 2.7 to 5.5 V, VREFH = VREFH0 = AVCC0, VSS = AVSS0 = VREFL = VREFL0 = 0 V

Temperature range for the programming/erasure operation: T<sub>a</sub> = -40 to +105°C

| Item                                                                            |           | Symbol              | FCLK = 4 MHz |      |      | FCLK = 32 MHz |      |      | Unit |
|---------------------------------------------------------------------------------|-----------|---------------------|--------------|------|------|---------------|------|------|------|
|                                                                                 |           |                     | Min.         | Typ. | Max. | Min.          | Typ. | Max. |      |
| Programming time<br>when N <sub>DPEC</sub> ≤ 100 times                          | 2 bytes   | t <sub>DP2</sub>    | —            | 0.40 | 4.4  | —             | 0.16 | 2.0  | ms   |
|                                                                                 | 8 bytes   | t <sub>DP8</sub>    | —            | 0.45 | 5.1  | —             | 0.17 | 2.2  |      |
| Programming time<br>when N <sub>DPEC</sub> > 100 times                          | 2 bytes   | t <sub>DP2</sub>    | —            | 0.62 | 6.4  | —             | 0.25 | 3.0  | ms   |
|                                                                                 | 8 bytes   | t <sub>DP8</sub>    | —            | 0.69 | 7.5  | —             | 0.26 | 3.2  |      |
| Erasure time<br>when N <sub>DPEC</sub> ≤ 100 times                              | 128 bytes | t <sub>DE128</sub>  | —            | 5.6  | 27.1 | —             | 2.8  | 8    | ms   |
| Erasure time<br>when N <sub>DPEC</sub> > 100 times                              | 128 bytes | t <sub>DE128</sub>  | —            | 6.8  | 45.1 | —             | 3.4  | 12   | ms   |
| Blank check time                                                                | 2 bytes   | t <sub>DBC2</sub>   | —            | —    | 98   | —             | —    | 35   | μs   |
|                                                                                 | 2 Kbytes  | t <sub>DBC2K</sub>  | —            | —    | 16   | —             | —    | 2.5  | ms   |
| Suspend delay time during programming<br>(in programming/erasure priority mode) |           | t <sub>DSPD</sub>   | —            | —    | 0.9  | —             | —    | 0.8  | ms   |
| First suspend delay time during<br>programming (in suspend priority mode)       |           | t <sub>DSPSD1</sub> | —            | —    | 220  | —             | —    | 120  | μs   |
| Second suspend delay time during<br>programming (in suspend priority mode)      |           | t <sub>DSPSD2</sub> | —            | —    | 0.9  | —             | —    | 0.8  | ms   |
| Suspend delay time during erasing<br>(in programming/erasure priority mode)     |           | t <sub>DSED</sub>   | —            | —    | 0.9  | —             | —    | 0.8  | ms   |
| First suspend delay time during erasing<br>(in suspend priority mode)           |           | t <sub>DSESD1</sub> | —            | —    | 220  | —             | —    | 120  | μs   |
| Second suspend delay time during erasing<br>(in suspend priority mode)          |           | t <sub>DSESD2</sub> | —            | —    | 0.9  | —             | —    | 0.8  | ms   |

[Chip versions A and C]

**Table 5.83 E2 DataFlash Characteristics (4)  
: middle-speed operating mode 1B**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $3.6$  V,  $V_{REFH} = V_{REFH0} = AVCC0$ ,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  VTemperature range for the programming/erase operation:  $T_a = -40$  to  $+105^{\circ}\text{C}$ 

| Item                                                                          |           | Symbol       | FCLK = 4 MHz |      |      | FCLK = 32 MHz*1 |      |      | Unit          |
|-------------------------------------------------------------------------------|-----------|--------------|--------------|------|------|-----------------|------|------|---------------|
|                                                                               |           |              | Min.         | Typ. | Max. | Min.            | Typ. | Max. |               |
| Programming time<br>when $N_{DPEC} \leq 100$ times                            | 2 bytes   | $t_{DP2}$    | —            | 0.52 | 5.1  | —               | 0.24 | 2.8  | ms            |
|                                                                               | 8 bytes   | $t_{DP8}$    | —            | 0.57 | 6.0  | —               | 0.26 | 3.2  |               |
| Programming time<br>when $N_{DPEC} > 100$ times                               | 2 bytes   | $t_{DP2}$    | —            | 0.77 | 7.6  | —               | 0.36 | 4.2  | ms            |
|                                                                               | 8 bytes   | $t_{DP8}$    | —            | 0.84 | 8.8  | —               | 0.38 | 4.5  |               |
| Erase time<br>when $N_{DPEC} \leq 100$ times                                  | 128 bytes | $t_{DE128}$  | —            | 6.8  | 32.5 | —               | 4.4  | 12   | ms            |
| Erase time<br>when $N_{DPEC} > 100$ times                                     | 128 bytes | $t_{DE128}$  | —            | 8.2  | 51.4 | —               | 5.3  | 17   | ms            |
| Blank check time                                                              | 2 bytes   | $t_{DBC2}$   | —            | —    | 110  | —               | —    | 40   | $\mu\text{s}$ |
|                                                                               | 2 Kbytes  | $t_{DBC2K}$  | —            | —    | 16.3 | —               | —    | 2.6  | ms            |
| Suspend delay time during programming<br>(in programming/erase priority mode) |           | $t_{DSPD}$   | —            | —    | 1.7  | —               | —    | 1.6  | ms            |
| First suspend delay time during<br>programming (in suspend priority mode)     |           | $t_{DSPSD1}$ | —            | —    | 220  | —               | —    | 120  | $\mu\text{s}$ |
| Second suspend delay time during<br>programming (in suspend priority mode)    |           | $t_{DSPSD2}$ | —            | —    | 1.7  | —               | —    | 1.6  | ms            |
| Suspend delay time during erasing<br>(in programming/erase priority mode)     |           | $t_{DSED}$   | —            | —    | 1.7  | —               | —    | 1.6  | ms            |
| First suspend delay time during erasing<br>(in suspend priority mode)         |           | $t_{DSESD1}$ | —            | —    | 220  | —               | —    | 120  | $\mu\text{s}$ |
| Second suspend delay time during erasing<br>(in suspend priority mode)        |           | $t_{DSESD2}$ | —            | —    | 1.7  | —               | —    | 1.6  | ms            |

Note 1. The operating frequency is 20 MHz (max.) when the voltage is in the range from 1.62 V to less than 1.8 V.

[Chip version B]

**Table 5.84 E2 DataFlash Characteristics (5)**  
**: high-speed operating mode, middle-speed operating modes 1A and 2A**

Conditions: VCC = AVCC0 = 2.7 to 5.5 V, VREFH = VREFH0 = AVCC0, VSS = AVSS0 = VREFL = VREFL0 = 0 V

Temperature range for the programming/erasure operation: T<sub>a</sub> = -40 to +105°C

| Item                                                                            |           | Symbol              | FCLK = 4 MHz |      |      | FCLK = 32 MHz |      |      | Unit |
|---------------------------------------------------------------------------------|-----------|---------------------|--------------|------|------|---------------|------|------|------|
|                                                                                 |           |                     | Min.         | Typ. | Max. | Min.          | Typ. | Max. |      |
| Programming time<br>when N <sub>DPEC</sub> ≤ 100 times                          | 2 bytes   | t <sub>DP2</sub>    | —            | 0.19 | 4.4  | —             | 0.13 | 2.0  | ms   |
|                                                                                 | 8 bytes   | t <sub>DP8</sub>    | —            | 0.24 | 5.1  | —             | 0.13 | 2.2  |      |
| Programming time<br>when N <sub>DPEC</sub> > 100 times                          | 2 bytes   | t <sub>DP2</sub>    | —            | 0.25 | 6.4  | —             | 0.17 | 3.0  | ms   |
|                                                                                 | 8 bytes   | t <sub>DP8</sub>    | —            | 0.32 | 7.5  | —             | 0.18 | 3.2  |      |
| Erasure time<br>when N <sub>DPEC</sub> ≤ 100 times                              | 128 bytes | t <sub>DE128</sub>  | —            | 3.3  | 27.1 | —             | 2.5  | 8    | ms   |
| Erasure time<br>when N <sub>DPEC</sub> > 100 times                              | 128 bytes | t <sub>DE128</sub>  | —            | 4.0  | 45.1 | —             | 3.0  | 12   | ms   |
| Blank check time                                                                | 2 bytes   | t <sub>DBC2</sub>   | —            | —    | 98   | —             | —    | 35   | μs   |
|                                                                                 | 2 Kbytes  | t <sub>DBC2K</sub>  | —            | —    | 16   | —             | —    | 2.5  | ms   |
| Suspend delay time during programming<br>(in programming/erasure priority mode) |           | t <sub>DSPD</sub>   | —            | —    | 0.9  | —             | —    | 0.8  | ms   |
| First suspend delay time during<br>programming (in suspend priority mode)       |           | t <sub>DSPSD1</sub> | —            | —    | 220  | —             | —    | 120  | μs   |
| Second suspend delay time during<br>programming (in suspend priority mode)      |           | t <sub>DSPSD2</sub> | —            | —    | 0.9  | —             | —    | 0.8  | ms   |
| Suspend delay time during erasing<br>(in programming/erasure priority mode)     |           | t <sub>DSED</sub>   | —            | —    | 0.9  | —             | —    | 0.8  | ms   |
| First suspend delay time during erasing<br>(in suspend priority mode)           |           | t <sub>DSESD1</sub> | —            | —    | 220  | —             | —    | 120  | μs   |
| Second suspend delay time during erasing<br>(in suspend priority mode)          |           | t <sub>DSESD2</sub> | —            | —    | 0.9  | —             | —    | 0.8  | ms   |

[Chip version B]

**Table 5.85 E2 DataFlash Characteristics (6)  
: middle-speed operating modes 1B and 2B**Conditions:  $V_{CC} = AVCC0 = 1.62$  to  $3.6$  V,  $V_{REFH} = V_{REFH0} = AVCC0$ ,  $V_{SS} = AVSS0 = V_{REFL} = V_{REFL0} = 0$  VTemperature range for the programming/erasure operation:  $T_a = -40$  to  $+105^{\circ}\text{C}$ 

| Item                                                                            |           | Symbol       | FCLK = 4 MHz |      |      | FCLK = 32 MHz*1 |      |      | Unit          |
|---------------------------------------------------------------------------------|-----------|--------------|--------------|------|------|-----------------|------|------|---------------|
|                                                                                 |           |              | Min.         | Typ. | Max. | Min.            | Typ. | Max. |               |
| Programming time<br>when $N_{DPEC} \leq 100$ times                              | 2 bytes   | $t_{DP2}$    | —            | 0.28 | 5.1  | —               | 0.20 | 2.8  | ms            |
|                                                                                 | 8 bytes   | $t_{DP8}$    | —            | 0.32 | 6.0  | —               | 0.22 | 3.2  |               |
| Programming time<br>when $N_{DPEC} > 100$ times                                 | 2 bytes   | $t_{DP2}$    | —            | 0.36 | 7.6  | —               | 0.25 | 4.2  | ms            |
|                                                                                 | 8 bytes   | $t_{DP8}$    | —            | 0.40 | 8.8  | —               | 0.28 | 4.5  |               |
| Erasure time<br>when $N_{DPEC} \leq 100$ times                                  | 128 bytes | $t_{DE128}$  | —            | 4.8  | 32.4 | —               | 4.1  | 12   | ms            |
| Erasure time<br>when $N_{DPEC} > 100$ times                                     | 128 bytes | $t_{DE128}$  | —            | 5.8  | 51.4 | —               | 4.9  | 17   | ms            |
| Blank check time                                                                | 2 bytes   | $t_{DBC2}$   | —            | —    | 110  | —               | —    | 40   | $\mu\text{s}$ |
|                                                                                 | 2 Kbytes  | $t_{DBC2K}$  | —            | —    | 16.3 | —               | —    | 2.6  | ms            |
| Suspend delay time during programming<br>(in programming/erasure priority mode) |           | $t_{DSPD}$   | —            | —    | 1.7  | —               | —    | 1.6  | ms            |
| First suspend delay time during<br>programming (in suspend priority mode)       |           | $t_{DSPSD1}$ | —            | —    | 220  | —               | —    | 120  | $\mu\text{s}$ |
| Second suspend delay time during<br>programming (in suspend priority mode)      |           | $t_{DSPSD2}$ | —            | —    | 1.7  | —               | —    | 1.6  | ms            |
| Suspend delay time during erasing<br>(in programming/erasure priority mode)     |           | $t_{DSED}$   | —            | —    | 1.7  | —               | —    | 1.6  | ms            |
| First suspend delay time during erasing<br>(in suspend priority mode)           |           | $t_{DSESD1}$ | —            | —    | 220  | —               | —    | 120  | $\mu\text{s}$ |
| Second suspend delay time during erasing<br>(in suspend priority mode)          |           | $t_{DSESD2}$ | —            | —    | 1.7  | —               | —    | 1.6  | ms            |

Note 1. The operating frequency is 20 MHz (max.) when the voltage is in the range from 1.62 V to less than 1.8 V.

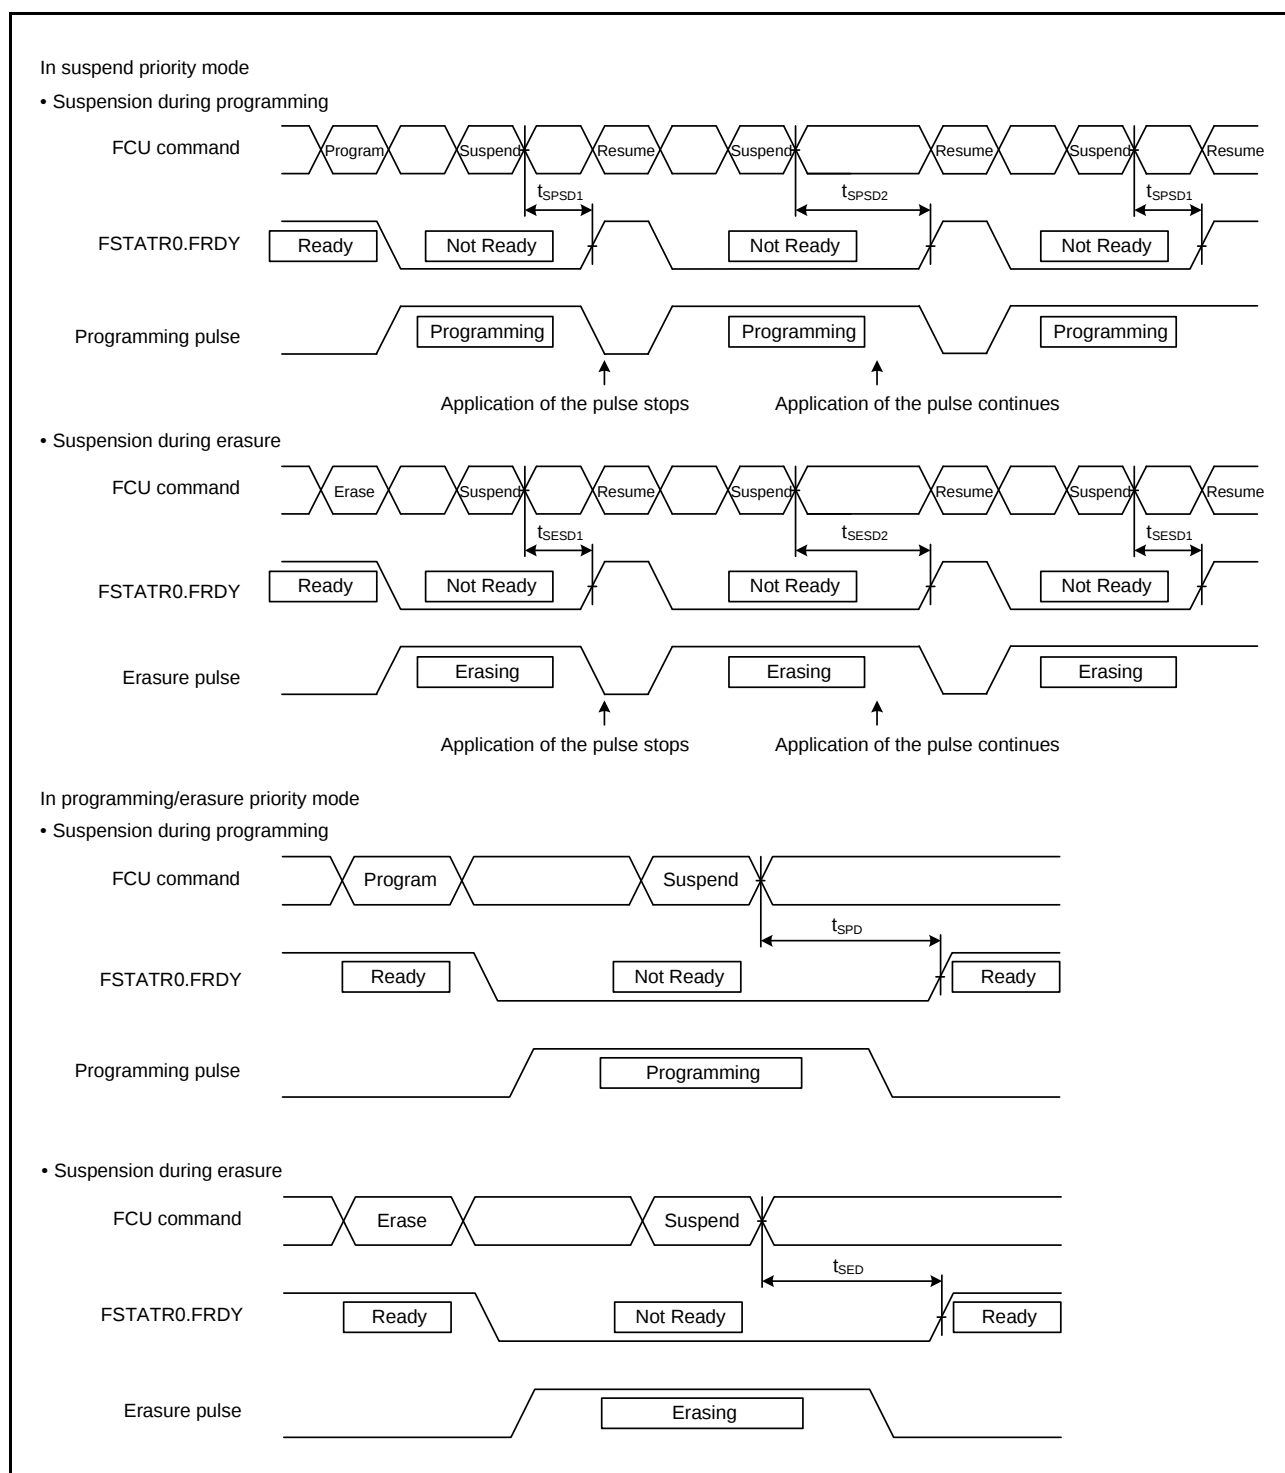


Figure 5.109 Flash Memory Program/Erase Suspend Timing

# Appendix 1. Package Dimensions

Information on the latest version of the package dimensions or mountings has been displayed in “Packages” on Renesas Electronics Corporation website.

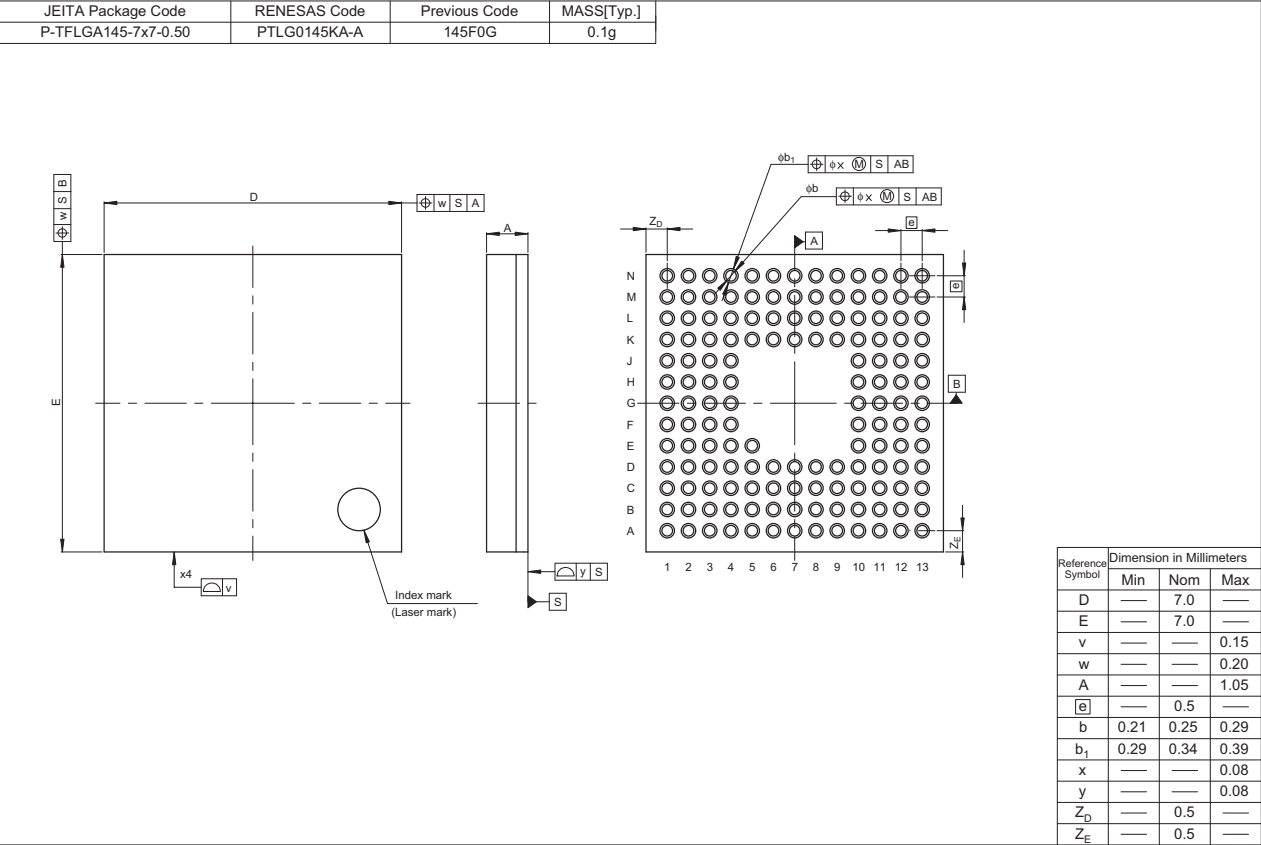


Figure A 145-Pin TFLGA (PTLG0145KA-A)

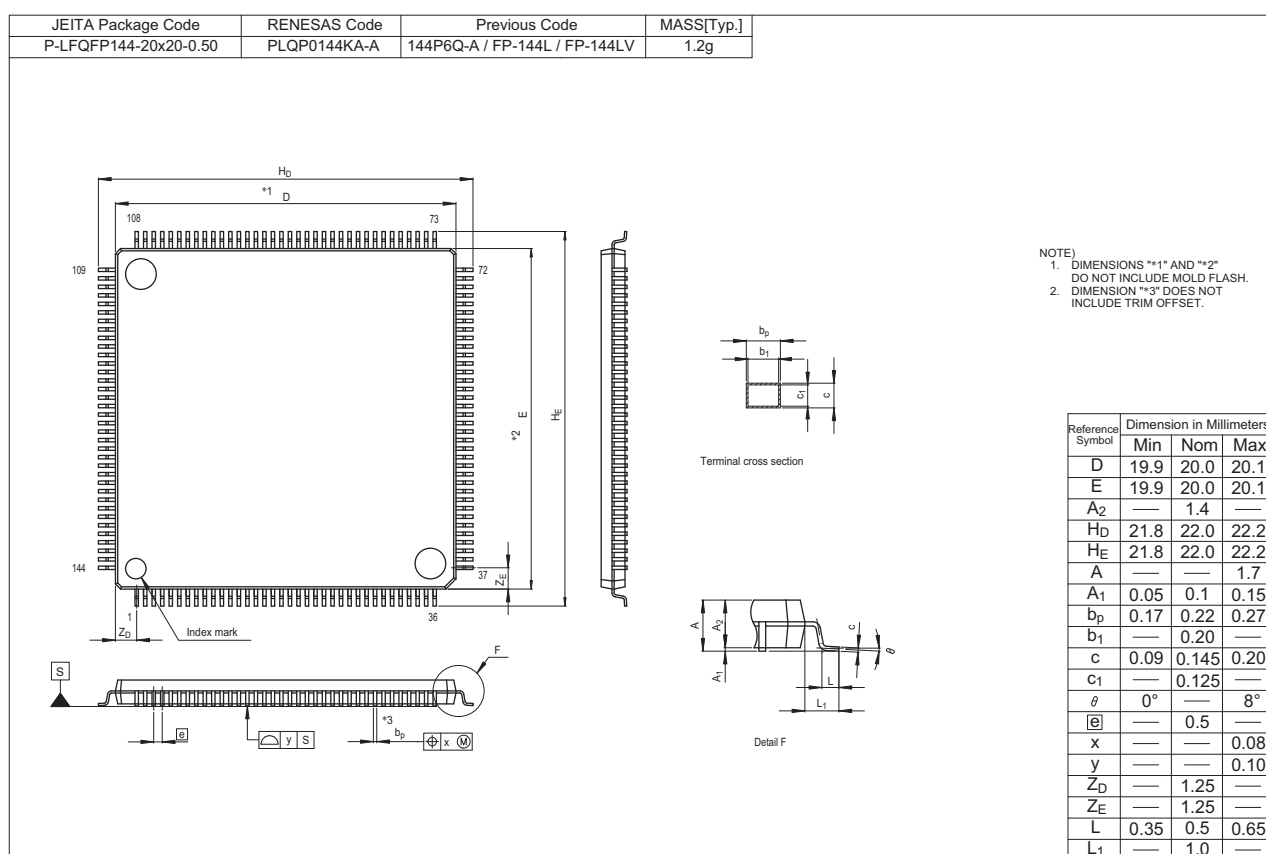


Figure B 144-Pin LQFP (PLQP0144KA-A)

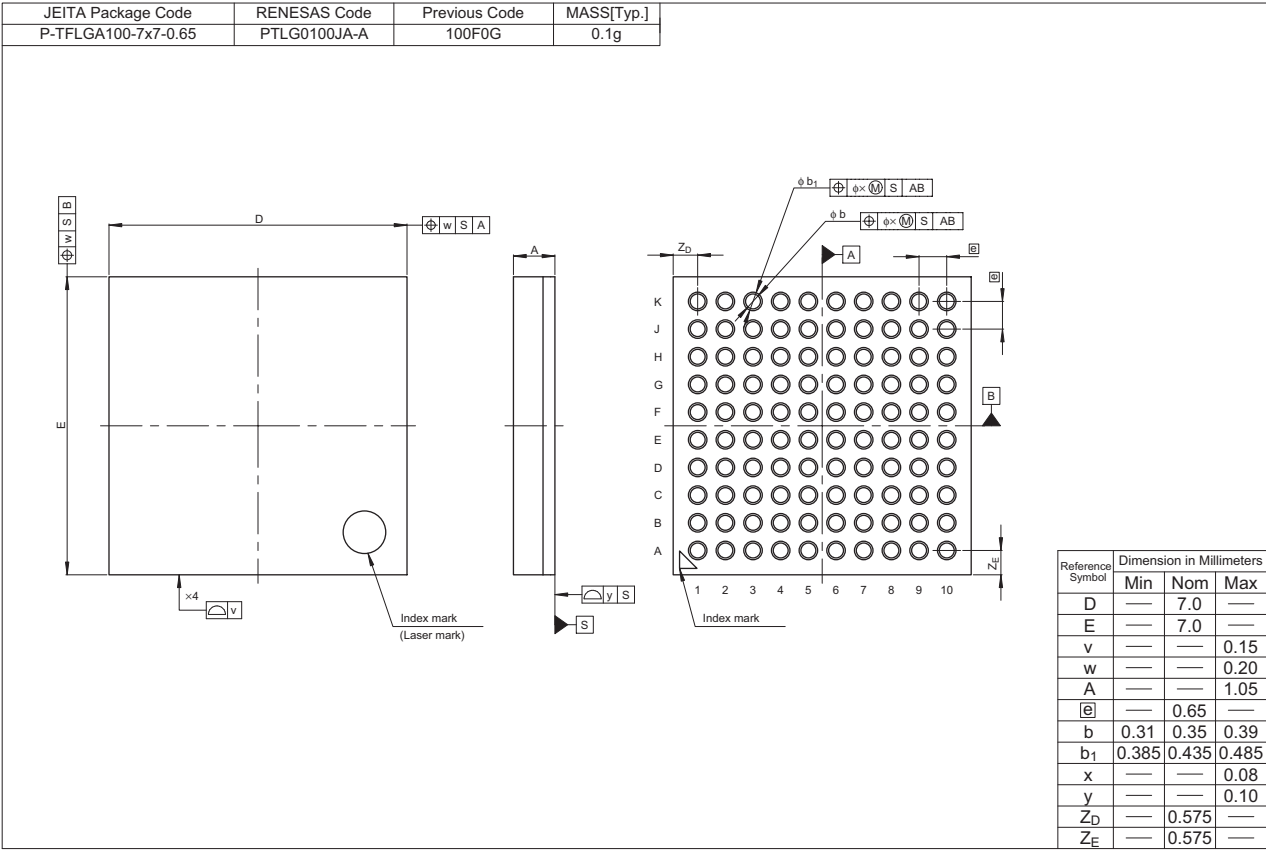


Figure C 100-Pin TFLGA (PTLG0100JA-A)


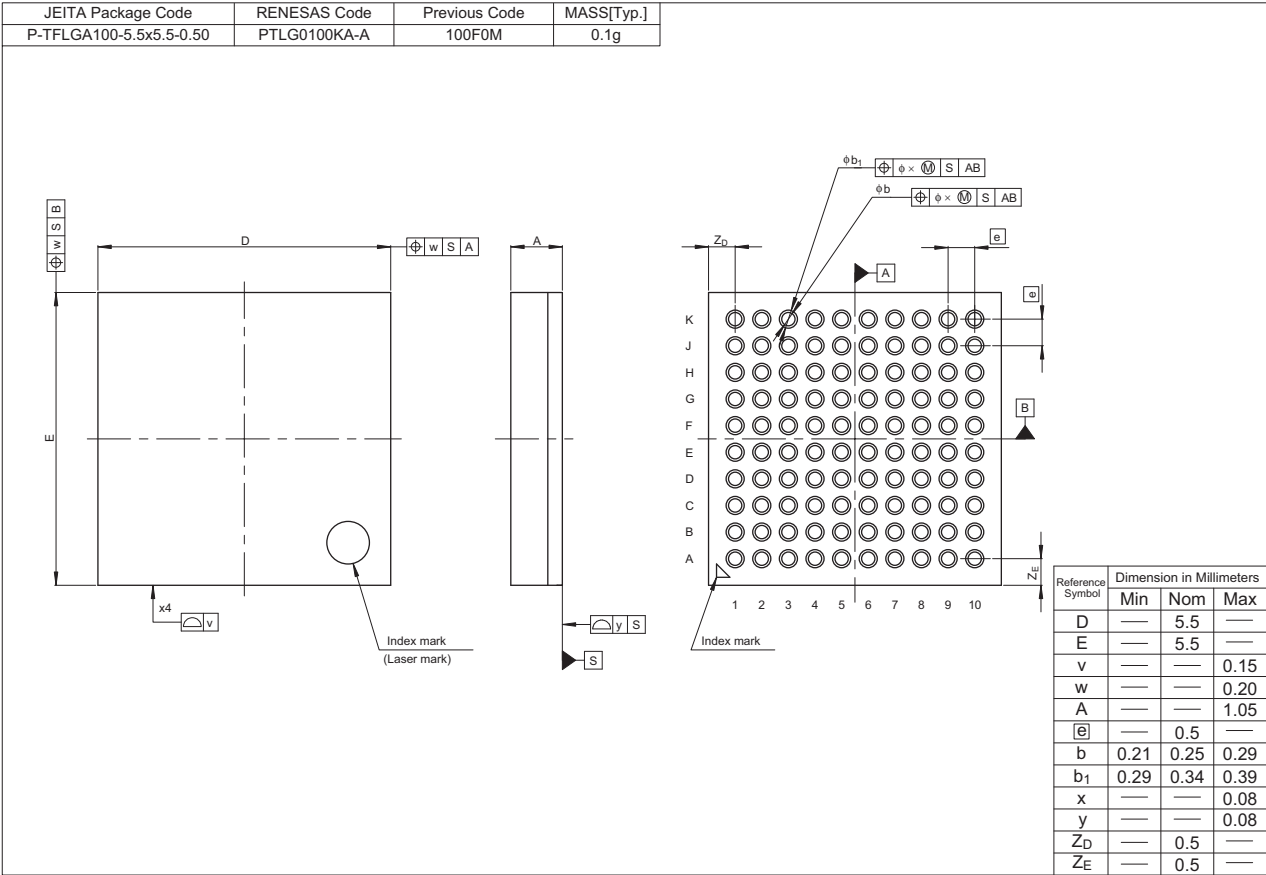


Figure D 100-Pin TFLGA (PTLG0100KA-A)

| JEITA Package code       | RENESAS Code | Previous Code | MASS(TYP.)[g] |
|--------------------------|--------------|---------------|---------------|
| S-WFBGA69-3.91x4.26-0.40 | SWBG0069LA-A | —             | 0.02          |

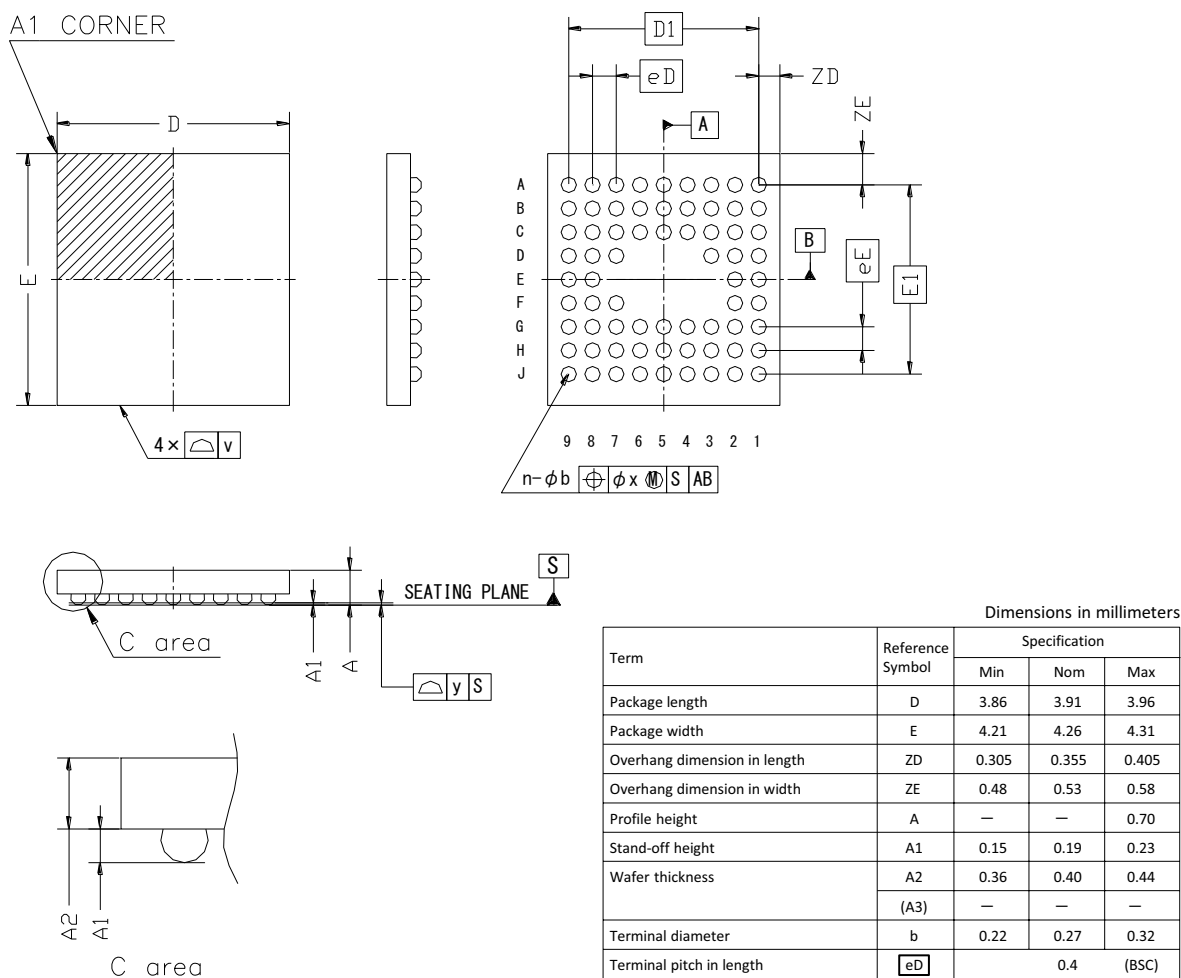

**注記:**

1. 端子ピッチは端子中央部の位置で規定する。
2. データA及びBは、ボールグリッドセンタを称す。

**Note:**

1. Ball pitch dimension is specified with the center of balls.
2. Datum A and B are axes defined by the ball grid array, not by the PKG outline.

© 2013 Renesas Electronics Corporation. All rights reserved.

Figure E 69-Pin WLBGA (SWBG0069LA-A)

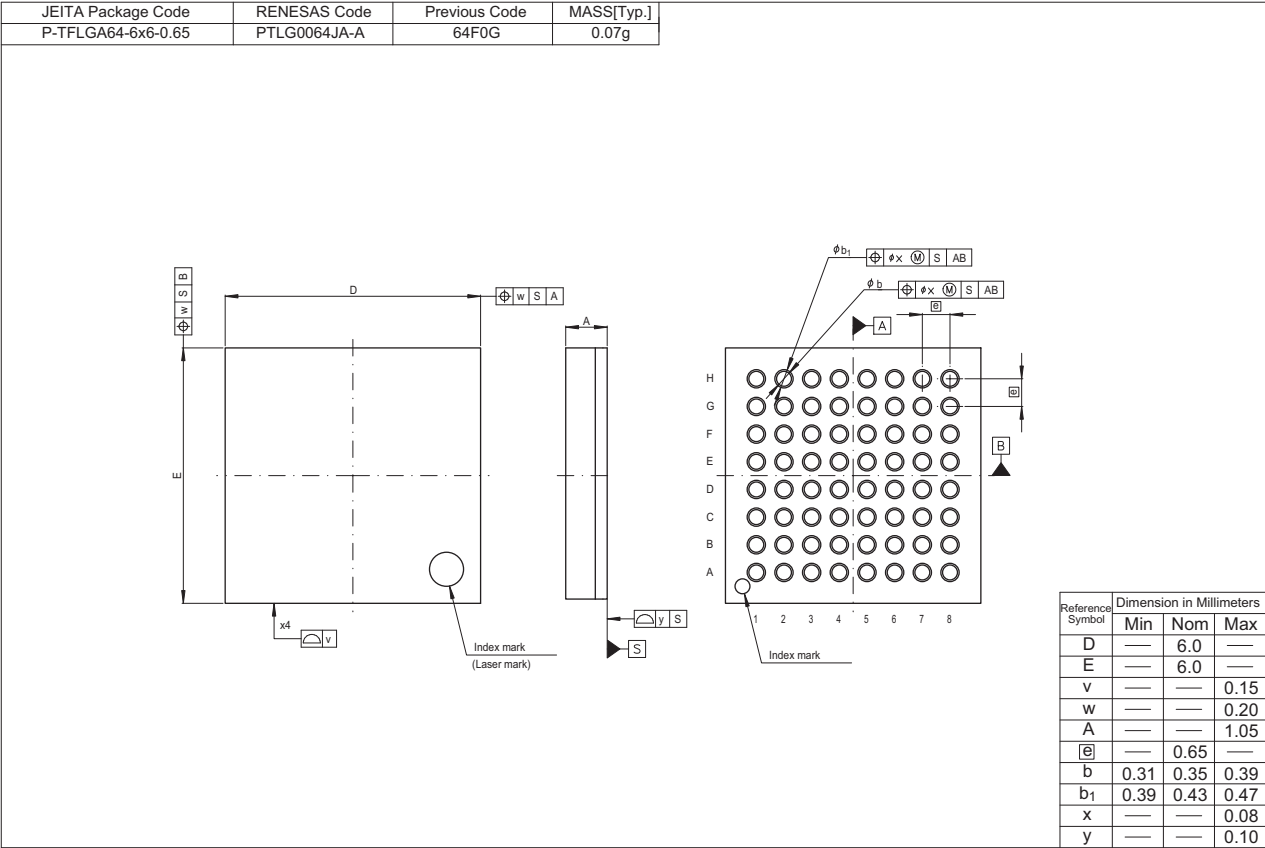


Figure F 64-Pin TFLGA (PTLG0064JA-A)

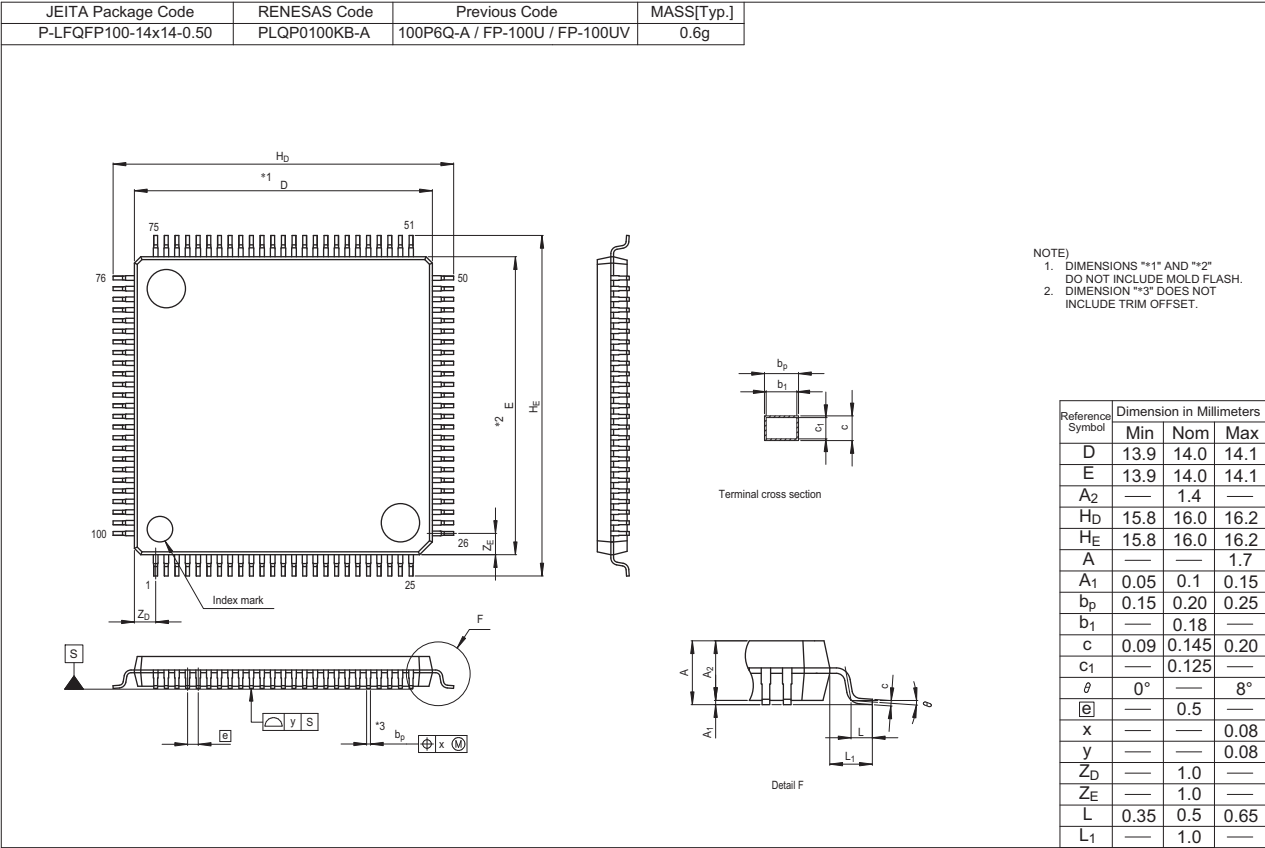


Figure G 100-Pin LQFP (PLQP0100KB-A)

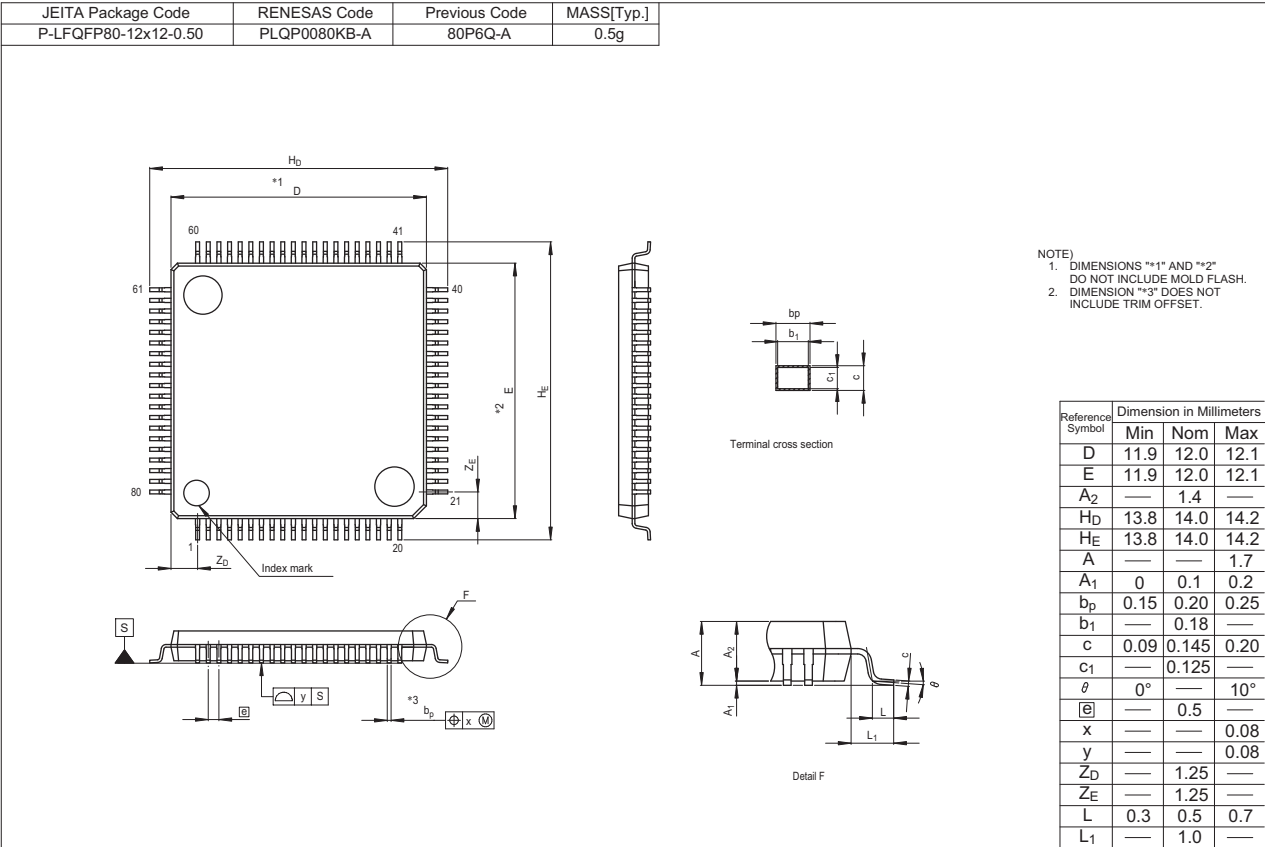


Figure H 80-Pin LQFP (PLQP0080KB-A)

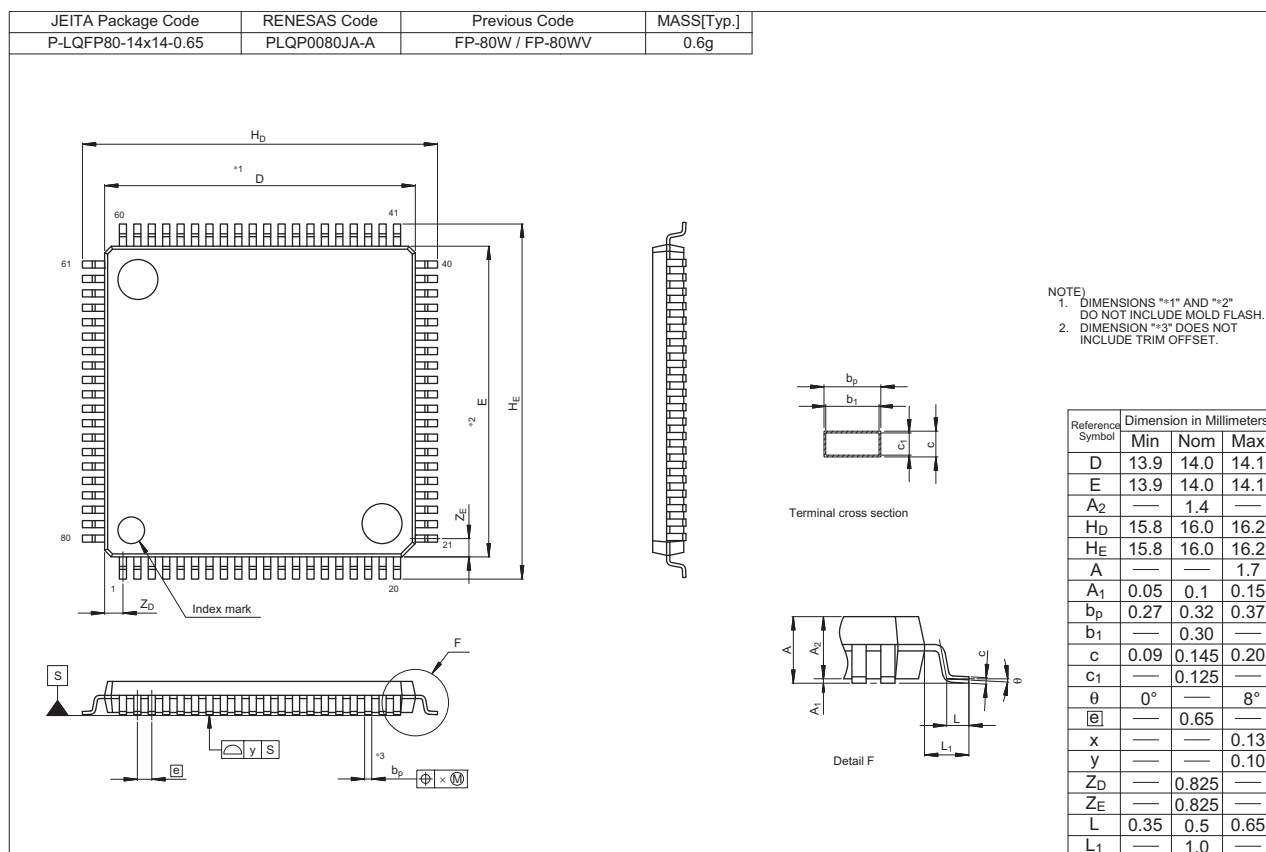


Figure I 80-Pin LQFP (PLQP0080JA-A)

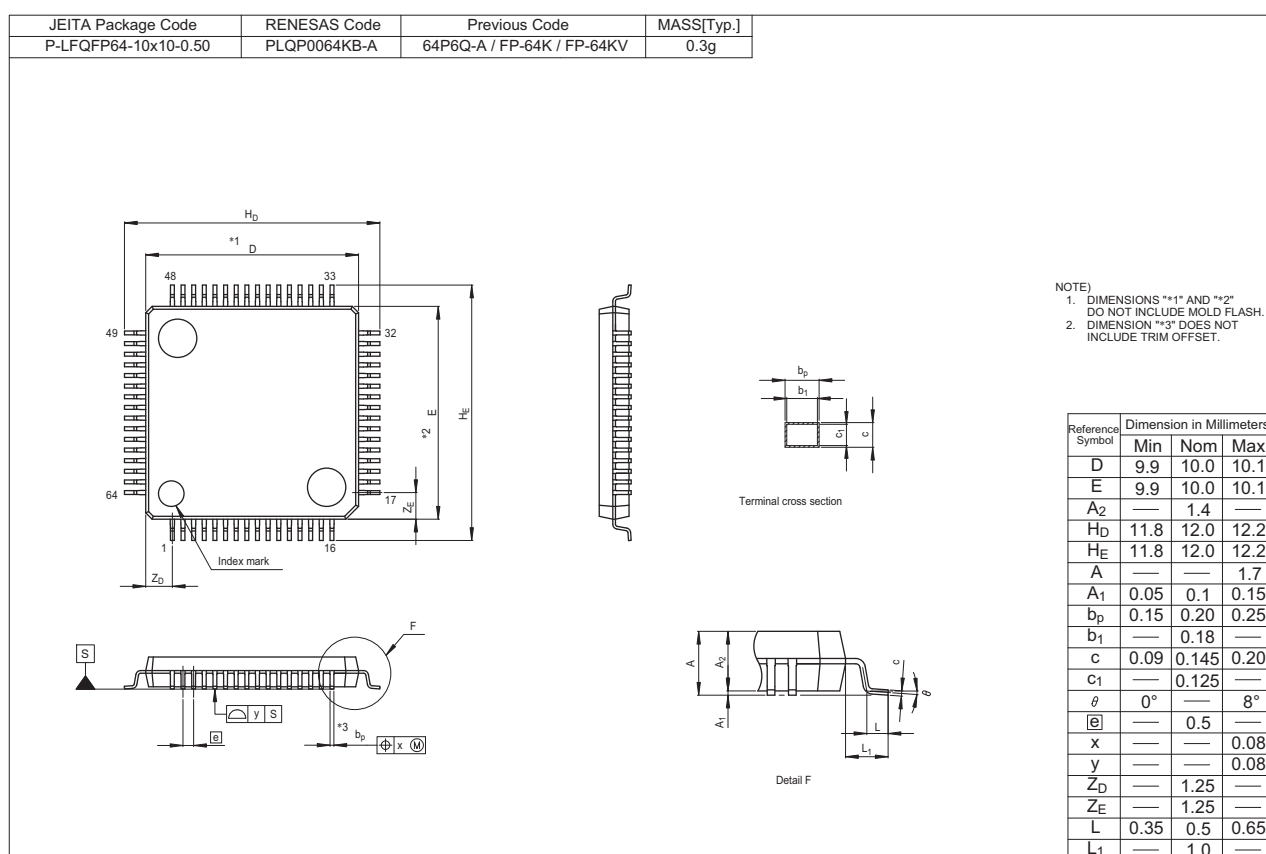


Figure J 64-Pin LQFP (PLQP0064KB-A)

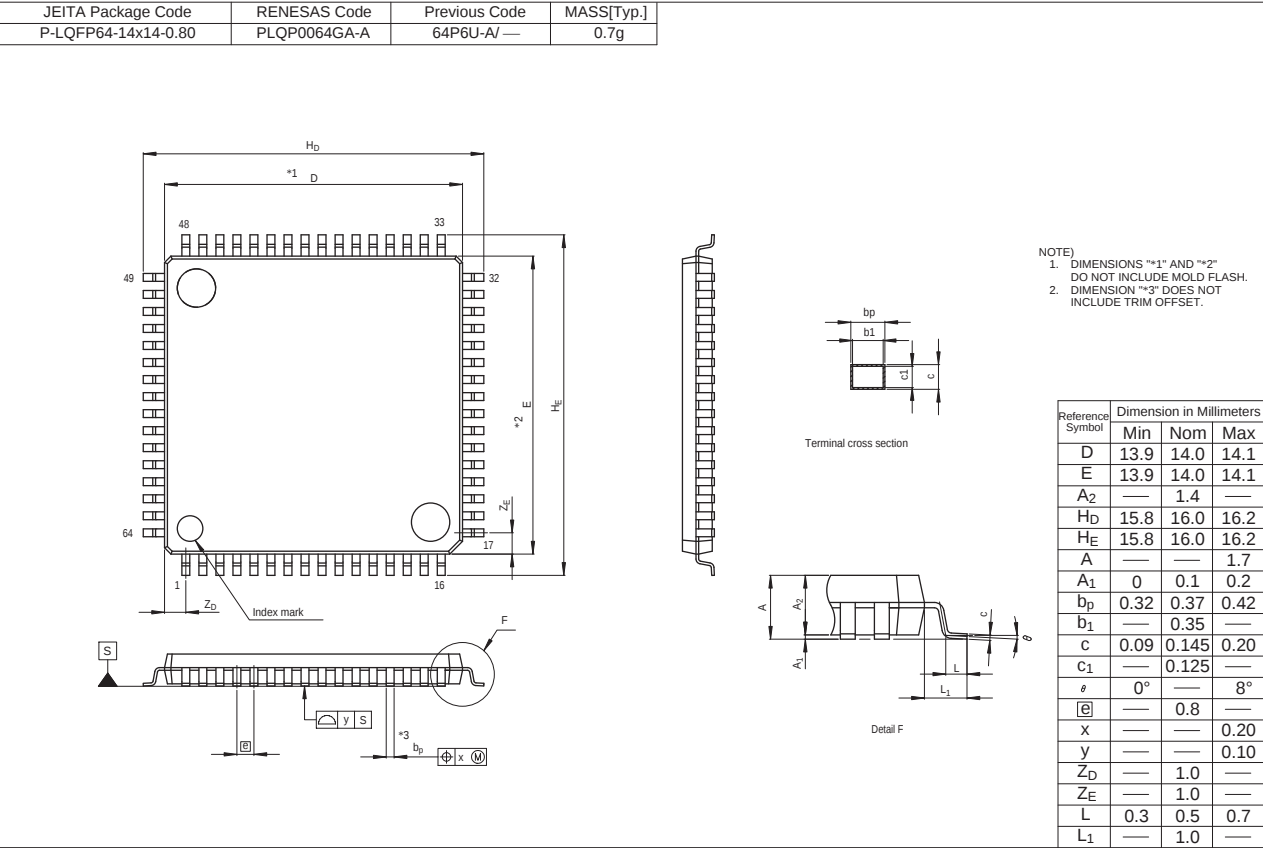


Figure K 64-Pin LQFP (PLQP0064GA-A)

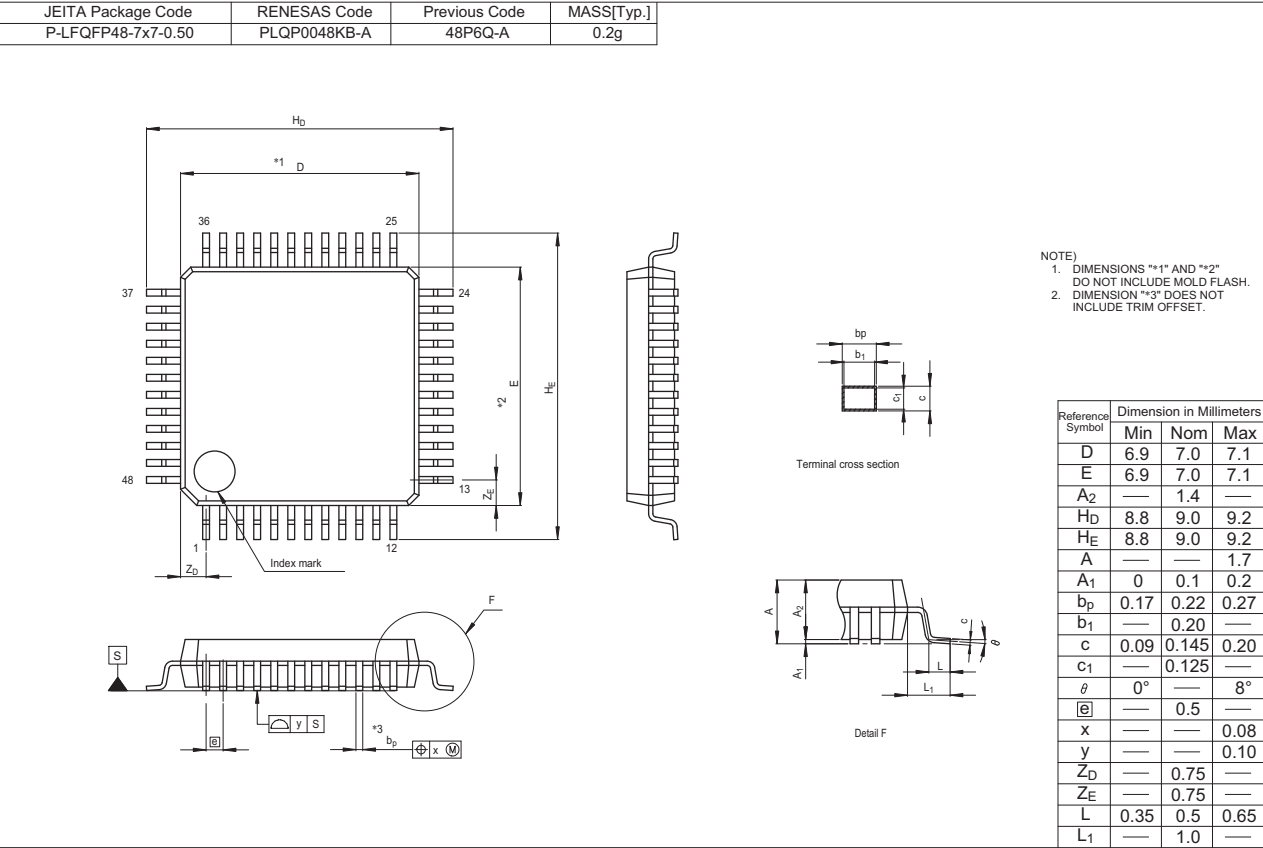


Figure L 48-Pin LQFP (PLQP0048KB-A)

| REVISION HISTORY | RX210 Group Datasheet |
|------------------|-----------------------|
|------------------|-----------------------|

| Rev. | Date         | Description                   |                                                                                                                                                                                                                 |
|------|--------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |              | Page                          | Summary                                                                                                                                                                                                         |
| 0.50 | Apr.15, 2011 | —                             | First edition, issued                                                                                                                                                                                           |
| 0.90 | Aug.10, 2011 | 1. Overview                   |                                                                                                                                                                                                                 |
|      |              | 4                             | Table 1.1 Outline of Specifications: Power supply voltage/ Operating frequency, changed                                                                                                                         |
|      |              | 17, 21, 24, 26                | Table 1.5 to Table 1.8 List of Pins and Pin Functions (Pin name: LVCMP2 → CMPA2), changed                                                                                                                       |
|      |              | 2. CPU                        |                                                                                                                                                                                                                 |
|      |              | 51                            | Table 2.14 Instructions that are Converted into Multiple Micro-Operations (multiplier: 32 × 32 → 64 bits), (memory source operand), added                                                                       |
|      |              | 4. I/O Registers              |                                                                                                                                                                                                                 |
|      |              | 63                            | Table 5.1 List of I/O Registers (Address Order), SOSWTCR, LOCOWTCR2, HOCOWTCR2, added                                                                                                                           |
|      |              | 114 to 116                    | Table 5.1 List of I/O Registers (Address Order): Interrupt source priority register, changed                                                                                                                    |
|      |              | 5. Electrical Characteristics |                                                                                                                                                                                                                 |
|      |              | 85 to 137                     | Newly added                                                                                                                                                                                                     |
| 1.20 | Nov 28, 2012 | All                           | Information on chip versions A, B, and C, corresponding descriptions and notes, added<br>48-pin products added, PLQP0080JA-A 14 × 14 mm, 0.65-mm pitch, package deleted                                         |
|      |              | Features                      |                                                                                                                                                                                                                 |
|      |              | 1                             | Description changed                                                                                                                                                                                             |
|      |              | 1. Overview                   |                                                                                                                                                                                                                 |
|      |              | 2                             | 1.1 Outline of Specifications: Description, changed                                                                                                                                                             |
|      |              | 2 to 5                        | Table 1.1 Outline of Specifications, changed<br>Note 1, added                                                                                                                                                   |
|      |              | 6                             | Table 1.2 Comparison of Functions for Different Packages, changed                                                                                                                                               |
|      |              | 7                             | Table 1.3 List of Products, changed                                                                                                                                                                             |
|      |              | 8 to 10                       | Tables 1.4 to 1.7 List of Products, added                                                                                                                                                                       |
|      |              | 11                            | Figure 1.1 How to Read the Product Part No., Memory Capacity, and Package Type: G item added                                                                                                                    |
|      |              | 12                            | Figure 1.2 Block Diagram, changed                                                                                                                                                                               |
|      |              | 13                            | Table 1.8 Pin Functions: Power supply and On-chip emulator, changed                                                                                                                                             |
|      |              | 13                            | Table 1.8 Pin Functions: Multiplexed bus, added                                                                                                                                                                 |
|      |              | 18                            | Figure 1.4 Pin Assignments of the 100-Pin LQFP, changed                                                                                                                                                         |
|      |              | 21                            | Figure 1.7 Pin Assignments of the 48-Pin LQFP, added                                                                                                                                                            |
|      |              | 23                            | Table 1.9 List of Pins and Pin Functions (100-Pin TFLGA): Pin No. G4, changed                                                                                                                                   |
|      |              | 25                            | Table 1.10 List of Pins and Pin Functions (100-Pin LQFP): Pin No. 21, changed                                                                                                                                   |
|      |              | 28                            | Table 1.11 List of Pins and Pin Functions (80-Pin LQFP): Pin No. 19, changed                                                                                                                                    |
|      |              | 30                            | Table 1.12 List of Pins and Pin Functions (64-Pin LQFP): Pin No. 15, changed                                                                                                                                    |
|      |              | 3. Address Space              |                                                                                                                                                                                                                 |
|      |              | 37                            | Figure 3.1 Memory Map in Each Operating Mode: Note 2, changed                                                                                                                                                   |
|      |              | 4. I/O Registers              |                                                                                                                                                                                                                 |
|      |              | 41 to 63                      | Table 4.1 List of I/O Registers (Address Order): Number of Access, changed<br>Voltage regulator control register, Timeout internal counter L, Timeout internal counter U, and PLL power control register, added |
|      |              | 63                            | Table 4.1 List of I/O Registers (Address Order): Notes 1 and 2, added                                                                                                                                           |
|      |              | —                             | Table 4.1 List of I/O Registers (Address Order): LOCO Wait Control Register 2 (LOCOWTCR2), deleted                                                                                                              |
|      |              | 5. Electrical Characteristics |                                                                                                                                                                                                                 |
|      |              | 64 to 152                     | Description added                                                                                                                                                                                               |
| 1.30 | Jan 22, 2013 | Features                      |                                                                                                                                                                                                                 |
|      |              | 1                             | On-chip flash memory for code, no wait states, On-chip SRAM, no wait states, Real-time clock, Up to 15 communications channels, Up to 20 extended-function timers, changed                                      |
|      |              | 1. Overview                   |                                                                                                                                                                                                                 |
|      |              | 2 to 6                        | Table 1.1 Outline of Specifications, changed                                                                                                                                                                    |
|      |              | 7                             | Table 1.2 Comparison of Functions for Different Packages, changed                                                                                                                                               |
|      |              | 9                             | Table 1.4 List of Products Chip Version B: D Version (Ta = -40 to +85°C), changed                                                                                                                               |
|      |              | 10                            | Table 1.5 List of Products Chip Version B: G Version (Ta = -40 to +105°C), changed                                                                                                                              |

| Rev. | Date         | Description                    |                                                                                                                                                                                                                                      |
|------|--------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |              | Page                           | Summary                                                                                                                                                                                                                              |
| 1.30 | Jan 22, 2013 | 11                             | Table 1.6 List of Products Chip Version C: D Version (Ta = -40 to +85°C),<br>Table 1.7 List of Products Chip Version C: G Version (Ta = -40 to +105°C), changed                                                                      |
|      |              | 12                             | Figure 1.1 How to Read the Product Part No., Memory Capacity, and Package Type, changed                                                                                                                                              |
|      |              | 13                             | Figure 1.2 Block Diagram, changed                                                                                                                                                                                                    |
|      |              | 14 to 17                       | Table 1.8 Pin Functions, changed                                                                                                                                                                                                     |
|      |              | 18                             | Figure 1.3 Pin Assignments of the 145-Pin TFLGA (Upper Perspective View), added                                                                                                                                                      |
|      |              | 19                             | Figure 1.4 Pin Assignments of the 144-Pin LQFP, added                                                                                                                                                                                |
|      |              | 25 to 28                       | Table 1.9 List of Pins and Pin Functions (145-Pin TFLGA), changed                                                                                                                                                                    |
|      |              | 29 to 32                       | Table 1.10 List of Pins and Pin Functions (144-Pin LQFP), changed                                                                                                                                                                    |
|      |              | 3. Address Space               |                                                                                                                                                                                                                                      |
|      |              | 48                             | Figure 3.1 Memory Map in Each Operating Mode, changed                                                                                                                                                                                |
|      |              | 4. I/O Registers               |                                                                                                                                                                                                                                      |
|      |              | 52 to 81                       | Table 4.1 List of I/O Registers (Address Order), changed                                                                                                                                                                             |
|      |              | 5. Electrical Characteristics  |                                                                                                                                                                                                                                      |
|      |              | 83                             | Table 5.2 DC Characteristics (1),<br>Table 5.3 DC Characteristics (2), changed                                                                                                                                                       |
|      |              | 84 to 122                      | Table 5.6 DC Characteristics (5) to Table 5.20 DC Characteristics (19), changed<br>Figure 5.1 Voltage Dependency in High-Speed .... for Chip Version A to<br>Figure 5.34 Temperature Dependency in .... and 100 to 145 pins, changed |
|      |              | 158                            | Table 5.55 Timing of On-Chip Peripheral Modules (1), changed                                                                                                                                                                         |
|      |              | 159                            | [512 Kbytes or less of flash memory and 48 to 100 pins]<br>Table 5.56 Timing of On-Chip Peripheral Modules (2), added                                                                                                                |
|      |              | 160, 161                       | [768 Kbytes/1 Mbyte of flash memory or 145/145 pins]<br>Table 5.57 Timing of On-Chip Peripheral Modules (3), added                                                                                                                   |
|      |              | 162                            | Table 5.58 Timing of On-Chip Peripheral Modules (4), changed                                                                                                                                                                         |
|      |              | 165                            | Figure 5.75 MTU/TPU Input/Output Timing,<br>Figure 5.76 MTU/TPU Clock Input Timing, changed                                                                                                                                          |
|      |              | 166                            | Figure 5.79 SCK Clock Input Timing,<br>Figure 5.80 SCI Input/Output Timing: Clock Synchronous Mode, changed                                                                                                                          |
|      |              | 167                            | Figure 5.82 RSPI Clock Timing and Simple SPI Clock Timing, changed                                                                                                                                                                   |
|      |              | 168                            | Figure 5.83 RSPI Timing (Master, CPHA = 0) .... and Simple SPI Timing (Master, CKPH = 1),<br>Figure 5.84 RSPI Timing (Master, CPHA = 0) (Bit Rate: PCLKB Set to Divided by 2), changed                                               |
|      |              | 169                            | Figure 5.85 RSPI Timing (Master, CPHA = 1) .... and Simple SPI Timing (Master, CKPH = 0),<br>Figure 5.86 RSPI Timing (Master, CPHA = 1) (Bit Rate: PCLKB Set to Divided by 2), changed                                               |
|      |              | 170                            | Figure 5.87 RSPI Timing (Slave, CPHA = 0) and Simple SPI Timing (Slave, CKPH = 1),<br>Figure 5.88 RSPI Timing (Slave, CPHA = 1) and Simple SPI Timing (Slave, CKPH = 0), changed                                                     |
|      |              | 173                            | Table 5.64 A/D Conversion Characteristics (2), changed                                                                                                                                                                               |
|      |              | 175                            | Figure 5.91 Illustration of A/D Converter Characteristic Terms,<br>Absolute accuracy, changed                                                                                                                                        |
|      |              | 184                            | Table 5.74 ROM (Flash Memory for Code Storage) Characteristics (1), changed                                                                                                                                                          |
|      |              | 189                            | Table 5.80 E2 DataFlash Characteristics (1),<br>Table 5.81 E2 DataFlash Characteristics (2), changed                                                                                                                                 |
|      |              | Appendix 1. Package Dimensions |                                                                                                                                                                                                                                      |
|      |              | 195                            | Figure A 145-Pin TFLGA (PTLG0145KA-A), added                                                                                                                                                                                         |
|      |              | 196                            | Figure B 144-Pin LQFP (PLQP0144KA-A), added                                                                                                                                                                                          |
| 1.40 | Feb 19, 2013 | 1. Overview                    |                                                                                                                                                                                                                                      |
|      |              | 2 to 6                         | Table 1.1 Outline of Specifications, changed<br>Note 2, added                                                                                                                                                                        |
|      |              | 9                              | Table 1.4 List of Products Chip Version B: D Version (Ta = -40 to +85°C), changed                                                                                                                                                    |
|      |              | 10                             | Table 1.5 List of Products Chip Version B: G Version (Ta = -40 to +105°C), changed<br>Note, added                                                                                                                                    |
|      |              | 11                             | Table 1.6 List of Products Chip Version C: D Version (Ta = -40 to +85°C): Note 1,<br>Table 1.7 List of Products Chip Version C: G Version (Ta = -40 to +105°C): Note 1 deleted,<br>Note added                                        |
|      |              | 12                             | Figure 1.1 How to Read the Product Part No., Memory Capacity, and Package Type, changed                                                                                                                                              |
|      |              | 4. I/O Registers               |                                                                                                                                                                                                                                      |
|      |              | 58                             | Table 5.1 List of I/O Registers (Address Order), changed                                                                                                                                                                             |
|      |              | 5. Electrical Characteristics  |                                                                                                                                                                                                                                      |
|      |              | 83                             | Table 5.4 DC Characteristics (3), changed                                                                                                                                                                                            |
|      |              | 88                             | Table 5.8 DC Characteristics (7), changed                                                                                                                                                                                            |

| Rev. | Date         | Description                    |                                                                                                                                                                                                                                                                                                                                                                                       |
|------|--------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |              | Page                           | Summary                                                                                                                                                                                                                                                                                                                                                                               |
| 1.40 | Feb 19, 2013 | 96                             | Table 5.11 DC Characteristics (10), changed                                                                                                                                                                                                                                                                                                                                           |
|      |              | 105                            | Table 5.14 DC Characteristics (13), changed                                                                                                                                                                                                                                                                                                                                           |
|      |              | 114                            | Table 5.17 DC Characteristics (16), changed                                                                                                                                                                                                                                                                                                                                           |
|      |              | 115                            | Figure 5.31 Voltage Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins, changed                                                                                                                                                                                           |
|      |              | 116                            | Figure 5.32 Temperature Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 768 Kbytes/1 Mbyte of Flash Memory and 100 to 145 Pins, changed                                                                                                                                                                                       |
|      |              | 118                            | Table 5.18 DC Characteristics (17), changed                                                                                                                                                                                                                                                                                                                                           |
|      |              | 119, 120                       | Table 5.19 DC Characteristics (18), changed                                                                                                                                                                                                                                                                                                                                           |
|      |              | 121 to 123                     | Figure 5.35 Voltage Dependency in High-Speed Operating Mode (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins to<br>Figure 5.39 Voltage Dependency in Low-Speed Operating Mode 2 (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins, added                                               |
|      |              | 124                            | Table 5.20 DC Characteristics (19), changed                                                                                                                                                                                                                                                                                                                                           |
|      |              | 125 to 127                     | Figure 5.40 Voltage Dependency in Software Standby Mode (SOFTCUT[2:0] Bits = 110b) (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins to<br>Figure 5.43 Temperature Dependency in Deep Software Standby Mode (DEEPCUT1 Bit = 1) (Reference Data) for Chip Version B with 512 Kbytes or Less of Flash Memory and 144 and 145 Pins, added |
|      |              | 128                            | Table 5.22 DC Characteristics (21), changed, Note 2 added                                                                                                                                                                                                                                                                                                                             |
|      |              | 144                            | Table 5.44 Clock Timing: Note 5, changed                                                                                                                                                                                                                                                                                                                                              |
|      |              | 154                            | Table 5.49 Bus Timing (1), Table 5.50 Bus Timing (2), changed                                                                                                                                                                                                                                                                                                                         |
|      |              | 155                            | Table 5.51 Bus Timing (3), changed                                                                                                                                                                                                                                                                                                                                                    |
|      |              | 160                            | Table 5.52 Bus Timing (Multiplexed Bus) (1), Table 5.53 Bus Timing (Multiplexed Bus) (2), changed                                                                                                                                                                                                                                                                                     |
|      |              | 161                            | Table 5.54 Bus Timing (Multiplexed Bus) (3), changed                                                                                                                                                                                                                                                                                                                                  |
|      |              | 164                            | Table 5.56 Timing of On-Chip Peripheral Modules (2), changed                                                                                                                                                                                                                                                                                                                          |
|      |              | 166                            | Table 5.57 Timing of On-Chip Peripheral Modules (3), changed                                                                                                                                                                                                                                                                                                                          |
|      |              | 177                            | Table 5.61 A/D Conversion Characteristics (1), Note 3, deleted<br>Figure 5.99 AVCC to AVREFH Voltage Range, added                                                                                                                                                                                                                                                                     |
|      |              | 179                            | Table 5.64 A/D Conversion Characteristics (2), Note 3,<br>Table 5.65 A/D Conversion Characteristics (3), Note 3, deleted                                                                                                                                                                                                                                                              |
|      |              | 186                            | Table 5.72 Power-on Reset Circuit and Voltage Detection Circuit Characteristics (2), changed                                                                                                                                                                                                                                                                                          |
| 1.50 | Oct 18, 2013 | All                            | 69-Pin WLBGA package products, added                                                                                                                                                                                                                                                                                                                                                  |
|      |              | Features                       |                                                                                                                                                                                                                                                                                                                                                                                       |
|      |              | 1                              | SWBG0069LA-A 3.91 × 4.26mm, 0.40-mm pitch, ■ Applications, added                                                                                                                                                                                                                                                                                                                      |
|      |              | 1. Overview                    |                                                                                                                                                                                                                                                                                                                                                                                       |
|      |              | 2                              | 1.1 Outline of Specifications, changed                                                                                                                                                                                                                                                                                                                                                |
|      |              | 2 to 6                         | Table 1.1 Outline of Specifications, Note 2, changed                                                                                                                                                                                                                                                                                                                                  |
|      |              | 7                              | Table 1.2 Comparison of Functions for Different Packages, changed                                                                                                                                                                                                                                                                                                                     |
|      |              | 8                              | Table 1.3 List of Products Chip Version A: D Version (Ta = -40 to +85°C), changed, Note, added                                                                                                                                                                                                                                                                                        |
|      |              | 9                              | Table 1.4 List of Products Chip Version B: D Version (Ta = -40 to +85°C), Note 1, changed, Note added                                                                                                                                                                                                                                                                                 |
|      |              | 10                             | Table 1.5 List of Products Chip Version B: G Version (Ta = -40 to +105°C), Note, changed, Note 1, deleted                                                                                                                                                                                                                                                                             |
|      |              | 11                             | Table 1.6 List of Products Chip Version C: D Version (Ta = -40 to +85°C), Table 1.7 List of Products Chip Version C: G Version (Ta = -40 to +105°C), Note, changed                                                                                                                                                                                                                    |
|      |              | 12                             | Figure 1.1 How to Read the Product Part No., Memory Capacity, and Package Type, changed                                                                                                                                                                                                                                                                                               |
|      |              | 23                             | Figure 1.8 Pin Assignments of the 69-Pin WLBGA, added                                                                                                                                                                                                                                                                                                                                 |
|      |              | 43, 44                         | Table 1.14 List of Pins and Pin Functions (69-Pin WLBGA), added                                                                                                                                                                                                                                                                                                                       |
|      |              | 5. Electrical Characteristics  |                                                                                                                                                                                                                                                                                                                                                                                       |
|      |              | 134                            | Table 5.21 DC Characteristics (20) Note, added                                                                                                                                                                                                                                                                                                                                        |
|      |              | 149, 150                       | Table 5.44 Clock Timing Note 6, Note 7, added                                                                                                                                                                                                                                                                                                                                         |
|      |              | 183                            | Table 5.61 A/D Conversion Characteristics (1) Note, changed, Note 4, deleted                                                                                                                                                                                                                                                                                                          |
|      |              | 184                            | Table 5.62 Channel Classification for A/D Converter, changed                                                                                                                                                                                                                                                                                                                          |
|      |              | 185                            | Table 5.64 A/D Conversion Characteristics (2) Note, changed                                                                                                                                                                                                                                                                                                                           |
|      |              | Appendix 1. Package Dimensions |                                                                                                                                                                                                                                                                                                                                                                                       |
|      |              | 211                            | Figure E 69-Pin WLBGA (SWBG0069LA-A), added                                                                                                                                                                                                                                                                                                                                           |

## General Precautions in the Handling of MPU/MCU Products

The following usage notes are applicable to all MPU/MCU products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

### 1. Handling of Unused Pins

Handle unused pins in accord with the directions given under Handling of Unused Pins in the manual.

- The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible. Unused pins should be handled as described under Handling of Unused Pins in the manual.

### 2. Processing at Power-on

The state of the product is undefined at the moment when power is supplied.

- The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the moment when power is supplied.  
In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the moment when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the moment when power is supplied until the power reaches the level at which resetting has been specified.

### 3. Prohibition of Access to Reserved Addresses

Access to reserved addresses is prohibited.

- The reserved addresses are provided for the possible future expansion of functions. Do not access these addresses; the correct operation of LSI is not guaranteed if they are accessed.

### 4. Clock Signals

After applying a reset, only release the reset line after the operating clock signal has become stable. When switching the clock signal during program execution, wait until the target clock signal has stabilized.

- When the clock signal is generated with an external resonator (or from an external oscillator) during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Moreover, when switching to a clock signal produced with an external resonator (or by an external oscillator) while program execution is in progress, wait until the target clock signal is stable.

### 5. Differences between Products

Before changing from one product to another, i.e. to a product with a different part number, confirm that the change will not lead to problems.

- The characteristics of an MPU or MCU in the same group but having a different part number may differ in terms of the internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
  2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
  3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
  4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
  5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.

Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
  6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
  7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
  8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
  9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
  10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
  11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
  12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



### SALES OFFICES

### Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

**Renesas Electronics America Inc.**  
2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.  
Tel: +1-408-588-6000, Fax: +1-408-588-6130

**Renesas Electronics Canada Limited**  
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada  
Tel: +1-905-898-5441, Fax: +1-905-898-3220

**Renesas Electronics Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: +44-1628-651-700, Fax: +44-1628-651-804

**Renesas Electronics Europe GmbH**  
Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-65030, Fax: +49-211-6503-1327

**Renesas Electronics (China) Co., Ltd.**  
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

**Renesas Electronics (Shanghai) Co., Ltd.**  
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China  
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

**Renesas Electronics Hong Kong Limited**  
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

**Renesas Electronics Taiwan Co., Ltd.**  
13F, No. 363, Fu Shing North Road, Taipei, Taiwan  
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

**Renesas Electronics Singapore Pte. Ltd.**  
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre Singapore 339949  
Tel: +65-6213-0200, Fax: +65-6213-0300

**Renesas Electronics Malaysia Sdn.Bhd.**  
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

**Renesas Electronics Korea Co., Ltd.**  
11F., Samik Laved' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5141