
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST
-	-

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	ECR-12-016601	18OCT2012	CW	PY
	A2	ECR-13-013865	04SEP2013	LW	PY
	A3	ECR-14-015468	20OCT2014	LW	PY
	A4	ECR-15-005723	13APR2015	KR	TD

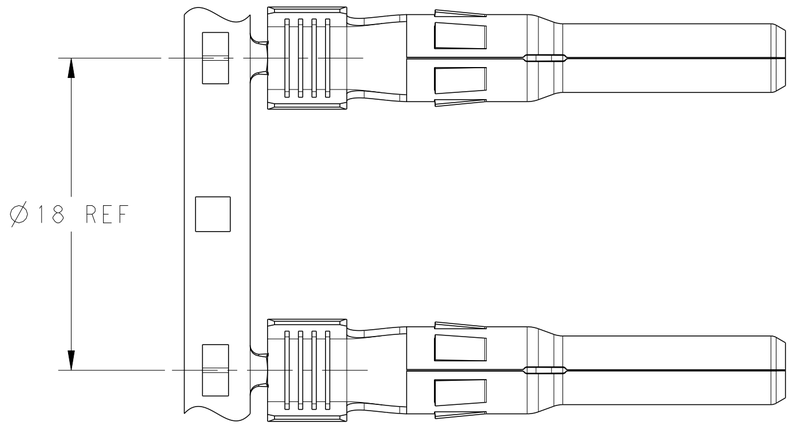



STRIP
-2 AS SHOWN

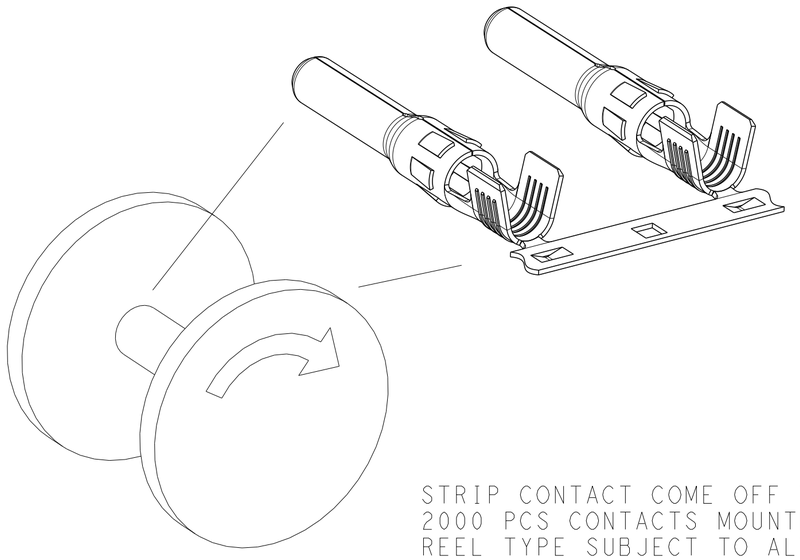

STRIP CONTACT COME OFF TO ASSEMBLY
2000 PCS CONTACTS MOUNTED REEL
REEL TYPE SUBJECT TO ALTERNATION

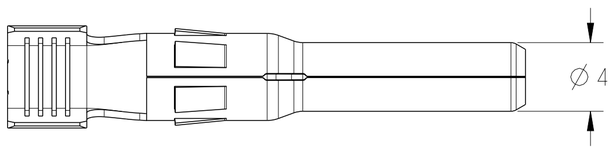



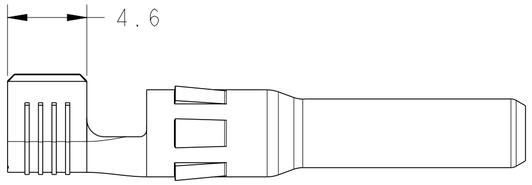

LOOSE PIECE
-3 AS SHOWN

1. MATERIAL: COPPER ALLOY, TIN PLATED
2. USED FOR SOLAR CABLE: 4mm2/12AWG, 6mm2/10AWG.
3. USE ONLY CRIMPING TOOL OF TE CONNECTIVITY TO CRIMP CONTACT. CRIMPING TOOL PN 6-1579014-8 WILL BE USED FOR CRIMPING THE CONTACTS HAVING WIRE SIZE 4.0mm² + 6.0mm².

	PART NUMBER	PACKING UNIT
LOOSE PIECE	1971857-6	1
	1971857-5	10
	1971857-4	100
	1971857-3	1000
STRIP	1971857-2	2000
CONTACT TYPE	FOR ORDER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.5
1 PLC ±0.3
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: COPPER ALLOY
FINISH: TIN

DWN 09AUG2012 CHRIS WANG
CHK 09AUG2012 TANDY TANG
APVD 09AUG2012 PETER YIN
PRODUCT SPEC 108-106078
APPLICATION SPEC 114-106078
WEIGHT -

TE Connectivity

NAME: PIN CONTACT
SOLARLOK PV4 CONNECTOR
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1971857	-

Customer Drawing | SCALE 4:1 | SHEET 1 OF 1 | REV A4