



SMA Female Bulkhead Connector Solder Attachment 0.062 inch
End Launch PCB, .250 inch Diameter, .030 inch Diameter

TECHNICAL DATA SHEET

PE44212

SMA Female Bulkhead Connector Solder Attachment 0.062 inch End Launch PCB, .250 inch Diameter, .030 inch Diameter

Configuration

Connector	SMA Female
Connector Specification	MIL-C-39012
Connector Interface Type	0.062 inch End Launch
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	Bulkhead

Electrical Specifications

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum Operating Voltage, Volts	335
Dielectric Withstanding Voltage, Vrms	1,000

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

Size

Length, in [mm]	0.687 [17.45]
Width/Dia., in [mm]	0.375 [9.53]
Height, in [mm]	0.312 [7.92]
Weight, lbs [g]	0.009 [4.08]

Connector

Type	SMA Female
Mating Cycles	500
Contact Material and Plating	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204, 30µ in. minimum
Body Material and Plating	Brass, Gold
Body Plating Specification	MIL-G-45204, 10µ in. minimum
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead Connector Solder Attachment 0.062 inch End Launch PCB, .250 inch Diameter, .030 inch Diameter PE44212](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Female Bulkhead Connector Solder Attachment 0.062 inch
End Launch PCB, .250 inch Diameter, .030 inch Diameter

TECHNICAL DATA SHEET

PE44212

Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMA Female Bulkhead Connector Solder Attachment 0.062 inch End Launch PCB, .250 inch Diameter, .030 inch Diameter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead Connector Solder Attachment 0.062 inch End Launch PCB, .250 inch Diameter, .030 inch Diameter PE44212](http://www.pasternack.com/sma-female-standard-0.062-end-launch-connector-pe44212-p.aspx)

URL: <http://www.pasternack.com/sma-female-standard-0.062-end-launch-connector-pe44212-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE44212 CAD Drawing

SMA Female Bulkhead Connector Solder Attachment 0.062 inch
End Launch PCB, .250 inch Diameter, .030 inch Diameter

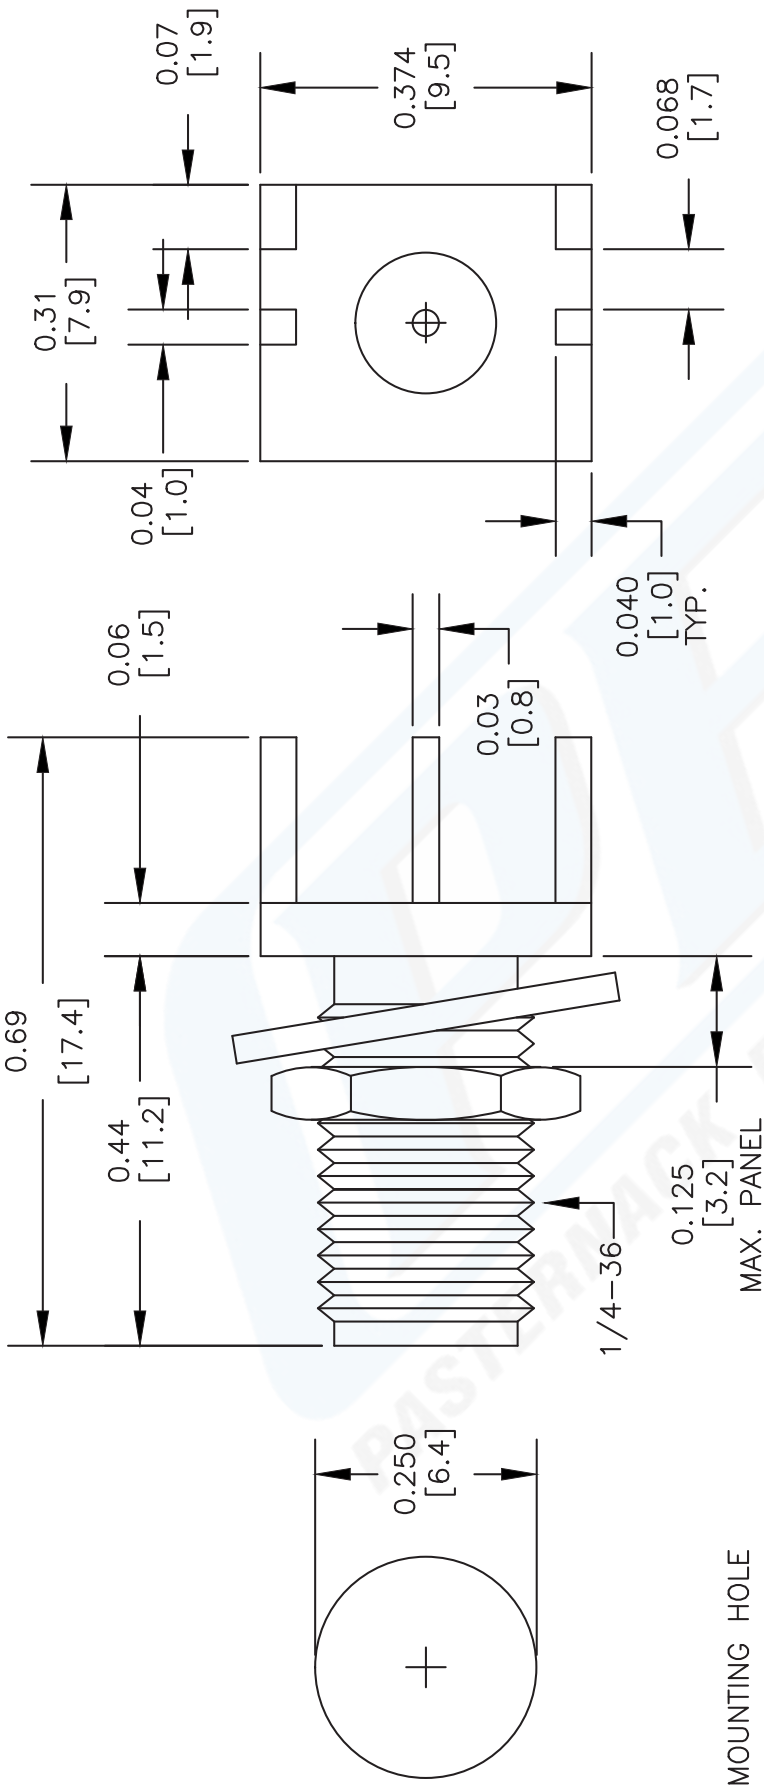

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE44212

FSCM NO. 53919

2233

SIZE A

SCALE N/A

CAD FILE

071202

FSCM NO. 53919

Website: www.pasternack.com | E-Mail: sales@pasternack.com

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451