

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.


| | |
|---|---|
| **Rating** | 16A 277V AC<br>1HP 277V AC<br>1/2HP 125V AC |
| **Contact Resistance** | 50m ohm Max. |
| **Insulation Resistance** | DC 500V 100M ohm Min. |
| **Dielectric Strength** | AC 1500V 1 minute |
| **Switch Function** | 6P DPDT ON-ON |
| **Operation Temperature** | 0°C~85°C |

**Mounting Hole**






**Circuit Diagram**




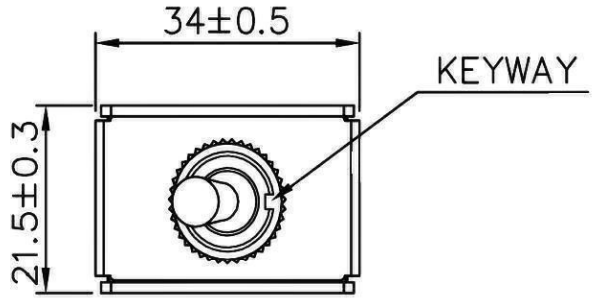


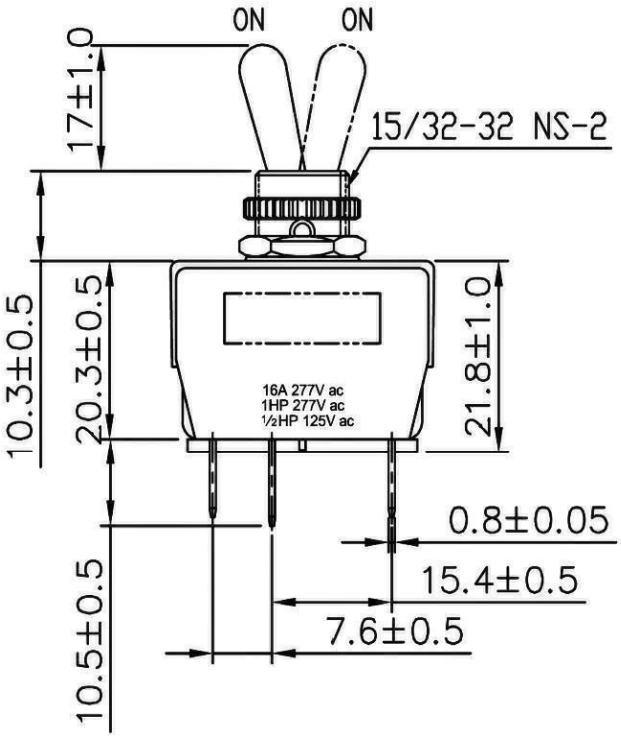

MATERIAL:
Frame: Nylon 66,Black
UL Flame: 94-V2
Cover: PA#66+30%GF A0520
UL Flame: 94-V0
Terminal: Copper Alloy
Contact: Copper Alloy
Water proof and dust proof to fit IP-56

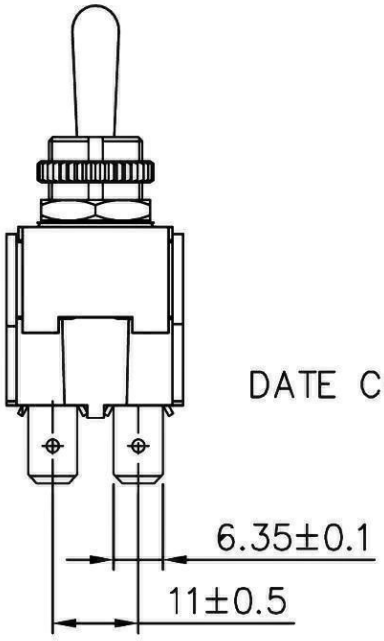

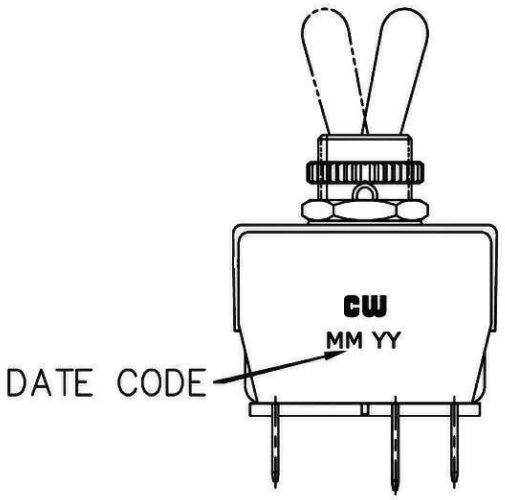
**RoHS Compliant**

| | |
|---|---|
| 1 | Removed cULus from drawing. 8/17/10. |

**CW INDUSTRIES**
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

| | | | |
|---|---|---|---|
| Date Drawn: 5/19/10 | Rev. 1 | Unit: mm | Checked By: G. Guld |

| | |
|---|---|
| Title: TOGGLE SWITCH | CW P/N: GTS448B101A1HR |