

Surface Mount Aluminum Electrolytic Capacitors



SRE Series
(Low Impedance, 105°C)

MERITEK

FEATURES

- Load Life : 105°C 1000~2000 hours
- For high density mounting
- Low impedance at 100kHz



SPECIFICATIONS

Item	Characteristic												
Operation Temperature Range	-55 ~ +105°C												
Rated Working Voltage	6.3 ~ 50VDC												
Capacitance Tolerance (120Hz 20°C)	$\pm 20\%$ (M)												
Leakage Current (20°C)	I $\leq 0.01CV$ or 3 (μA) *Whichever is greater after 2 minutes I: Leakage Current (μA) C: Rated Capacitance (μF) V: Working Voltage (V)												
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50						
	S.V.	8	13	20	32	44	63						
Add 0.02 per 1000uF for more than 1000 μF													
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	6.3	10	16	25	35	50						
	tan δ	$\Phi 4 \sim \Phi 6.3$	0.24	0.20	0.16	0.14	0.12						
		$\Phi 8 \sim \Phi 10$	0.28	0.24	0.20	0.16	0.14						
Low Temperature Stability	Impedance ratio at 120Hz												
	Rated Voltage (V)	6.3	10	16	25	35	50						
	-25°C / +20°C	3	2	2	2	2	2						
	-55°C / +20°C	5	4	4	3	3	3						
Load Life	After hours ($\Phi D \leq 6.3mm$ 1000 hours, $\Phi D \geq 8mm$ 2000 hours) application of W.V. and +105°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rate working voltage)												
	Capacitance Change	$\leq \pm 25\%$ of initial value											
	Dissipation Factor	$\leq 200\%$ of initial specified value											
	Leakage current	\leq initial specified value											
Shelf Life	At +105°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)												
Resistance to Soldering Heat	Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminals facing downward will fulfill the following conditions after being cooled to room temperature.												
	Capacitance Change	$\leq \pm 10\%$ of initial value											
	Dissipation Factor	\leq initial specified value											
	Leakage current	\leq initial specified value											

PART NUMBERING SYSTEM

Meritek Series	SRE	50V	152	M	J	102	
Voltage							
Capacitance							
Capacitance expressed in microfarads (μF).							
First two digits are significant figures.							
Third digit denotes number of zeros.							
'R' denotes decimal point for values less than 10 μF							
Tolerance							
M= $\pm 20\%$							
Case Diameter Code							
Case Height (mm)							
The third digit denotes the first decimal place							
For example, 102 = 10.2mm							

Case Diameter Code	ΦD
D	$\Phi 4.0$
E	$\Phi 5.0$
F	$\Phi 6.3$
H	$\Phi 8.0$
J	$\Phi 10.0$

Surface Mount Aluminum Electrolytic Capacitors




SRE Series

(Low Impedance, 105°C)

MERITEK

DIMENSIONS (mm)

ϕD	L	A	H	I	W	P	K
$\phi 4.0$	5.8	4.3	5.5MAX	1.8	0.65 ± 0.1	1.0	$0.35^{+0.15}_{-0.20}$
$\phi 5.0$	5.8	5.3	6.5MAX	2.2	0.65 ± 0.1	1.5	$0.35^{+0.15}_{-0.20}$
$\phi 6.3$	5.8	6.6	7.8MAX	2.6	0.65 ± 0.1	2.1	$0.35^{+0.15}_{-0.20}$
$\phi 6.3$	7.7	6.6	7.8MAX	2.6	0.65 ± 0.1	2.1	$0.35^{+0.15}_{-0.20}$
$\phi 8.0$	10.2	8.3	10.0MAX	3.4	0.90 ± 0.2	3.1	0.70 ± 0.2
$\phi 10.0$	10.2	10.3	12.0MAX	3.5	0.90 ± 0.2	4.6	0.70 ± 0.2

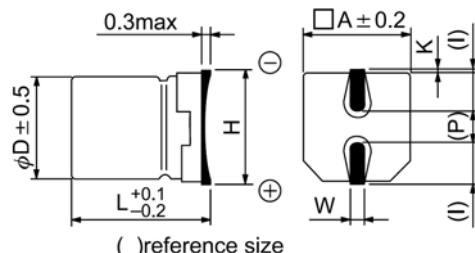

CASE SIZE & MAX RIPPLE CURRENT

Cap. (μF)	V	6.3			10			16			25			35			50									
		Item	DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.						
1.0	010																		4x5.8	5.00	30					
2.2	2R2																		4x5.8	5.00	30					
3.3	3R3																		4x5.8	5.00	30					
4.7	4R7																	4x5.8	1.80	80	5x5.8	1.52	85			
6.8	6R8																	5x5.8	1.20	120	5x5.8	1.20	120			
10	100							4x5.8	1.80	80	4x5.8	1.80	80	5x5.8	0.76	150	6.3x5.8	0.88	165							
15	150							4x5.8	1.80	80	5x5.8	0.76	150	5x5.8	0.76	150	6.3x5.8	0.88	165							
22	220					4x5.8	1.80	80	5x5.8	0.76	150	5x5.8	0.76	150	5x5.8	0.76	150	6.3x5.8	0.88	165						
27	270	4x5.8	1.80	80	5x5.8	0.76	150	5x5.8	0.76	150	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x7.7	0.68	185				
33	330	5x5.8	0.76	150	5x5.8	0.76	150	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x7.7	0.68	185				
47	470	5x5.8	0.76	150	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x7.7	0.68	185													
56	560	5x5.8	0.76	150	6.3x5.8	0.44	230	6.3x7.7	0.34	280	8x10.2	0.34	300													
68	680	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x7.7	0.34	280	8x10.2	0.34	300				
100	101	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	8x10.2	0.34	300				
150	151	6.3x5.8	0.44	230	6.3x5.8	0.44	230	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.17	450	10x10.2	0.18	670				
220	221	6.3x5.8	0.44	230	6.3x7.7	0.34	280	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.17	450	10x10.2	0.18	670				
330	331	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.09	670										
470	471	8x10.2	0.17	450	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.09	670													
680	681	8x10.2	0.17	450	10x10.2	0.09	670	10x10.2	0.09	670																
1000	102	8x10.2	0.17	450	10x10.2	0.09	670																			
1500	152	10x10.2	0.09	670																						