





RECOMMENDED P.C.B. LAYOUT

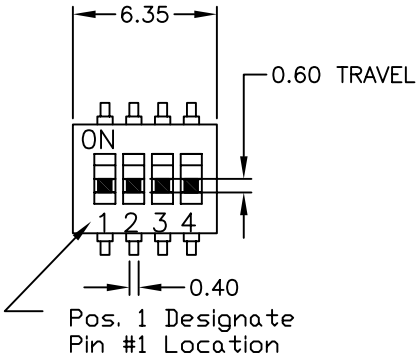



CIRCUIT

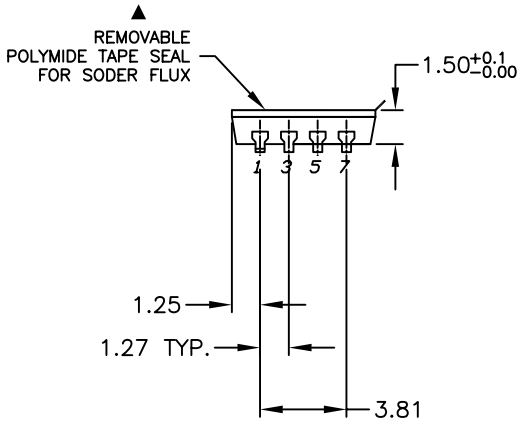



NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC.
5. CONTACT MATERIAL: Copper Alloy w/ gold plate over Nickel Plate.
▲ 6. PACKAGED: TAPE & REEL
7. ▲ DENOTES CRITICAL PARAMETER.
▲ 8. SWITCHES TO BE SHIPPED WITH THE ACTUATORS IN THE "OFF" POSITION.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	16122	RELEASED FOR PRODUCTION	6/9/06	CT

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: KAN1104RR (OFF POSITION)

SCALE	DATE	DR	DWG	REV
3:1	6/9/06	CT	N111206	A