

FEATURES

- ▶ DIP-24 Plastic Package
- ▶ Wide 2:1 Input Range
- ▶ Operating Temp.Range -40 to +85°C
- ▶ Overload Protection
- ▶ No Minimum Load Requirement
- ▶ I/O-Isolation 1500VDC(opt.3000VDC)
- ▶ Input Filter meets EN55022,class A and FCC,level A
- ▶ Fully compatible with MIW1000 Series
- ▶ 3 Years Product Warranty



PRODUCT OVERVIEW

The MINMAX MIW03 series is a range of high performance dc-dc converter modules, designed as a cost optimized replacement for the highly popular MIW1000 series. The converter features wide 2:1 input ranges and tight output voltage regulation. Excellent efficiency allows an operating temperature up to +70°C at full load. The product comes in a DIP-24 plastic package with industry standard footprint.

Typical applications for these economical priced dc-dc converters are industrial electronics, instrumentation or communication equipment.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current Max. mA	Input Current		Reflected Ripple Current mA(typ.)	Max. capacitive Load µF	Efficiency (typ.) @Max. Load %
				@Max. Load	@No Load			
				mA(typ.)	mA(typ.)			
MIW03-05S033	5 (4.5 ~ 9)	3.3	750	643	65	100	680	77
MIW03-05S05		5	600	750			470	80
MIW03-05S12		12	250	732			330	82
MIW03-05S15		15	200	732			220	82
MIW03-05S24		24	125	741			100	81
MIW03-05D05		±5	±250	625			220#	80
MIW03-05D12		±12	±125	732			150#	82
MIW03-05D15	±15	±100	732	100#	82			
MIW03-12S033	12 (9 ~ 18)	3.3	750	261	35	30	680	79
MIW03-12S05		5	600	309			470	81
MIW03-12S12		12	250	294			330	85
MIW03-12S15		15	200	294			220	85
MIW03-12S24		24	125	298			100	84
MIW03-12D05		±5	±250	260			220#	80
MIW03-12D12		±12	±125	298			150#	84
MIW03-12D15	±15	±100	298	100#	84			
MIW03-24S033	24 (18 ~ 36)	3.3	750	131	20	15	680	79
MIW03-24S05		5	600	154			470	81
MIW03-24S12		12	250	147			330	85
MIW03-24S15		15	200	147			220	85
MIW03-24S24		24	125	149			100	84
MIW03-24D05		±5	±250	130			220#	80
MIW03-24D12		±12	±125	149			150#	84
MIW03-24D15	±15	±100	149	100#	84			
MIW03-48S033	48 (36 ~ 75)	3.3	750	65	15	10	680	79
MIW03-48S05		5	600	77			470	81
MIW03-48S12		12	250	74			330	85
MIW03-48S15		15	200	74			220	85
MIW03-48S24		24	125	74			100	84
MIW03-48D05		±5	±250	65			220#	80
MIW03-48D12		±12	±125	74			150#	84
MIW03-48D15	±15	±100	74	100#	84			

For each output

Input Specifications					
Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	11	VDC
	12V Input Models	-0.7	---	25	
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	5V Input Models	---	---	4.5	
	12V Input Models	---	---	9	
	24V Input Models	---	---	18	
	48V Input Models	---	---	36	
Under Voltage Shutdown	5V Input Models	---	---	4	
	12V Input Models	---	---	8.5	
	24V Input Models	---	---	17.5	
	48V Input Models	---	---	35.5	
Internal Filter Type	All Models	Pi Filter			
Short Circuit Input Power		---	---	2000	mW
Internal Power Dissipation		---	---	1200	mW


Output Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	±2.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.3	±1.0	%
Load Regulation	Io=0% to 100%	---	±0.3	±1.0	%
Minimum Load	No minimum Load Requirement				
Ripple & Noise	0-20 MHz Bandwidth	---	---	70	mV _{P-P}
Transient Recovery Time	25% Load Step Change	---	300	500	µsec
Transient Response Deviation		---	±3	±5	%
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Current Protection	Foldback	120	150	---	%
Short Circuit Protection	Continuous				

General Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
I/O Isolation Voltage	60 Seconds	Standard	1500	---	---	VDC
		Suffix H ₍₆₎	3000	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ	
I/O Isolation Capacitance	100KHz, 1V	---	---	300	pF	
Switching Frequency		80	---	---	KHz	
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000			Hours	
Safety Approvals	UL/cUL 60950-1 recognition (CSA certificate), IEC/EN 60950-1(CB-report)					

Environmental Specifications					
Parameter	Conditions	Min.	Max.	Unit	
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+85	°C	
Case Temperature		---	+100	°C	
Storage Temperature Range		-50	+125	°C	
Humidity (non condensing)		---	95	% rel. H	
Cooling	Free-Air convection				
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C	

EMC Specifications


Parameter	Standards & Level		Performance
EMI	EN55022, FCC part 15		Class A
EMS	EN55024		
	ESD	EN61000-4-2 air \pm 8kV , Contact \pm 6kV	A
	Radiated immunity	EN61000-4-3 10V/m	A
	Fast transient (S)	EN61000-4-4 \pm 2kV	A
	Surge (S)	EN61000-4-5 \pm 1kV	A
Conducted immunity	EN61000-4-6 10Vrms	A	

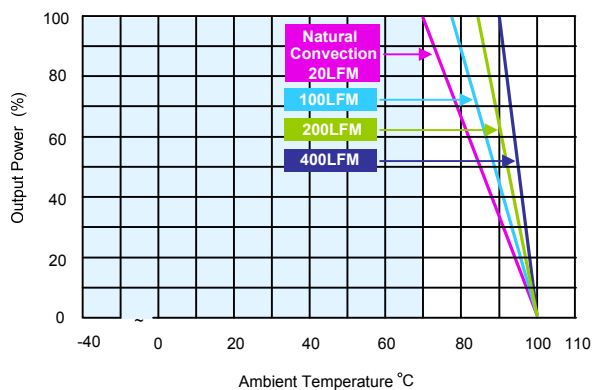Power Derating Curve

Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required. Suggested capacitor: CHEMI-CON KY 220 μ F/100V
- 6 To order the converter at 3KVDC isolation, please add a **suffix H** (e.g. MIW03-12S05H) to order code.
- 7 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 8 Specifications are subject to change without notice.

Package Specifications

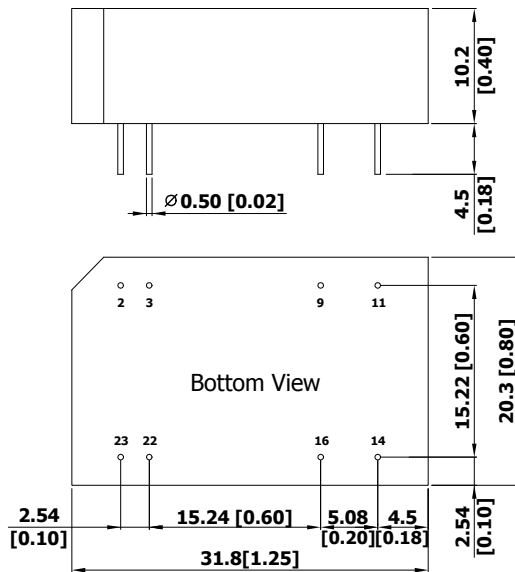Mechanical Dimensions



Pin Connections

Pin	Single Output	Dual Output
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02±0.002)

Physical Characteristics

Case Size : 31.8x20.3x10.2mm (1.25x0.80x0.40 inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)


Pin Material : Copper Alloy with Gold Plate Over Nickel Subplate

Weight : 12.8g

Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 KHz) to simulate source impedance. Capacitor C_{in} , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

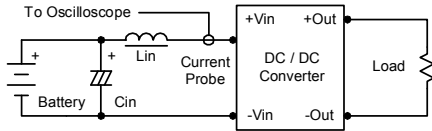

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

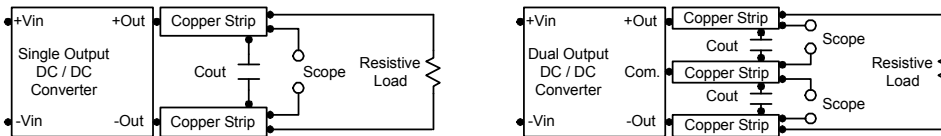


Technical Notes

Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 KHz) capacitor of a 8.2 μ F for the 5V input devices, a 3.3 μ F for the 12V input devices and a 1.5 μ F for the 24V and 48V devices.

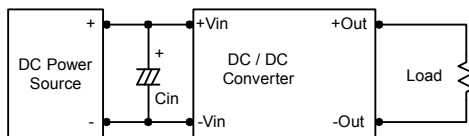

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

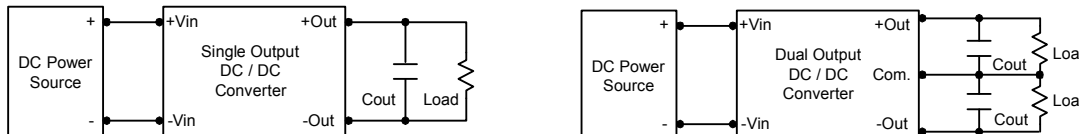

Maximum Capacitive Load

The MIW03 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 100°C. The derating curves are determined from measurements obtained in a test setup.

